

Service Manual

DVCPRO

**DVCPRO Camera Recorder
AJ-D400P/E**


Vol.2

Sec.4 Electrical Adjustment (Power Section)

Sec.6 Schematic Diagrams

Sec.7 Circuit Board Diagrams

Sec.8 Exploded views & Parts List

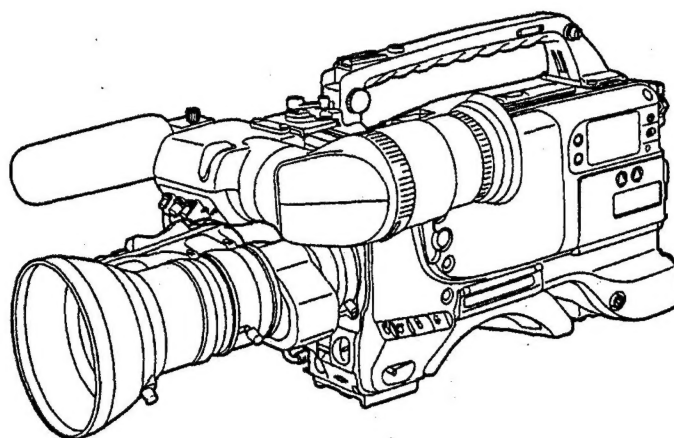

Please refer to the Service Manual Volume1 (Order No. VSD9903M004A) for Operating Instructions, Service Information, Maintenance/Disassembly Procedures & Mechanical Adjustment, Electrical Adjustment (Except Power Section), Block Diagrams.

Panasonic

© 1999 Matsushita Electric Industrial Co., Ltd. All rights reserved.
Unauthorized copying and distribution is a violation of law.

WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.

Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

INTRODUCTION

This Service Manual (Volume 2) contains technical information such as Electrical Adjustment (Power Section), Schematic Diagrams / P.C.Board. Layout and Exploded Views / Parts Lists which service personnel to understand and service the Panasonic DVCPRO Camera Recorder models AJ-D400P (NTSC) and AJ-D400E (PAL).

Panasonic

CONTENTS

Sec.4	Electrical Adjustment (Power Section).....	4-1
Sec.6	Schematic Diagrams.....	6-1
Sec.7	Circuit Board Diagrams.....	7-1
Sec.8	Exploded views & Parts List.....	8-1

Specifications

AJ-D400P

General

Power supply voltage:	DC 12 V
Power consumption:	23 W

Operating temperature:	32°F to 104°F
Storage temperature:	-4°F to 140°F
Operating humidity:	Less than 85% (relative humidity)
Continuous operating time:	Approx. 90 min. (using 1 Anton Bauer Trimpac 14 battery)
Weight:	Approx. 12.87 lbs (5.85 kg) (incl. main unit, viewfinder, lens, battery pack, tape and microphone)
Dimensions:	4 1/2" (W) × 10 1/16" (incl. handle) (H) × 12 7/8" (D) 119.2 × 255.5 × 326.3 mm

Camera Section

Pick-up devices:	1/2-inch on-chip FIT type of CCD
System:	RGB 3-CCD system
Picture elements:	410,000 pixel
Spectral system:	F1.4 prism system
Built-in filters:	1; 3200K 2; 5600K+1/4 ND 3; 5600K 4; 5600K+1/16 ND
Quantization:	10-bit A/D (R, G and B channels), 14.3 MHz
Digital signal processing:	16-bit long operation, 14.3 MHz/28.6 MHz
Horizontal drive frequency:	14.3 MHz
Programmable gains:	3 positions can be set from among -3, 0, 3, 6, 9, 12, 15, 18, 21, 24 and 30 dB.
Super gain:	30 dB
Shutter speeds:	1/100, 1/120, 1/250, 1/500, 1/1000 and 1/2000 sec. Synchro scan mode; 1/30.4-1/57.4 sec., 1/61.7-1/250 sec.
Lens mount:	1/2" Bayonet type
Sensitivity:	F8 (2000 lux, 89.9% reflection)
Minimum subject brightness:	2 lux (F1.4, +30 dB)
Image S/N ratio:	62 dB (typical)
Horizontal resolution:	750 lines (center)
Vertical resolution:	400 lines/more than 450 lines (Super V mode)
Sampling frequency:	14.3 MHz/28.6 MHz
Registration:	Below 0.03% (entire range) (excl. lens)
Geometric distortion:	Below measurable limit (excl. lens)

Viewfinder

CRT:	1.5" monochrome
Resolution:	600 lines (center)
Controls/Switches:	Controls; BRIGHT, CONTRAST, PEAKING Switches; TALLY, ZEBRA

Specifications

VTR Section

VTR Video System (during playback on a standard playback unit)

Bands:	Brightness; 30 Hz to 5.75 MHz+1.0 dB/-3.0 dB
S/N ratio:	55 dB
K factor (2T pulse):	Within 2%
Y/C delay:	Within 30 ns

VTR Audio System (during playback on a standard playback unit)

Sampling frequency:	48 kHz (synchronized to video)
Quantization:	16-bits/sample
Frequency response:	20 Hz to 20 kHz \pm 1.0 dB (at reference level)
Dynamic range:	80 dB or more (at 1 kHz, AWTD)
Distortion:	Within 0.1% (at 1 kHz, operating level)
Wow/flutter:	Below measurable limit
Head room:	20 dB
Emphasis:	T1=50 μ s, T2=15 μ s (can be turned ON/OFF)

VTR Tape Running System

Tape speed:	33.820 mm/s
Recording/playback time:	Approx. 66 min. (using the AJ-P66MP)
FF/REW time:	Approx. 3 min. (using the AJ-P66MP)

Connectors

Input

AUDIO IN CH1/CH2 (XLRX2, 3-pin, female):	MIC/LINE switchable, balanced, more than 10 kohm MIC; Menu setting to -60/-50/-40 dBu LINE; Menu setting to -6/0/+4 dBu
MIC IN (XLR, 3-pin, female):	Phantom +48 V, balanced, 3 kohm Menu setting to -60/-50/-40 dBu
GENLOCK IN (BNC):	1.0 Vp-p, 75 ohm

Output

CAMERA OUT (BNC):	1.0 Vp-p, 75 ohm
VIDEO OUT (BNC):	1.0 Vp-p, 75 ohm
AUDIO OUT (CH1/CH2/MIX) (XLR, 3-pin, male):	+4 dBu, balanced, low-impedance (Menu setting to CH1/CH2/MIX)

PHONES (mini-jack \times 1):

Other

DC IN (XLR, 4-pin, male):	DC 11 to 17 V
DC OUT (4-pin):	DC 11 to 17 V, maximum rated current; 0.1 A
LENS (12-pin):	
REMOTE (ECU, 6-pin):	

Accessories

Microphone kit
Tripod attachment
Sony battery connector (screw included)

Weight and dimensions shown are approximate.
Specifications are subject to change without notice.

Specifications

Related Components

Power supply related

AU-BP220, AU-BP402 battery packs
AG-B425 battery charger (for charging the AU-BP220 and AU-BP402 battery packs)
AU-M402H battery case
AJ-B75 AC adaptor

Viewfinder

5-inch viewfinder

External VTR-related

Portable video cassette recorder
AJ-YA710P* time code input/output/video input adaptor
AJ-YA900P 26-pin/12-pin output adaptor (for connecting an external VTR to the 26-pin interface)
AJ-YA700P* 26-pin output adaptor (for connecting an external VTR to the 26-pin interface)
AQ-EC1 extension control unit
Connection cables

- for connecting an external VTR to the 26-pin interface
- for connecting an external VTR to the 14-pin/26-pin interface
- SHAN-C12TCA multi connector cable

*Video input connector can only be used for return video input.

Audio components

AJ-MH700P microphone holder
WX-RA700 wireless receiver
WX-R980 camera attachment

Maintenance products

AJ-CL12MP cleaning tape
AJ-SC900 soft carrying case
SHAN-B700 carrying case
SHAN-RC700 rain cover

Specifications

AJ-D400E

General

Power supply voltage:	DC 12 V
Power consumption:	24 W

Operating temperature:	0°C to 40°C
Storage temperature:	-20°C to 60°C
Operating humidity:	Less than 85% (relative humidity)
Continuous operating time:	Approx. 90 min. (using 1 Anton Bauer Trimpac 14 battery)
Weight:	Approx. 5.85 kg (includ. main unit, viewfinder, lens, battery pack, tape and microphone)
Dimensions:	119.2 (W)×255.5 (includ. handle) (H)×326.3 (D) mm

Camera Section

Pick-up devices:	1/2-inch on-chip FIT type of CCD
System:	RGB 3-CCD system
Picture elements:	480,000 pixel
Spectral system:	F1.4 prism system
Built-in filters:	1; 3200K 2; 5600K+1/4 ND 3; 5600K 4; 5600K+1/16 ND
Quantization:	10-bit A/D (R, G and B channels), 14.4 MHz
Digital signal processing:	16-bit long operation, 14.4 MHz/28.8 MHz
Horizontal drive frequency:	14.4 MHz
Programmable gains:	3 positions can be set from among -3, 0, 3, 6, 9, 12, 15, 18, 21, 24 and 30 dB.
Super gain:	30 dB
Shutter speeds:	1/60, 1/120, 1/250, 1/500, 1/1000 and 1/2000 sec. Synchro scan mode; 1/29.9-1/47.6 sec., 1/51.5-1/252 sec.
Lens mount:	1/2" Bayonet type
Sensitivity:	F8 (2000 lux, 89.9% reflection)
Minimum subject brightness:	2 lux (F1.4, +30 dB)
Image S/N ratio:	60 dB (typical)
Horizontal resolution:	750 lines (centre)
Vertical resolution:	450 lines/more than 500 lines (Super V mode)
Sampling frequency:	14.4 MHz/28.8 MHz
Registration:	Below 0.03% (entire range) (excl. lens)
Geometric distortion:	Below measurable limit (excl. lens)

Viewfinder

CRT:	1.5" monochrome
Resolution:	600 lines (centre)
Controls/Switches:	Controls; BRIGHT, CONTRAST, PEAKING Switches; TALLY, ZEBRA

Specifications

VTR Section

VTR Video System (during playback on a standard playback unit)

Bands:	Brightness; 25 Hz to 5.75 MHz+1.0 dB/-3.0 dB
S/N ratio:	55 dB
K factor (2T pulse):	Within 2%
Y/C delay:	Within 30 ns

VTR Audio System (during playback on a standard playback unit)

Sampling frequency:	48 kHz (synchronized to video)
Quantization:	16-bits/sample
Frequency response:	20 Hz to 20 kHz±1.0 dB (at reference level)
Dynamic range:	80 dB or more (at 1 kHz, AWTD)
Distortion:	Within 0.1% (at 1 kHz, operating level)
Wow/flutter:	Below measurable limit
Head room:	18 dB
Emphasis:	T1=50 µs, T2=15 µs (can be turned ON/OFF)

VTR Tape Running System

Tape speed:	33.854 mm/s
Recording/playback time:	Approx. 66 min. (using the AJ-P66MP)
FF/REW time:	Approx. 3 min. (using the AJ-P66MP)

Connectors

Input

AUDIO IN CH1/CH2 (XLRX2, 3-pin, female):	MIC/LINE switchable, balanced, more than 10 kohm MIC; Menu setting to -60/-50/-40 dBu LINE; Menu setting to -6/0/+4 dBu
MIC IN (XLR, 3-pin, female):	Phantom +48 V, balanced, 3 kohm Menu setting to -60/-50/-40 dBu
GENLOCK IN (BNC):	1.0 Vp-p, 75 ohm

Output

CAMERA OUT (BNC):	1.0 Vp-p, 75 ohm
VIDEO OUT (BNC):	1.0 Vp-p, 75 ohm
AUDIO OUT (CH1/CH2/MIX) (XLR, 3-pin, male):	0 dBu, balanced, low-impedance (Menu setting to CH1/CH2/MIX)
PHONES (mini-jack×1):	

Other

DC IN (XLR, 4-pin, male):	DC 11 to 17 V
DC OUT (4-pin):	DC 11 to 17 V, maximum rated current; 0.1 A
LENS (12-pin):	
REMOTE (ECU, 6-pin):	

Accessories

Microphone kit
Tripod attachment
Sony battery connector (screw included)

Weight and dimensions shown are approximate.
Specifications are subject to change without notice.

Specifications

Related Components

Power supply related

AU-BP220, AU-BP402 battery packs
AG-B425 battery charger (for charging the AU-BP220 and AU-BP402 battery packs)
AU-M402H battery case
AJ-B75 AC adaptor

Viewfinder

5-inch viewfinder

External VTR-related

Portable video cassette recorder
AJ-YA710P* time code input/output/video input adaptor
AJ-YA900P 26-pin/12-pin output adaptor (for connecting an external VTR to the 26-pin interface)
AJ-YA700P* 26-pin output adaptor (for connecting an external VTR to the 26-pin interface)
AJ-EC2/AQ-EC1 extension control unit
Connection cables

- for connecting an external VTR to the 26-pin interface
- for connecting an external VTR to the 14-pin/26-pin interface
- SHAN-C12TCA multi connector cable

*Video input connector can only be used for return video input.

Audio components

AJ-MH700P microphone holder

Maintenance products

AJ-CL12MP cleaning tape
AJ-SC900 soft carrying case
SHAN-B700 carrying case
SHAN-RC700 rain cover

SAFETY PRECAUTIONS

GENERAL GUIDELINES

1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
2. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

LEAKAGE CURRENT COLD CHECK

1. Unplug the AC cord and connect a jumper between the two prongs on the plug.
2. Measure the resistance value, with an ohm meter, between the jumpered AC plug and each exposed metallic cabinet part on the equipment such as screwheads, connectors, control shafts, etc. When the exposed metallic part has a return path to the chassis, the reading should be between $1\text{M}\Omega$ and $5.2\text{M}\Omega$. When the exposed metal does not have a return path to the chassis, the reading must be ∞ .

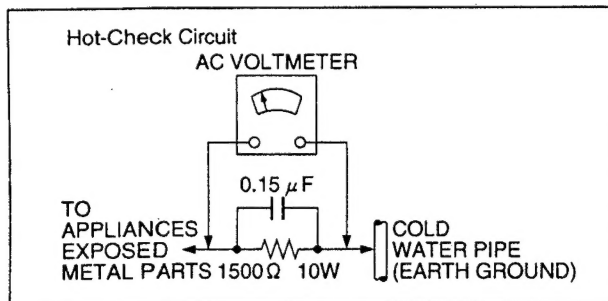


Figure 1

LEAKAGE CURRENT HOT CHECK (See Figure 1)

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a $1.5\text{k}\Omega$, 10W resistor, in parallel with a $0.15\mu\text{F}$ capacitor, between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
3. Use an AC voltmeter, with 1000 ohms/volt or more sensitivity, to measure the potential across the resistor.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reverse the AC plug in the AC outlet repeat each of the above measurements.
6. The potential at any point should not exceed 0.75 volts RMS. A leakage current tester (Simpson Model 229 equivalent) may be used to make the hot checks, leakage current must not exceed $1/2$ milliamp. In case a measurement is outside of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

ELECTROSTATICALLY SENSITIVE (ES) DEVICES

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by static electricity.

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any electrostatic charge on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging wrist strap device, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device classified as "anti-static" can generate electrical charges sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.
CAUTION: Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.
8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity sufficient to damage an ES device).


X-RADIATION

WARNING

1. The potential source of X-Radiation in EVF sets is the High Voltage section and the picture tube.
2. When using a picture tube test jig for service, ensure that jig is capable of handling 10kV without causing X-Radiation.

NOTE: It is important to use an accurate periodically calibrated high voltage meter.

3. Measure the High Voltage. The meter (electric type) reading should indicate 2.5kV , $\pm 0.15\text{kV}$. If the meter indication is out of tolerance, immediate service and correction is required to prevent the possibility of premature component failure. To prevent an X-Radiation possibility, it is essential to use the specified picture tube.

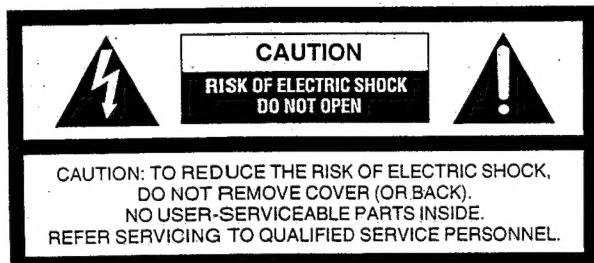

The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (service) instructions in the literature accompanying the appliance.



ATTENTION:

The product you have purchased is powered by a nickel cadmium battery which is recyclable. At the end of its useful life, under various state and local laws, it is illegal to dispose of this battery into your municipal waste stream.

Please call 1-800-8-BATTERY for information on how to recycle this battery.

ATTENTION:

Le produit que vous avez acheté est alimenté par une pile au nickel-cadmium. La pile est recyclable. Pour obtenir des renseignements sur les façons de recycler cette pile, appeler au 1-800-8 BATTERY.

Replace battery with part No. CR2032 only.
Use of another battery may present a risk of fire or explosion.
Caution—Battery may explode if mistreated.
Do not recharge, disassemble or dispose of in fire.

FCC NOTE:

This device complies with Part 15 of the FCC Rules. To assure continued compliance follow the attached installation instructions and do not make any unauthorized modifications.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

CAUTION:

TO REDUCE THE RISK OF FIRE OR SHOCK HAZARD AND ANNOYING INTERFERENCE, USE THE RECOMMENDED ACCESSORIES ONLY.

WARNING:

TO REDUCE THE RISK OF FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE.

■ DO NOT REMOVE PANEL COVER BY UNSCREWING.

To reduce the risk of the electric shock, do not remove cover. No user serviceable parts inside. Refer servicing to qualified service personnel.

WARNING:

TO REDUCE THE RISK OF FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE.

CAUTION:

TO REDUCE THE RISK OF FIRE OR SHOCK HAZARD AND ANNOYING INTERFERENCE, USE THE RECOMMENDED ACCESSORIES ONLY.

Lithium Battery

Warning

The lithium battery in this equipment must only be replaced by qualified personnel. When necessary, contact your local Panasonic supplier.

"The lithium battery is a critical component (type number CR2032 manufactured by Panasonic).

It must never be subjected to excessive heat or discharge. It must therefore only be fitted in equipment designed specifically for its use.

Replacement batteries must be of the same type and manufacturer. They must be fitted in the same manner and location as the original battery, with the correct polarity connections observed.

Do not attempt to re-charge the old battery or re-use it for any other purpose. It should be disposed of in waste products destined for burial rather than incineration."

CAUTION

Danger of explosion if battery is incorrectly replaced.

Replace only with the same or equivalent type recommended by the equipment manufacturer. Discard used batteries according to manufacturer's instructions.

VARNING

Explosionsfara vid felaktigt batteribyte.

Använd samma batterityp eller en ekvivalent typ som rekommenderas av apparattillverkaren. Kasserat använt batteri enligt fabrikantens instruktion.

ADVARSEL!

Eksplussionsfare ved fejlagtig håndtering.

Udskiftning må kun ske med batteri af samme fabrikat og type. Levér det brugte batteri tilbage til leverandøren.


VAROITUS

Paristo voi räjähtää, jos se on virheellisesti asennettu.

Vaihda paristo ainoastaan laitevalmistajan suosittelemaan tyyppiin. Hävitä käytetty paristo valmistajan ohjeiden mukaisesti.

Attention/Attentie

- Batteries are used for the main power source and memory back-up in the product.
At the end of their useful life, you should not throw them away.
Instead, hand them in as small chemical waste.
- Voor de primaire voeding en het reservegeheugen van het apparaat wordt gebruikgemaakt van een batterij.
Wanneer de batterij is uitgeput, mag u deze niet gewoon weggooien, maar dient u deze als klein chemisch afval weg te doen.




To remove the battery/Verwijderen van de batterij


Main Power Battery (Ni-Cd Battery)

Batterij Voor Primaire Voeding (Nikkelcadmiumbatterij)

Battery/Batterij AU-BP402

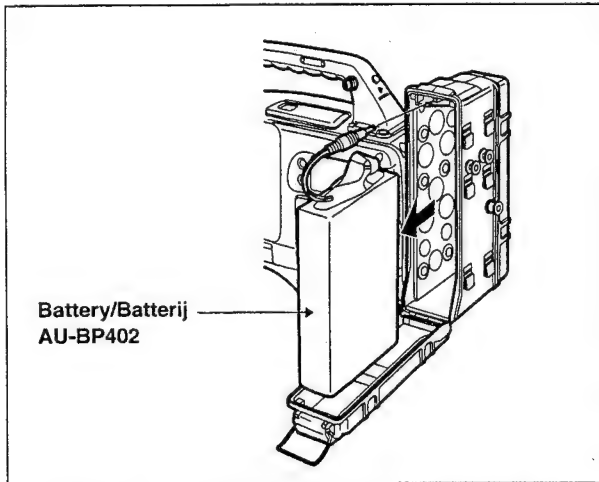

Anton/Bauer Battery
Anton/Bauer-Batterij

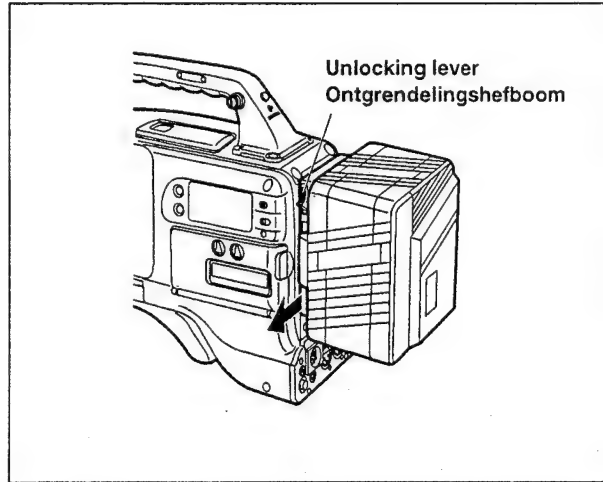


- If a battery made by any other manufacturer is to be used, check the Operating Instructions accompanying the battery.
- In geval u een batterij van een anden fabrikant zou gebruiken, gelieve dan eerst zorgvuldig de gebruiksaanwijzing van deze batterij te lezen.

Back-up Battery (Lithium Battery)

Batterij Voor Reservegeheugen (Lithiumbatterij)

- For the removal of the battery for disposal at the end of its service life, please consult your dealer.
- Raadpleeg uw leverancier over de verwijdering van de batterij op het moment dat u het apparaat bij einde levensduur afdankt.

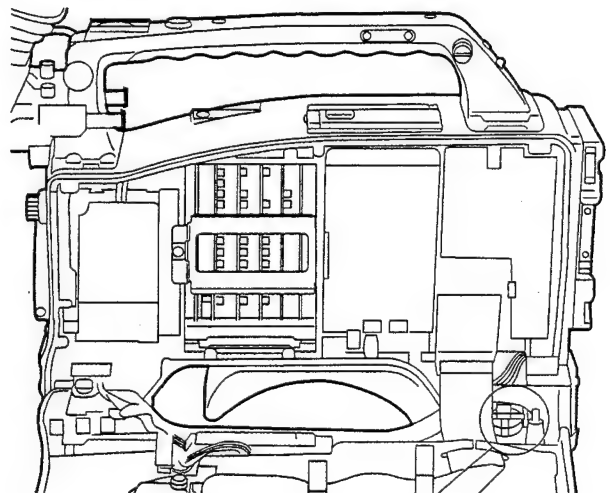

Back-up Battery (Lithium Battery)
Batterij Voor Reservegeheugen (Lithiumbatterij)

SECTION 4

ELECTRICAL ADJUSTMENT

CONTENTS

11. Power

11-1. D3.0V Adjustment	4-1
11-2. D5.0V Adjustment	4-1
11-3. A5.6V Adjustment	4-1
11-4. A9.0V Adjustment	4-1
11-5. A -5.6V Adjustment	4-1
11-6. A3.6V Adjustment	4-1
11-7. CCD 17.0V Confirmation	4-2
11-8. CCD -11.0V Confirmation	4-2
11-9. A-3.9V Confirmation	4-2

11. Power

11-1. D3.0V Adjustment

BOARD	Power, VIDEO MAIN
SPEC.	3.15V+0.05V/-0.00V
TEST	TP9[3.15], TP6[A-GND] (VIDEO MAIN Board)
ADJUST	VR1005(POWER Board)
INPUT	CAMERA Colour Bar
MODE	REC
M.EQ	Digital Volt Meter

1. Connect a D.V.M. to **TP9**, and its ground to **TP6** on the VIDEO MAIN Board, then adjust **VR1005** (POWER Board) so that the voltage is in the specification.

11-2. D5.0V Adjustment

BOARD	Power
SPEC.	5.00V+/-0.10V
TEST	TP1010, TG1002[GND]
ADJUST	VR1006
INPUT	CAMERA Colour Bar
MODE	REC
M.EQ	Digital Volt Meter

1. Connect a D.V.M. to **TP1010**, and its ground to **TG1002** on the POWER Board, then adjust **VR1006** (POWER Board) so that the voltage is in the specification.

11-3. A5.6V Adjustment

BOARD	Power
SPEC.	5.60V+/-0.10V
TEST	TP1008, TG1002[GND]
ADJUST	VR1004
INPUT	CAMERA Colour Bar
MODE	REC
M.EQ	Digital Volt Meter

1. Connect a D.V.M. to **TP1008**, and its ground to **TG1002** on the POWER Board, then adjust **VR1004** (POWER Board) so that the voltage is in the specification.

11-4. A9.0V Adjustment

BOARD	Power
SPEC.	9.00V+/-0.10V
TEST	TP1007, TG1002[GND]
ADJUST	VR1003
INPUT	CAMERA Colour Bar
MODE	REC
M.EQ	Digital Volt Meter

1. Connect a D.V.M. to **TP1007**, and its ground to **TG1002** on the POWER Board, then adjust **VR1003** (POWER Board) so that the voltage is in the specification.

11-5. A-5.6V Adjustment

BOARD	Power
SPEC.	-5.60V+/-0.10V
TEST	TP1003, TG1002[GND]
ADJUST	VR1001
INPUT	CAMERA Colour Bar
MODE	REC
M.EQ	Digital Volt Meter

1. Connect a D.V.M. to **TP1003**, and its ground to **TG1002** on the POWER Board, then adjust **VR1001** (POWER Board) so that the voltage is in the specification.

11-6. A3.6V Adjustment

BOARD	Power
SPEC.	3.60V+/-0.10V
TEST	TP1011, TG1002[GND]
ADJUST	VR1002
INPUT	CAMERA Colour Bar
MODE	REC
M.EQ	Digital Volt Meter

1. Connect a D.V.M. to **TP1011**, and its ground to **TG1002** on the POWER Board, then adjust **VR1002** (POWER Board) so that the voltage is in the specification.

11-7. CCD17.0V Confirmation

<MEMO>

BOARD	Power
SPEC.	17.40V \pm 0.40V
TEST	TP1005,TG1002[GND]
ADJUST	-----
INPUT	CAMERA Colour Bar
MODE	REC
M.EQ	Digital Volt Meter

1. Connect a D.V.M. to **TP1005**, and its ground to **TG1002** on the POWER Board, then confirm that the voltage is in the specification.
2. If it is not in the specification, adjust **VR1002** (11-6 A3.6V Adjustment) so that the voltage is in the specification.

11-8. CCD-11.0V Confirmation

BOARD	Power
SPEC.	-11.50V \pm 0.40V
TEST	TP1006,TG1002[GND]
ADJUST	-----
INPUT	CAMERA Colour Bar
MODE	REC
M.EQ	Digital Volt Meter

1. Connect a D.V.M. to **TP1006**, and its ground to **TG1002** on the POWER Board, then confirm that the voltage is in the specification.
2. If it is not in the specification, adjust **VR1002** (11-6 A3.6V Adjustment) so that the voltage is in the specification.

11-9. A-3.9V Confirmation

BOARD	Power
SPEC.	-3.90V \pm 0.30V
TEST	TP1012,TG1002[GND]
ADJUST	-----
INPUT	CAMERA Colour Bar
MODE	REC
M.EQ	Digital Volt Meter


1. Connect a D.V.M. to **TP1012**, and its ground to **TG1002** on the POWER Board, then confirm that the voltage is in the specification.
2. If it is not in the specification, adjust **VR1002** (11-6 A3.6V Adjustment) so that the voltage is in the specification.

SECTION 6


SCHEMATIC DIAGRAMS

NOTE

(EX 1)

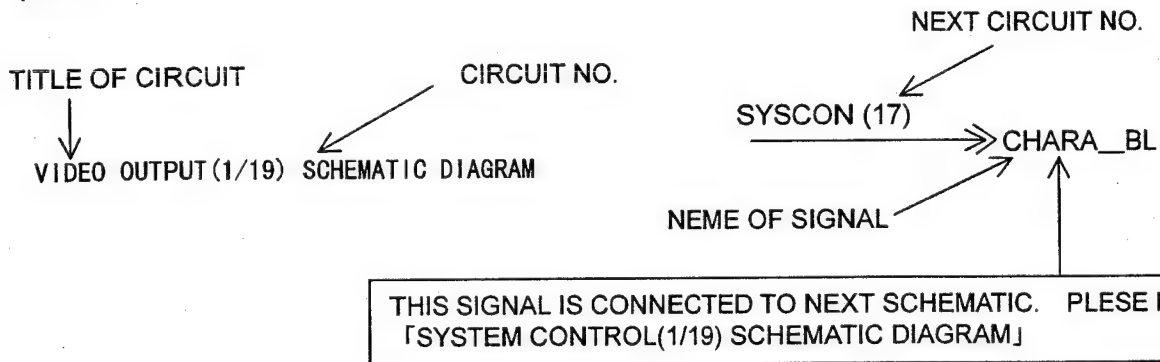

(EX 2)

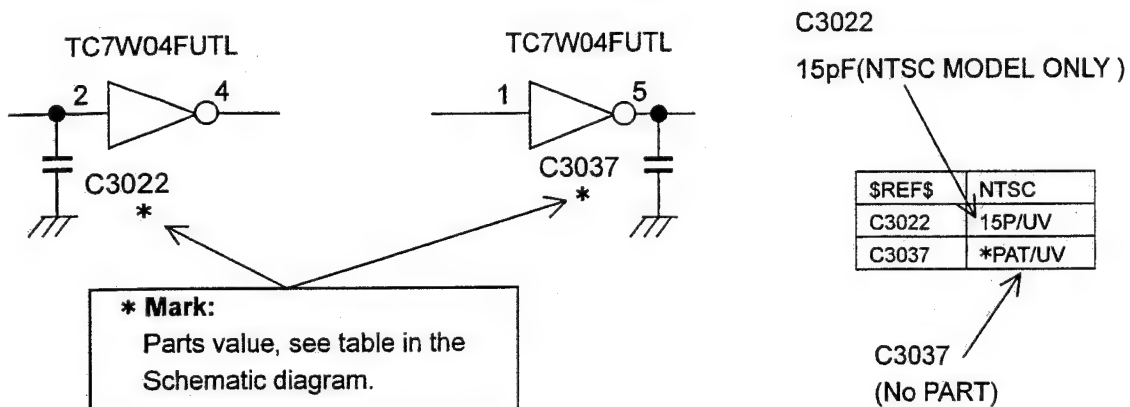

IMPORTANT SAFETY NOTICE

COMPONENTS IDENTIFIED WITH THE MARK  HAVE THE SPECIAL CHARACTERISTICS FOR SAFETY.
WHEN REPLACING ANY OF THESE COMPONENTS USE ONLY THE SAME TYPE.


DO NOT USE THE PART NUMBER SHOWN ON THIS DRAWING FOR ORDERING. THE CORRECT PART NUMBER IS SHOWN IN THE PARTS LIST.
AND MAY BE SLIGHTLY DIFFERENT OR AMENDED SINCE THIS DRAWING WAS PREPARED.

CONTENTS


INTERCONNECTION (FOR NTSC)	SCM001
INTERCONNECTION (FOR PAL)	SCM002
MOTHER (FOR NTSC)	SCM003
MOTHER (FOR PAL)	SCM005
CDS	SCM007
PRE PROCESS	SCM008
CAMERA DSP	SCM012
CAMERA ENCODER	SCM016
VIDEO I/F (FOR NTSC)	SCM020
VIDEO I/F (FOR PAL)	SCM025
VIDEO I/F SUB (PAL ONLY)	SCM032
VIDEO MAIN (MAIN 1)	SCM035
VIDEO MAIN (MAIN 2)	SCM036
VIDEO MAIN (EVR)	SCM037
VIDEO MAIN (SYNC CLK)	SCM038
VIDEO MAIN (SBC)	SCM039
VIDEO MAIN (LOCK)	SCM040
VIDEO MAIN (I/F)	SCM041
RF	SCM042
CCD	SCM047
PULSE	SCM048
CAMERA SYNC	SCM050
CAMERA SYSCON	SCM053
VTR SYSCON	SCM058
SERVO	SCM063
SERVO	SCM064
POWER	SCM071
AUDIO LCD (AUDIO INPUT)	SCM073
AUDIO LCD (AUDIO AGC)	SCM074
AUDIO LCD (AUDIO A/D D/A)	SCM075
AUDIO LCD (AUDIO MONITOR)	SCM076
AUDIO LCD (AUDIO CUE)	SCM077
AUDIO LCD (AUDIO CONTROL)	SCM078
AUDIO LCD (AUDIO LCD)	SCM079
AUDIO LCD (AUDIO LCD I/F)	SCM080
AUDIO LCD (AUDIO OUT)	SCM081
REAR JACK	SCM082
CAMERA FLEX	SCM084
VTR FLEX	SCM085
MEMORY CARD (NOT USE)	SCM086
OPERATE	SCM087
EVF INTERCONNECTION	SCM088
EVF VIDEO	SCM089
H DEF	SCM090
EVF CRT MASK	SCM091
EVF SW VR	SCM092
F TALLY	SCM093

A B C D E F G H I J K L M N O P Q


1 2 3 4 5 6 7 8 9 10 11 12

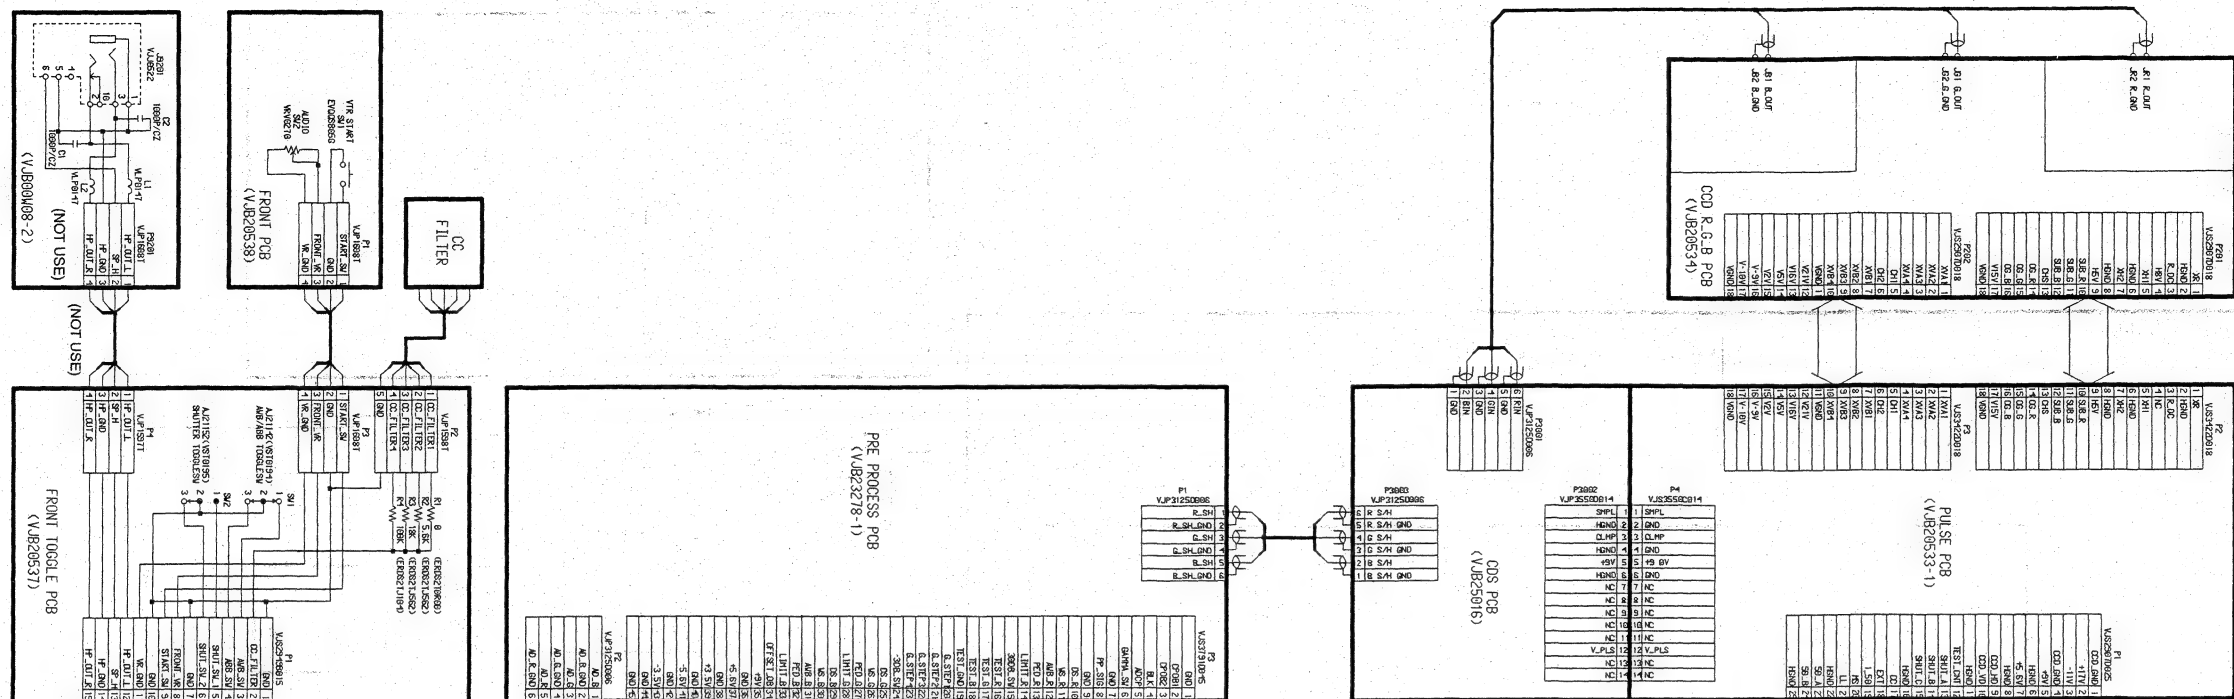

CAMERA FLEX (VJB00W29)

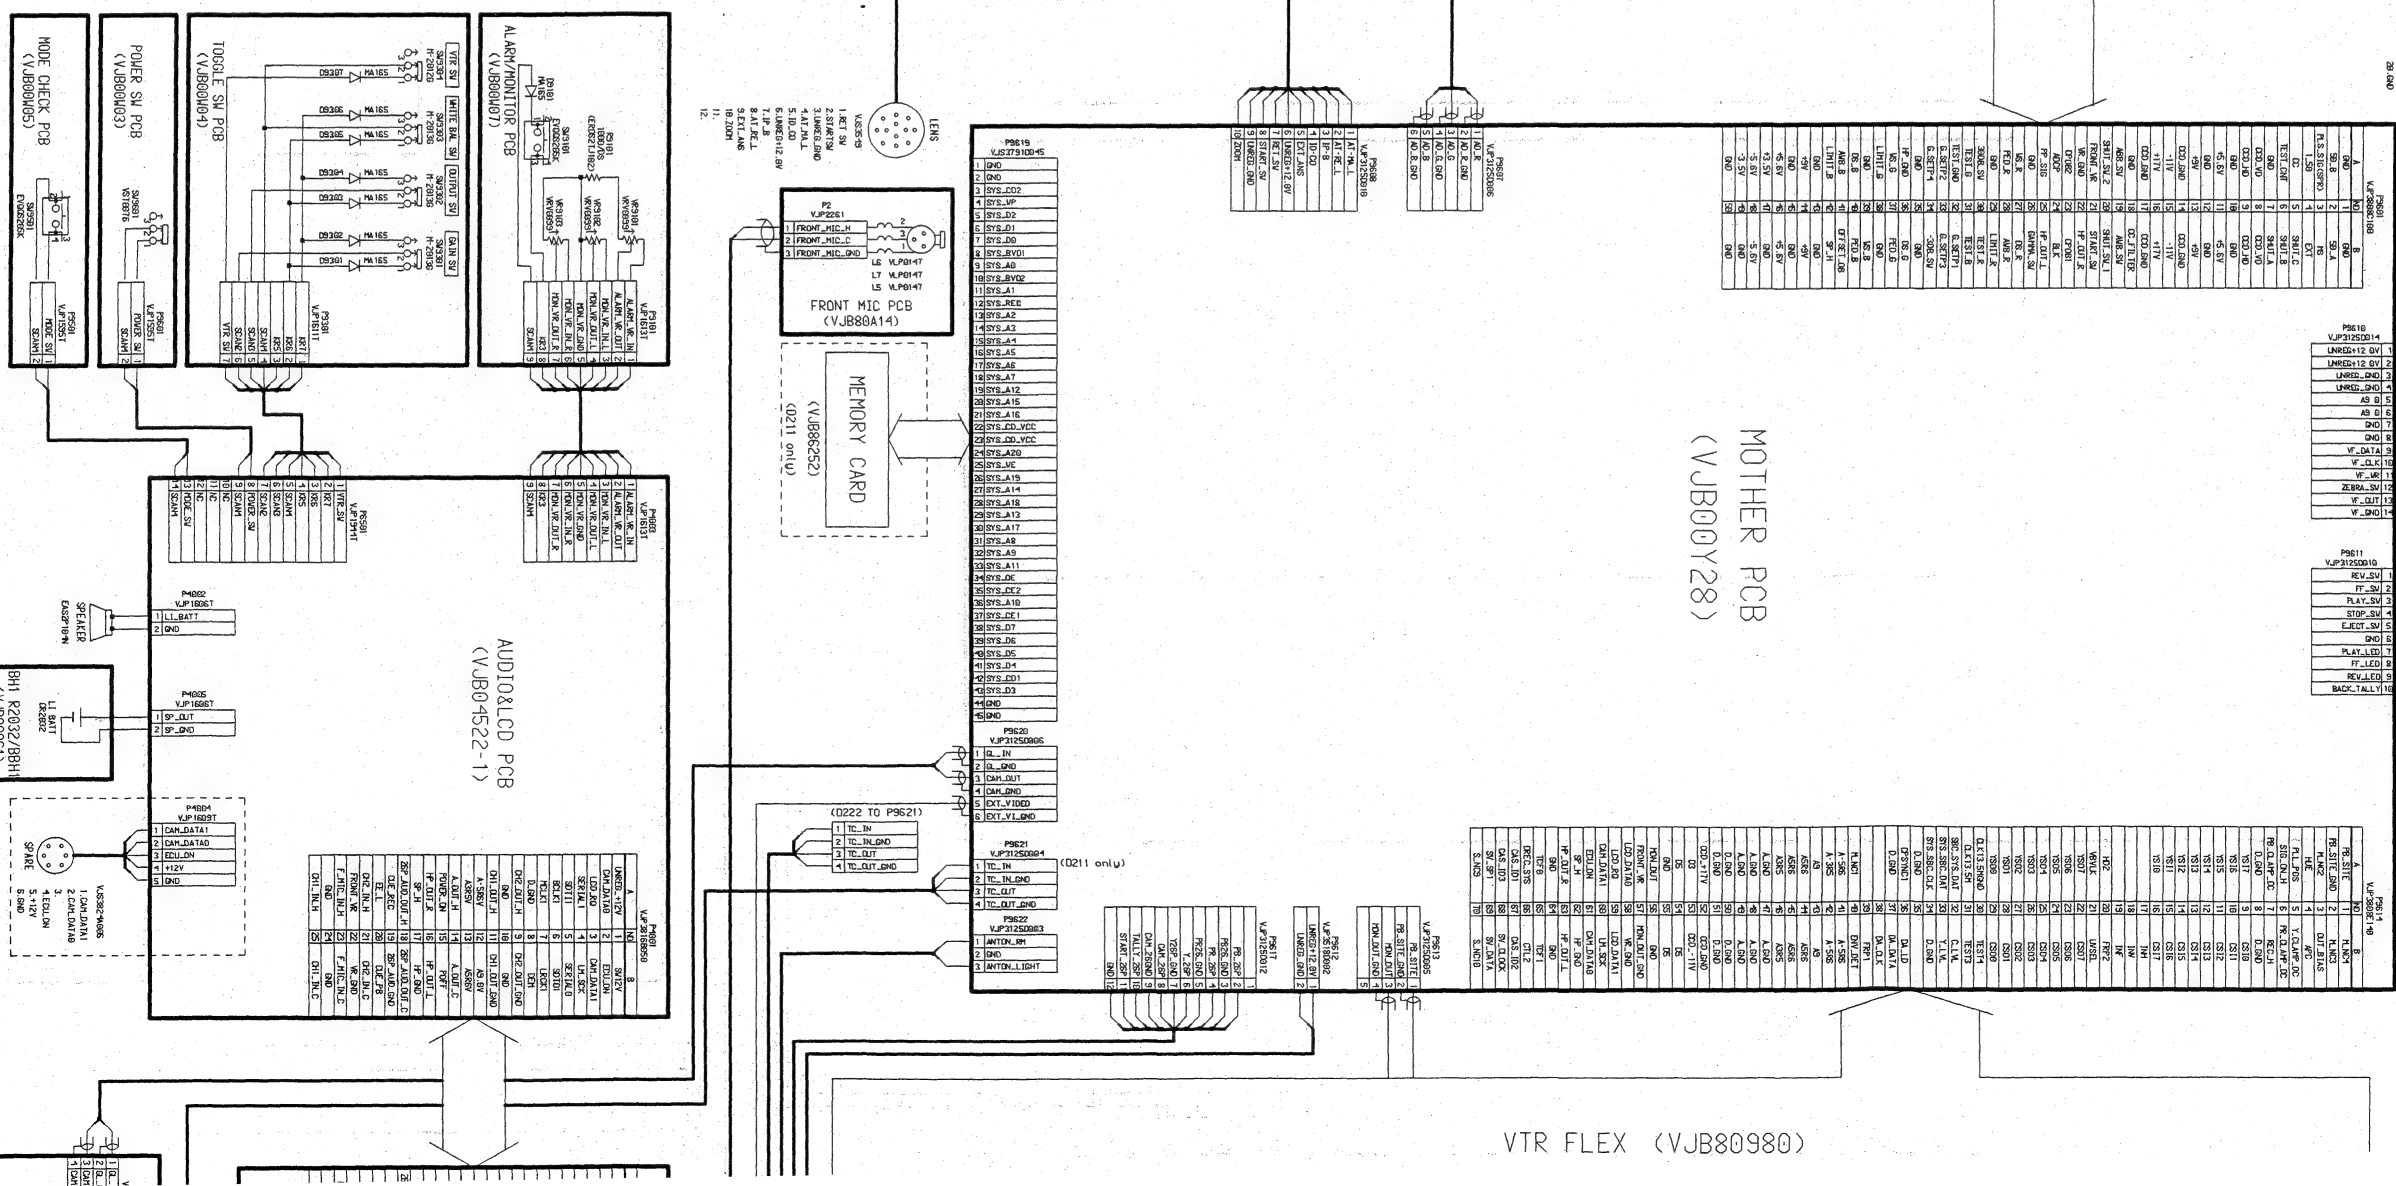

VTR FLEX (VJB00980)




VJB889583	
A	B
1	2
3	4
5	6
7	8
9	10
11	12
13	14
15	16
17	18
19	20
21	22
23	24
25	26
27	28
29	30
31	32
33	34
35	36
37	38
39	40
41	42
43	44
45	46
47	48
49	50
51	52
53	54
55	56
57	58
59	60
61	62
63	64
65	66
67	68
69	70
71	72
73	74
75	76
77	78
79	80
81	82
83	84
85	86
87	88
89	90
91	92
93	94
95	96
97	98
99	100

VJB889583	
A	B
1	2
3	4
5	6
7	8
9	10
11	12
13	14
15	16
17	18
19	20
21	22
23	24
25	26
27	28
29	30
31	32
33	34
35	36
37	38
39	40
41	42
43	44
45	46
47	48
49	50
51	52
53	54
55	56
57	58
59	60
61	62
63	64
65	66
67	68
69	70
71	72
73	74
75	76
77	78
79	80
81	82
83	84
85	86
87	88
89	90
91	92
93	94
95	96
97	98
99	100



TEST	
A	B
1	2
3	4
5	6
7	8
9	10
11	12
13	14
15	16
17	18
19	20
21	22
23	24
25	26
27	28
29	30
31	32
33	34
35	36
37	38
39	40
41	42
43	44
45	46
47	48
49	50
51	52
53	54
55	56
57	58
59	60
61	62
63	64
65	66
67	68
69	70
71	72
73	74
75	76
77	78
79	80
81	82
83	84
85	86
87	88
89	90
91	92
93	94
95	96
97	98
99	100

SERVO PCB
(VJB02437-1)

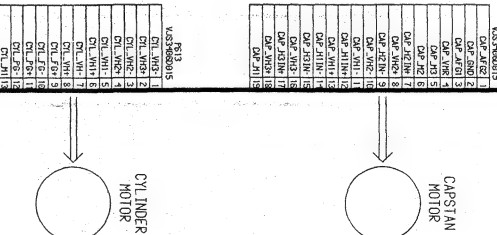

RF PCB
(VJB03B95-1)


POWER PCB
(VJB01643-1)

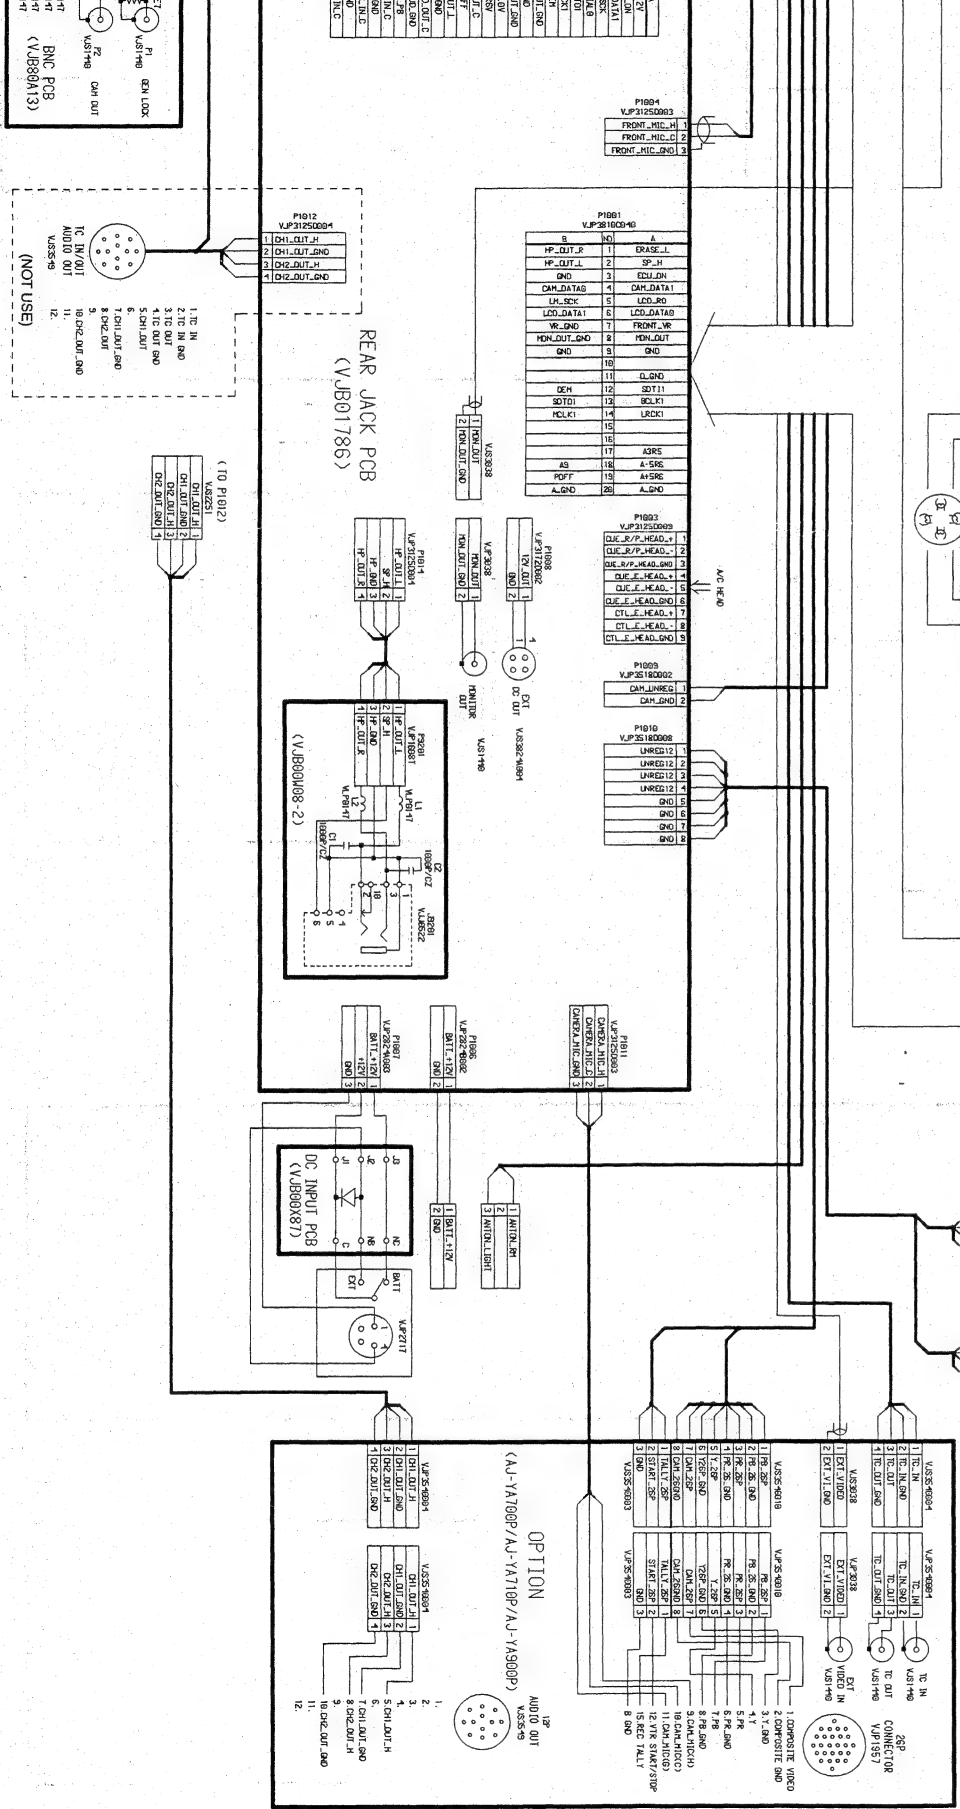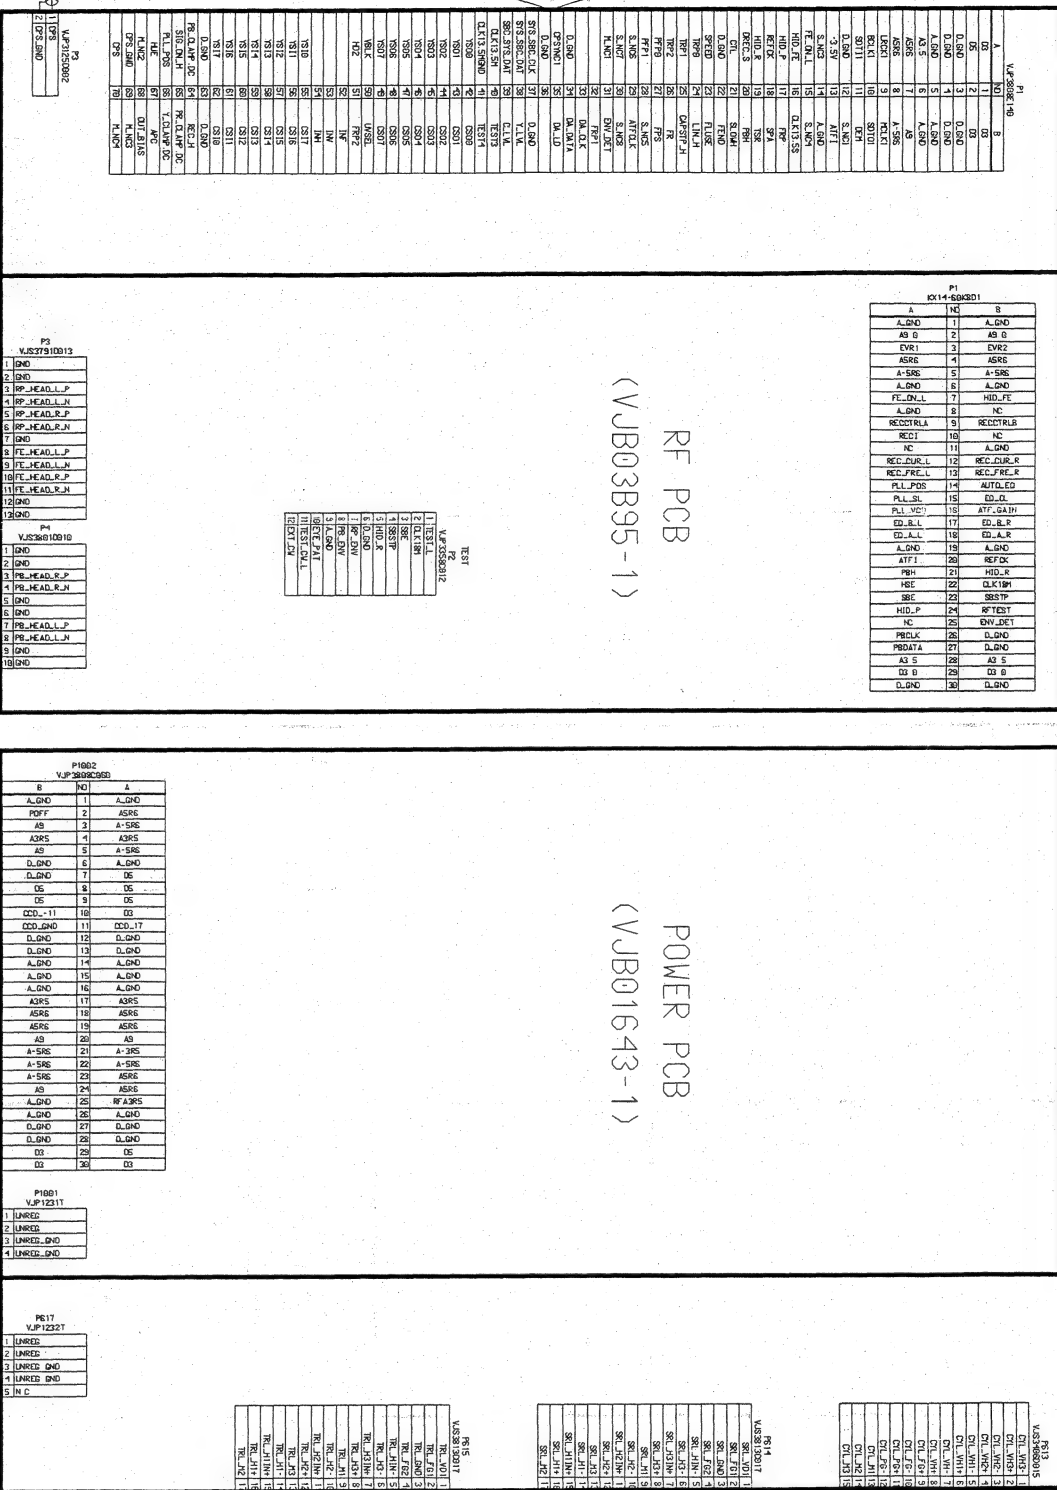




































COMPONENT NAME	
INTERCONNECTION (FOR PAL)	
CIRCUIT BOARD NO.	
MODEL NO.	
SCM002	

A B C D E F G H I J K L M N O P Q

1 2 3 4 5 6 7 8 9 10 11

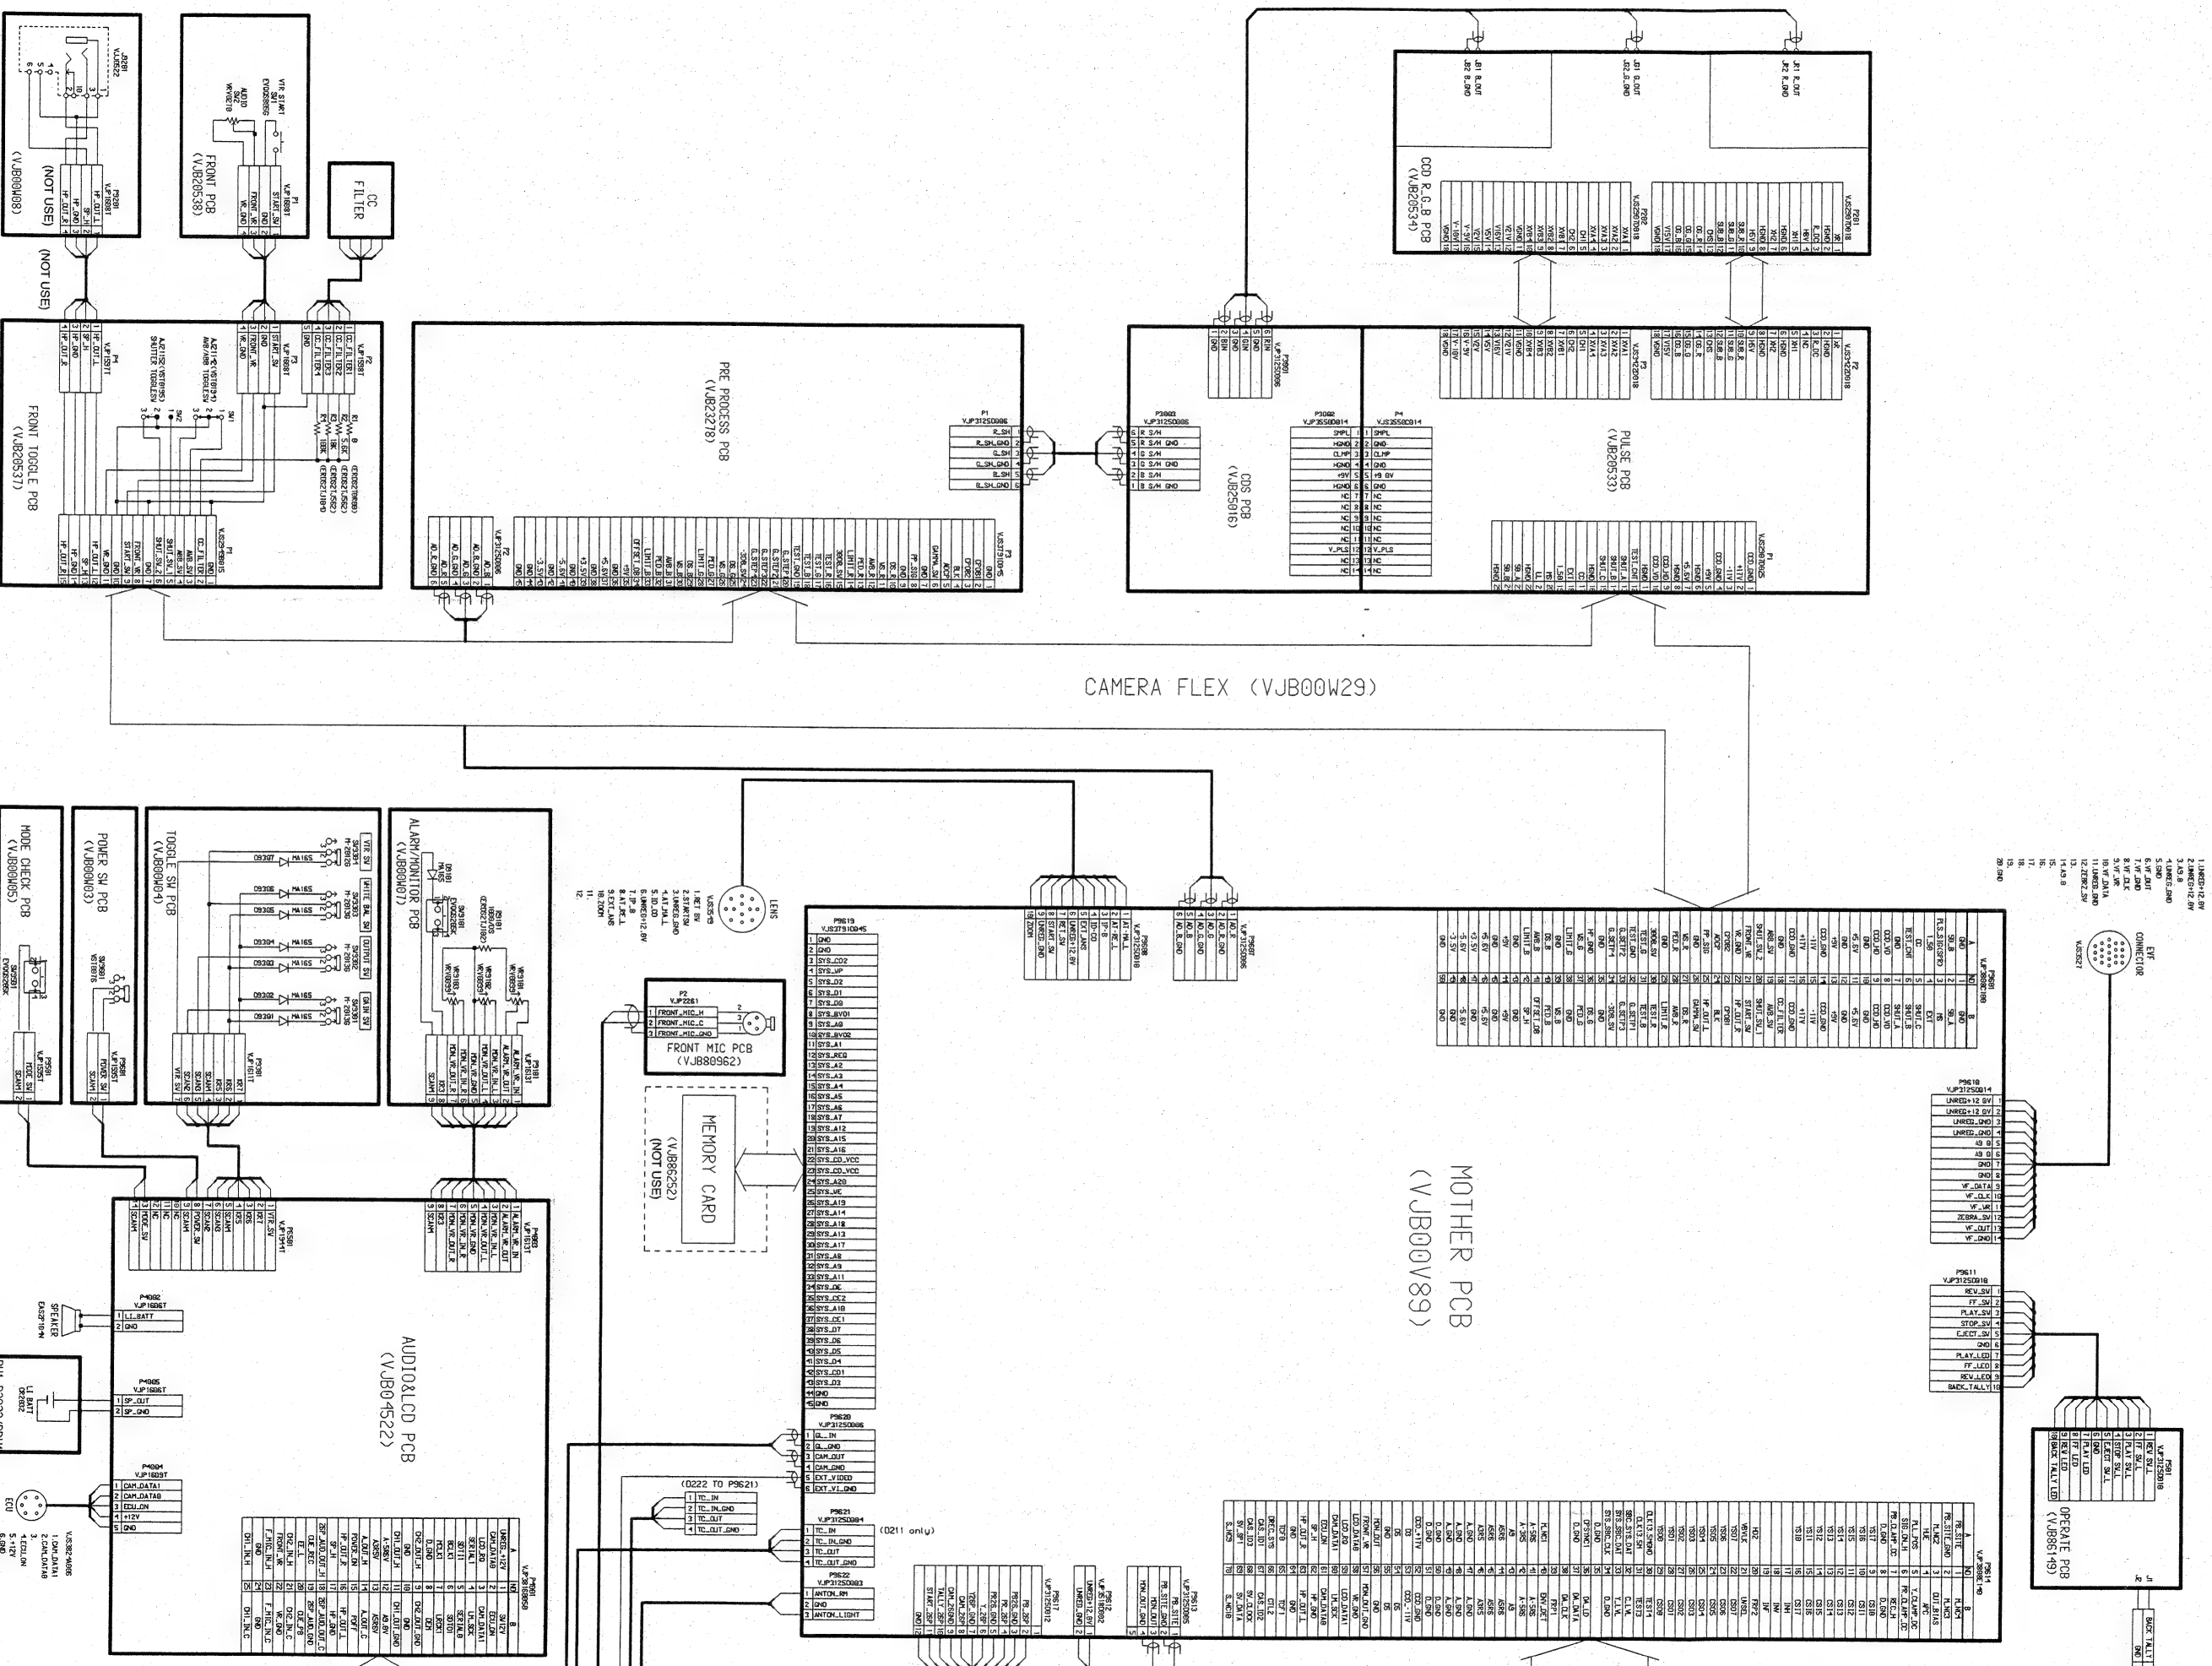

Pin	Signal	Pin	Signal
1	V+	1	V+
2	GND	2	GND
3	V+	3	V+
4	GND	4	GND
5	V+	5	V+
6	GND	6	GND
7	V+	7	V+
8	GND	8	GND
9	V+	9	V+
10	GND	10	GND
11	V+	11	V+
12	GND	12	GND
13	V+	13	V+
14	GND	14	GND
15	V+	15	V+
16	GND	16	GND
17	V+	17	V+
18	GND	18	GND
19	V+	19	V+
20	GND	20	GND
21	V+	21	V+
22	GND	22	GND
23	V+	23	V+
24	GND	24	GND
25	V+	25	V+
26	GND	26	GND
27	V+	27	V+
28	GND	28	GND
29	V+	29	V+
30	GND	30	GND
31	V+	31	V+
32	GND	32	GND
33	V+	33	V+
34	GND	34	GND
35	V+	35	V+
36	GND	36	GND
37	V+	37	V+
38	GND	38	GND
39	V+	39	V+
40	GND	40	GND
41	V+	41	V+
42	GND	42	GND
43	V+	43	V+
44	GND	44	GND
45	V+	45	V+
46	GND	46	GND
47	V+	47	V+
48	GND	48	GND
49	V+	49	V+
50	GND	50	GND
51	V+	51	V+
52	GND	52	GND
53	V+	53	V+
54	GND	54	GND
55	V+	55	V+
56	GND	56	GND
57	V+	57	V+
58	GND	58	GND
59	V+	59	V+
60	GND	60	GND
61	V+	61	V+
62	GND	62	GND
63	V+	63	V+
64	GND	64	GND
65	V+	65	V+
66	GND	66	GND
67	V+	67	V+
68	GND	68	GND
69	V+	69	V+
70	GND	70	GND
71	V+	71	V+
72	GND	72	GND
73	V+	73	V+
74	GND	74	GND
75	V+	75	V+
76	GND	76	GND
77	V+	77	V+
78	GND	78	GND
79	V+	79	V+
80	GND	80	GND
81	V+	81	V+
82	GND	82	GND
83	V+	83	V+
84	GND	84	GND
85	V+	85	V+
86	GND	86	GND
87	V+	87	V+
88	GND	88	GND
89	V+	89	V+
90	GND	90	GND
91	V+	91	V+
92	GND	92	GND
93	V+	93	V+
94	GND	94	GND
95	V+	95	V+
96	GND	96	GND
97	V+	97	V+
98	GND	98	GND
99	V+	99	V+
100	GND	100	GND

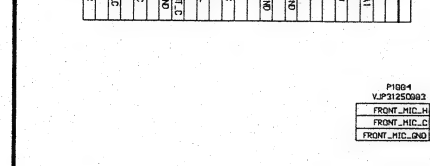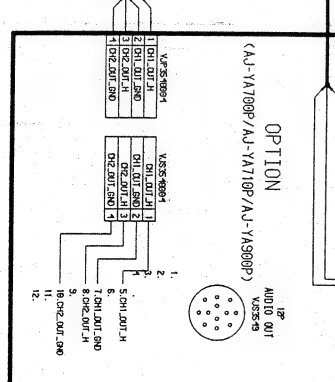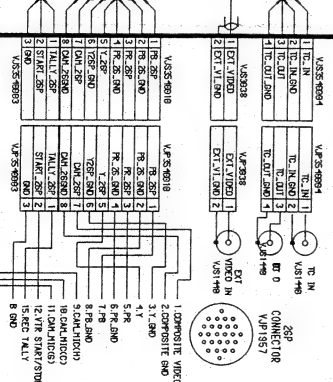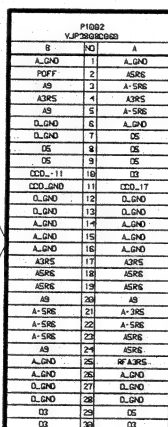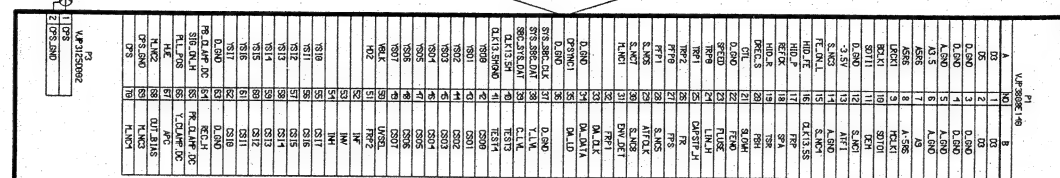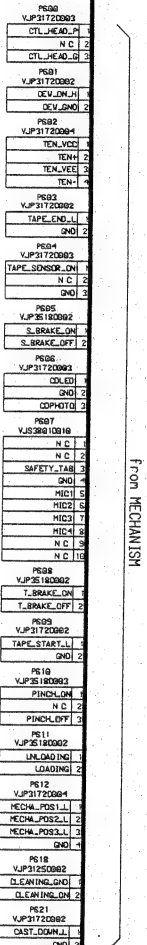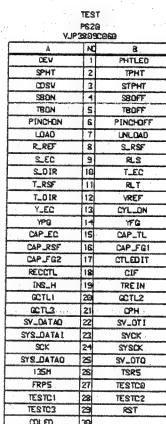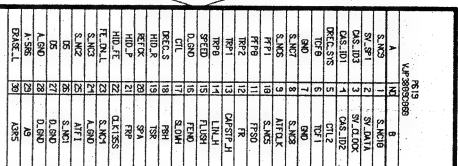

COMPONENT NAME	INTERCONNECTION (FOR NTSC)	01/01
CIRCUIT BOARD NO.	MODEL NO.	

CCD R.G.B PCB
(VJB0534)

Pin	Signal
1	VCC
2	NC
3	NC
4	NC
5	NC
6	NC
7	NC
8	NC
9	NC
10	NC
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	NC
18	NC
19	NC
20	NC
21	NC
22	NC
23	NC
24	NC
25	NC
26	NC
27	NC
28	NC
29	NC
30	NC
31	NC
32	NC
33	NC
34	NC
35	NC
36	NC
37	NC
38	NC
39	NC
40	NC
41	NC
42	NC
43	NC
44	NC
45	NC
46	NC
47	NC
48	NC
49	NC
50	NC
51	NC
52	NC
53	NC
54	NC
55	NC
56	NC
57	NC
58	NC
59	NC
60	NC
61	NC
62	NC
63	NC
64	NC
65	NC
66	NC
67	NC
68	NC
69	NC
70	NC
71	NC
72	NC
73	NC
74	NC
75	NC
76	NC
77	NC
78	NC
79	NC
80	NC
81	NC
82	NC
83	NC
84	NC
85	NC
86	NC
87	NC
88	NC
89	NC
90	NC
91	NC
92	NC
93	NC
94	NC
95	NC
96	NC
97	NC
98	NC
99	NC
100	NC

CDS PCB
(VJB5016)

CAMERA FLEX (VJB00W29)

(VJB00V89)

Pin	Signal
1	VCC
2	NC
3	NC
4	NC
5	NC
6	NC
7	NC
8	NC
9	NC
10	NC
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	NC
18	NC
19	NC
20	NC
21	NC
22	NC
23	NC
24	NC
25	NC
26	NC
27	NC
28	NC
29	NC
30	NC
31	NC
32	NC
33	NC
34	NC
35	NC
36	NC
37	NC
38	NC
39	NC
40	NC
41	NC
42	NC
43	NC
44	NC
45	NC
46	NC
47	NC
48	NC
49	NC
50	NC
51	NC
52	NC
53	NC
54	NC
55	NC
56	NC
57	NC
58	NC
59	NC
60	NC
61	NC
62	NC
63	NC
64	NC
65	NC
66	NC
67	NC
68	NC
69	NC
70	NC
71	NC
72	NC
73	NC
74	NC
75	NC
76	NC
77	NC
78	NC
79	NC
80	NC
81	NC
82	NC
83	NC
84	NC
85	NC
86	NC
87	NC
88	NC
89	NC
90	NC
91	NC
92	NC
93	NC
94	NC
95	NC
96	NC
97	NC
98	NC
99	NC
100	NC

Pin	Signal
1	VCC
2	NC
3	NC
4	NC
5	NC
6	NC
7	NC
8	NC
9	NC
10	NC
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	NC
18	NC
19	NC
20	NC
21	NC
22	NC
23	NC
24	NC
25	NC
26	NC
27	NC
28	NC
29	NC
30	NC
31	NC
32	NC
33	NC
34	NC
35	NC
36	NC
37	NC
38	NC
39	NC
40	NC
41	NC
42	NC
43	NC
44	NC
45	NC
46	NC
47	NC
48	NC
49	NC
50	NC
51	NC
52	NC
53	NC
54	NC
55	NC
56	NC
57	NC
58	NC
59	NC
60	NC
61	NC
62	NC
63	NC
64	NC
65	NC
66	NC
67	NC
68	NC
69	NC
70	NC
71	NC
72	NC
73	NC
74	NC
75	NC
76	NC
77	NC
78	NC
79	NC
80	NC
81	NC
82	NC
83	NC
84	NC
85	NC
86	NC
87	NC
88	NC
89	NC
90	NC
91	NC
92	NC
93	NC
94	NC
95	NC
96	NC
97	NC
98	NC
99	NC
100	NC

MEMORY CARD
(VJB8652)
(NOT USE)

FRONT MIC PCB
(VJB80962)

LENS

- 1. VCC
- 2. GND
- 3. VCC
- 4. GND
- 5. VCC
- 6. GND
- 7. VCC
- 8. GND
- 9. VCC
- 10. GND
- 11. VCC
- 12. GND
- 13. VCC
- 14. GND
- 15. VCC
- 16. GND
- 17. VCC
- 18. GND
- 19. VCC
- 20. GND
- 21. VCC
- 22. GND
- 23. VCC
- 24. GND
- 25. VCC
- 26. GND
- 27. VCC
- 28. GND
- 29. VCC
- 30. GND
- 31. VCC
- 32. GND
- 33. VCC
- 34. GND
- 35. VCC
- 36. GND
- 37. VCC
- 38. GND
- 39. VCC
- 40. GND
- 41. VCC
- 42. GND
- 43. VCC
- 44. GND
- 45. VCC
- 46. GND
- 47. VCC
- 48. GND
- 49. VCC
- 50. GND
- 51. VCC
- 52. GND
- 53. VCC
- 54. GND
- 55. VCC
- 56. GND
- 57. VCC
- 58. GND
- 59. VCC
- 60. GND
- 61. VCC
- 62. GND
- 63. VCC
- 64. GND
- 65. VCC
- 66. GND
- 67. VCC
- 68. GND
- 69. VCC
- 70. GND
- 71. VCC
- 72. GND
- 73. VCC
- 74. GND
- 75. VCC
- 76. GND
- 77. VCC
- 78. GND
- 79. VCC
- 80. GND
- 81. VCC
- 82. GND
- 83. VCC
- 84. GND
- 85. VCC
- 86. GND
- 87. VCC
- 88. GND
- 89. VCC
- 90. GND
- 91. VCC
- 92. GND
- 93. VCC
- 94. GND
- 95. VCC
- 96. GND
- 97. VCC
- 98. GND
- 99. VCC
- 100. GND

PRE PROCESS PCB
(VJB23218)

CC
FILTER

FRONT PCB
(VJB0538)

(NOT USE)
(VJB00408)

FRONT TONE PCB
(VJB00633)

MODE CHECK PCB
(VJB00405)

POWER SW PCB
(VJB00403)

1000 E SW PCB
(VJB00404)


ALARM/MONITOR PCB
(VJB00407)

AUDIO&LCD PCB
(VJB04522)


BH1 R2032/BH1
(VJB80951)

US28-408S
1. CH1A1
2. CH1A2
3. CH1A3
4. CH1A4
5. CH1A5
6. CH1A6
7. CH1A7
8. CH1A8
9. CH1A9
10. CH1A10
11. CH1A11
12. CH1A12
13. CH1A13
14. CH1A14
15. CH1A15
16. CH1A16
17. CH1A17
18. CH1A18
19. CH1A19
20. CH1A20
21. CH1A21
22. CH1A22
23. CH1A23
24. CH1A24
25. CH1A25
26. CH1A26
27. CH1A27
28. CH1A28
29. CH1A29
30. CH1A30
31. CH1A31
32. CH1A32
33. CH1A33
34. CH1A34
35. CH1A35
36. CH1A36
37. CH1A37
38. CH1A38
39. CH1A39
40. CH1A40
41. CH1A41
42. CH1A42
43. CH1A43
44. CH1A44
45. CH1A45
46. CH1A46
47. CH1A47
48. CH1A48
49. CH1A49
50. CH1A50
51. CH1A51
52. CH1A52
53. CH1A53
54. CH1A54
55. CH1A55
56. CH1A56
57. CH1A57
58. CH1A58
59. CH1A59
60. CH1A60
61. CH1A61
62. CH1A62
63. CH1A63
64. CH1A64
65. CH1A65
66. CH1A66
67. CH1A67
68. CH1A68
69. CH1A69
70. CH1A70
71. CH1A71
72. CH1A72
73. CH1A73
74. CH1A74
75. CH1A75
76. CH1A76
77. CH1A77
78. CH1A78
79. CH1A79
80. CH1A80
81. CH1A81
82. CH1A82
83. CH1A83
84. CH1A84
85. CH1A85
86. CH1A86
87. CH1A87
88. CH1A88
89. CH1A89
90. CH1A90
91. CH1A91
92. CH1A92
93. CH1A93
94. CH1A94
95. CH1A95
96. CH1A96
97. CH1A97
98. CH1A98
99. CH1A99
100. CH1A100


1 2 3 4 5 6 7 8 9 10 11

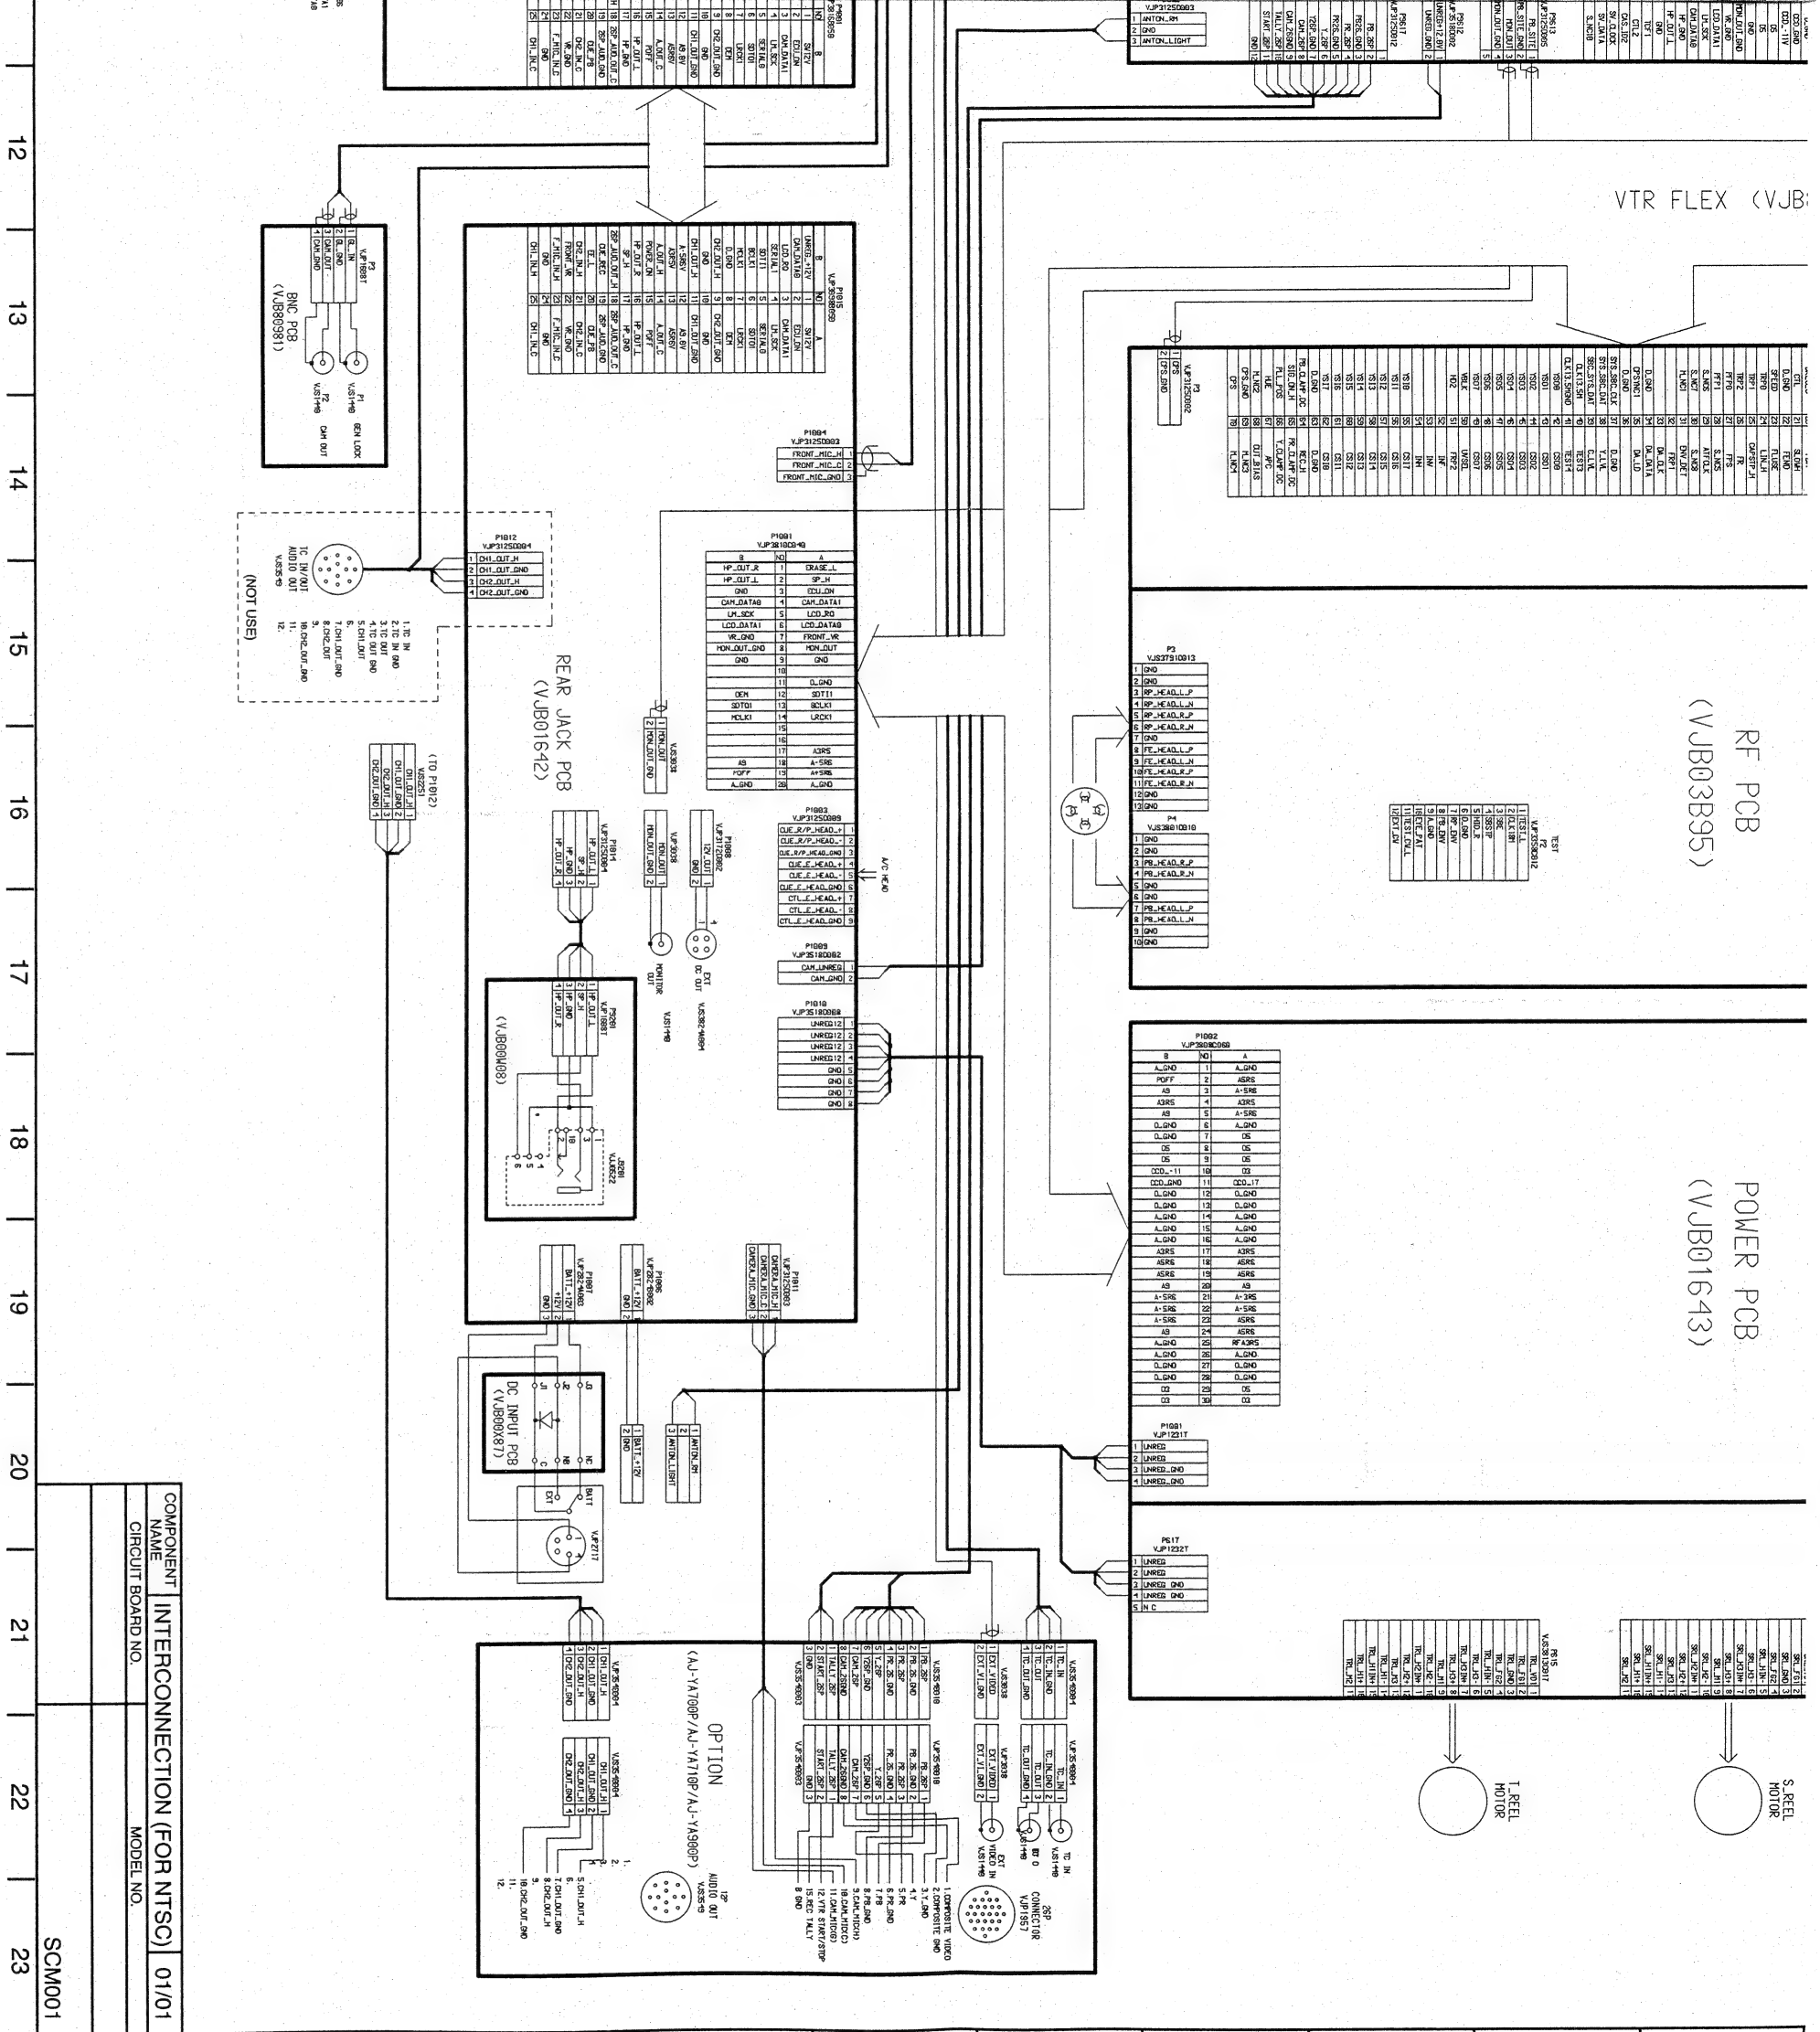


COMPONENT NAME	INTERCONNECTION (FOR NTSC)	01/01
CIRCUIT BOARD NO.	MODEL NO.	
		SCM001

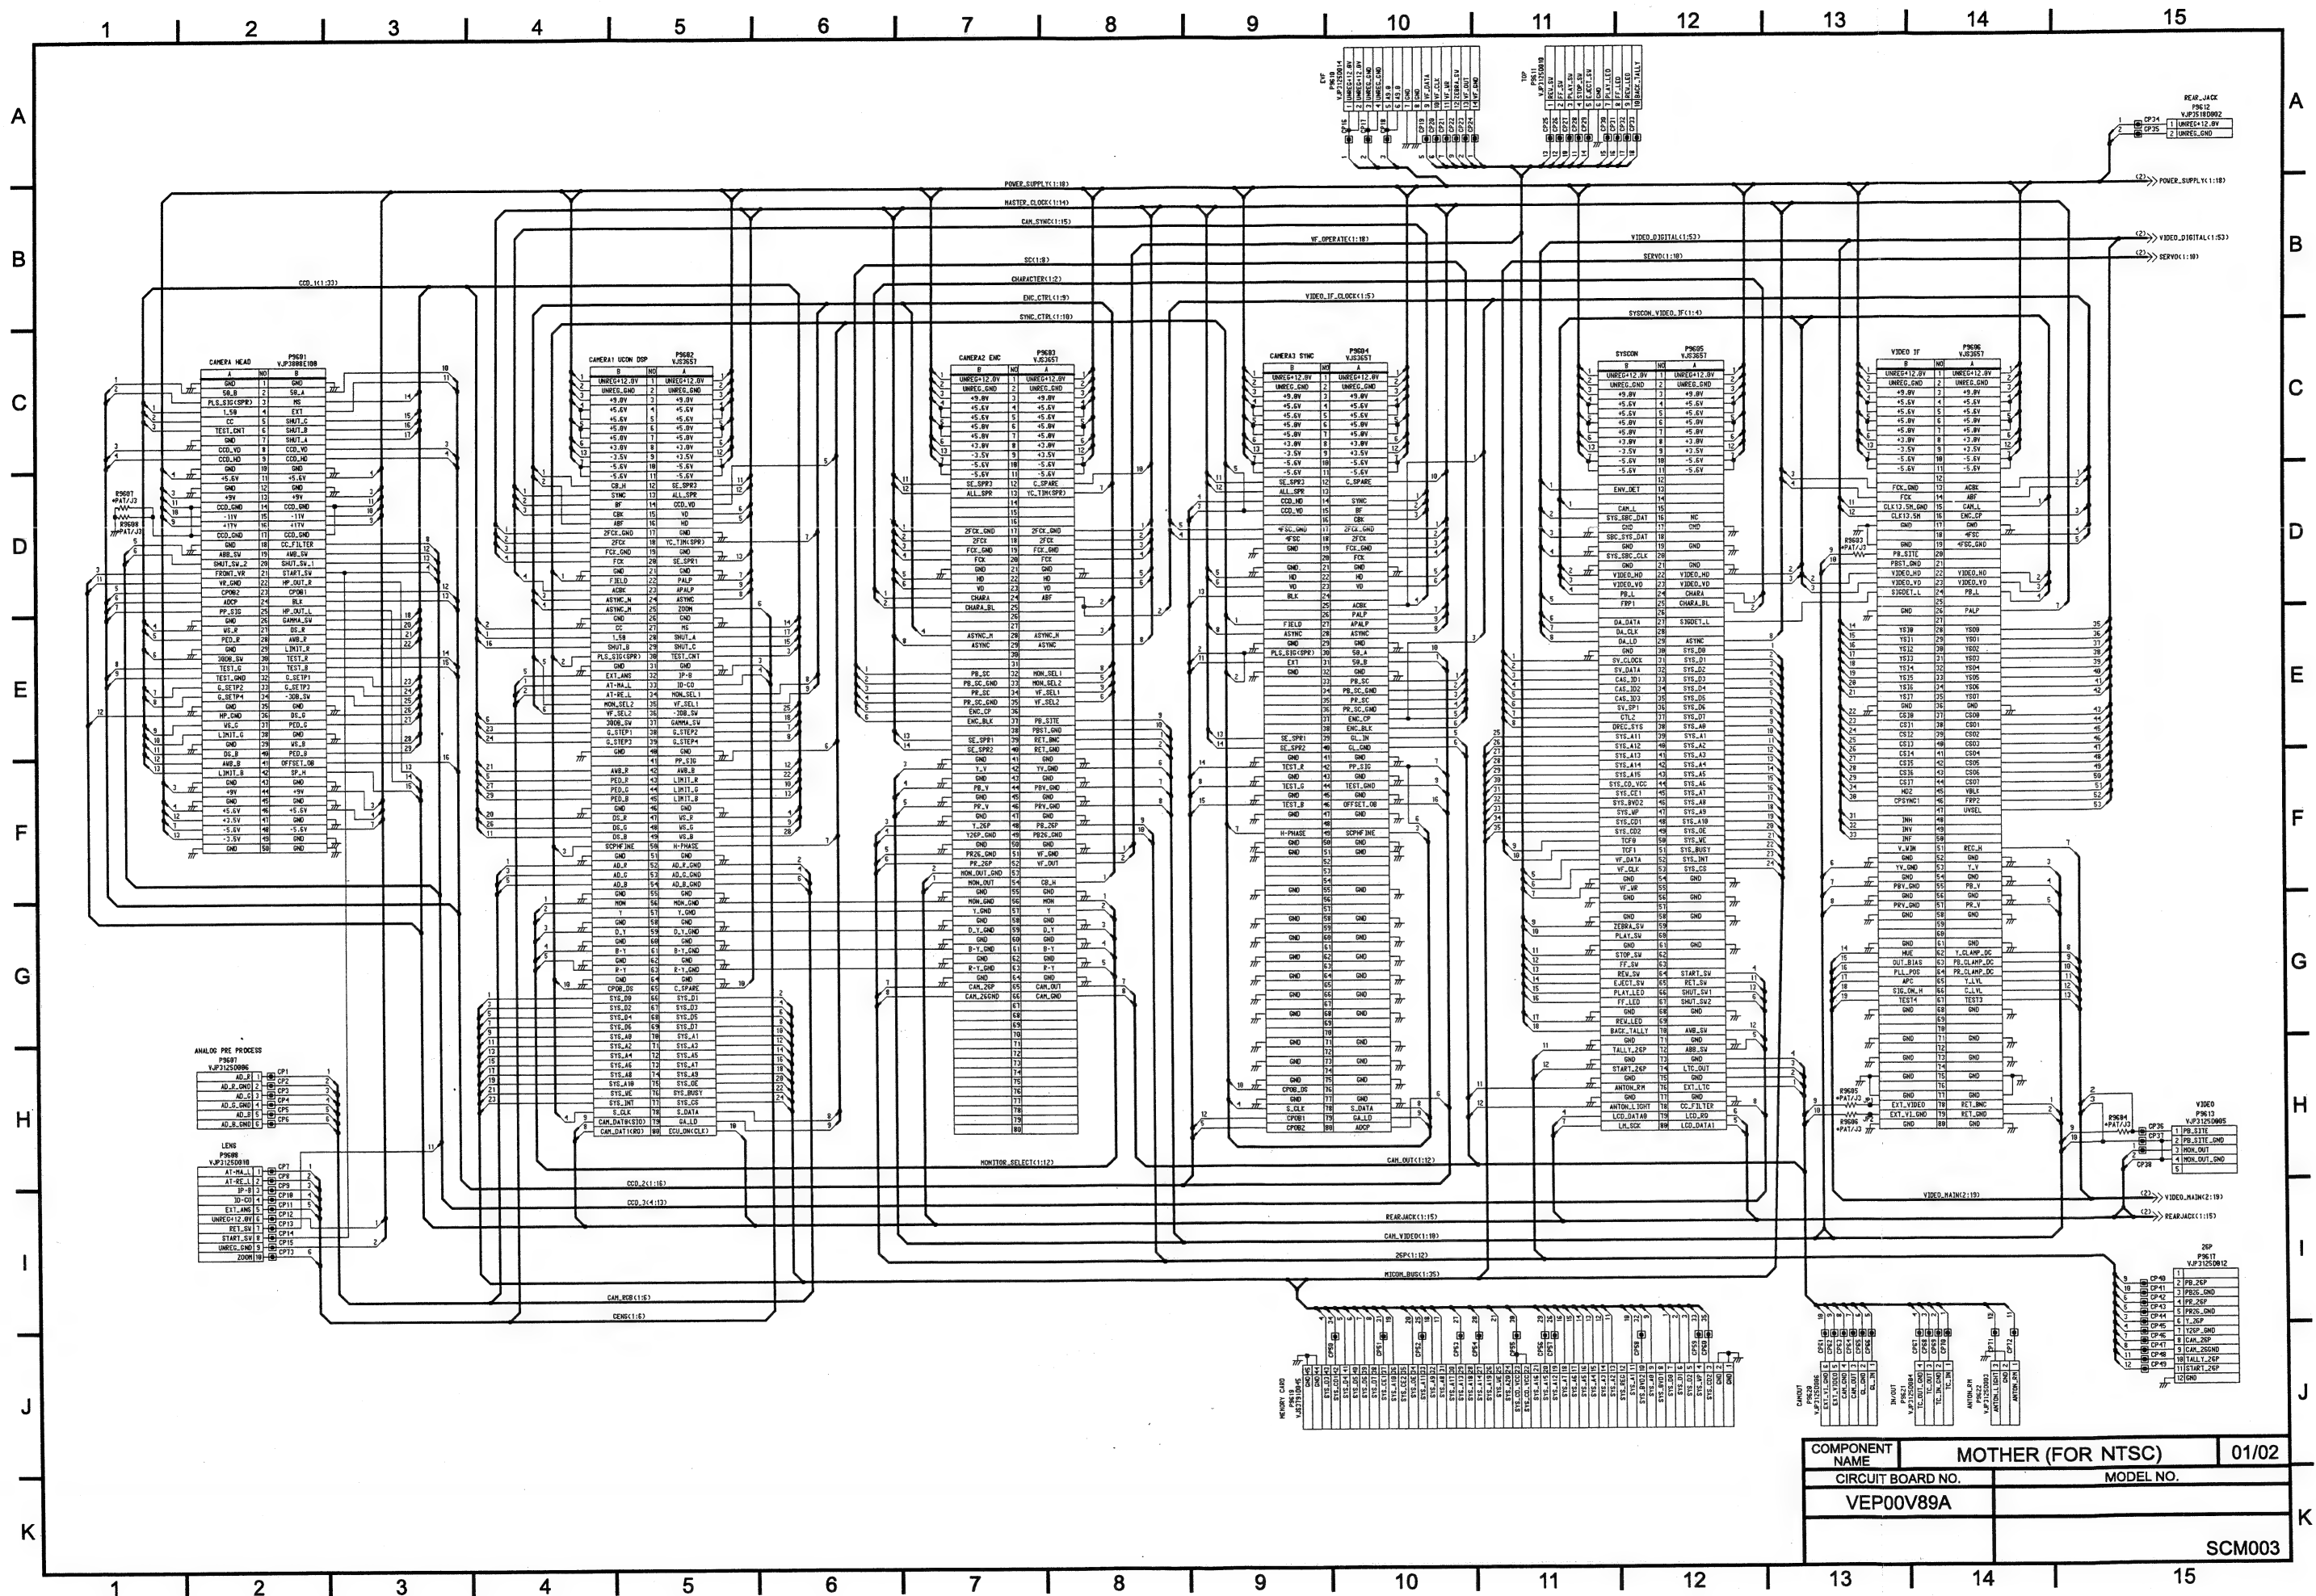


COMPONENT NAME	MOTHER (FOR NTSC)	01/02
CIRCUIT BOARD NO.	MODEL NO.	
VEP00V89A		
	SCM003	




COMPONENT NAME	MOTHER (FOR NTSC)	02/02
CIRCUIT BOARD NO.	MODEL NO.	
VEP00V89A		
	SCM004	

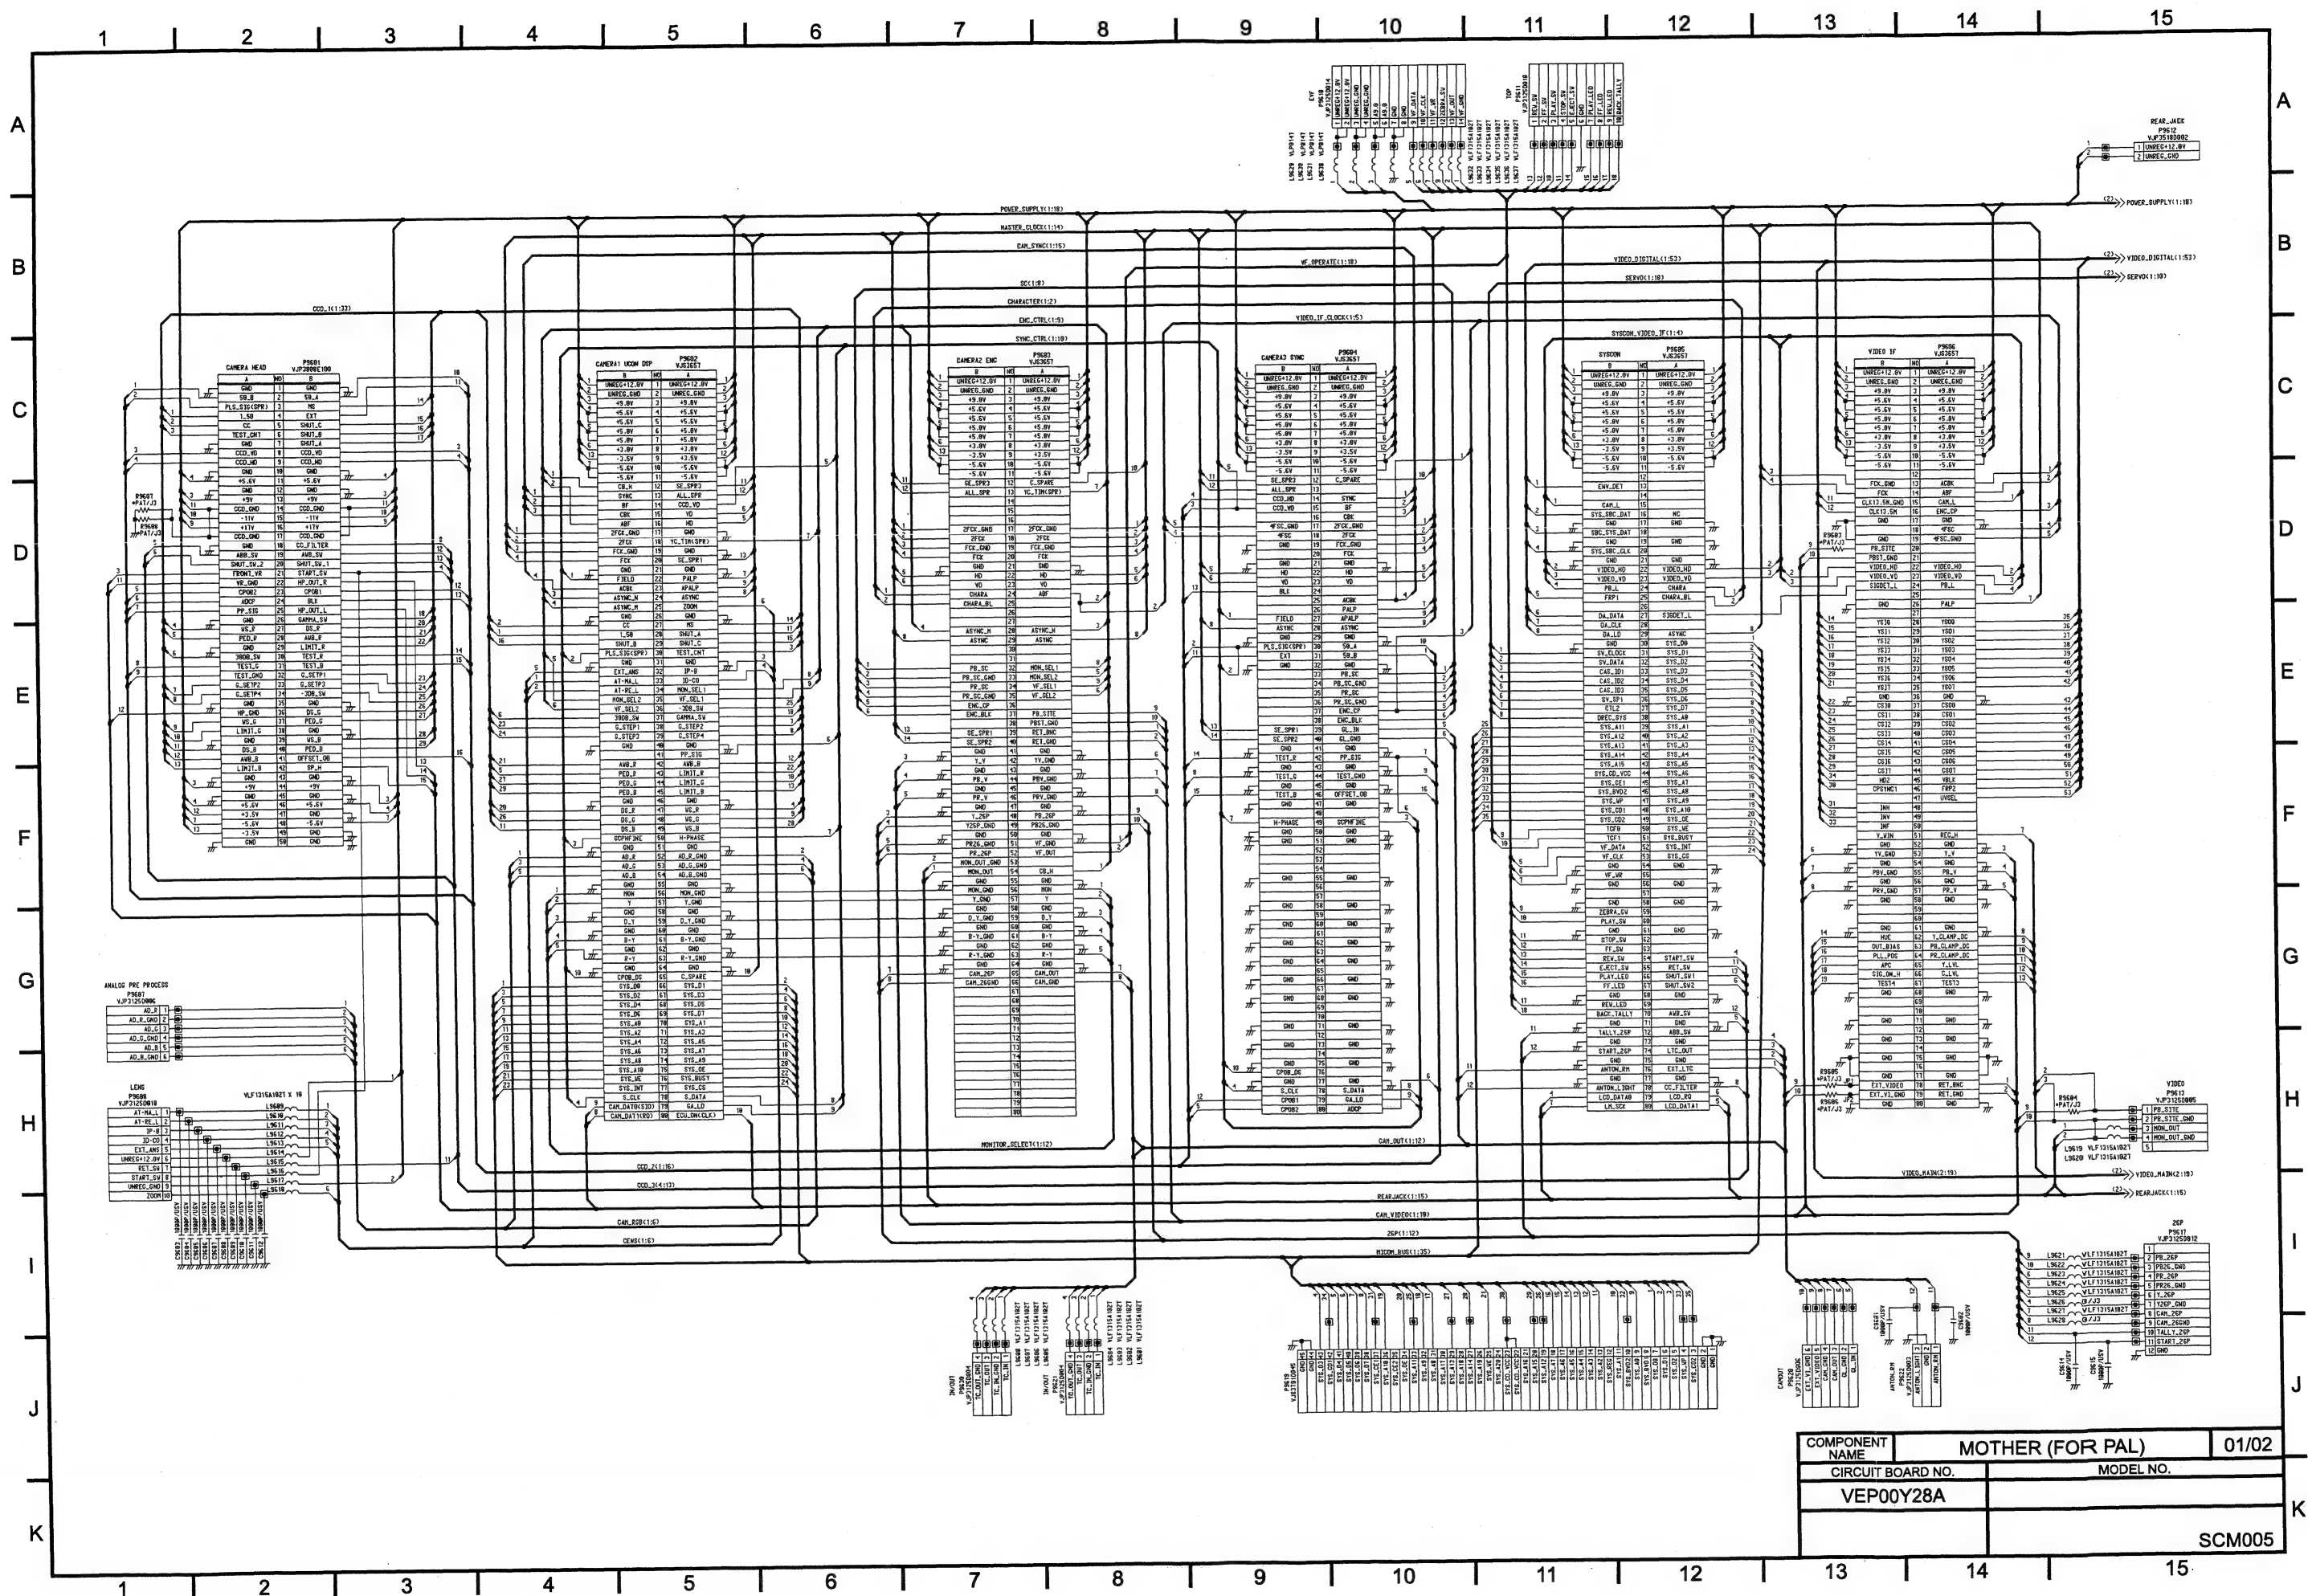


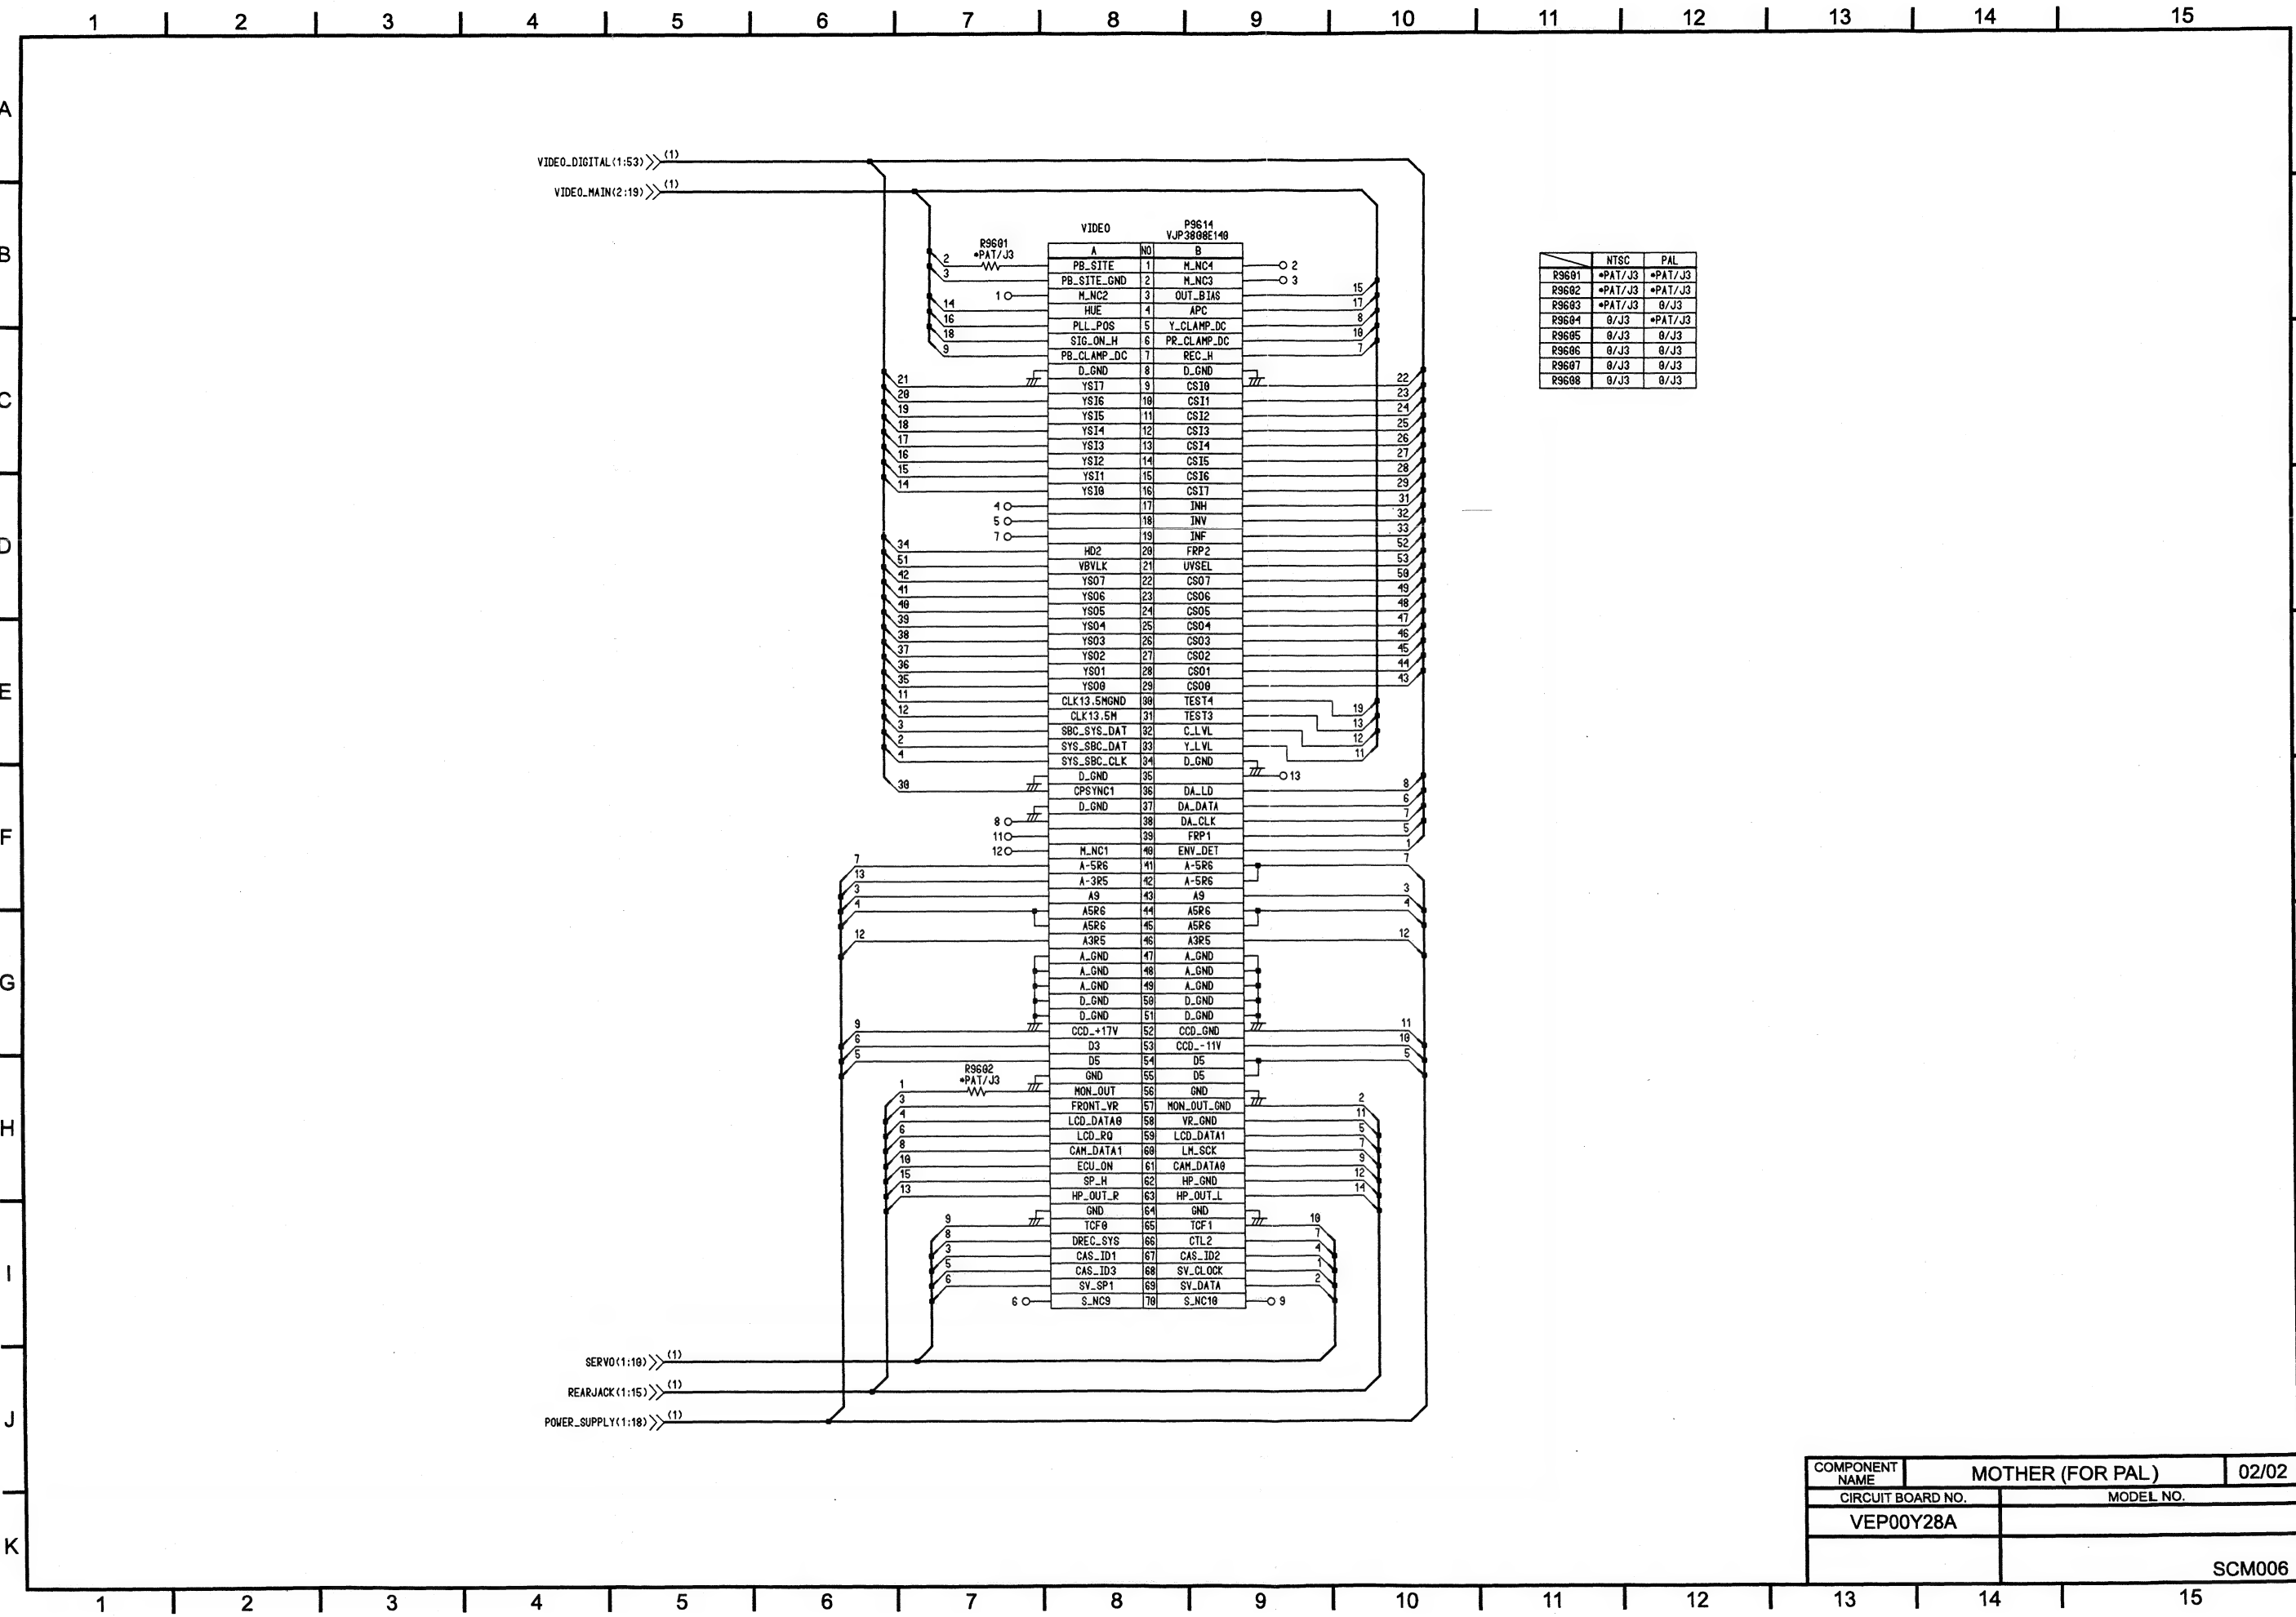

	NTSC	PAL
R9601	*PAT/J3	*PAT/J3
R9602	*PAT/J3	*PAT/J3
R9603	*PAT/J3	0/J3
R9604	0/J3	*PAT/J3
R9605	0/J3	0/J3
R9606	0/J3	0/J3
R9607	0/J3	0/J3
R9608	0/J3	0/J3


COMPONENT NAME	MOTHER (FOR PAL)	02/02
CIRCUIT BOARD NO.	MODEL NO.	
VEP00Y28A		
		SCM006

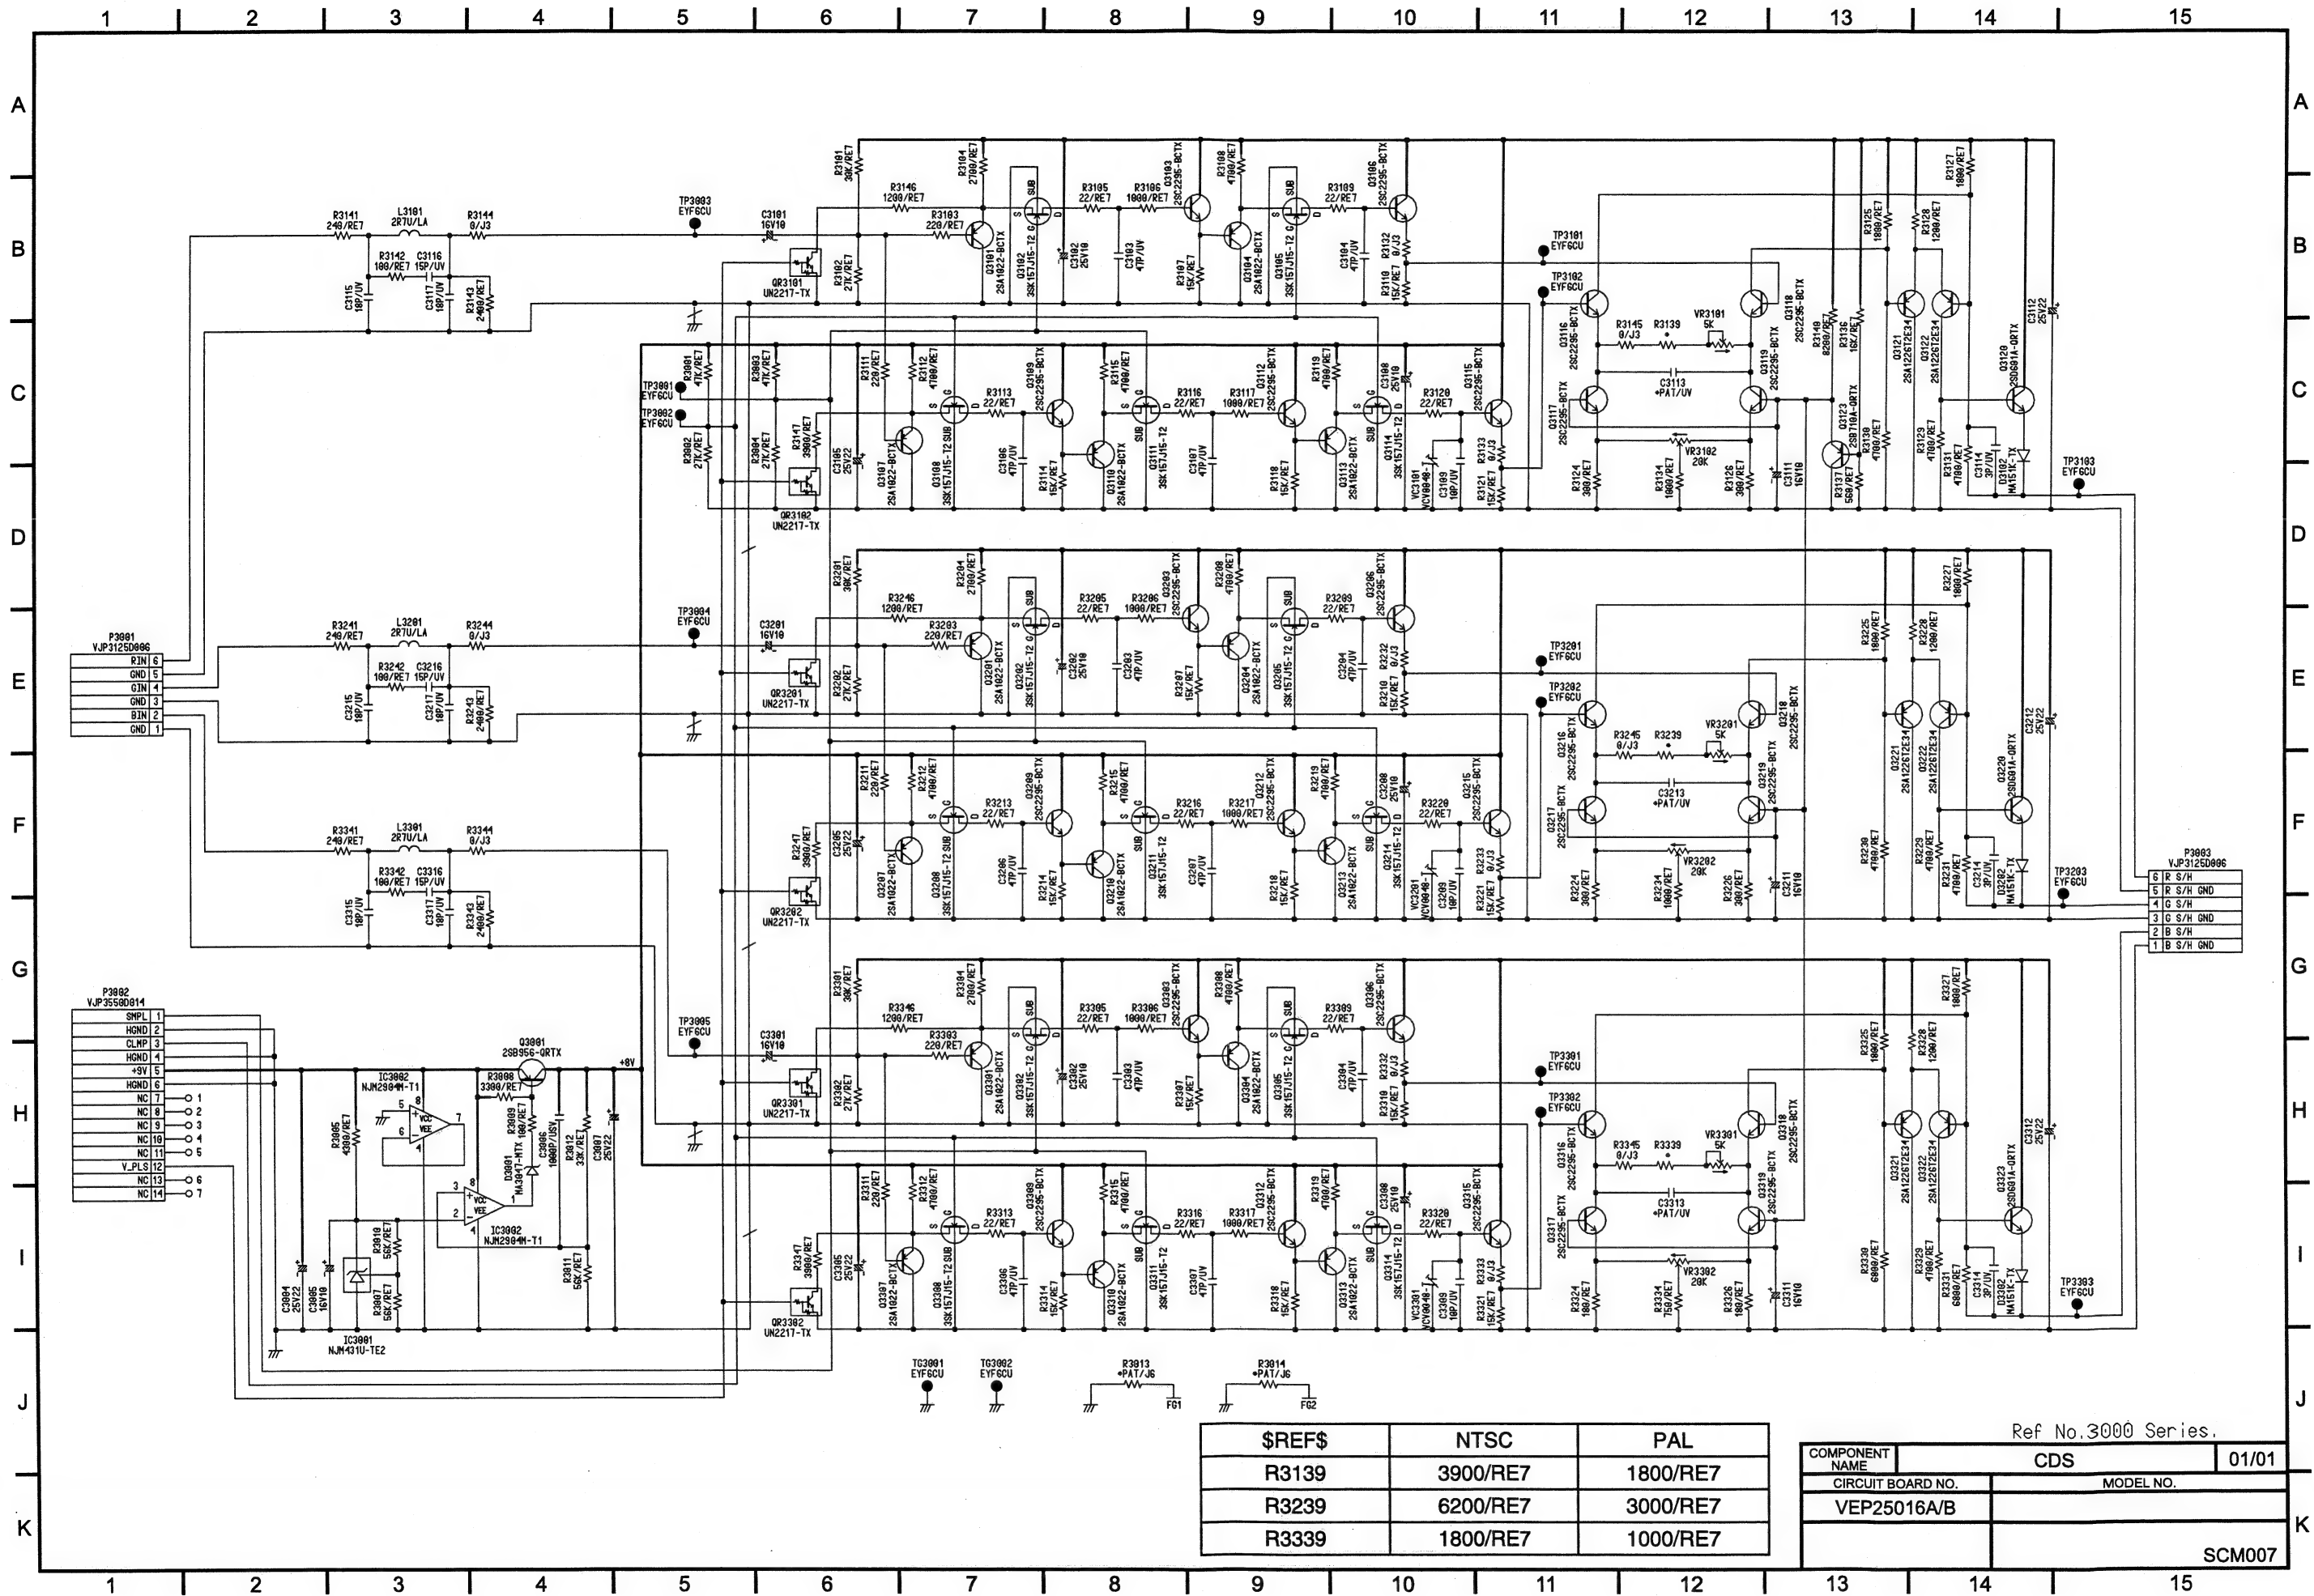


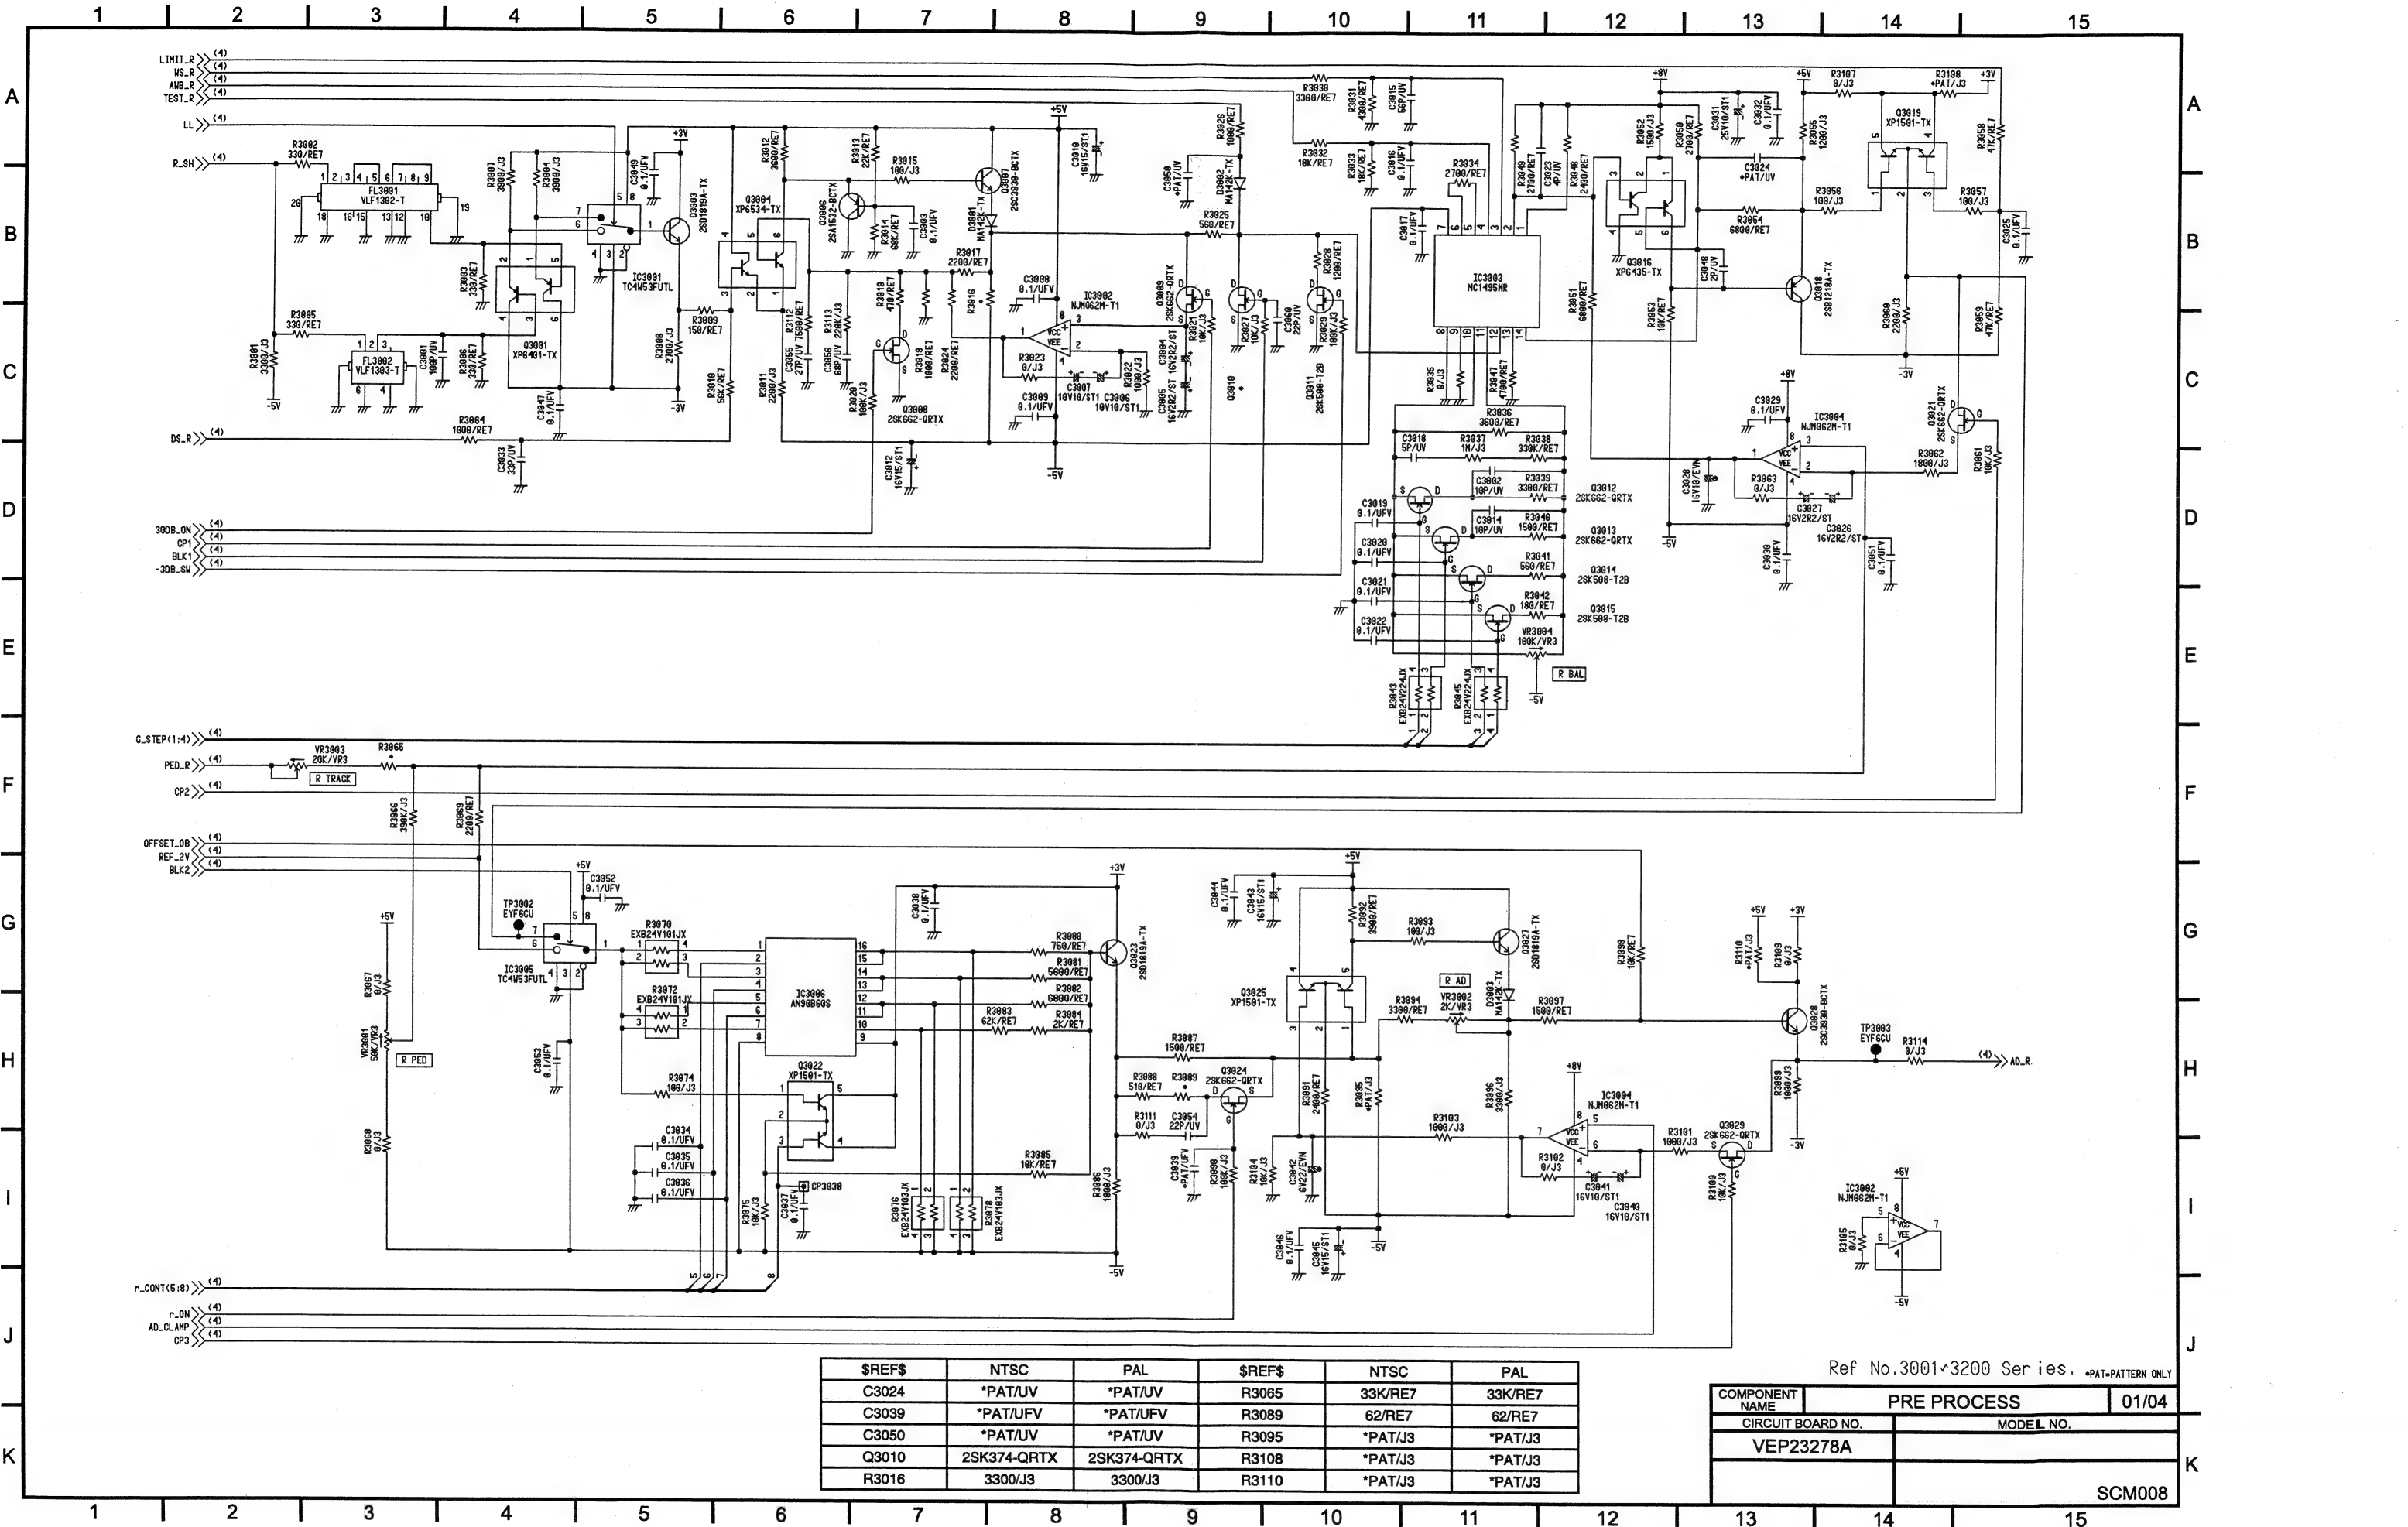


\$REF\$	NTSC	PAL	\$REF\$	NTSC	PAL
C3024	*PAT/UV	*PAT/UV	R3065	33K/RE7	33K/RE7
C3039	*PAT/UFV	*PAT/UFV	R3089	62/RE7	62/RE7
C3050	*PAT/UV	*PAT/UV	R3095	*PAT/J3	*PAT/J3
Q3010	2SK374-QRTX	2SK374-QRTX	R3108	*PAT/J3	*PAT/J3
R3016	3300/J3	3300/J3	R3110	*PAT/J3	*PAT/J3

Ref No.3001~3200 Series. *PAT=PATTERN ONLY		
COMPONENT NAME	PRE PROCESS	01/04
CIRCUIT BOARD NO.	MODEL NO.	
VEP23278A		
	SCM008	

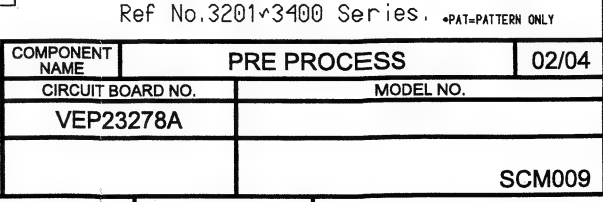


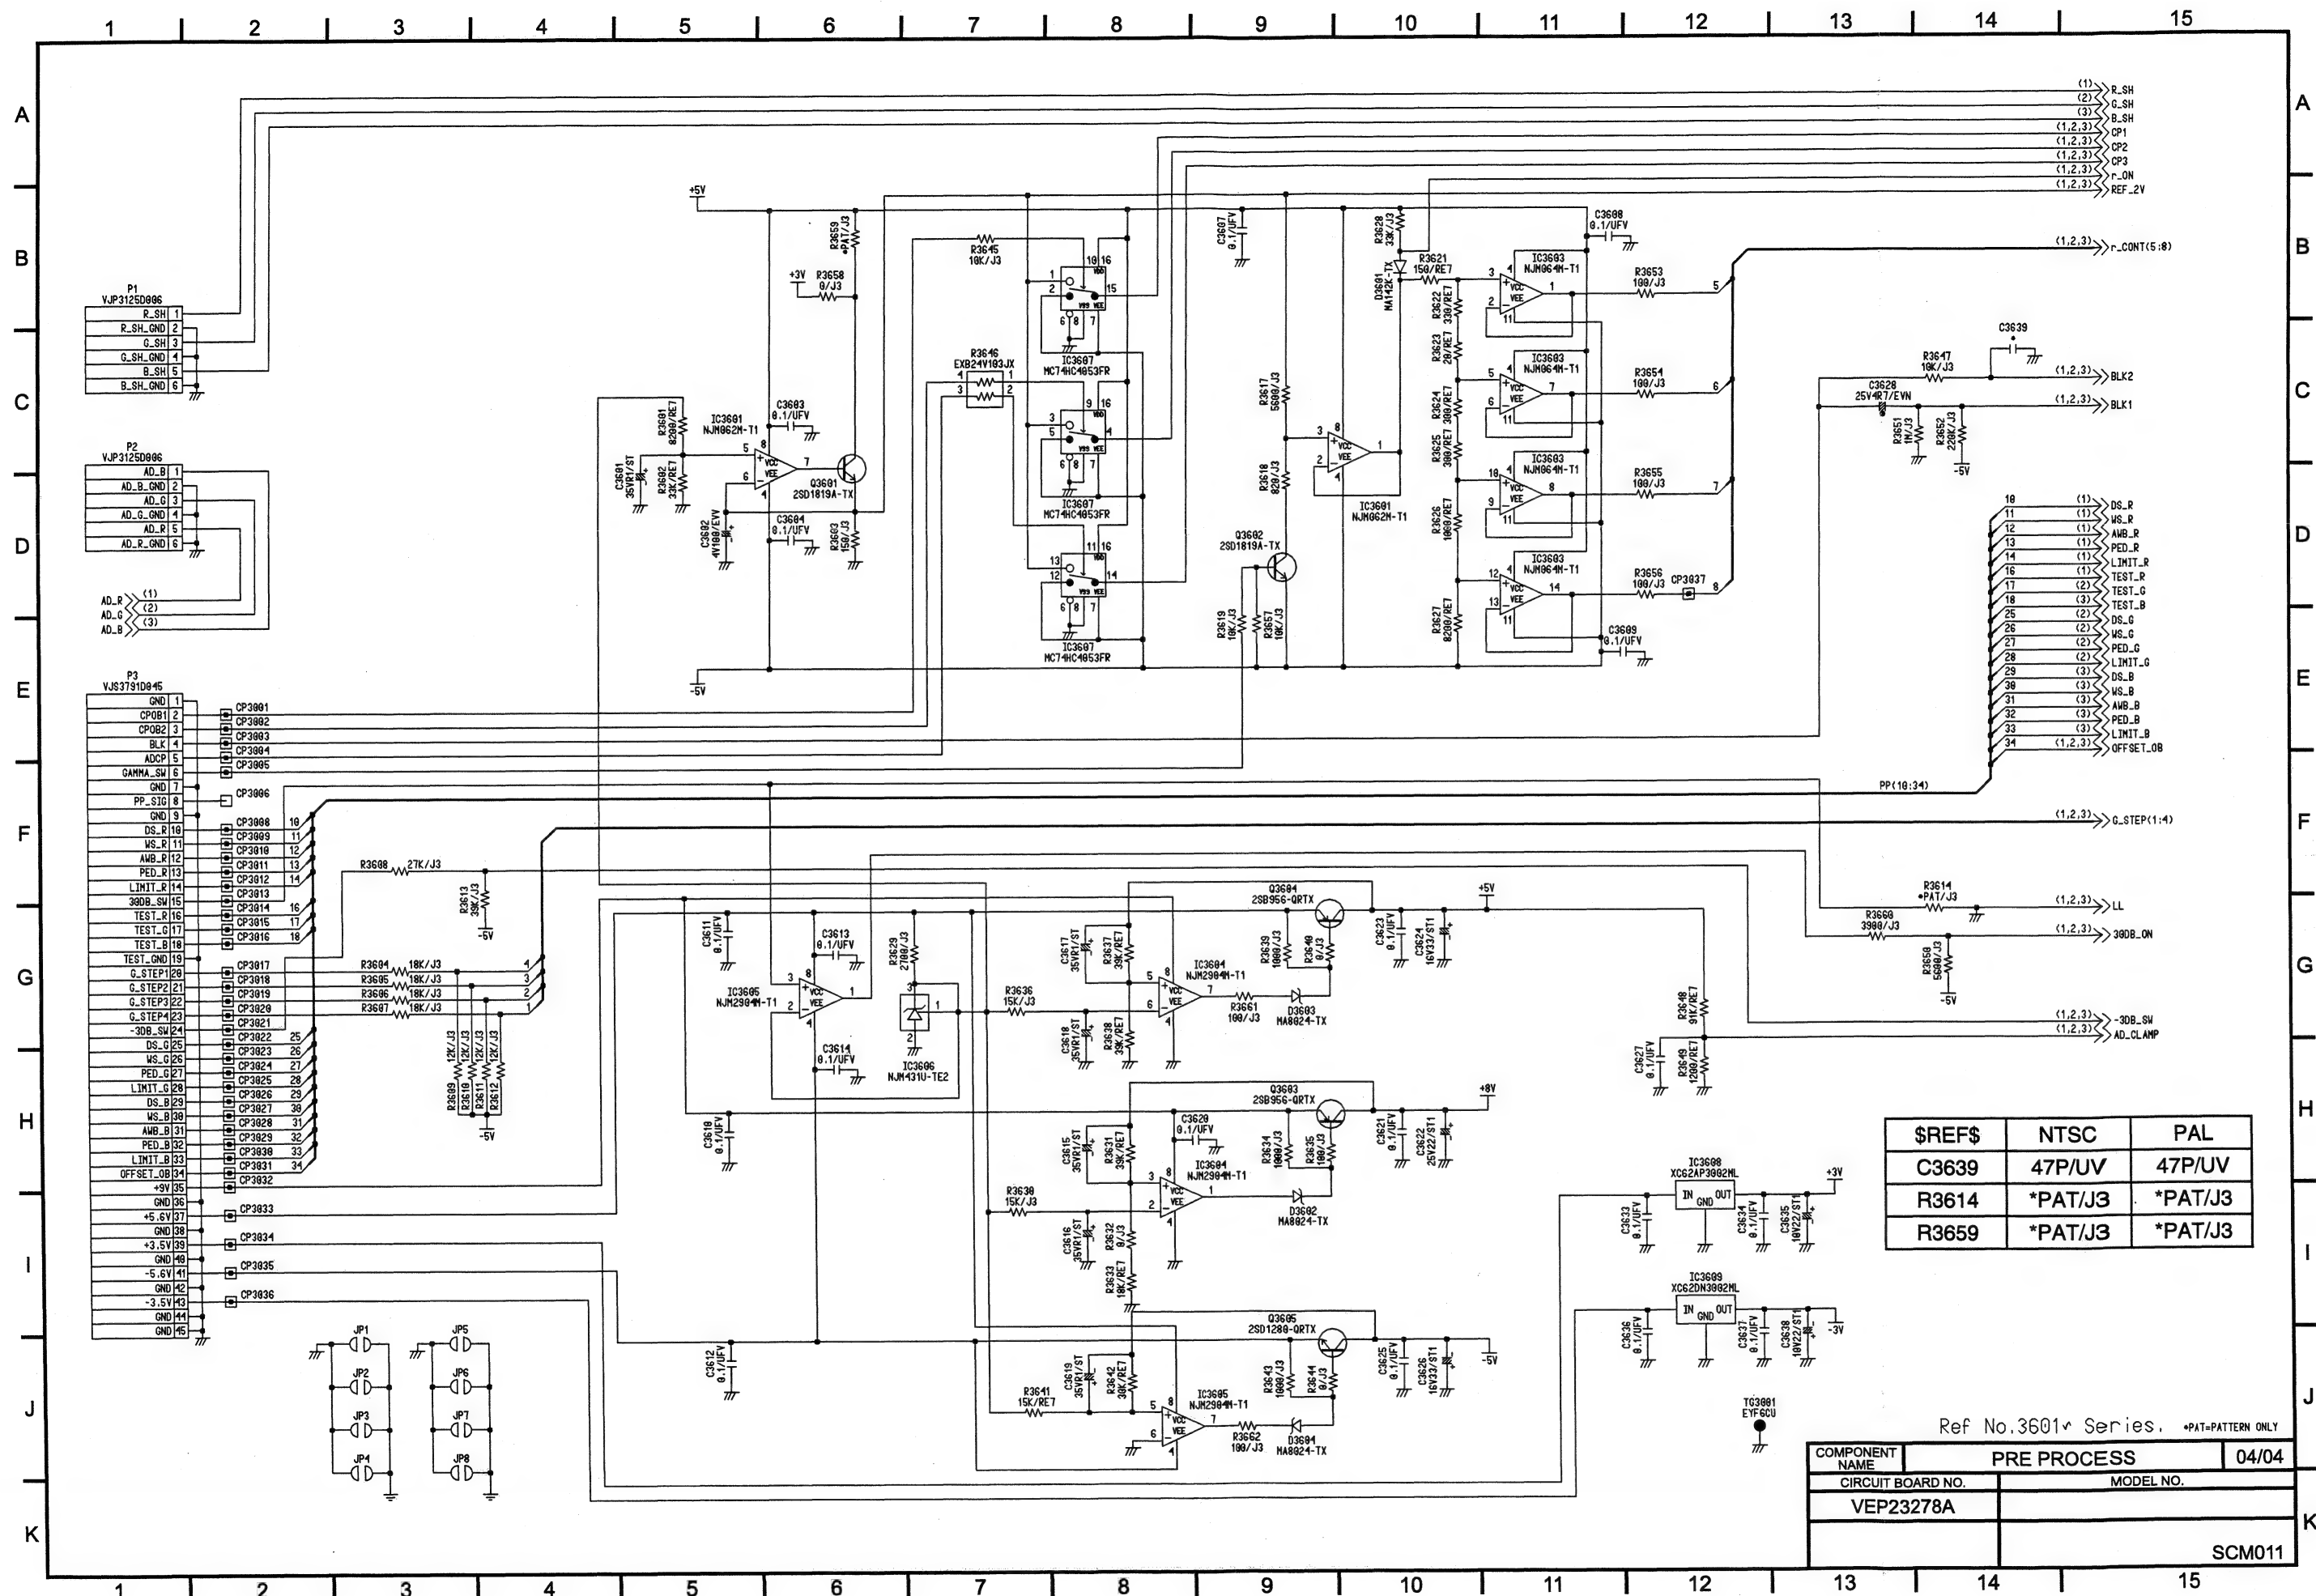

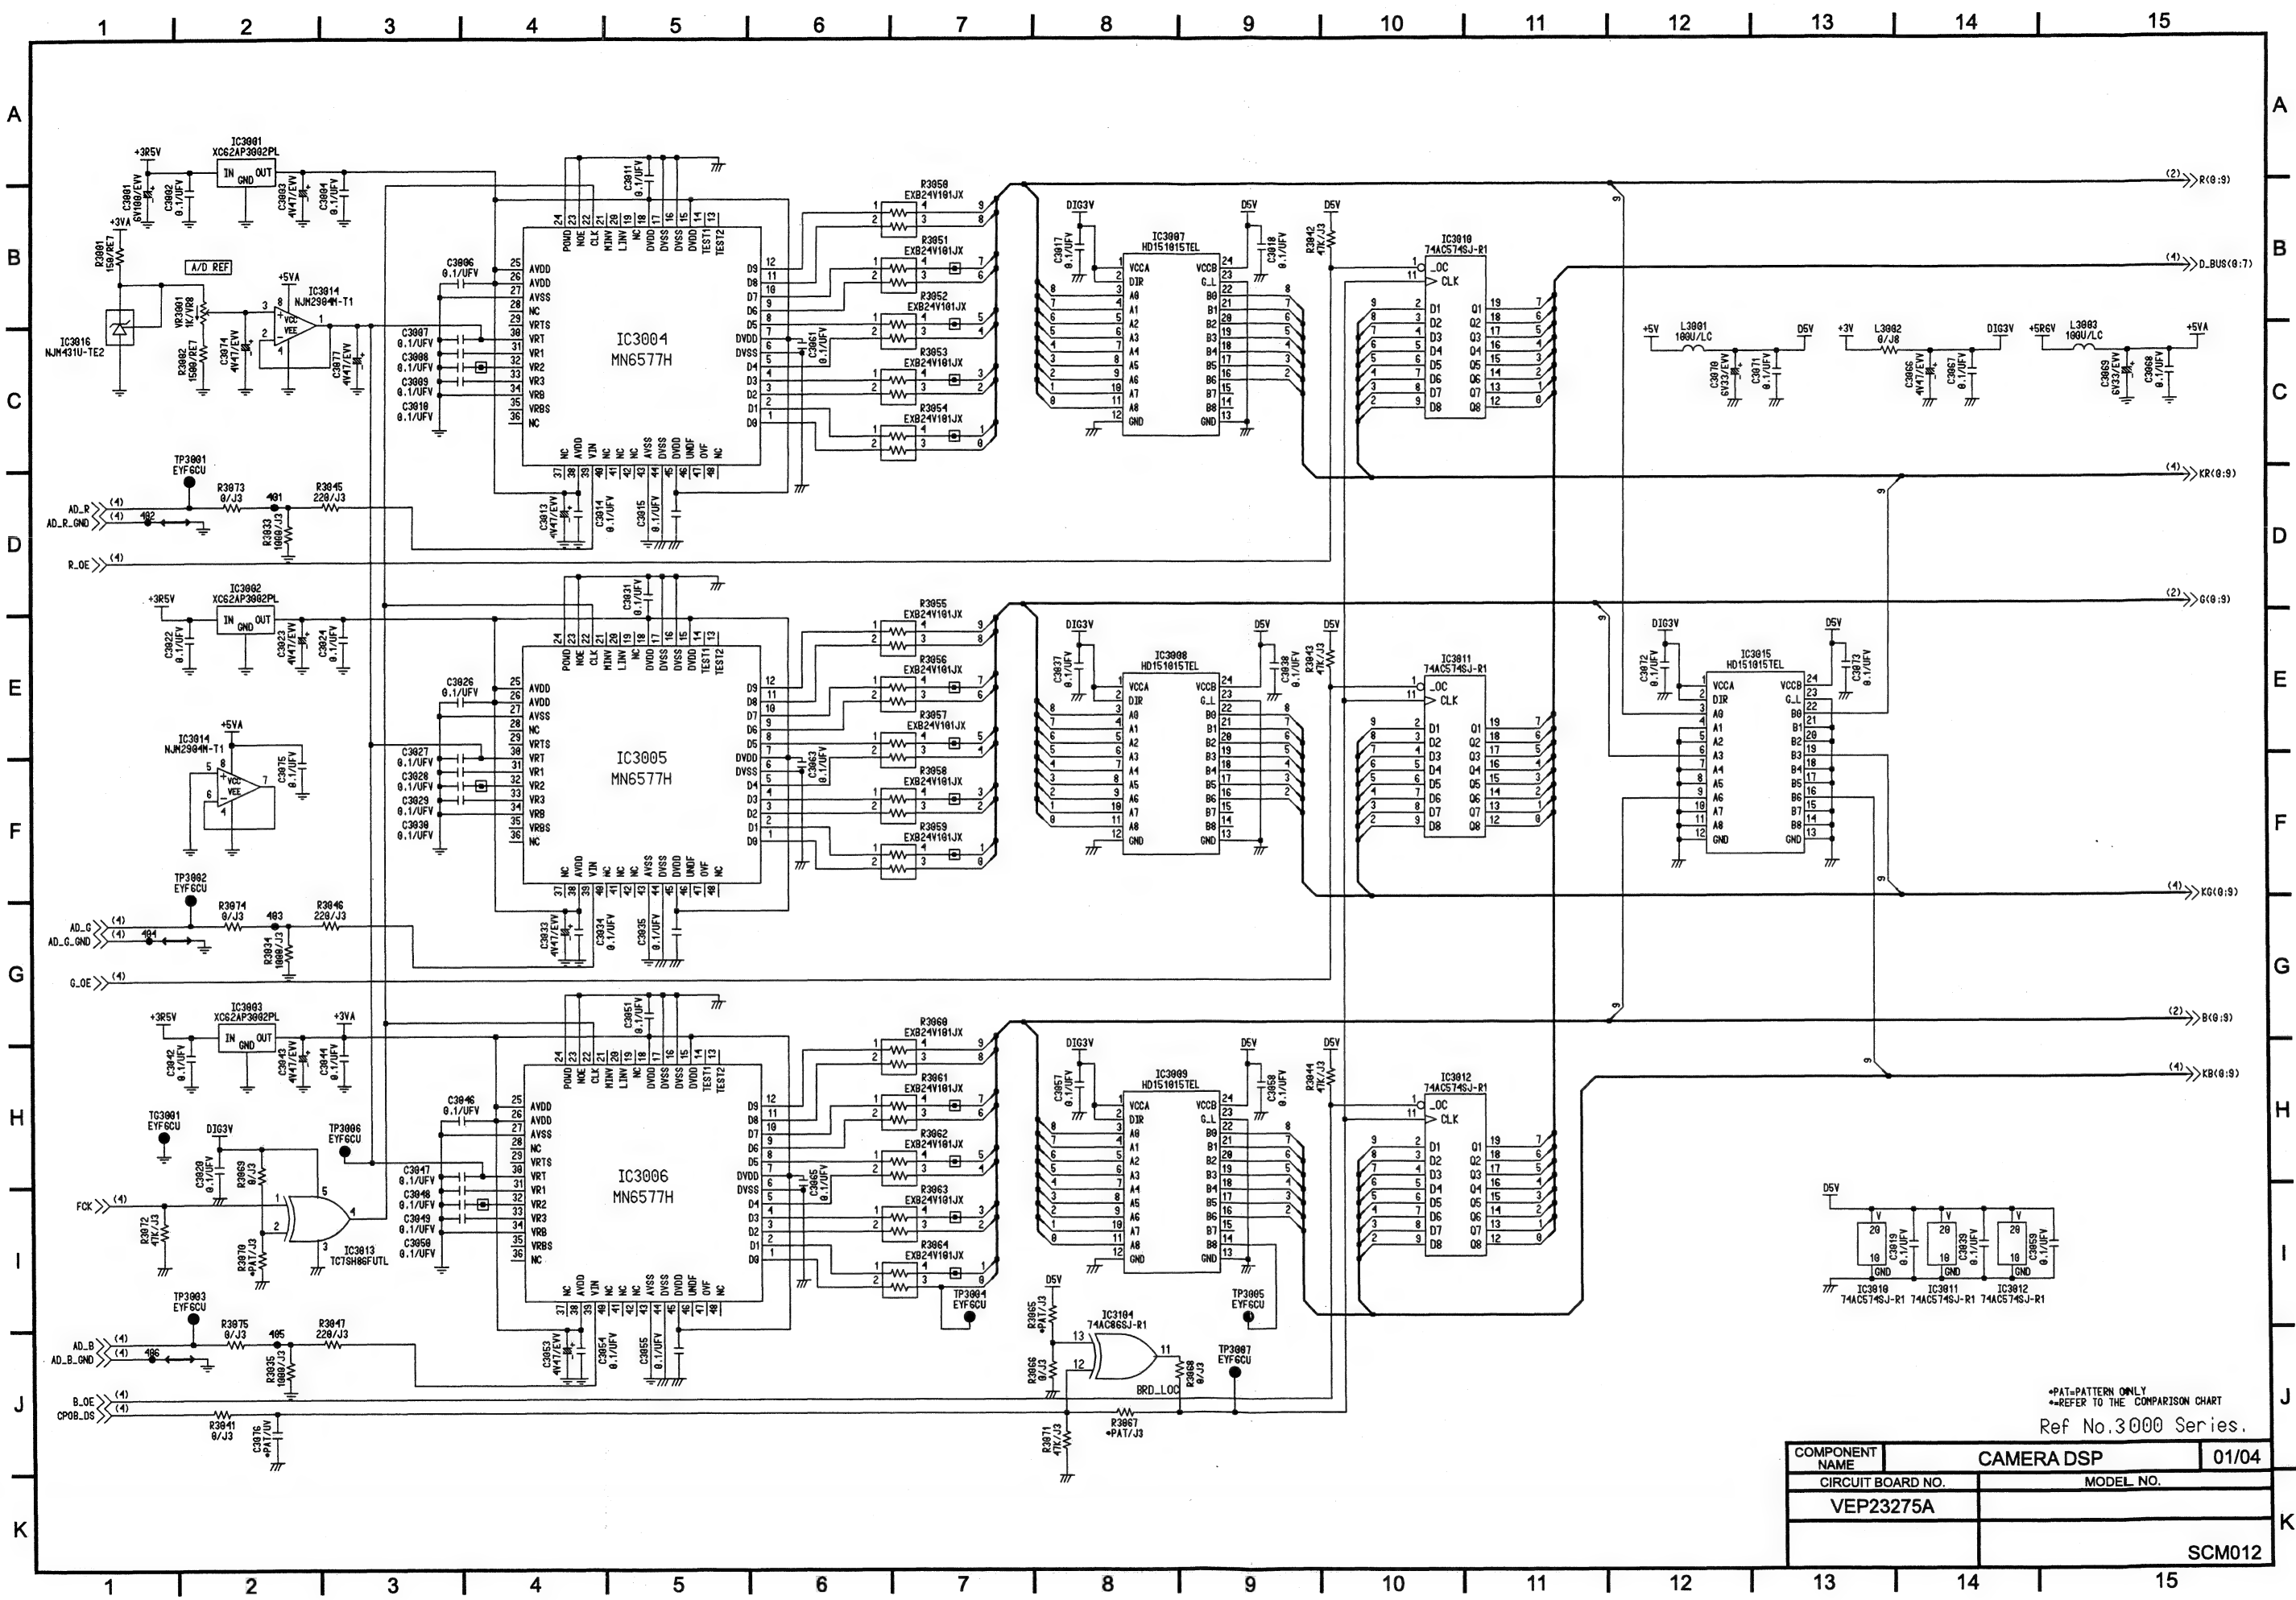


*PAT= PATTERN ONLY
**REFER TO THE COMPARISON CHART
Ref No.3000 Series.


COMPONENT NAME	CAMERA DSP	01/04
CIRCUIT BOARD NO.	MODEL NO.	
VEP23275A		
		SCM012

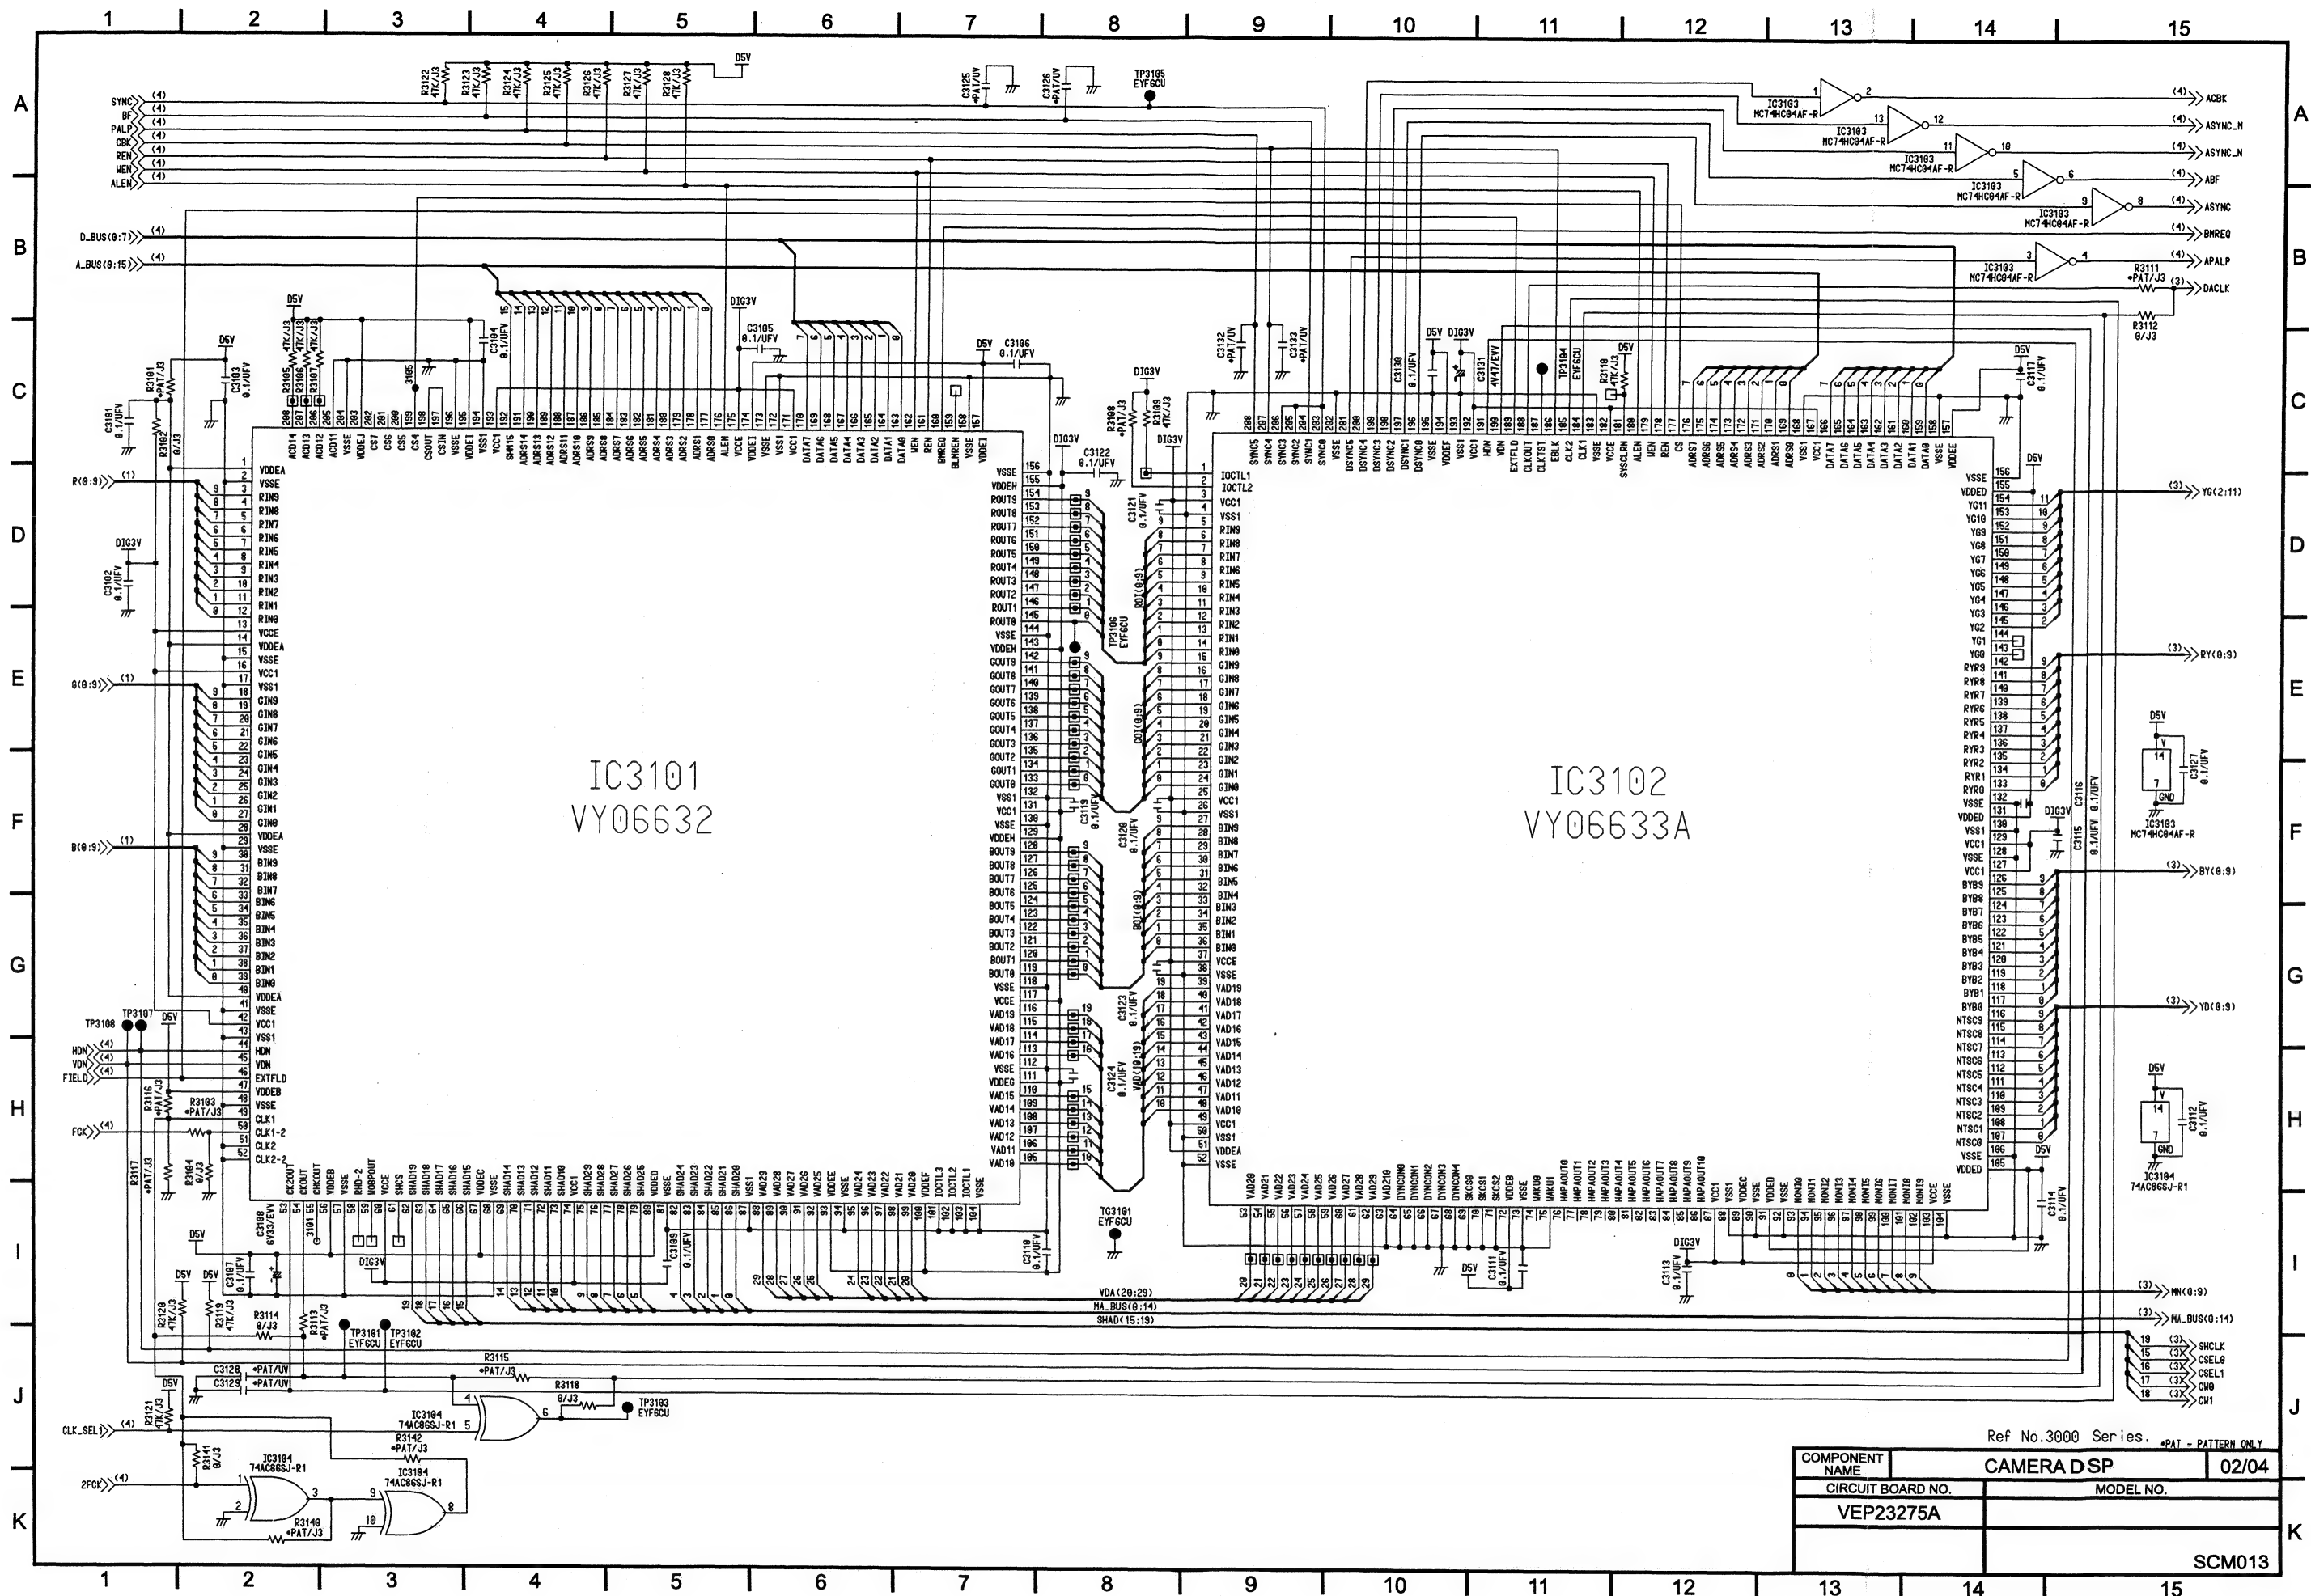


COMPONENT NAME		CAMERA DSP	02/04
CIRCUIT BOARD NO.		MODEL NO.	
VEP23275A			
		SCM013	

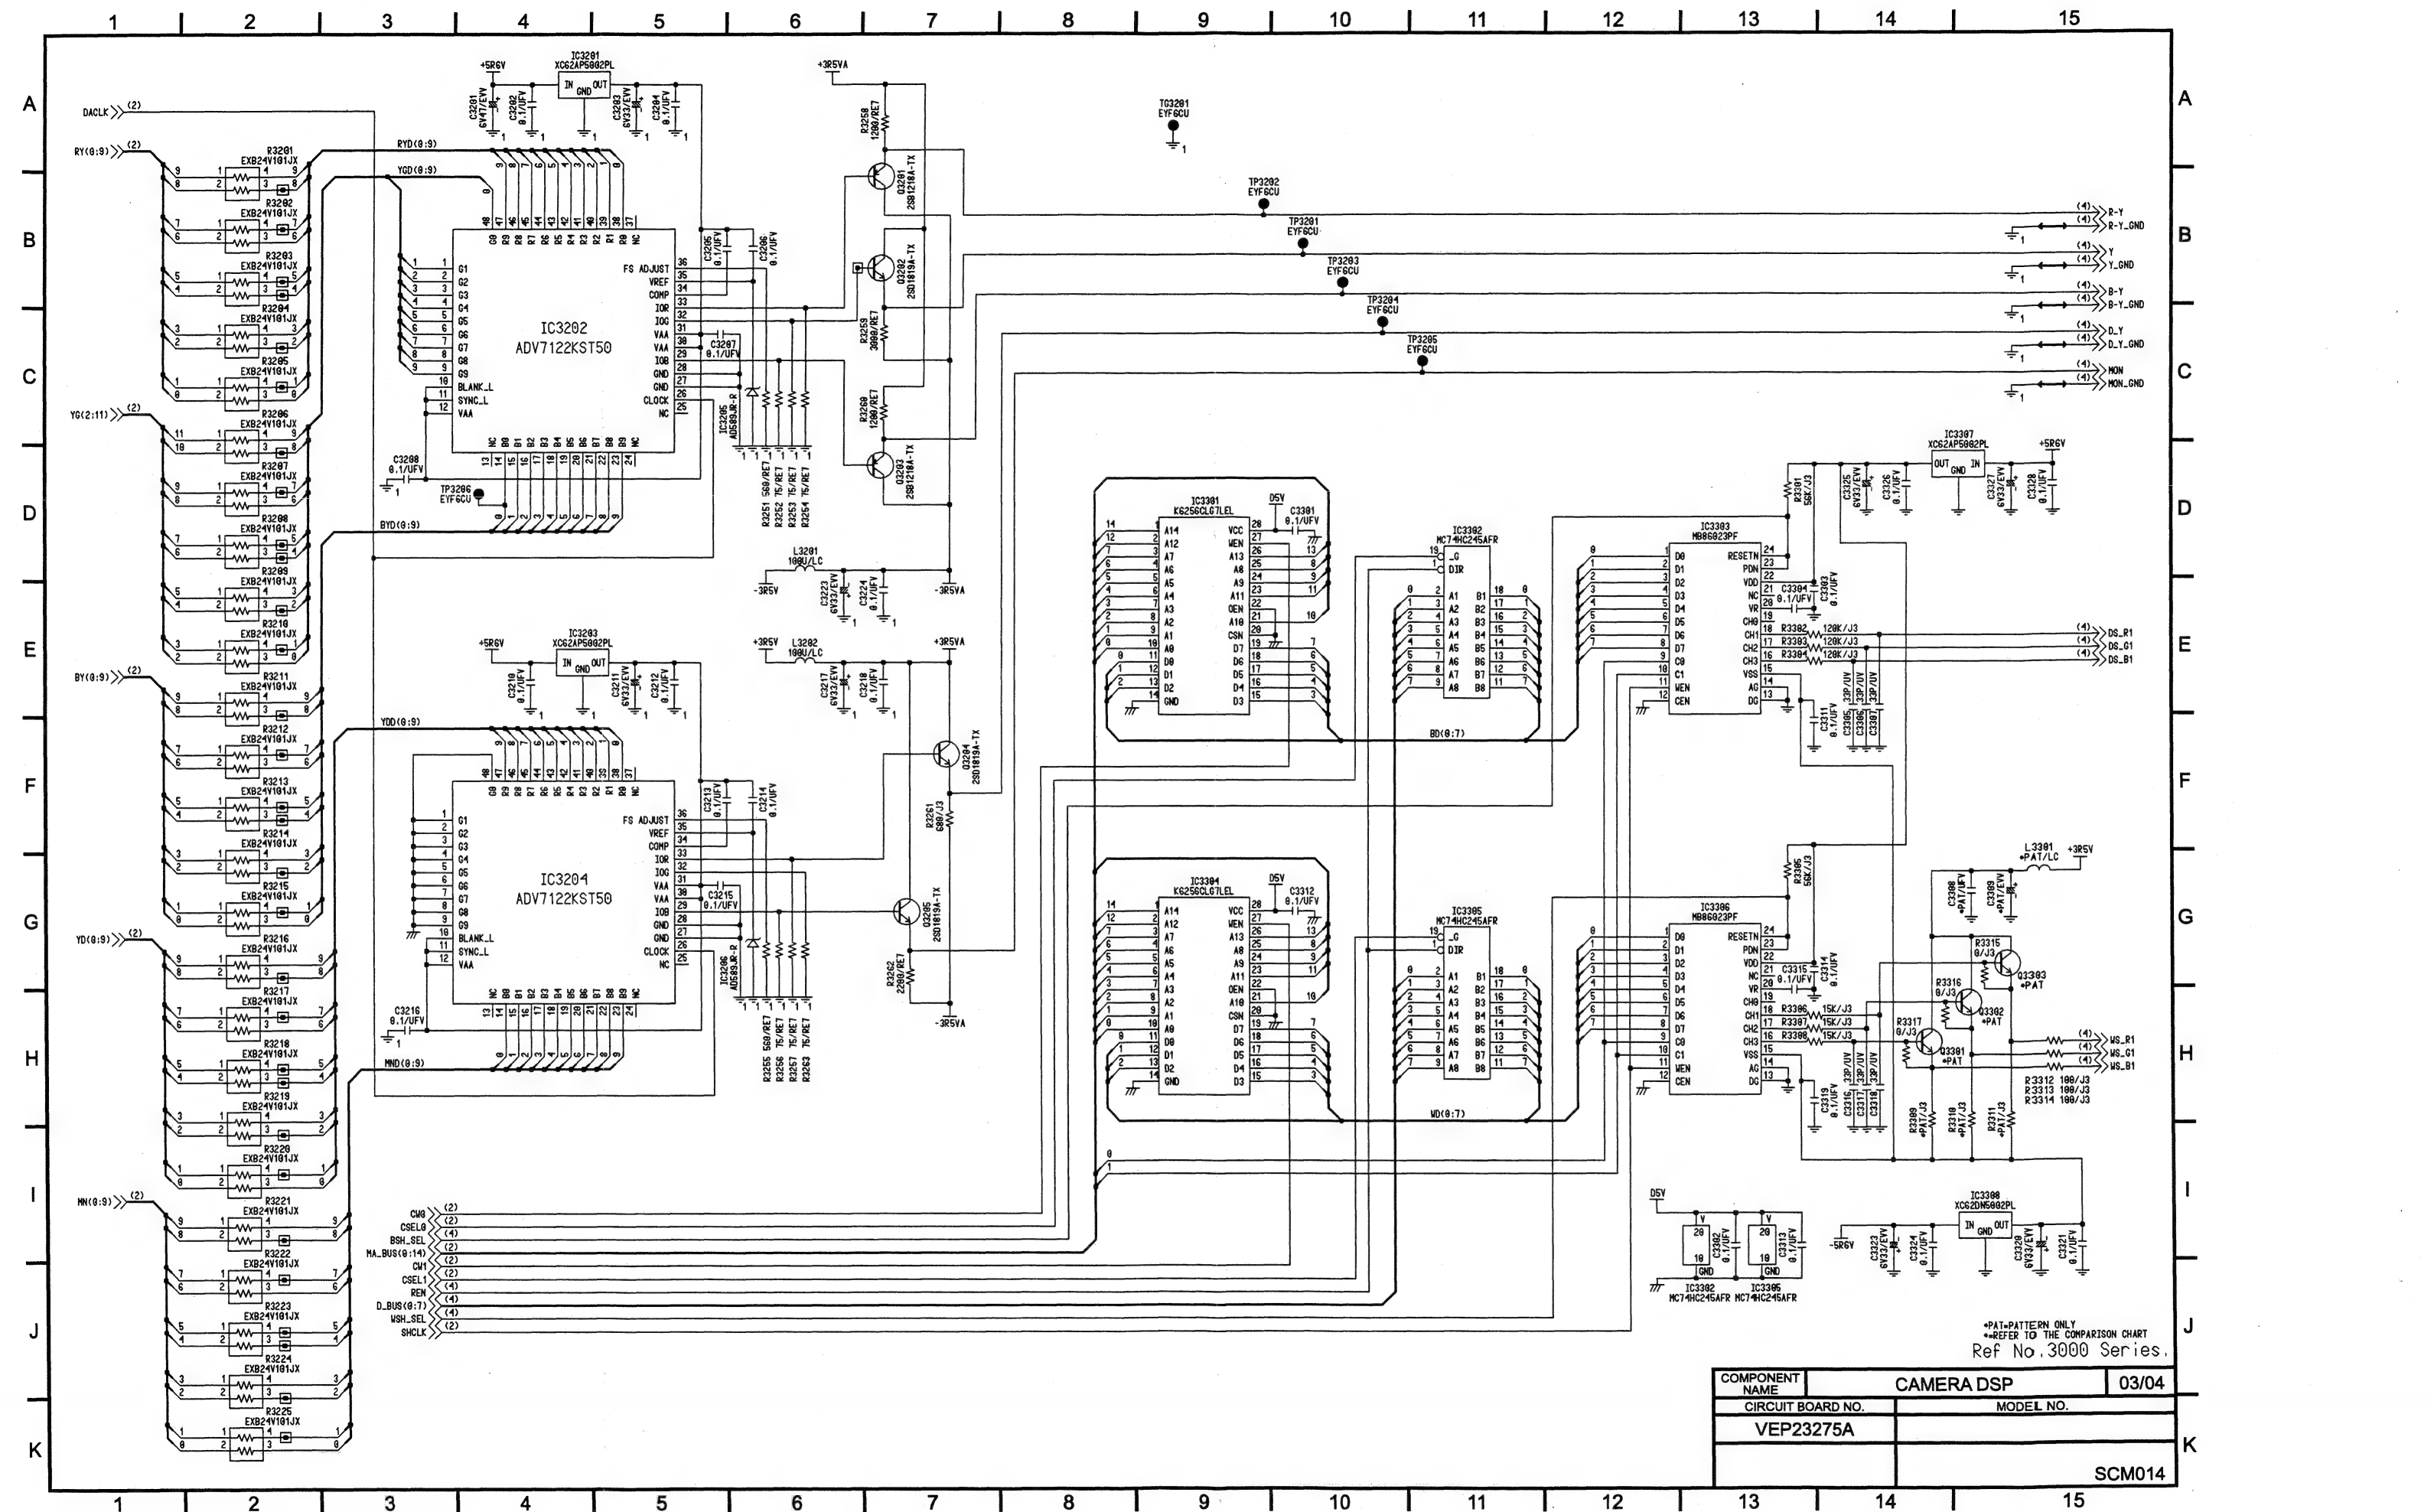


COMPONENT NAME	CAMERA DSP	03/04
CIRCUIT BOARD NO.	MODEL NO.	
VEP23275A		
	SCM014	

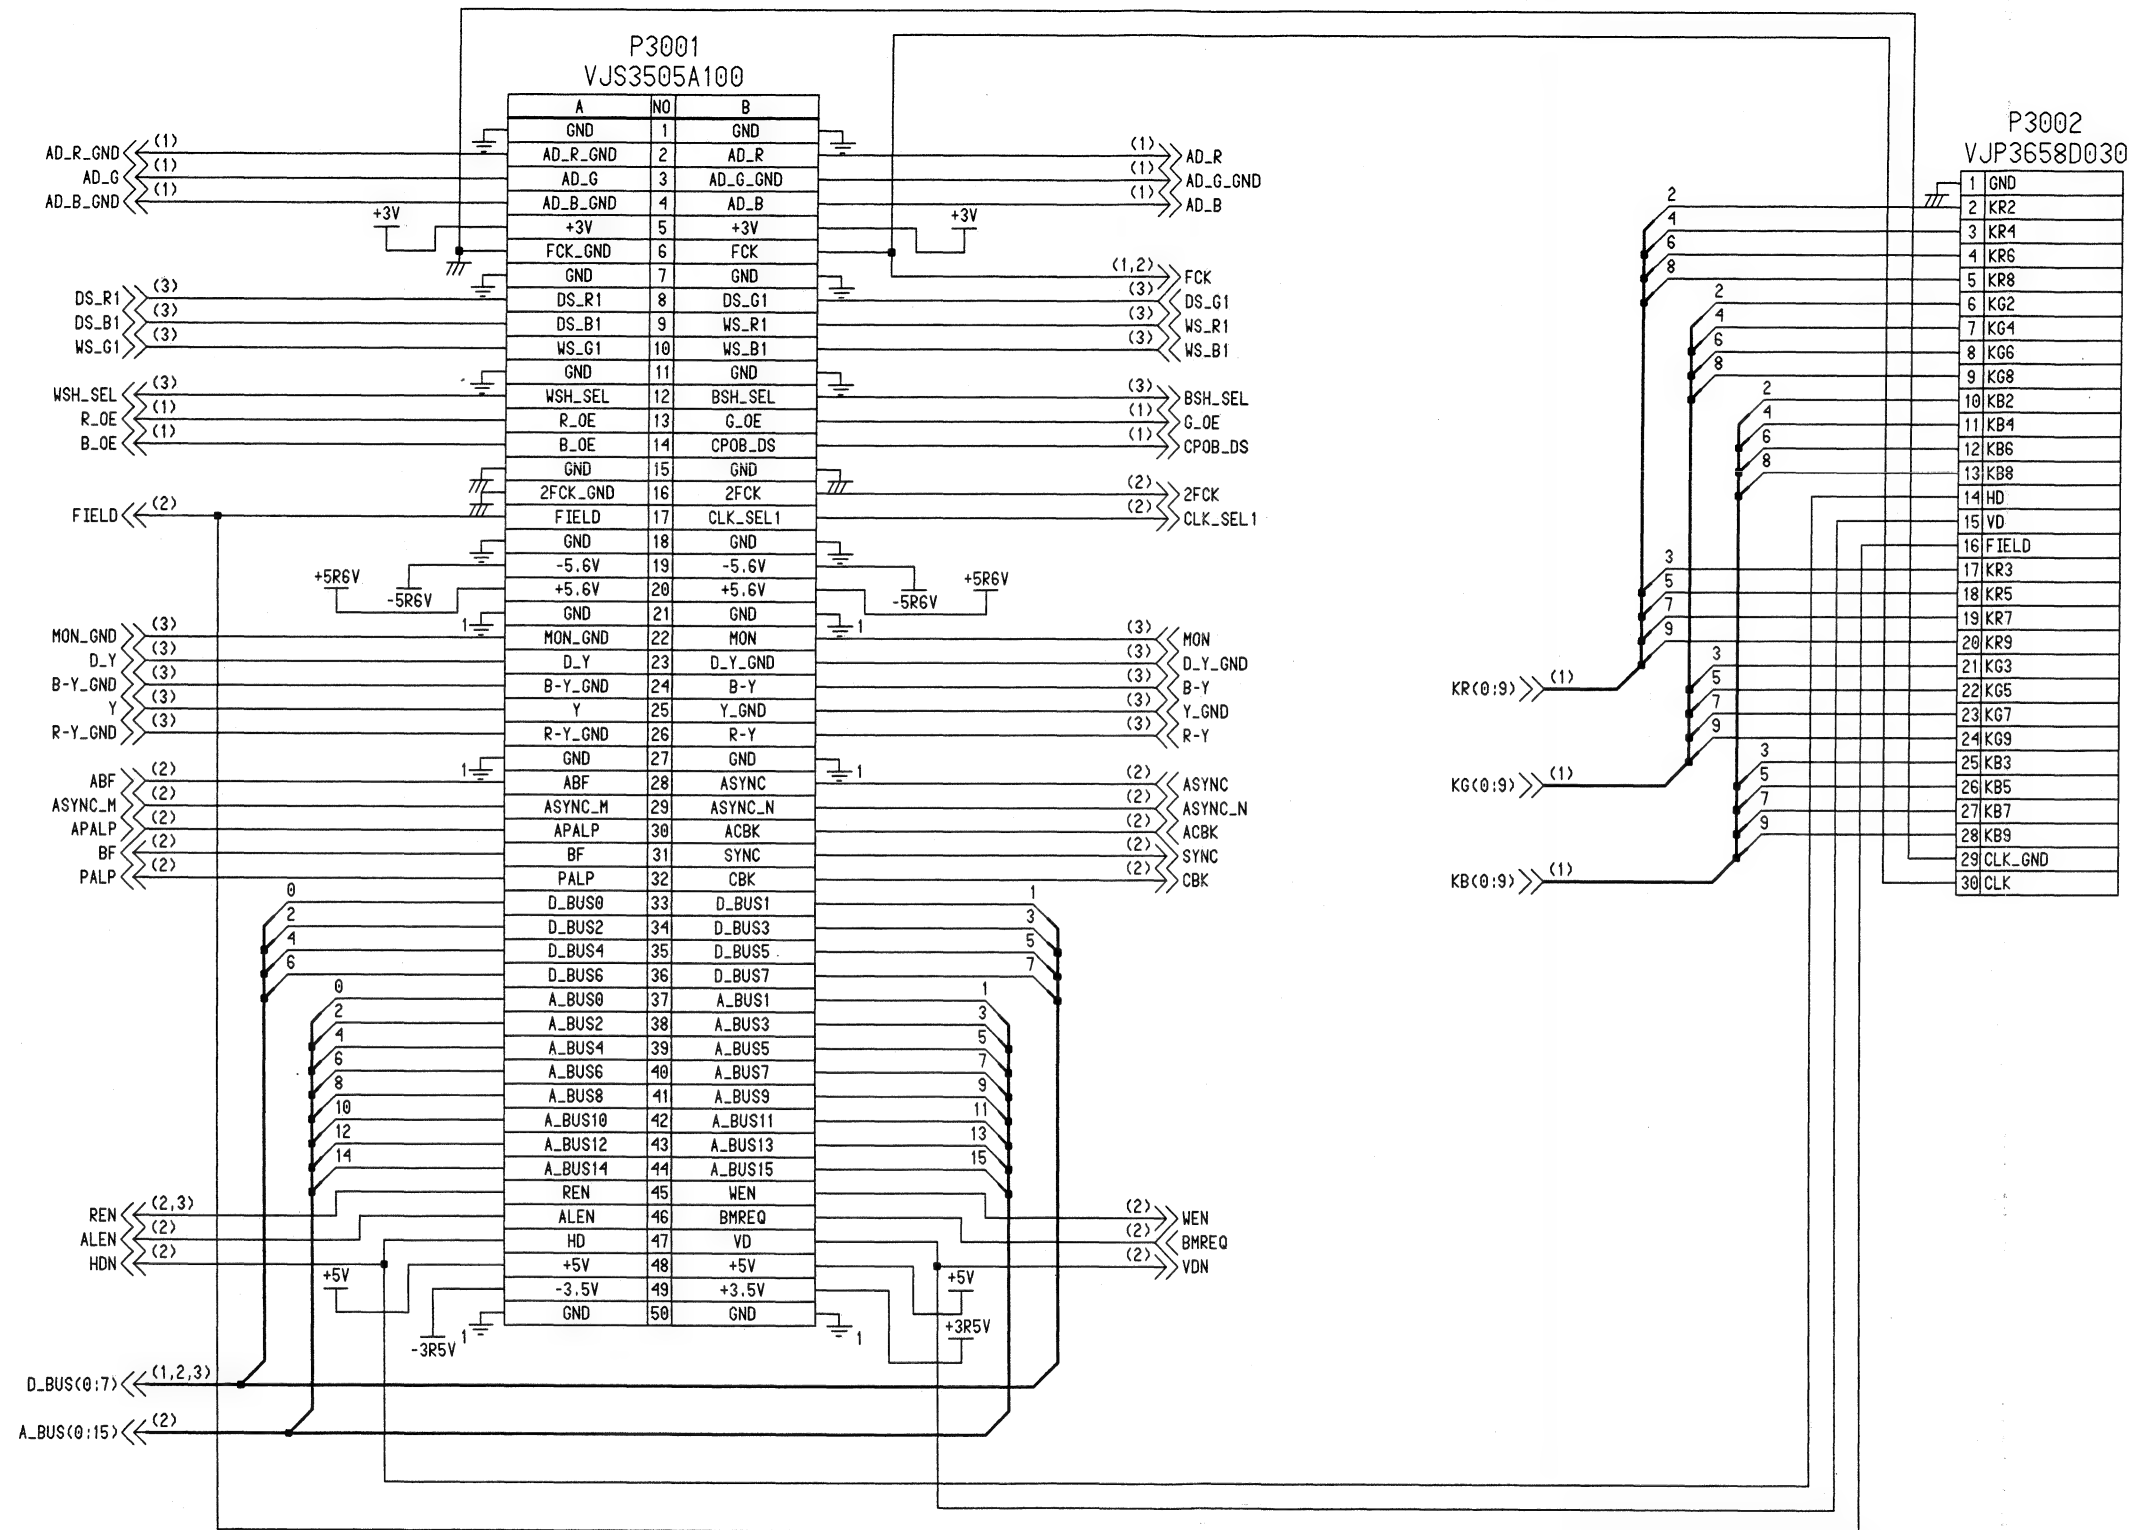


COMPONENT NAME	CAMERA DSP	04/04
CIRCUIT BOARD NO.	MODEL NO.	
VEP23275A		
		SCM015

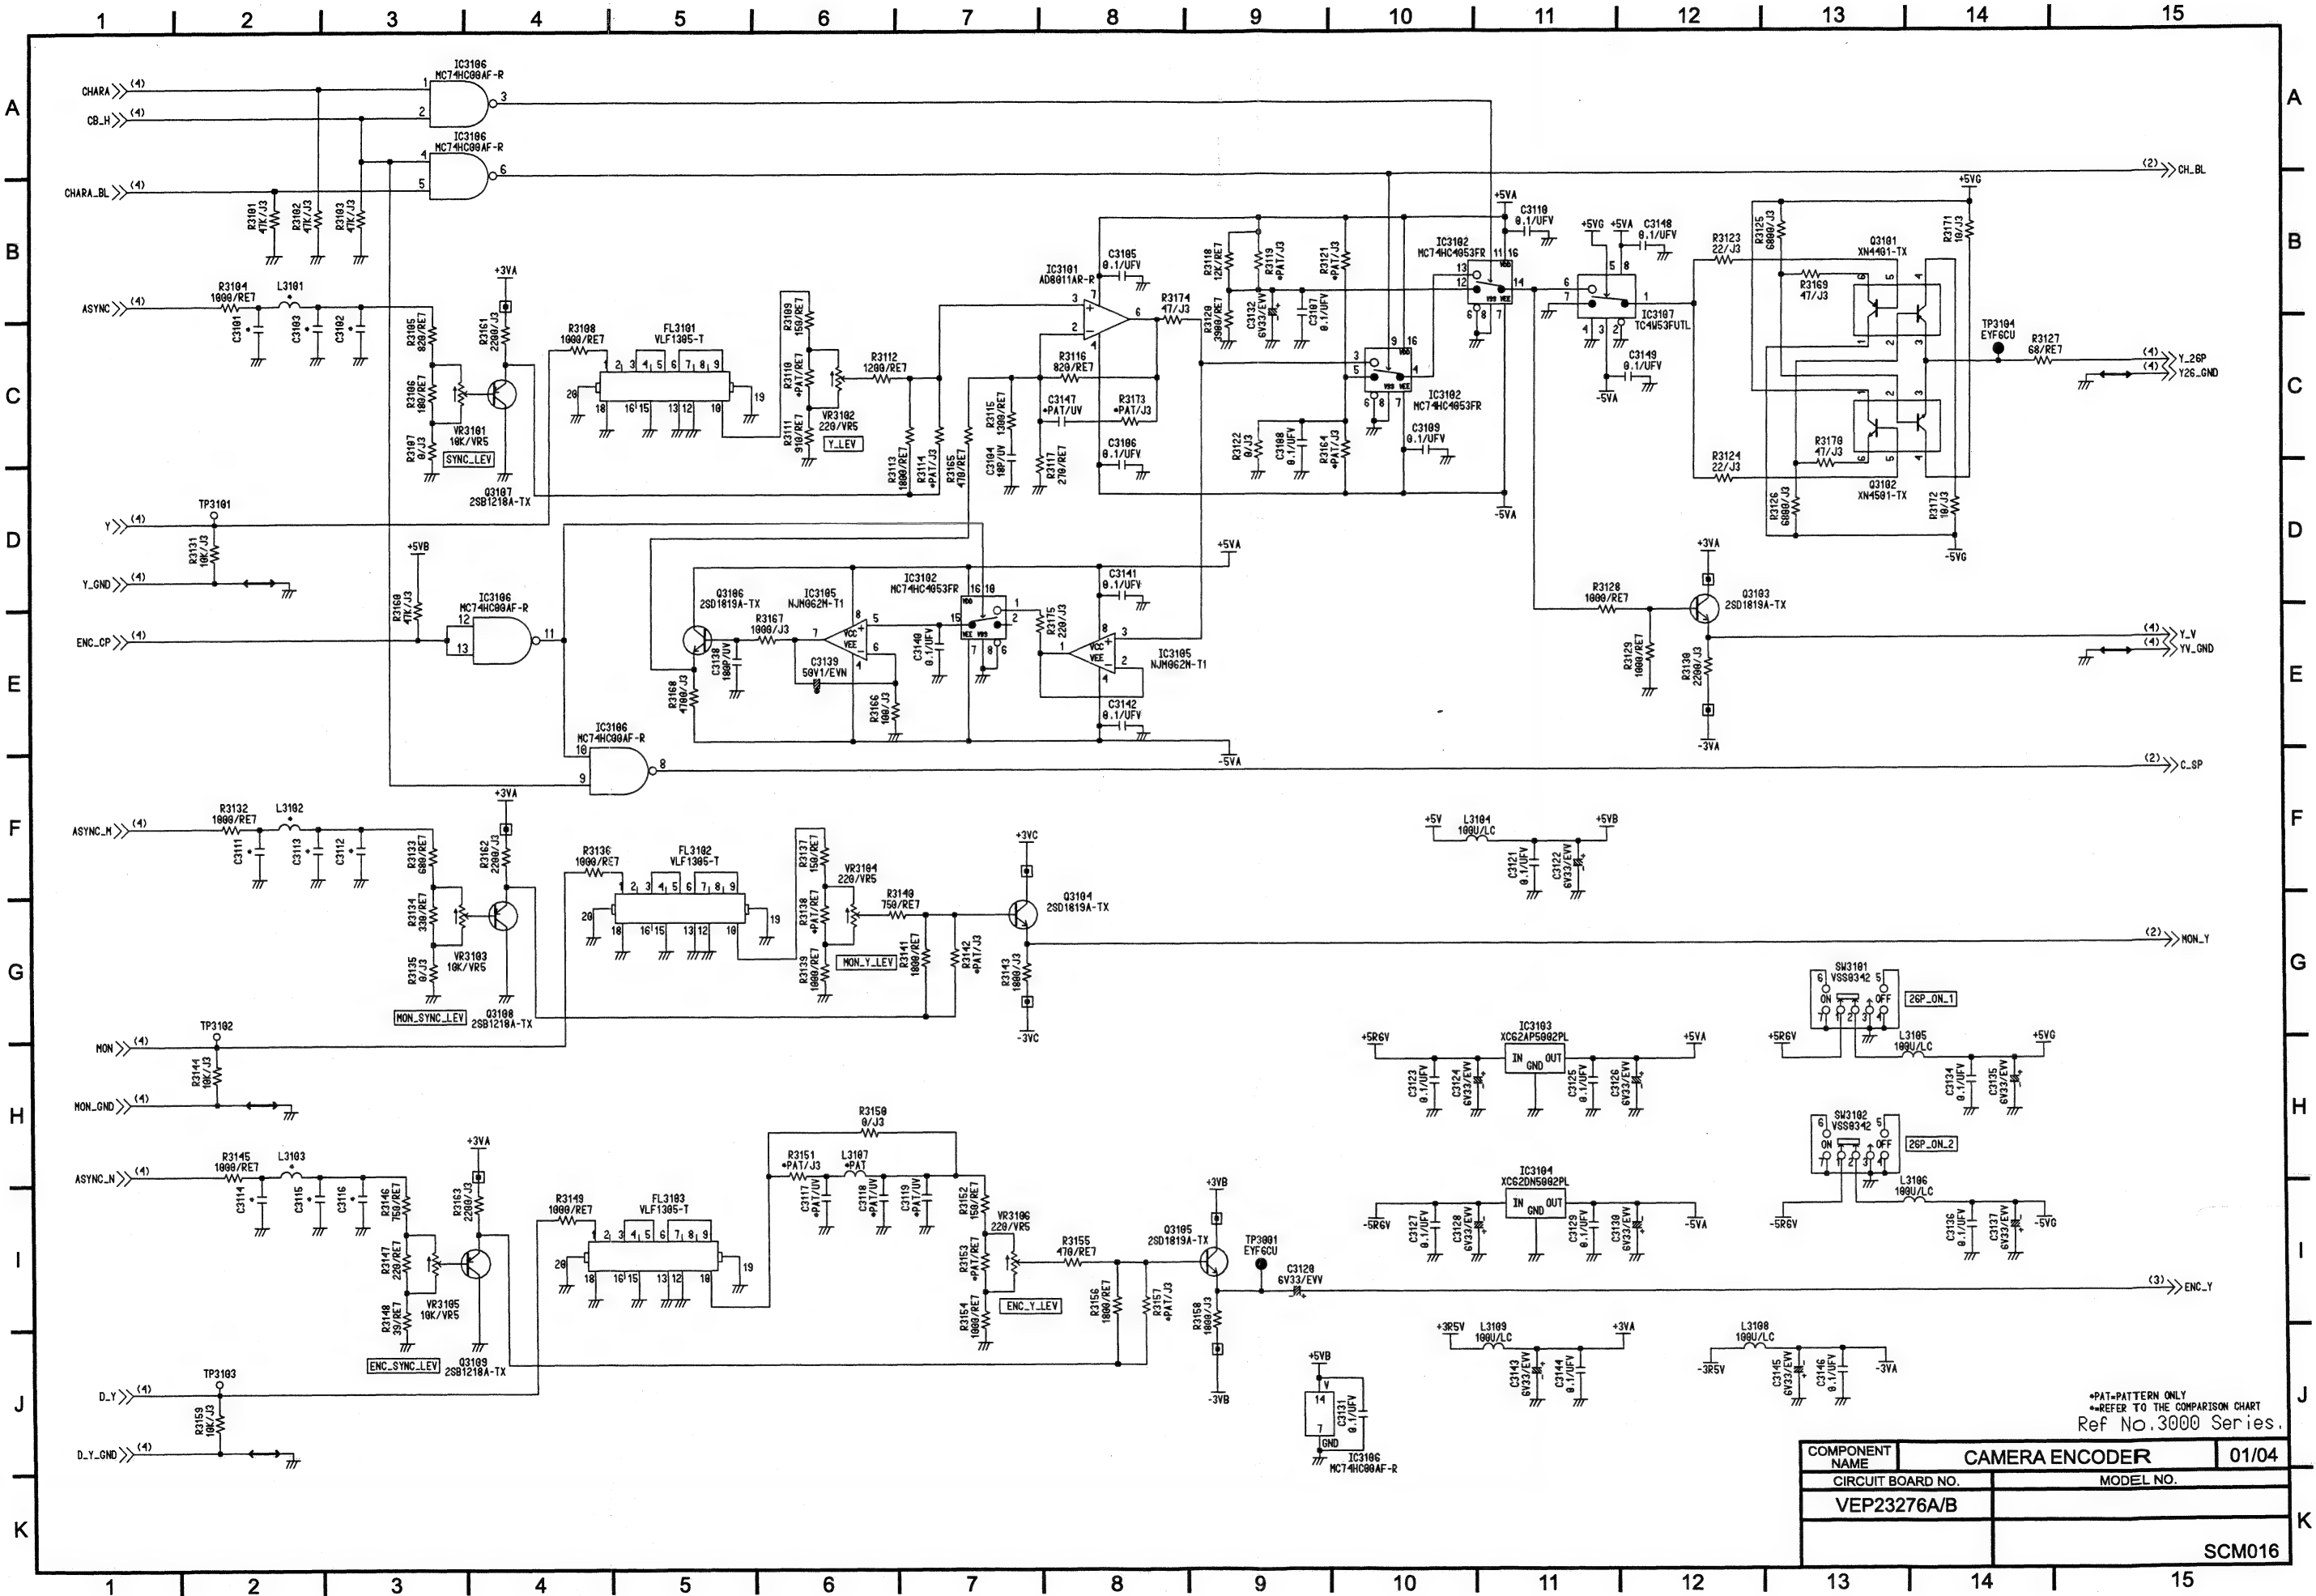

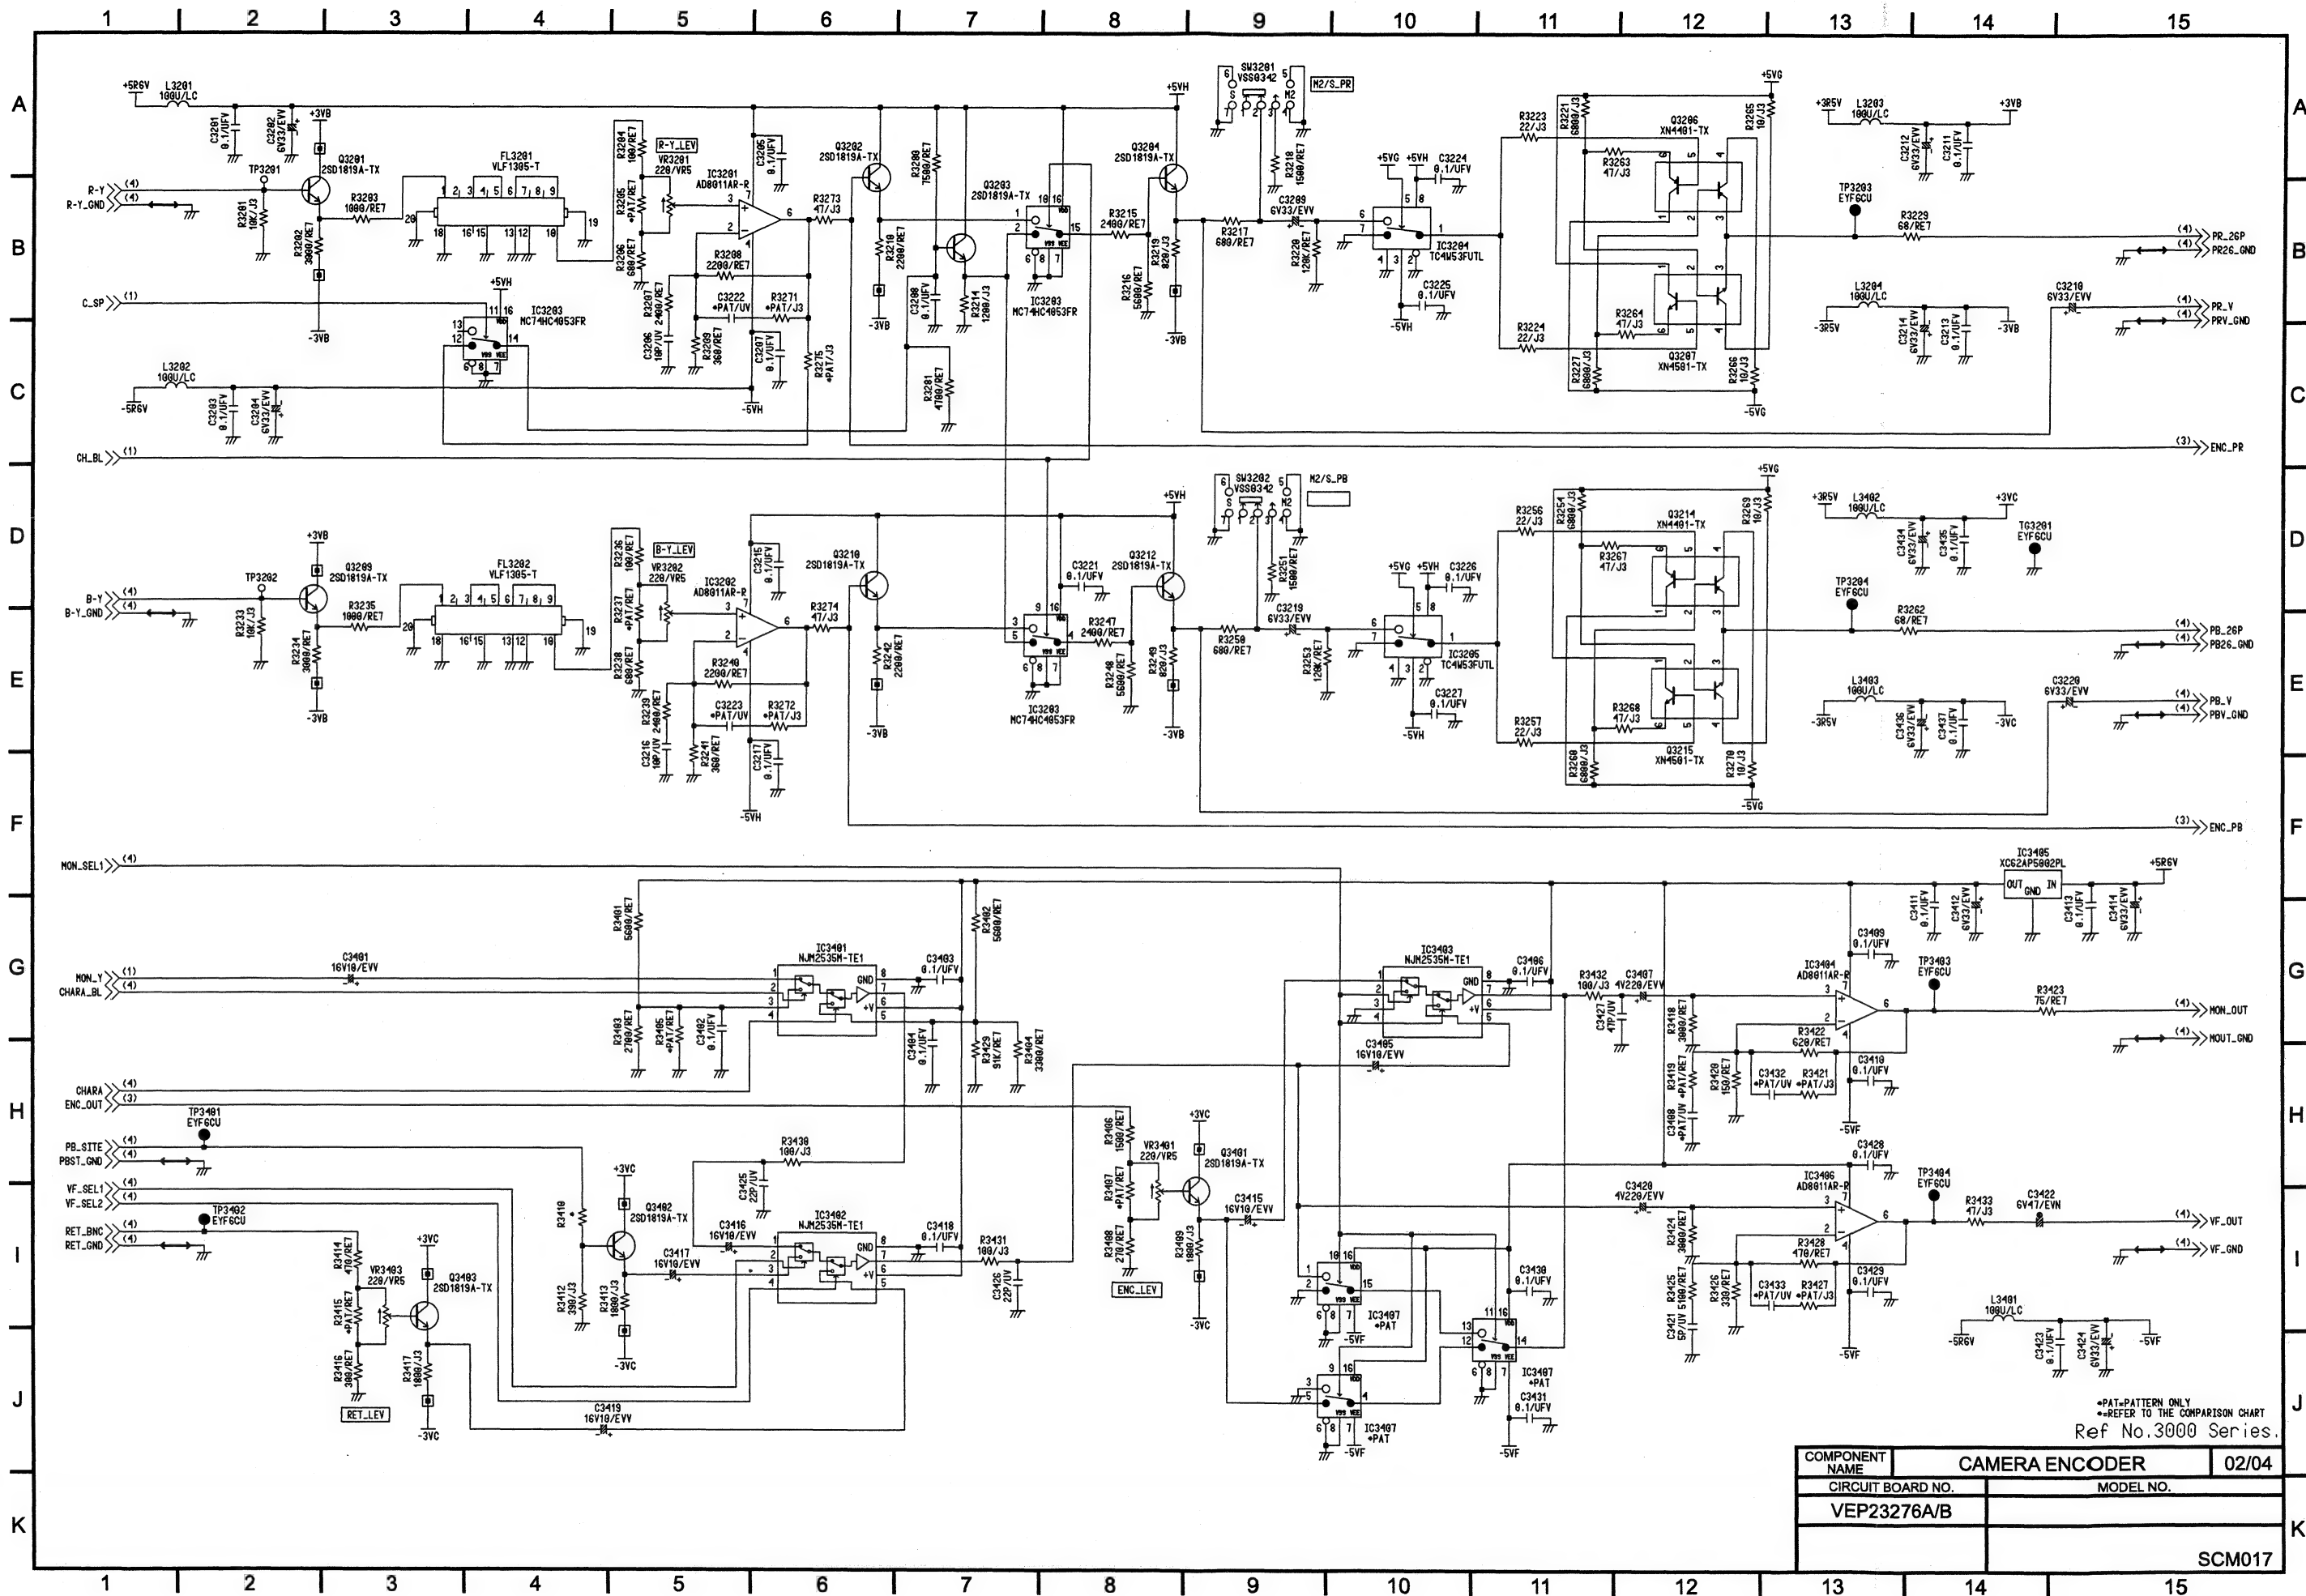



COMPONENT NAME	CAMERA ENCODER	02/04
CIRCUIT BOARD NO.	MODEL NO.	
VEP23276A/B		
	SCM017	

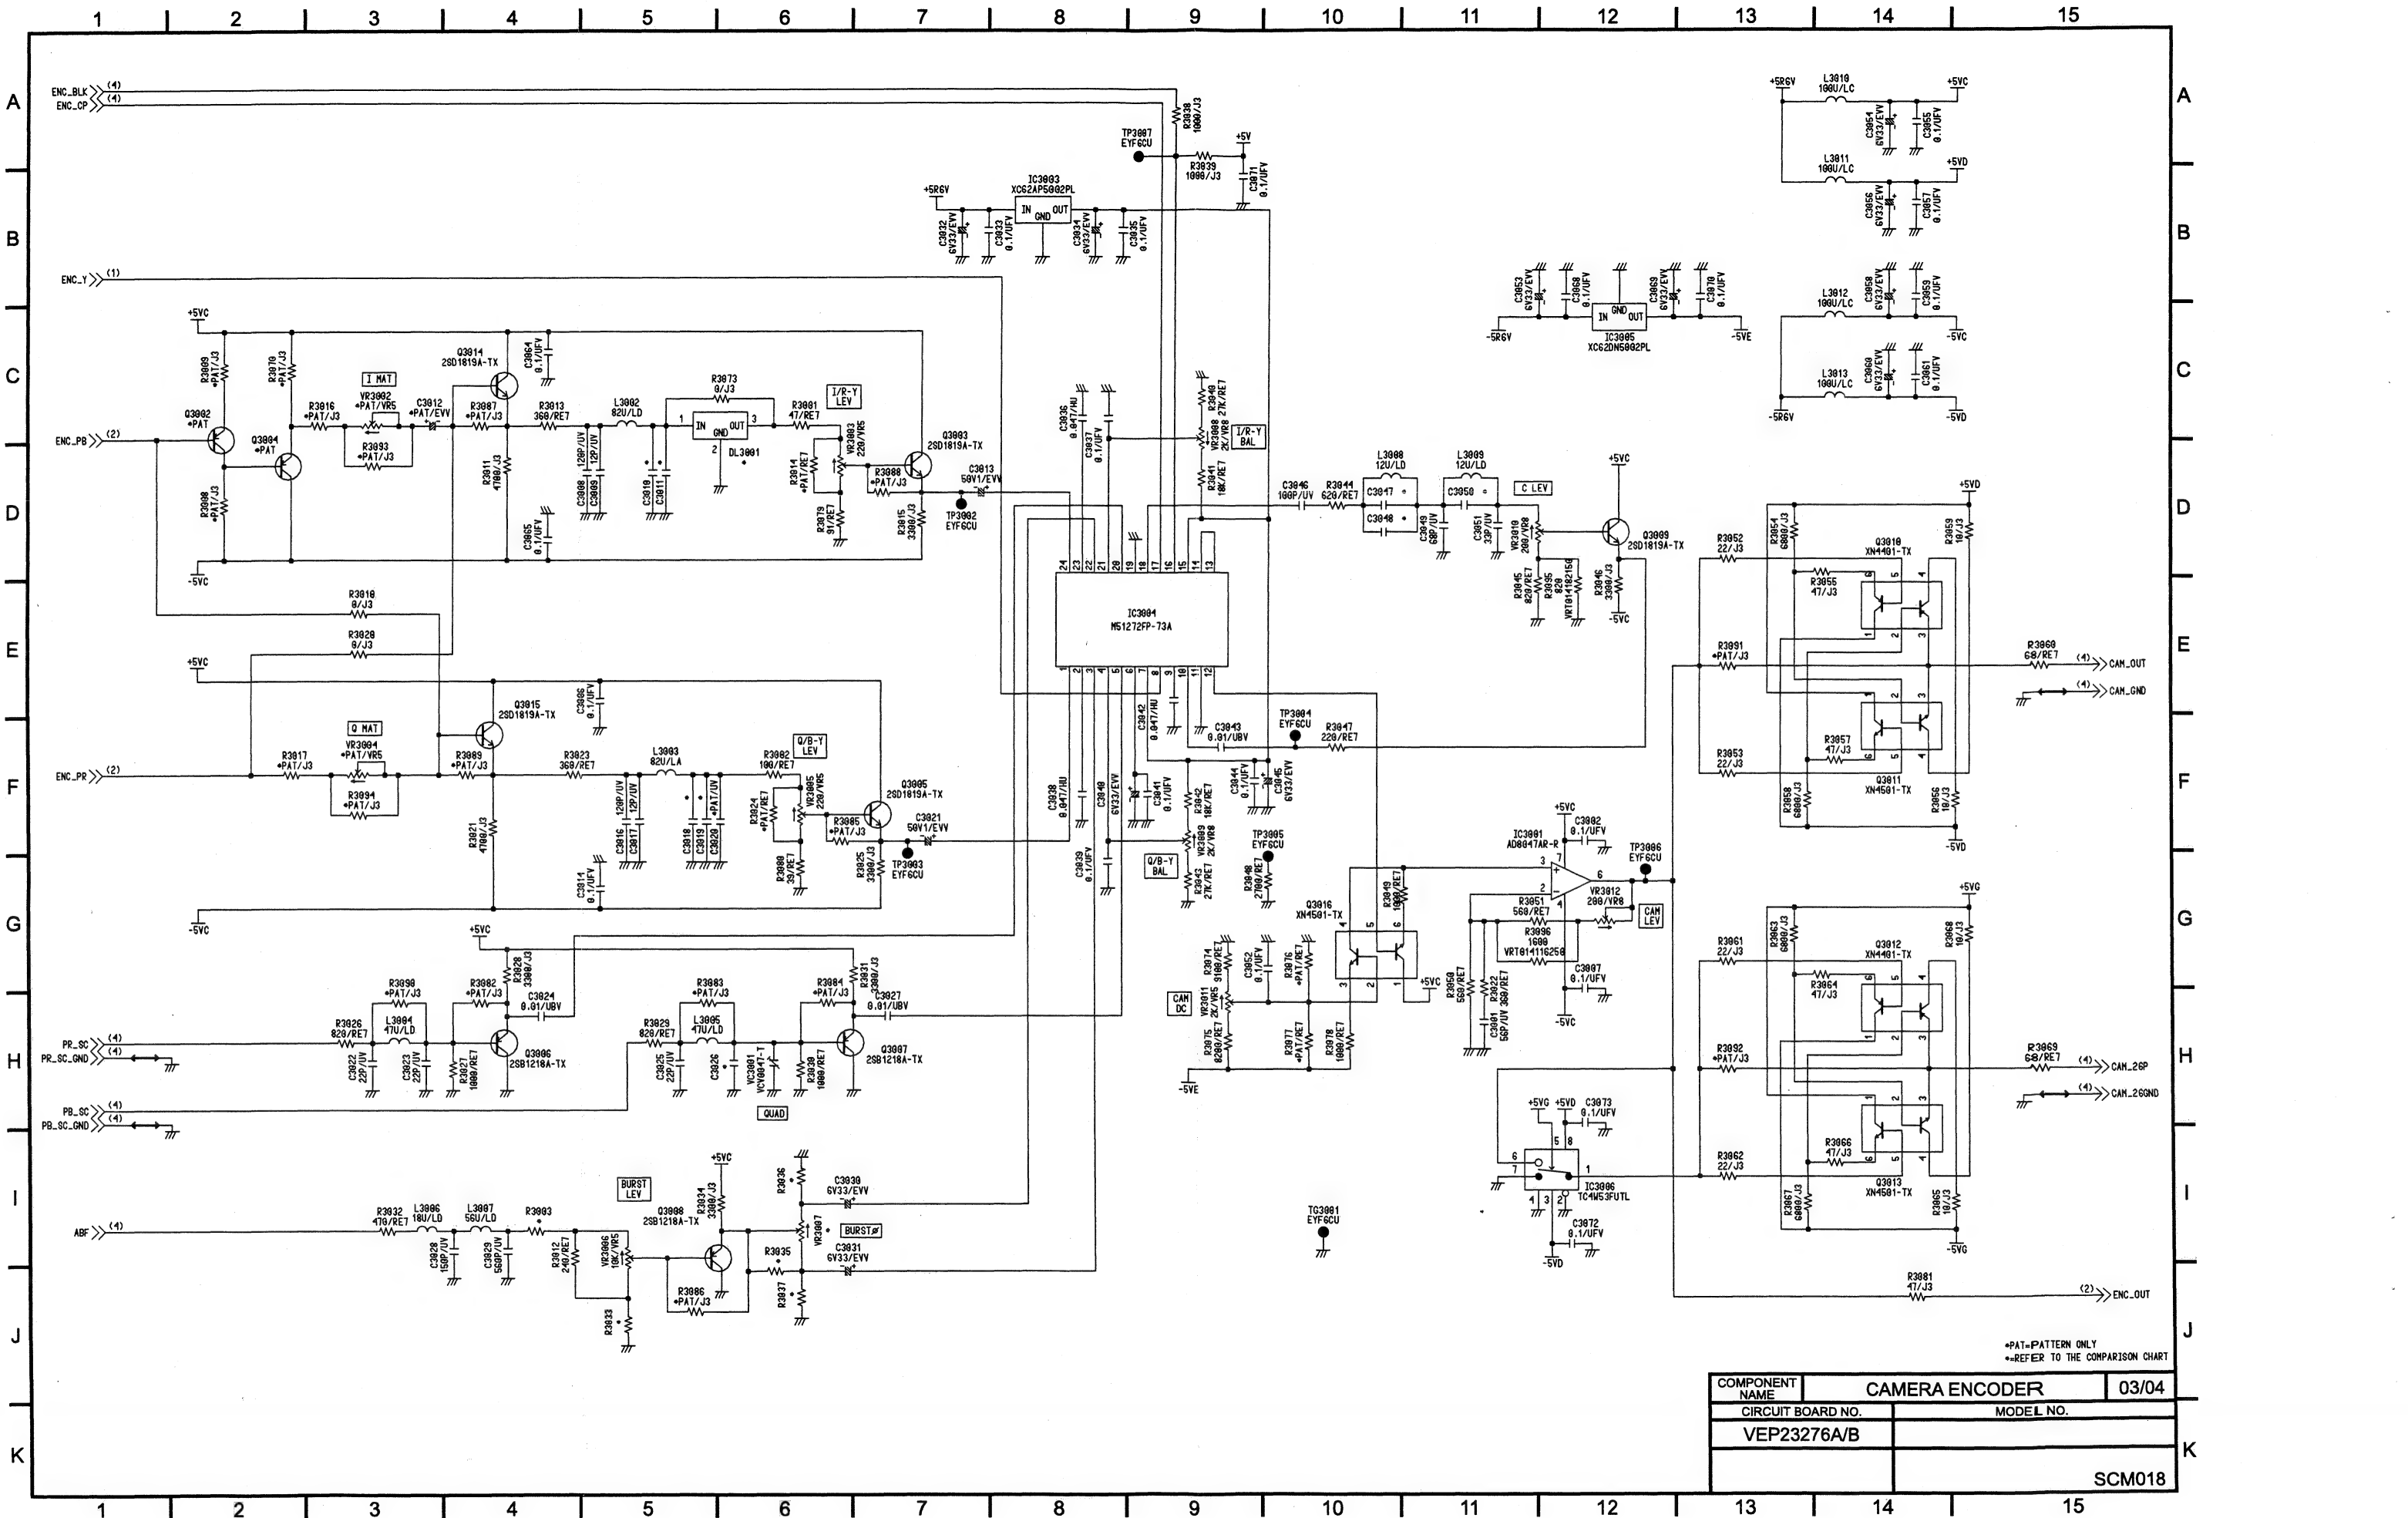


*PAT=PATTERN ONLY
**REFER TO THE COMPARISON CHART


COMPONENT NAME	CAMERA ENCODER	03/04
CIRCUIT BOARD NO.	MODEL NO.	
VEP23276A/B		
		SCM018

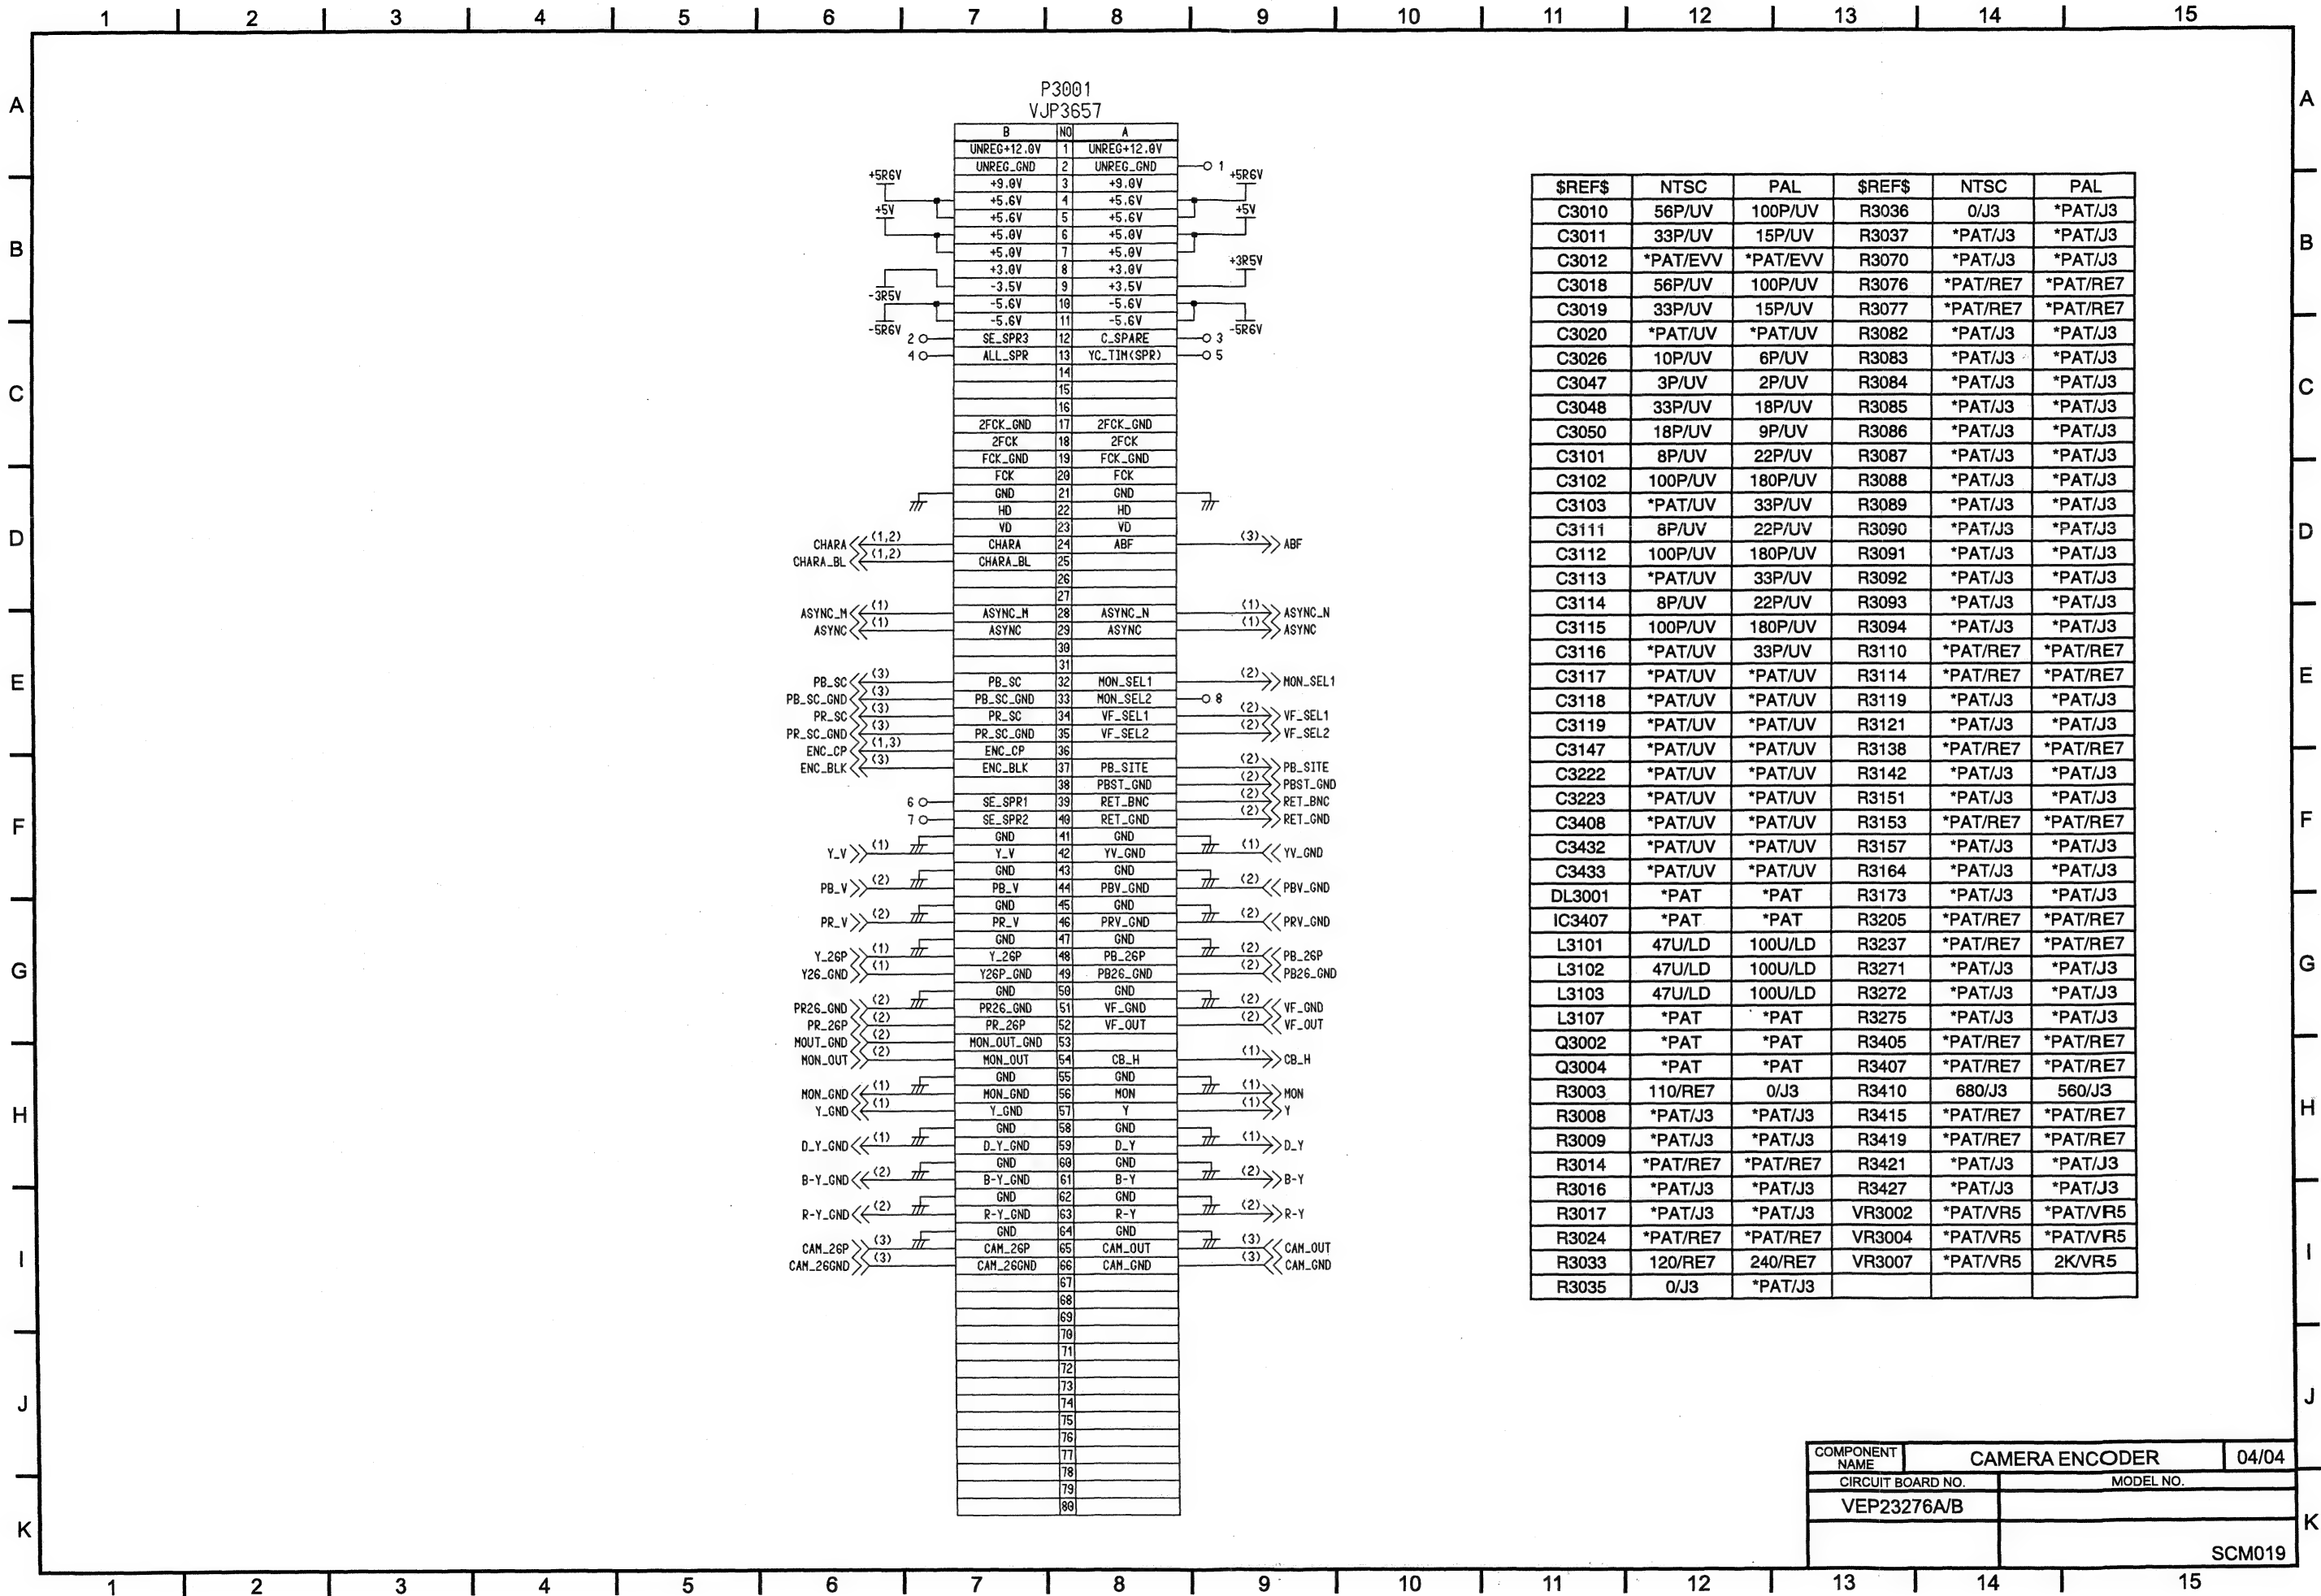

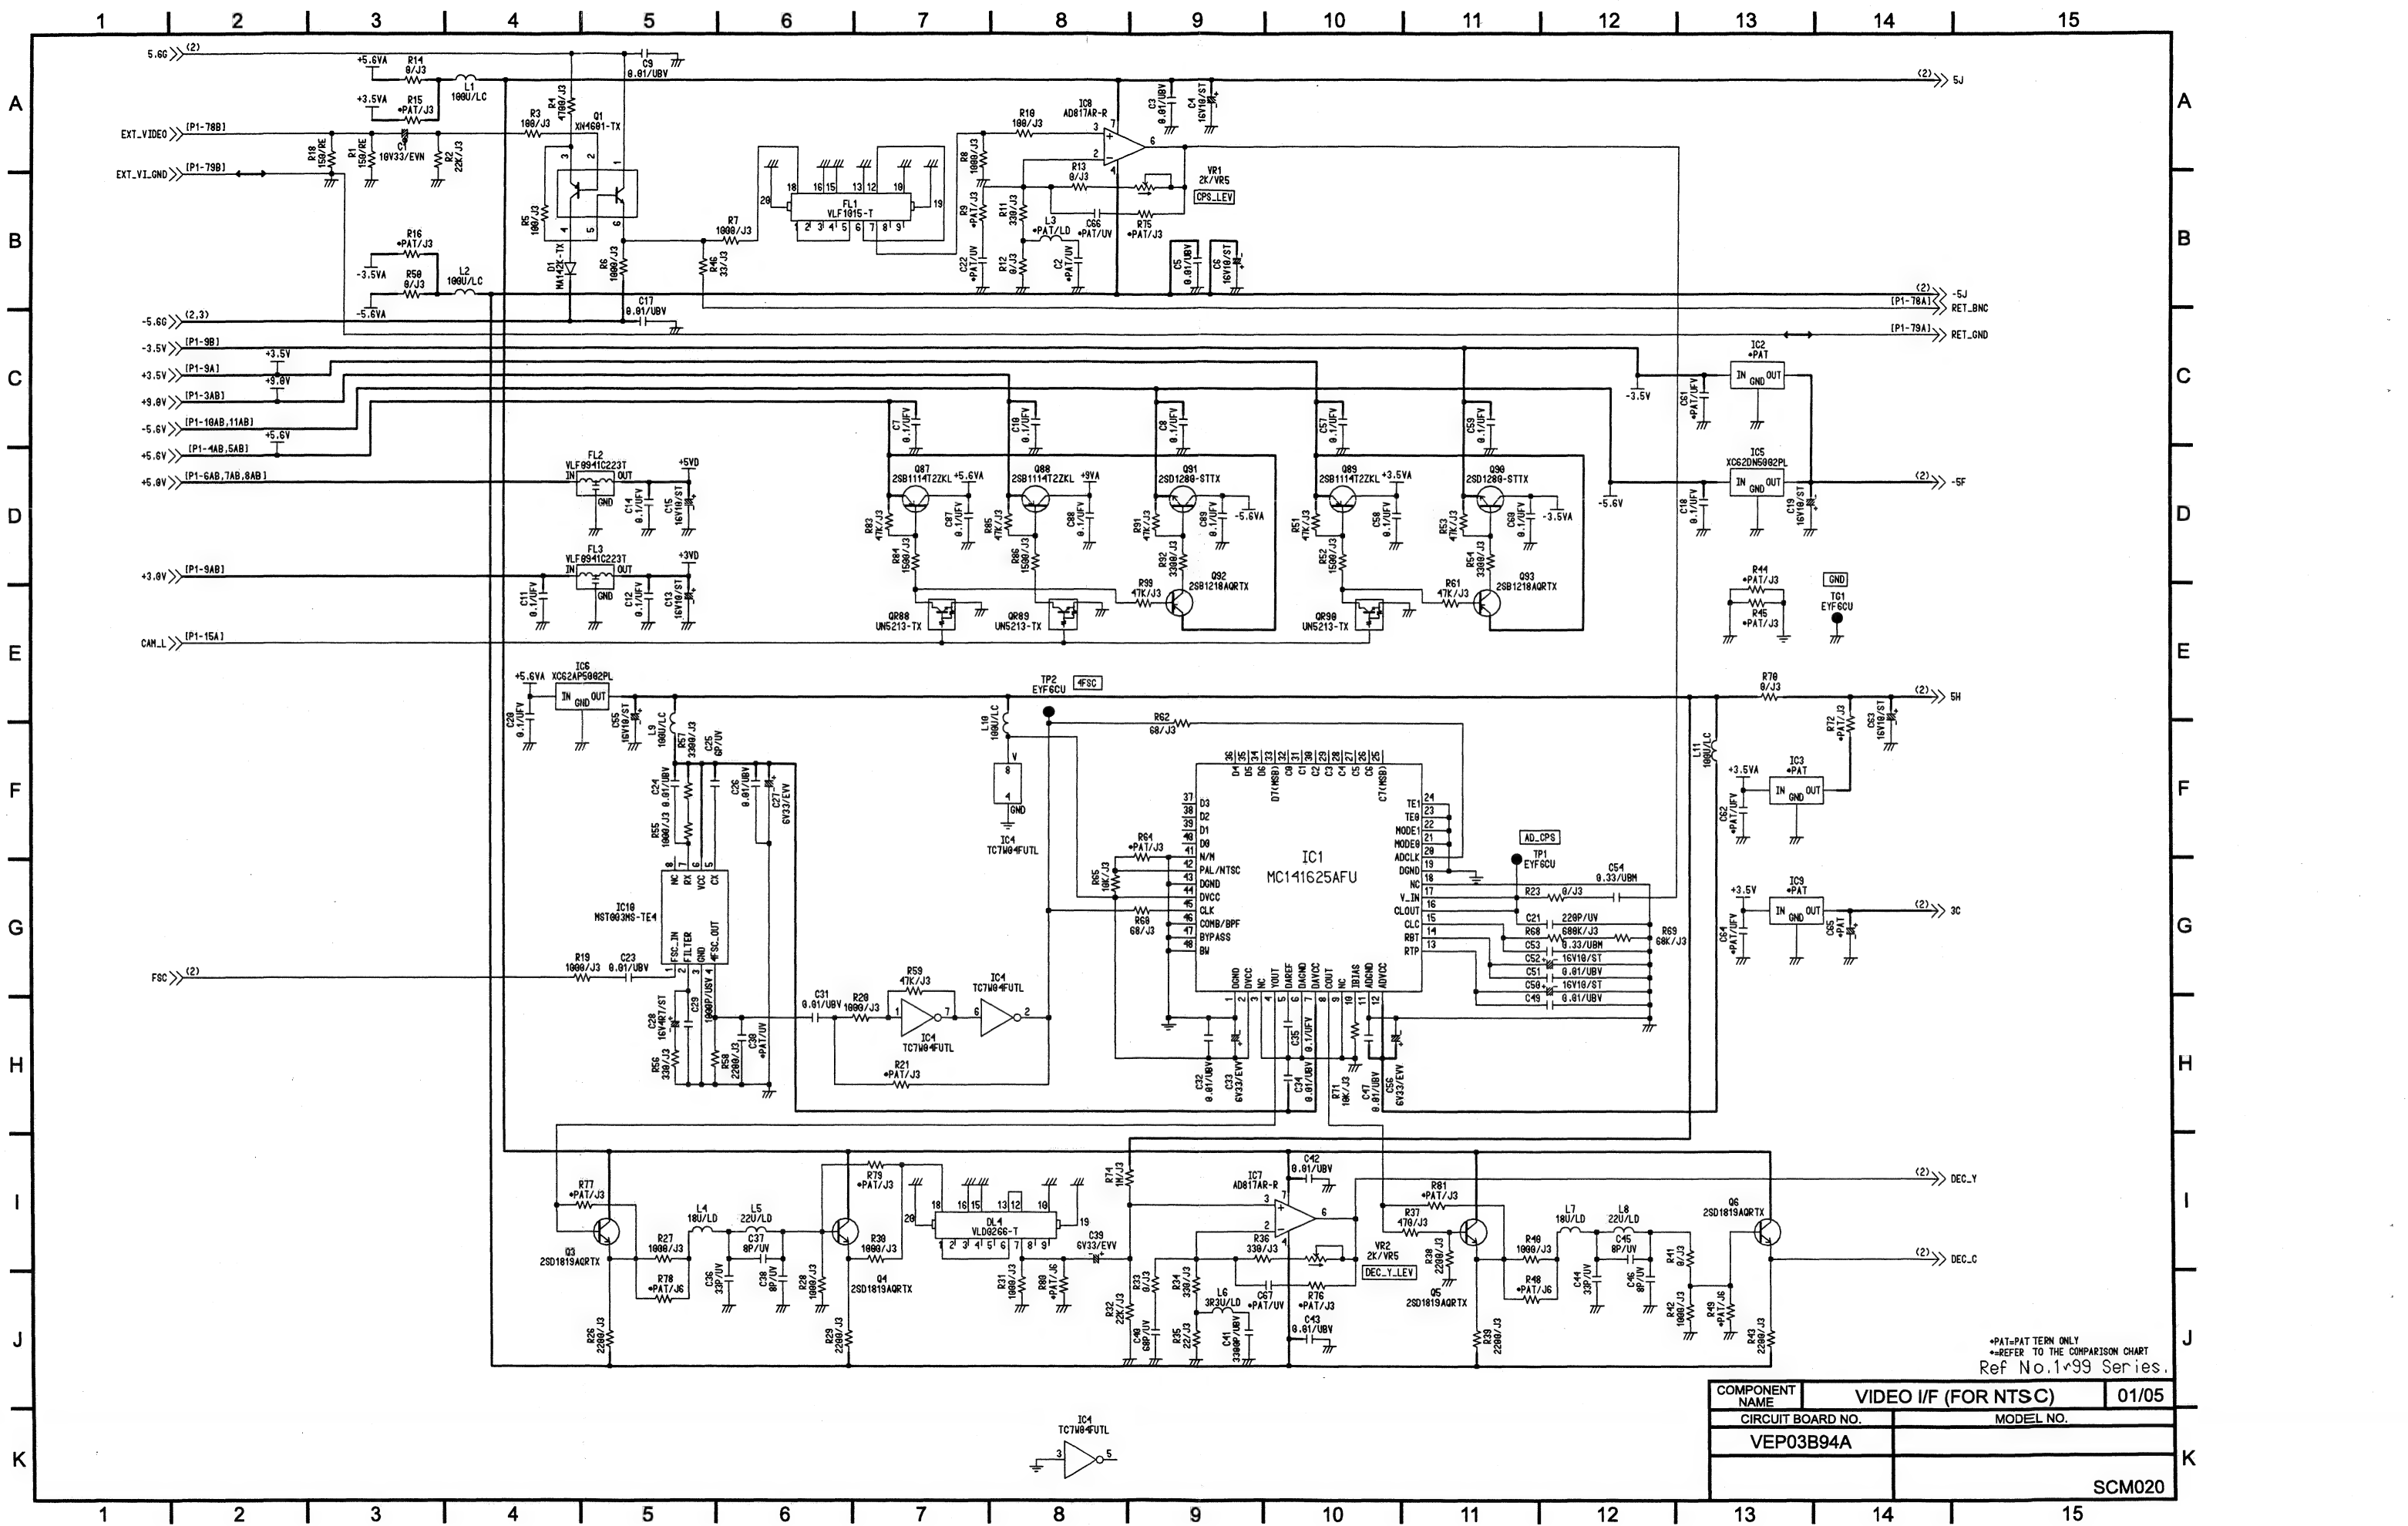


COMPONENT NAME		VIDEO I/F (FOR NTSC)	01/05
CIRCUIT BOARD NO.		MODEL NO.	
VEP03B94A			
		SCM020	

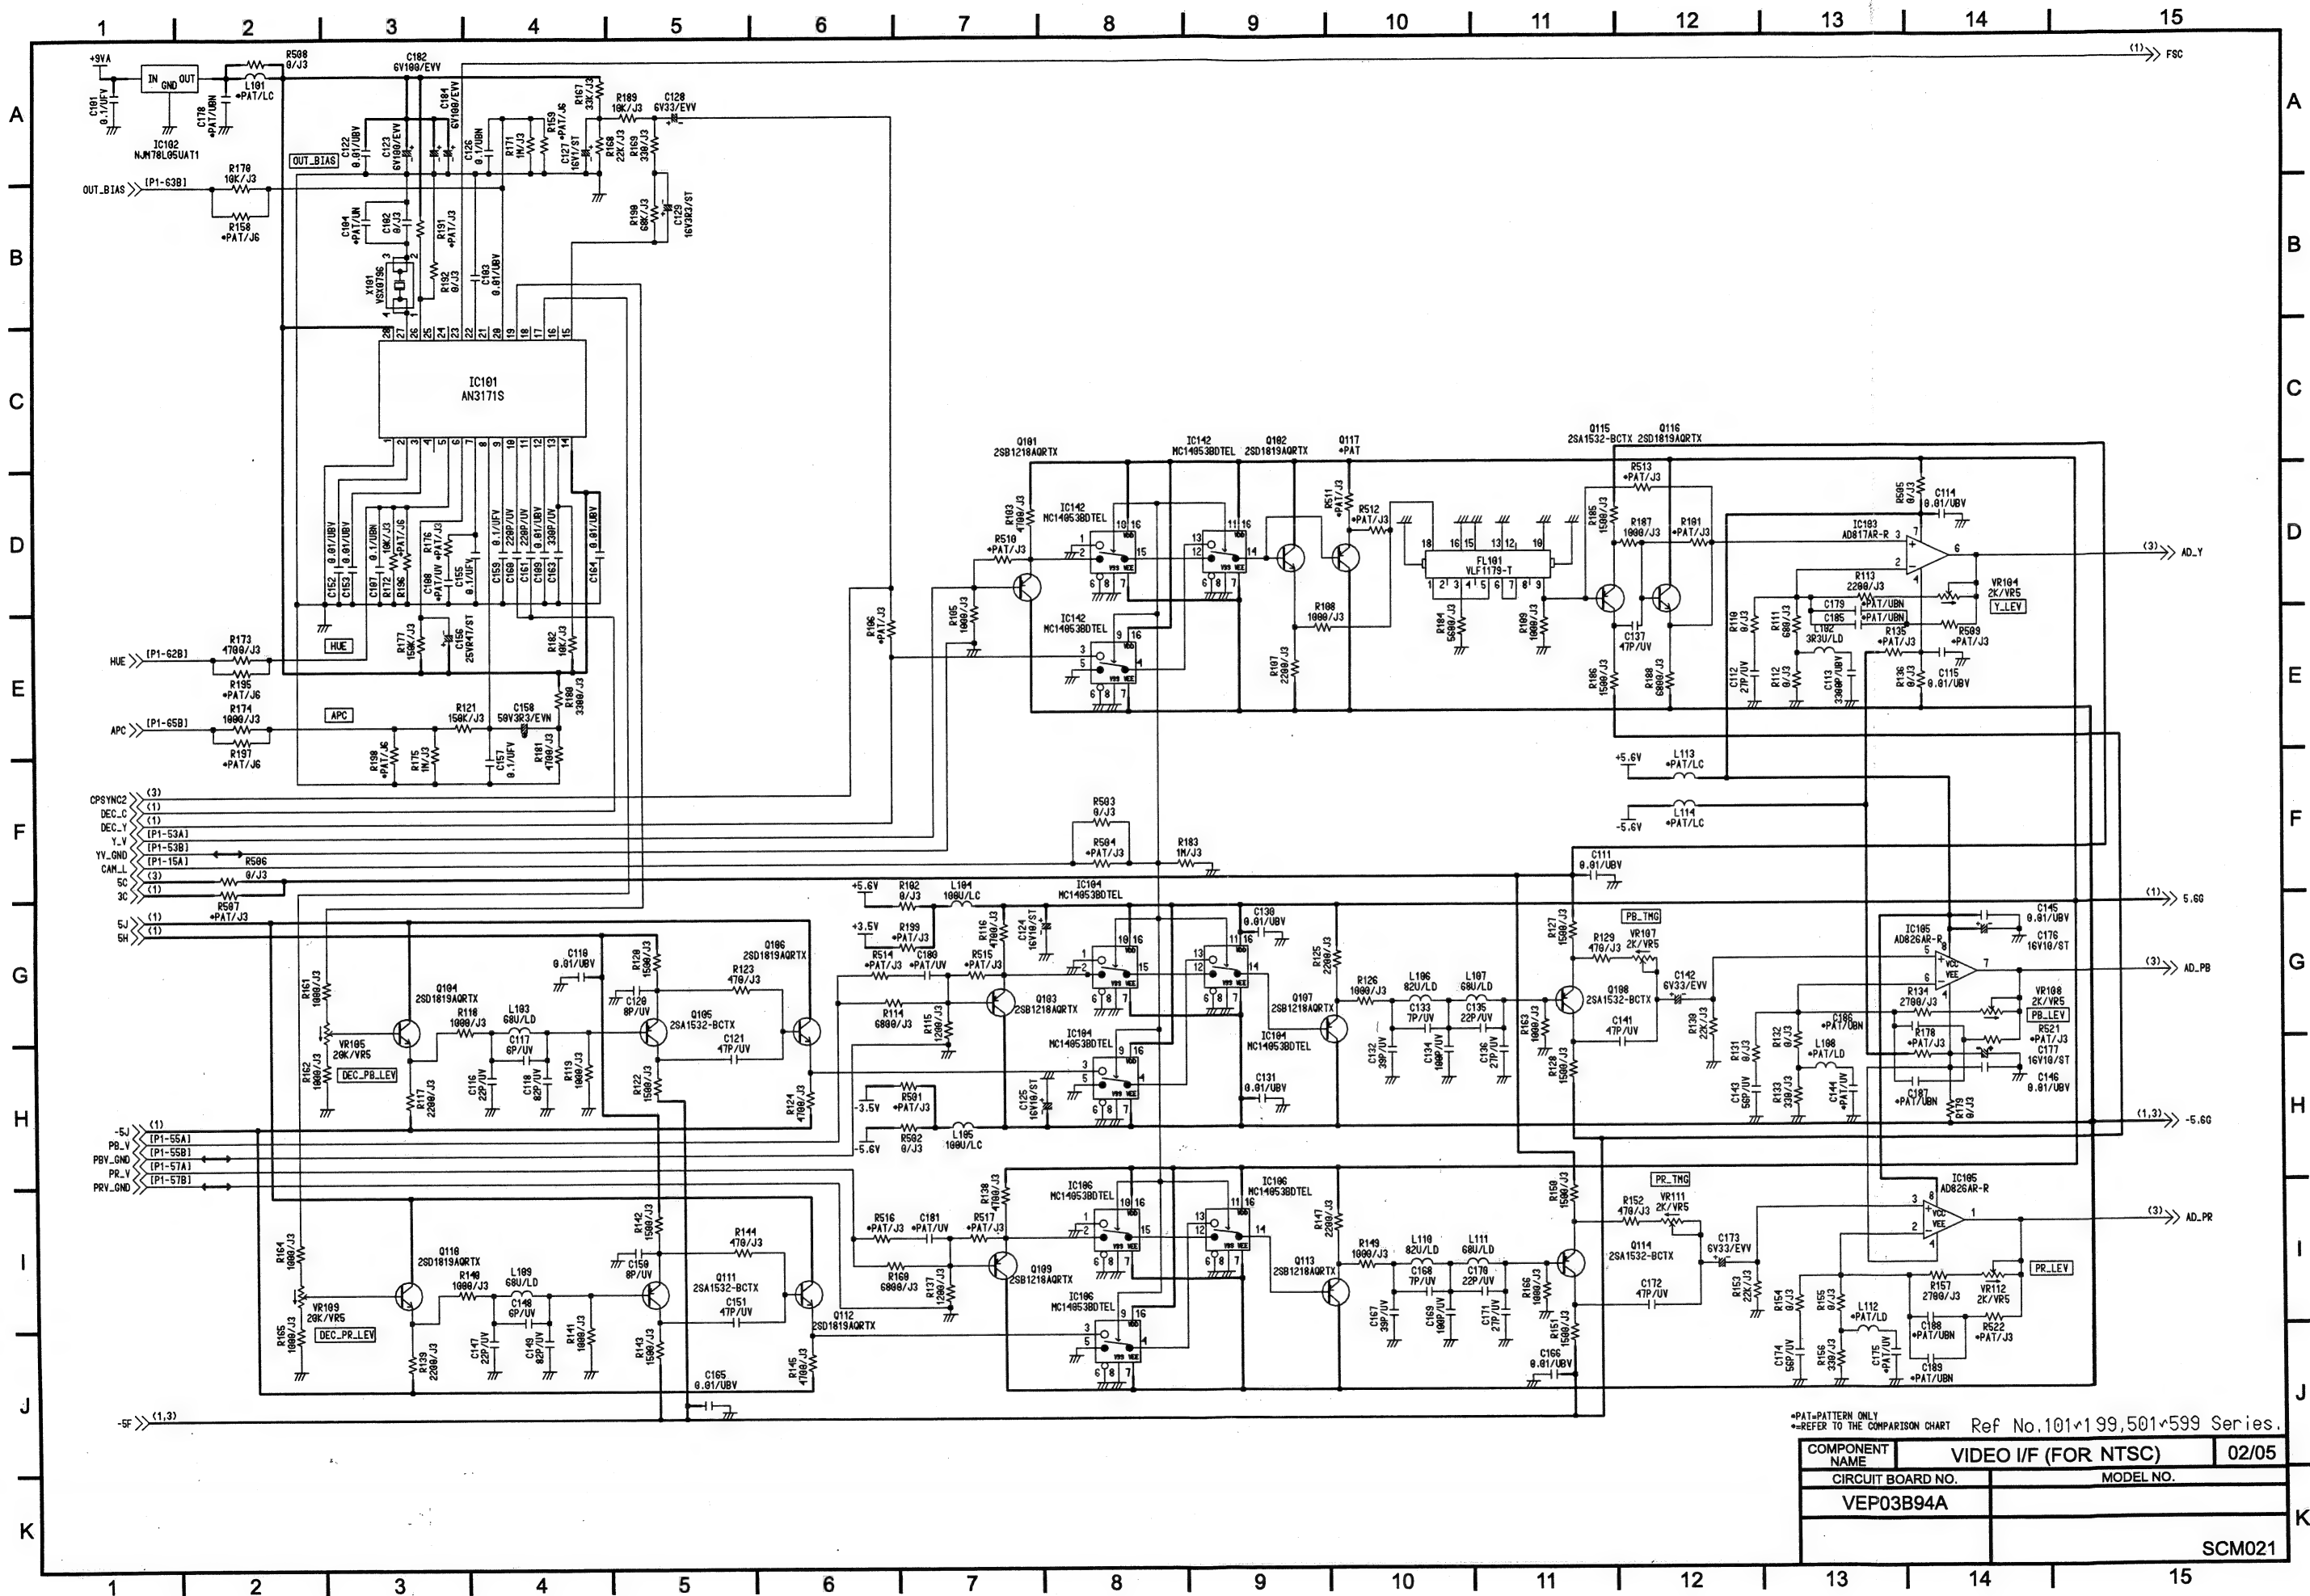

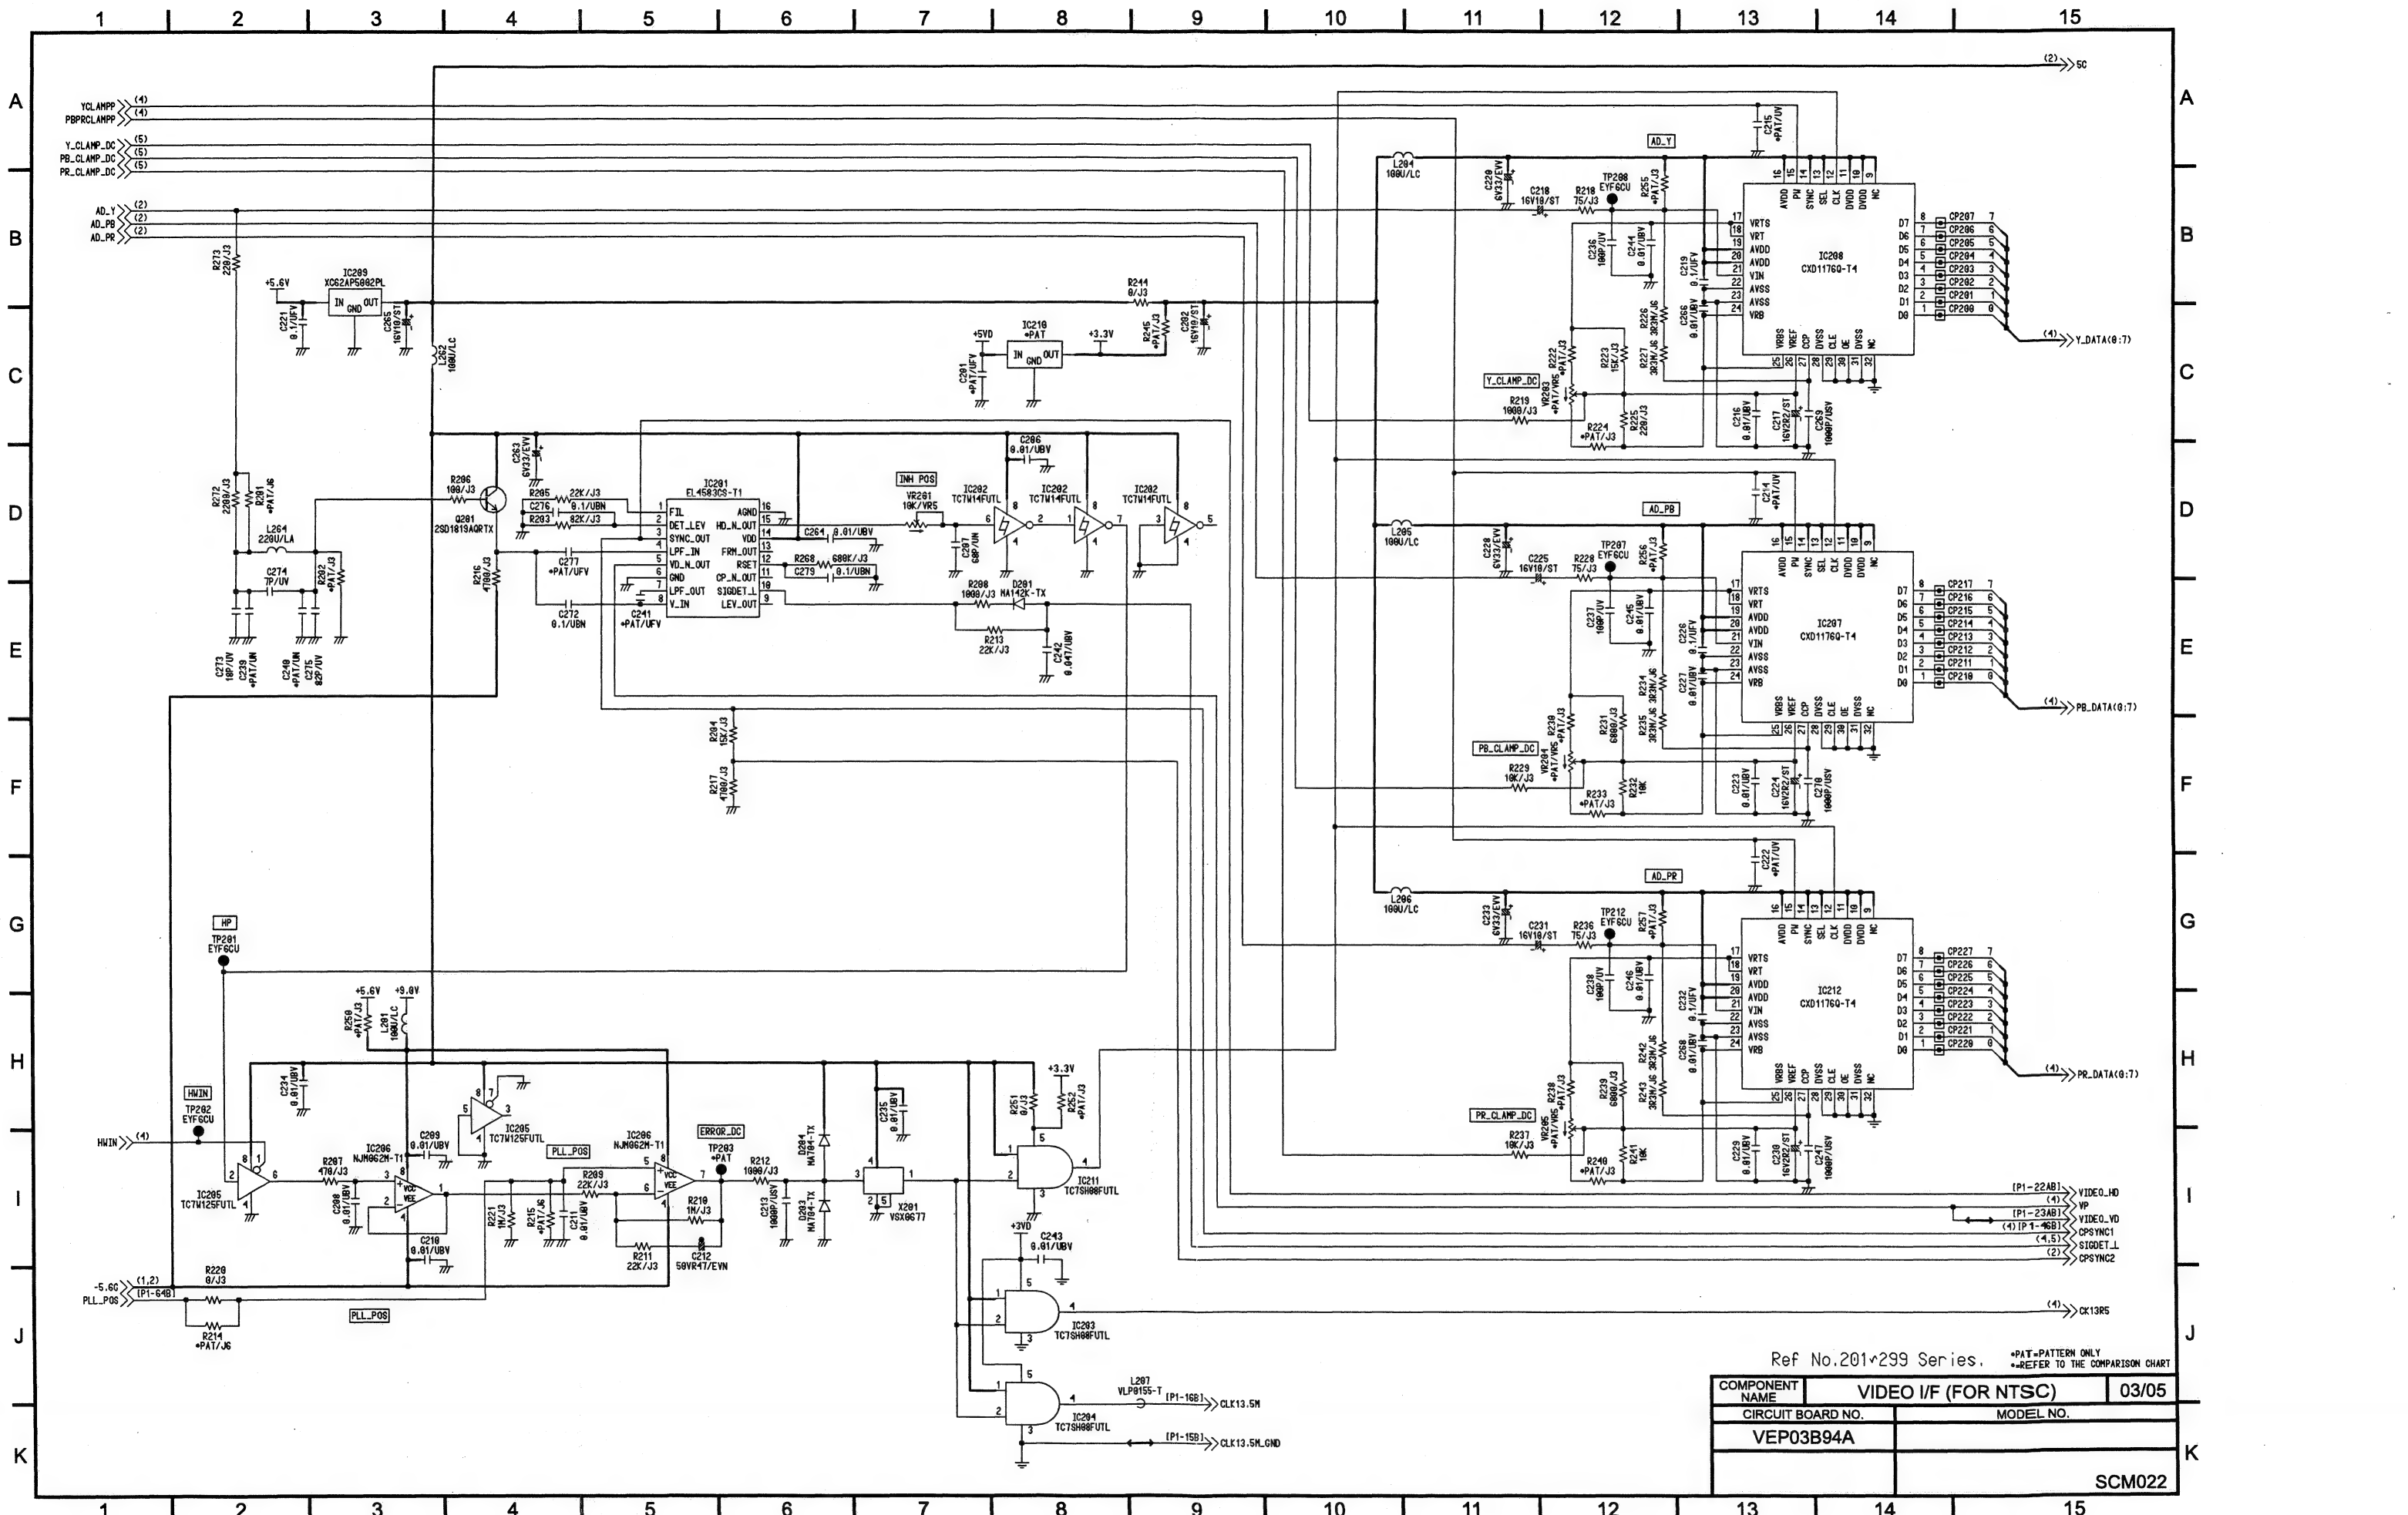



Ref No.201~299 Series. *PAT=PATTERN ONLY
*REFER TO THE COMPARISON CHART

COMPONENT NAME	VIDEO I/F (FOR NTSC)	03/05
CIRCUIT BOARD NO.	MODEL NO.	
VEP03B94A		
SCM022		

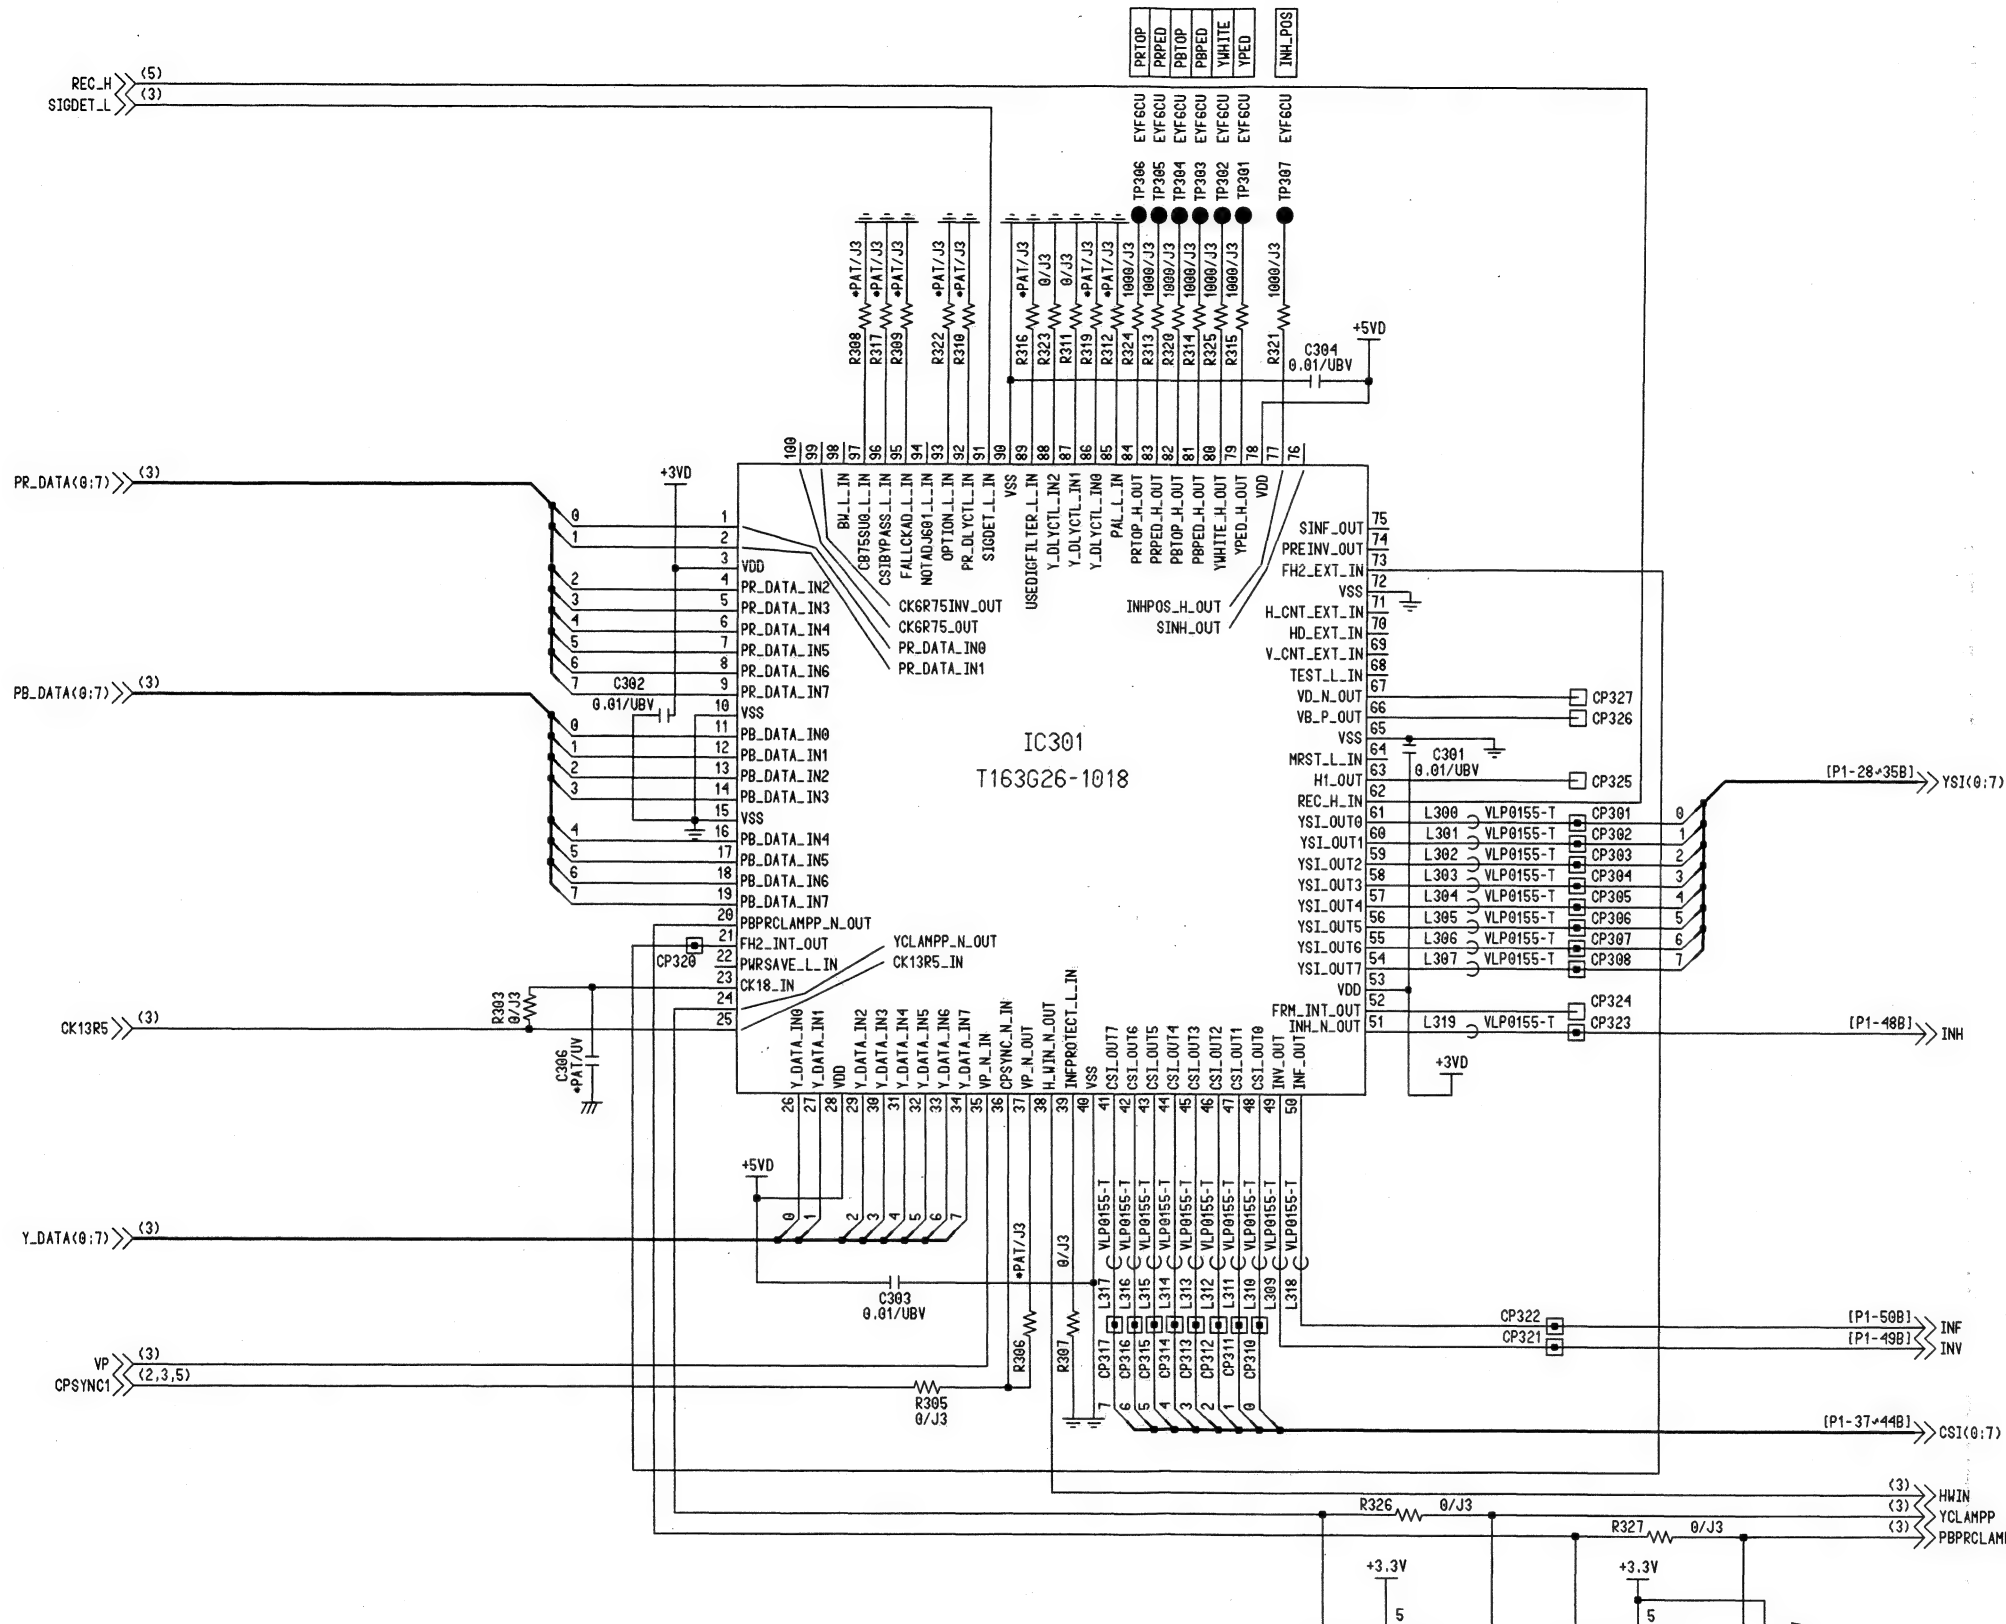


*PAT=PATTERN ONLY Ref No.301~399 Series.		
COMPONENT NAME	VIDEO I/F (FOR NTSC)	04/05
CIRCUIT BOARD NO.	MODEL NO.	
VEP03B94A		
	SCM023	

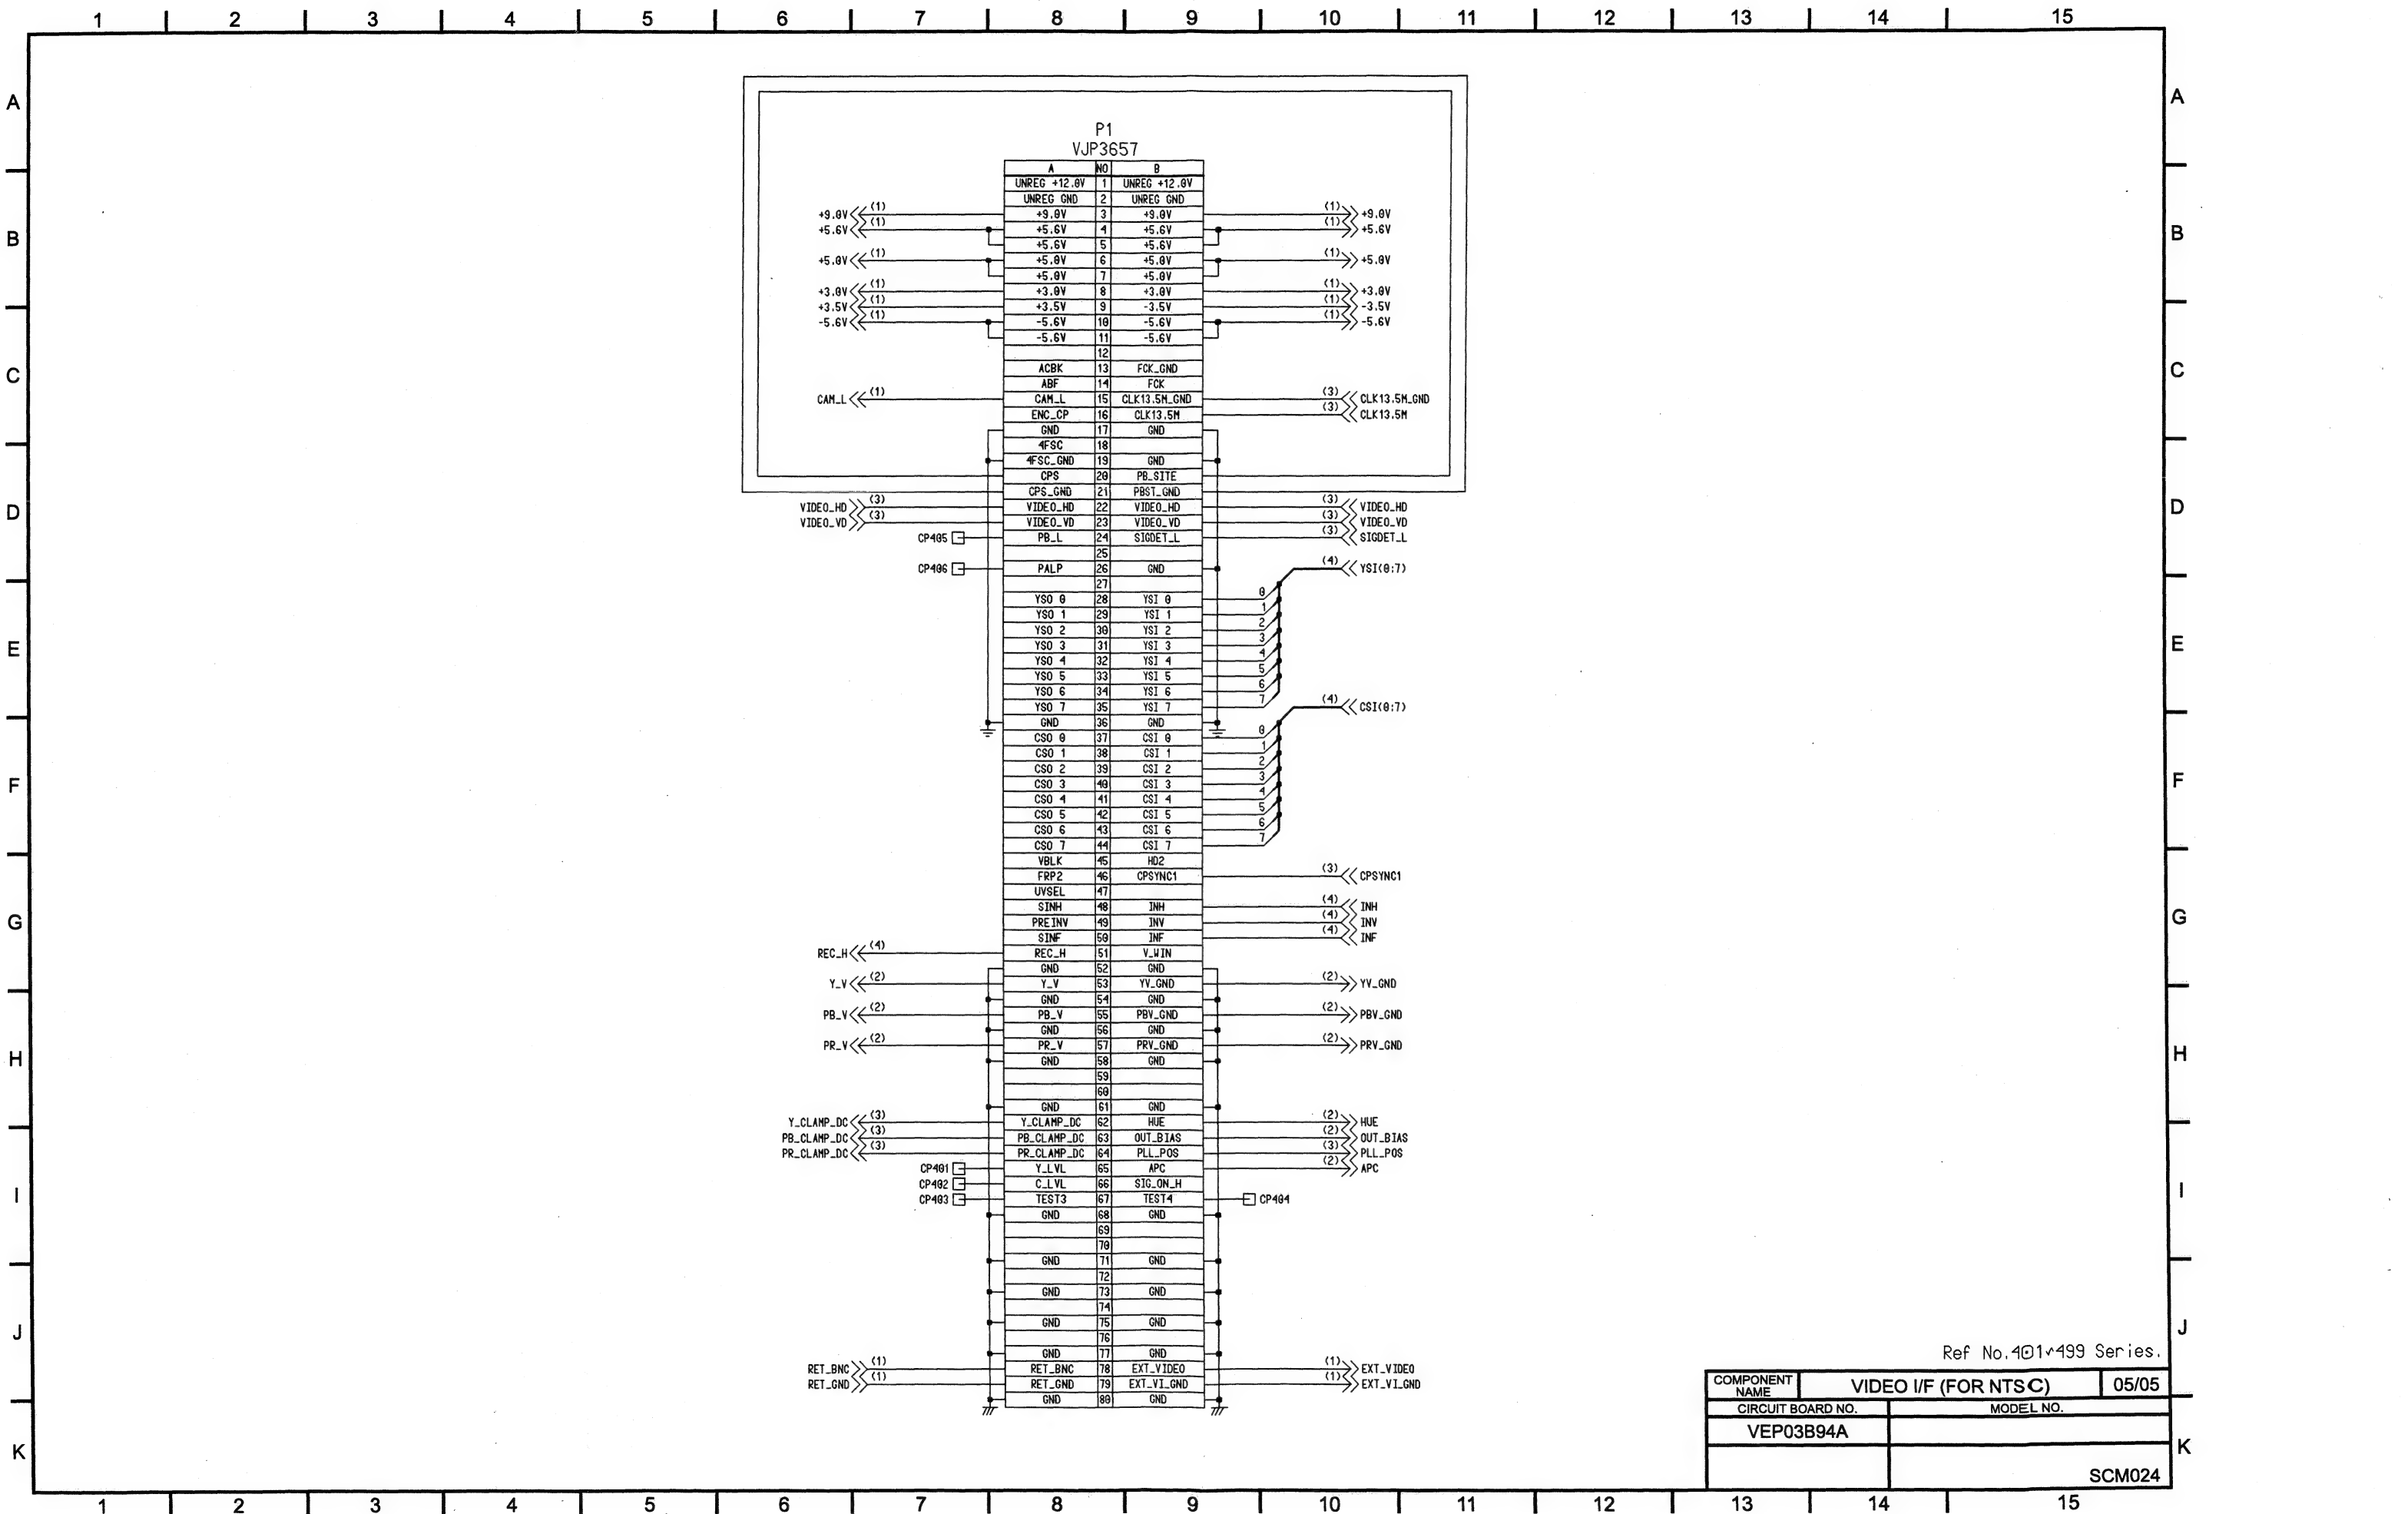

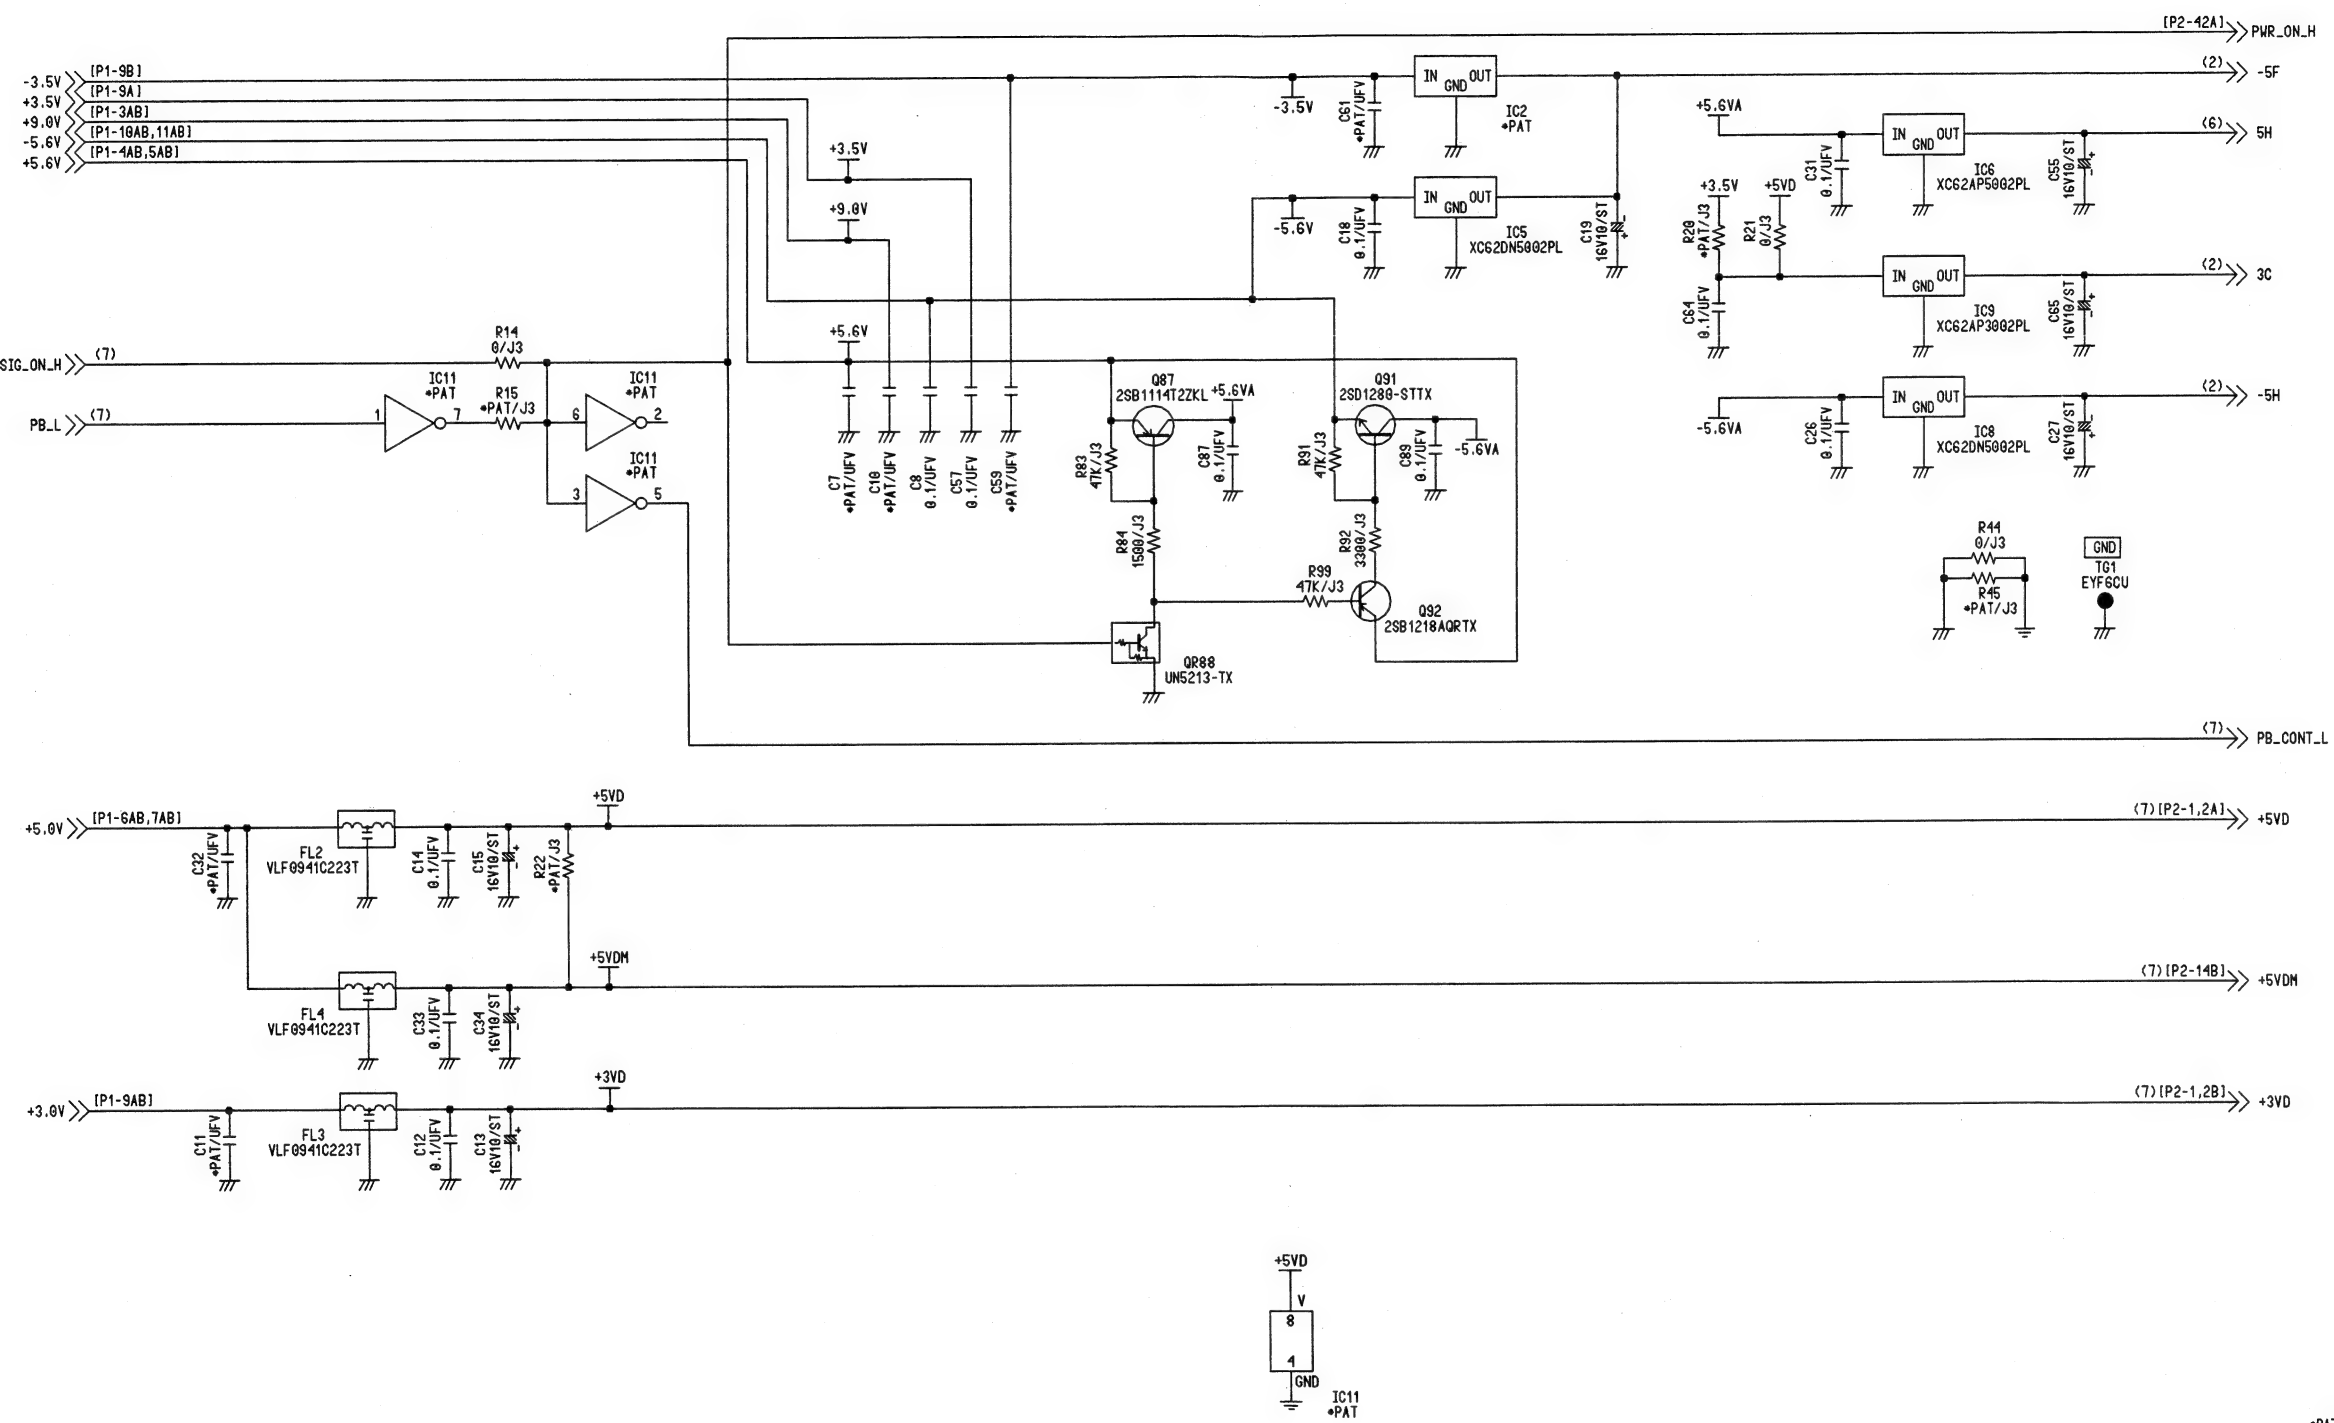


*PAT=PATTERN ONLY
Ref No.199 Series.

COMPONENT NAME	VIDEO I/F (FOR PAL)	01/07
CIRCUIT BOARD NO.	MODEL NO.	
VEP03D53A		
		SCM025

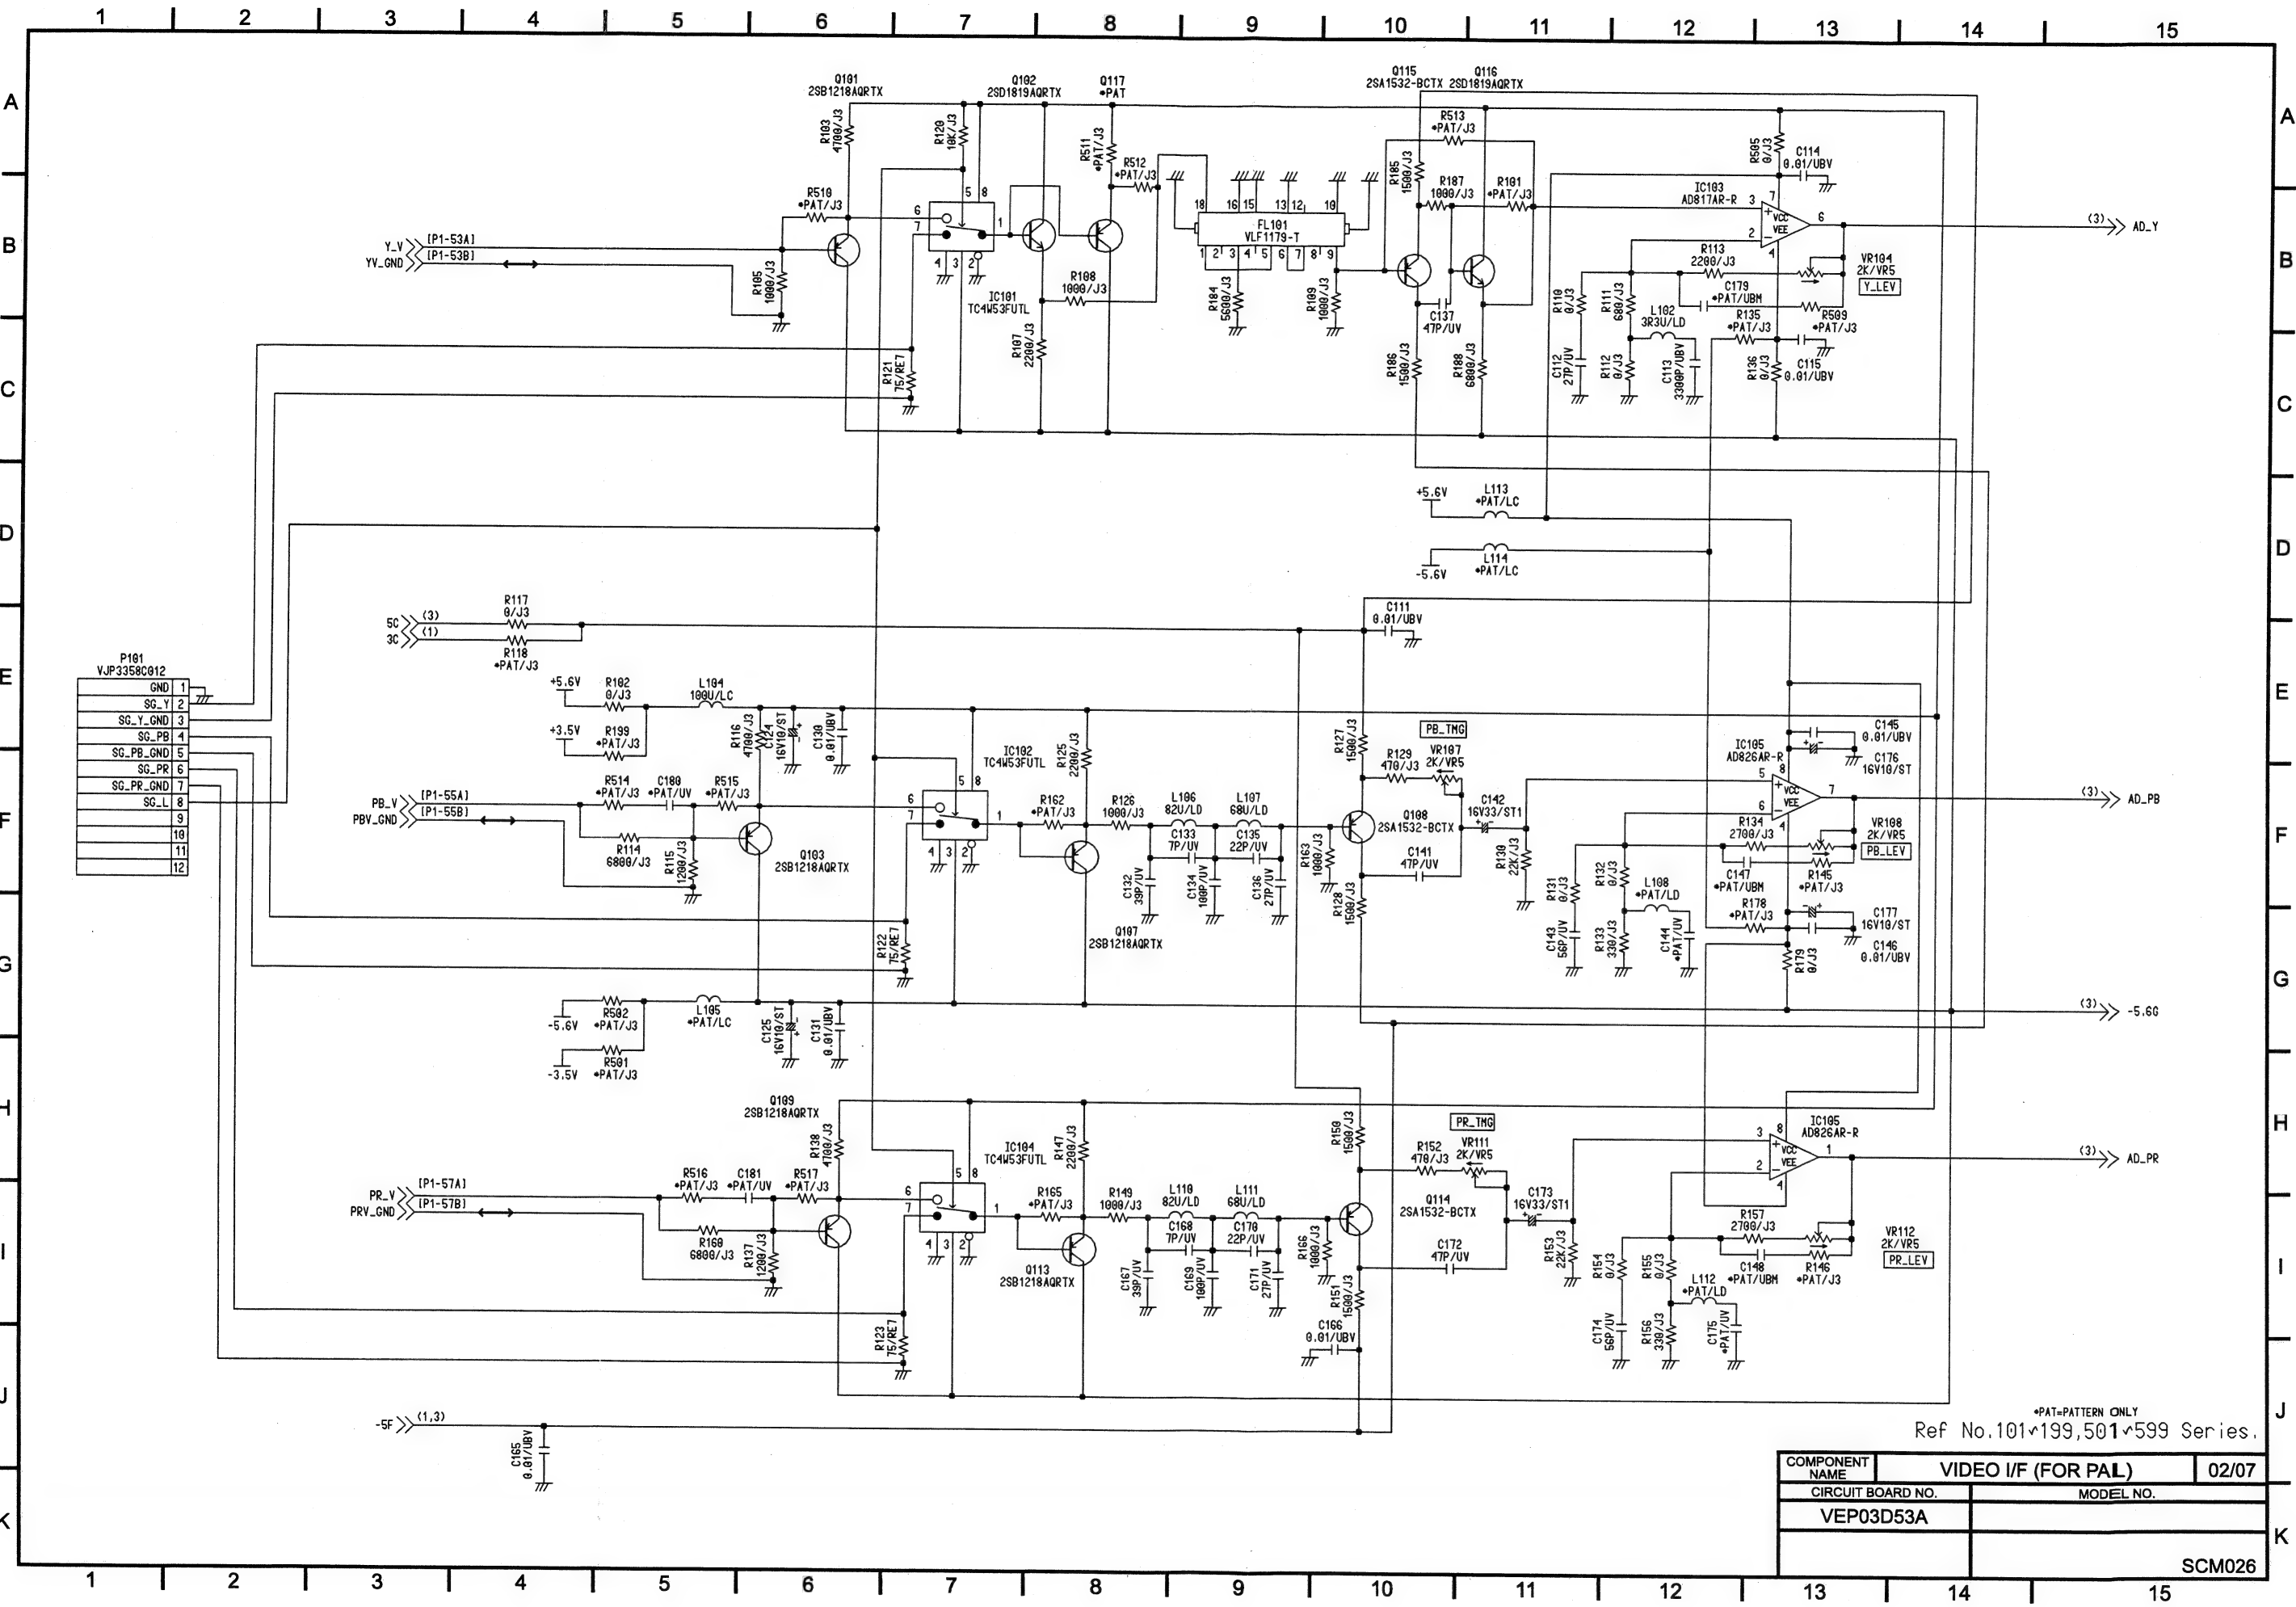



*PAT=PATTERN ONLY
Ref No.101~199,501~599 Series.

COMPONENT NAME	VIDEO I/F (FOR PAL)	02/07
CIRCUIT BOARD NO.	MODEL NO.	
VEP03D53A		

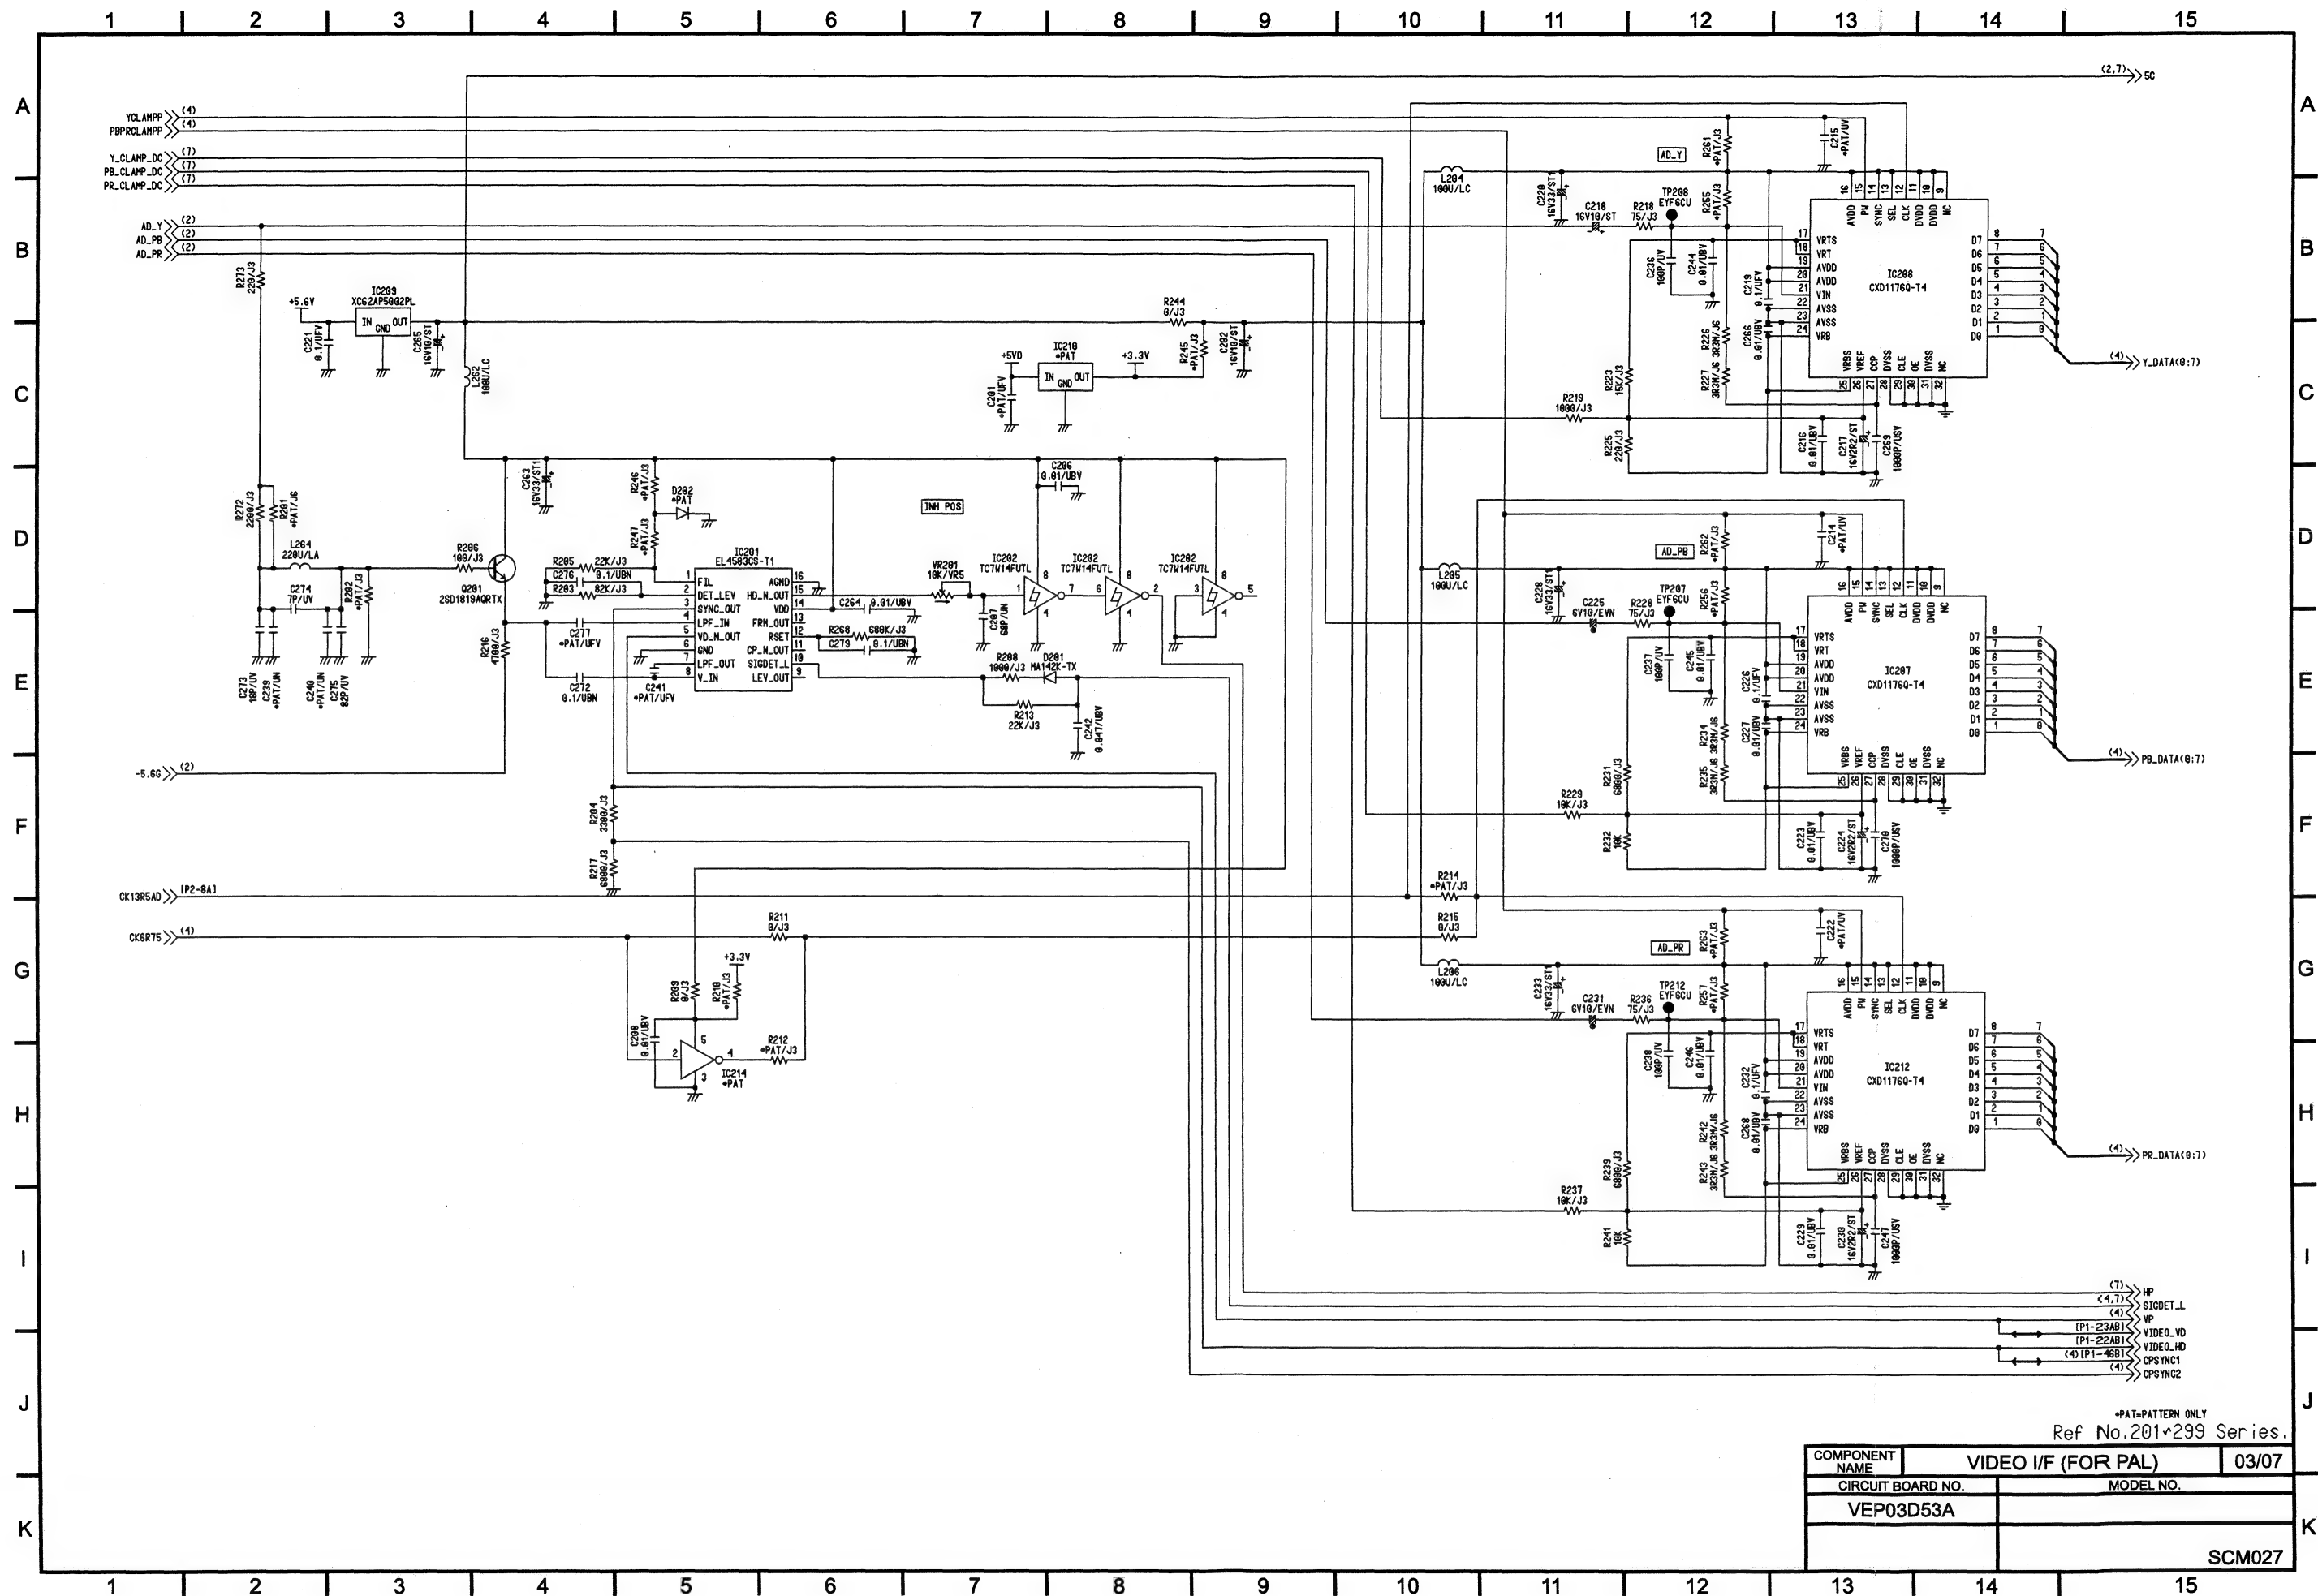


COMPONENT NAME	VIDEO I/F (FOR PAL)	03/07
CIRCUIT BOARD NO.	MODEL NO.	
VEP03D53A		
	SCM027	

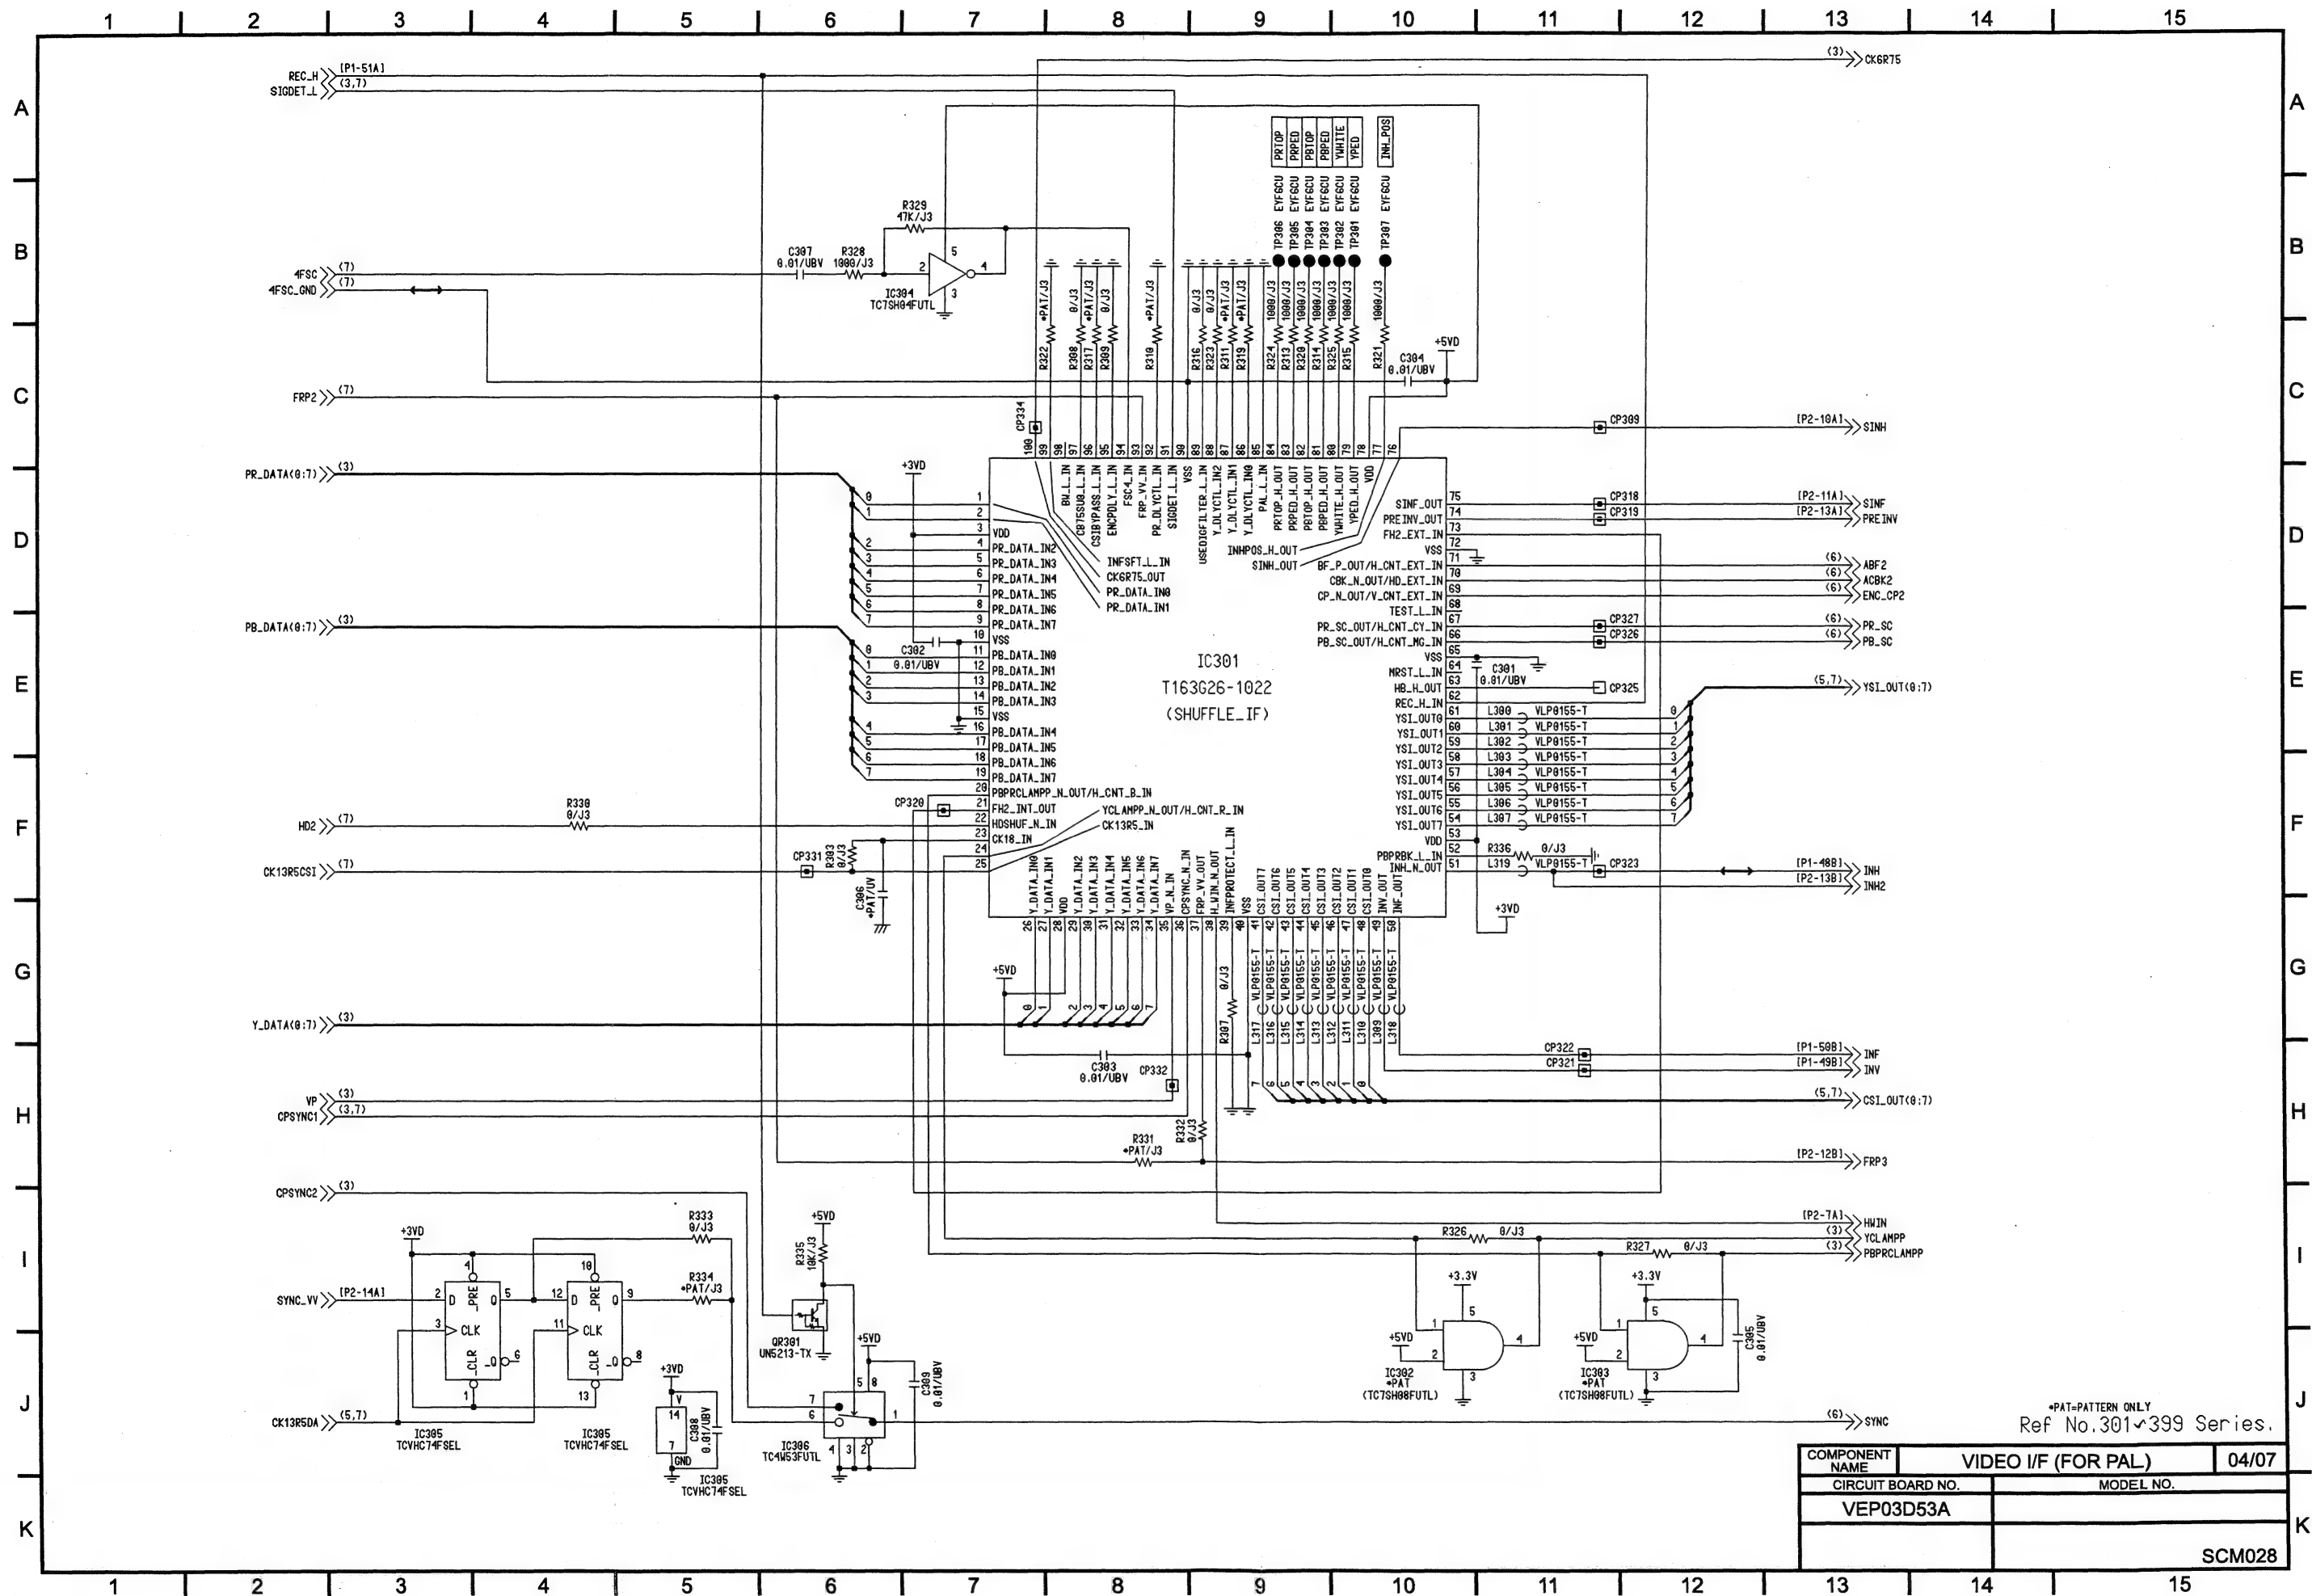


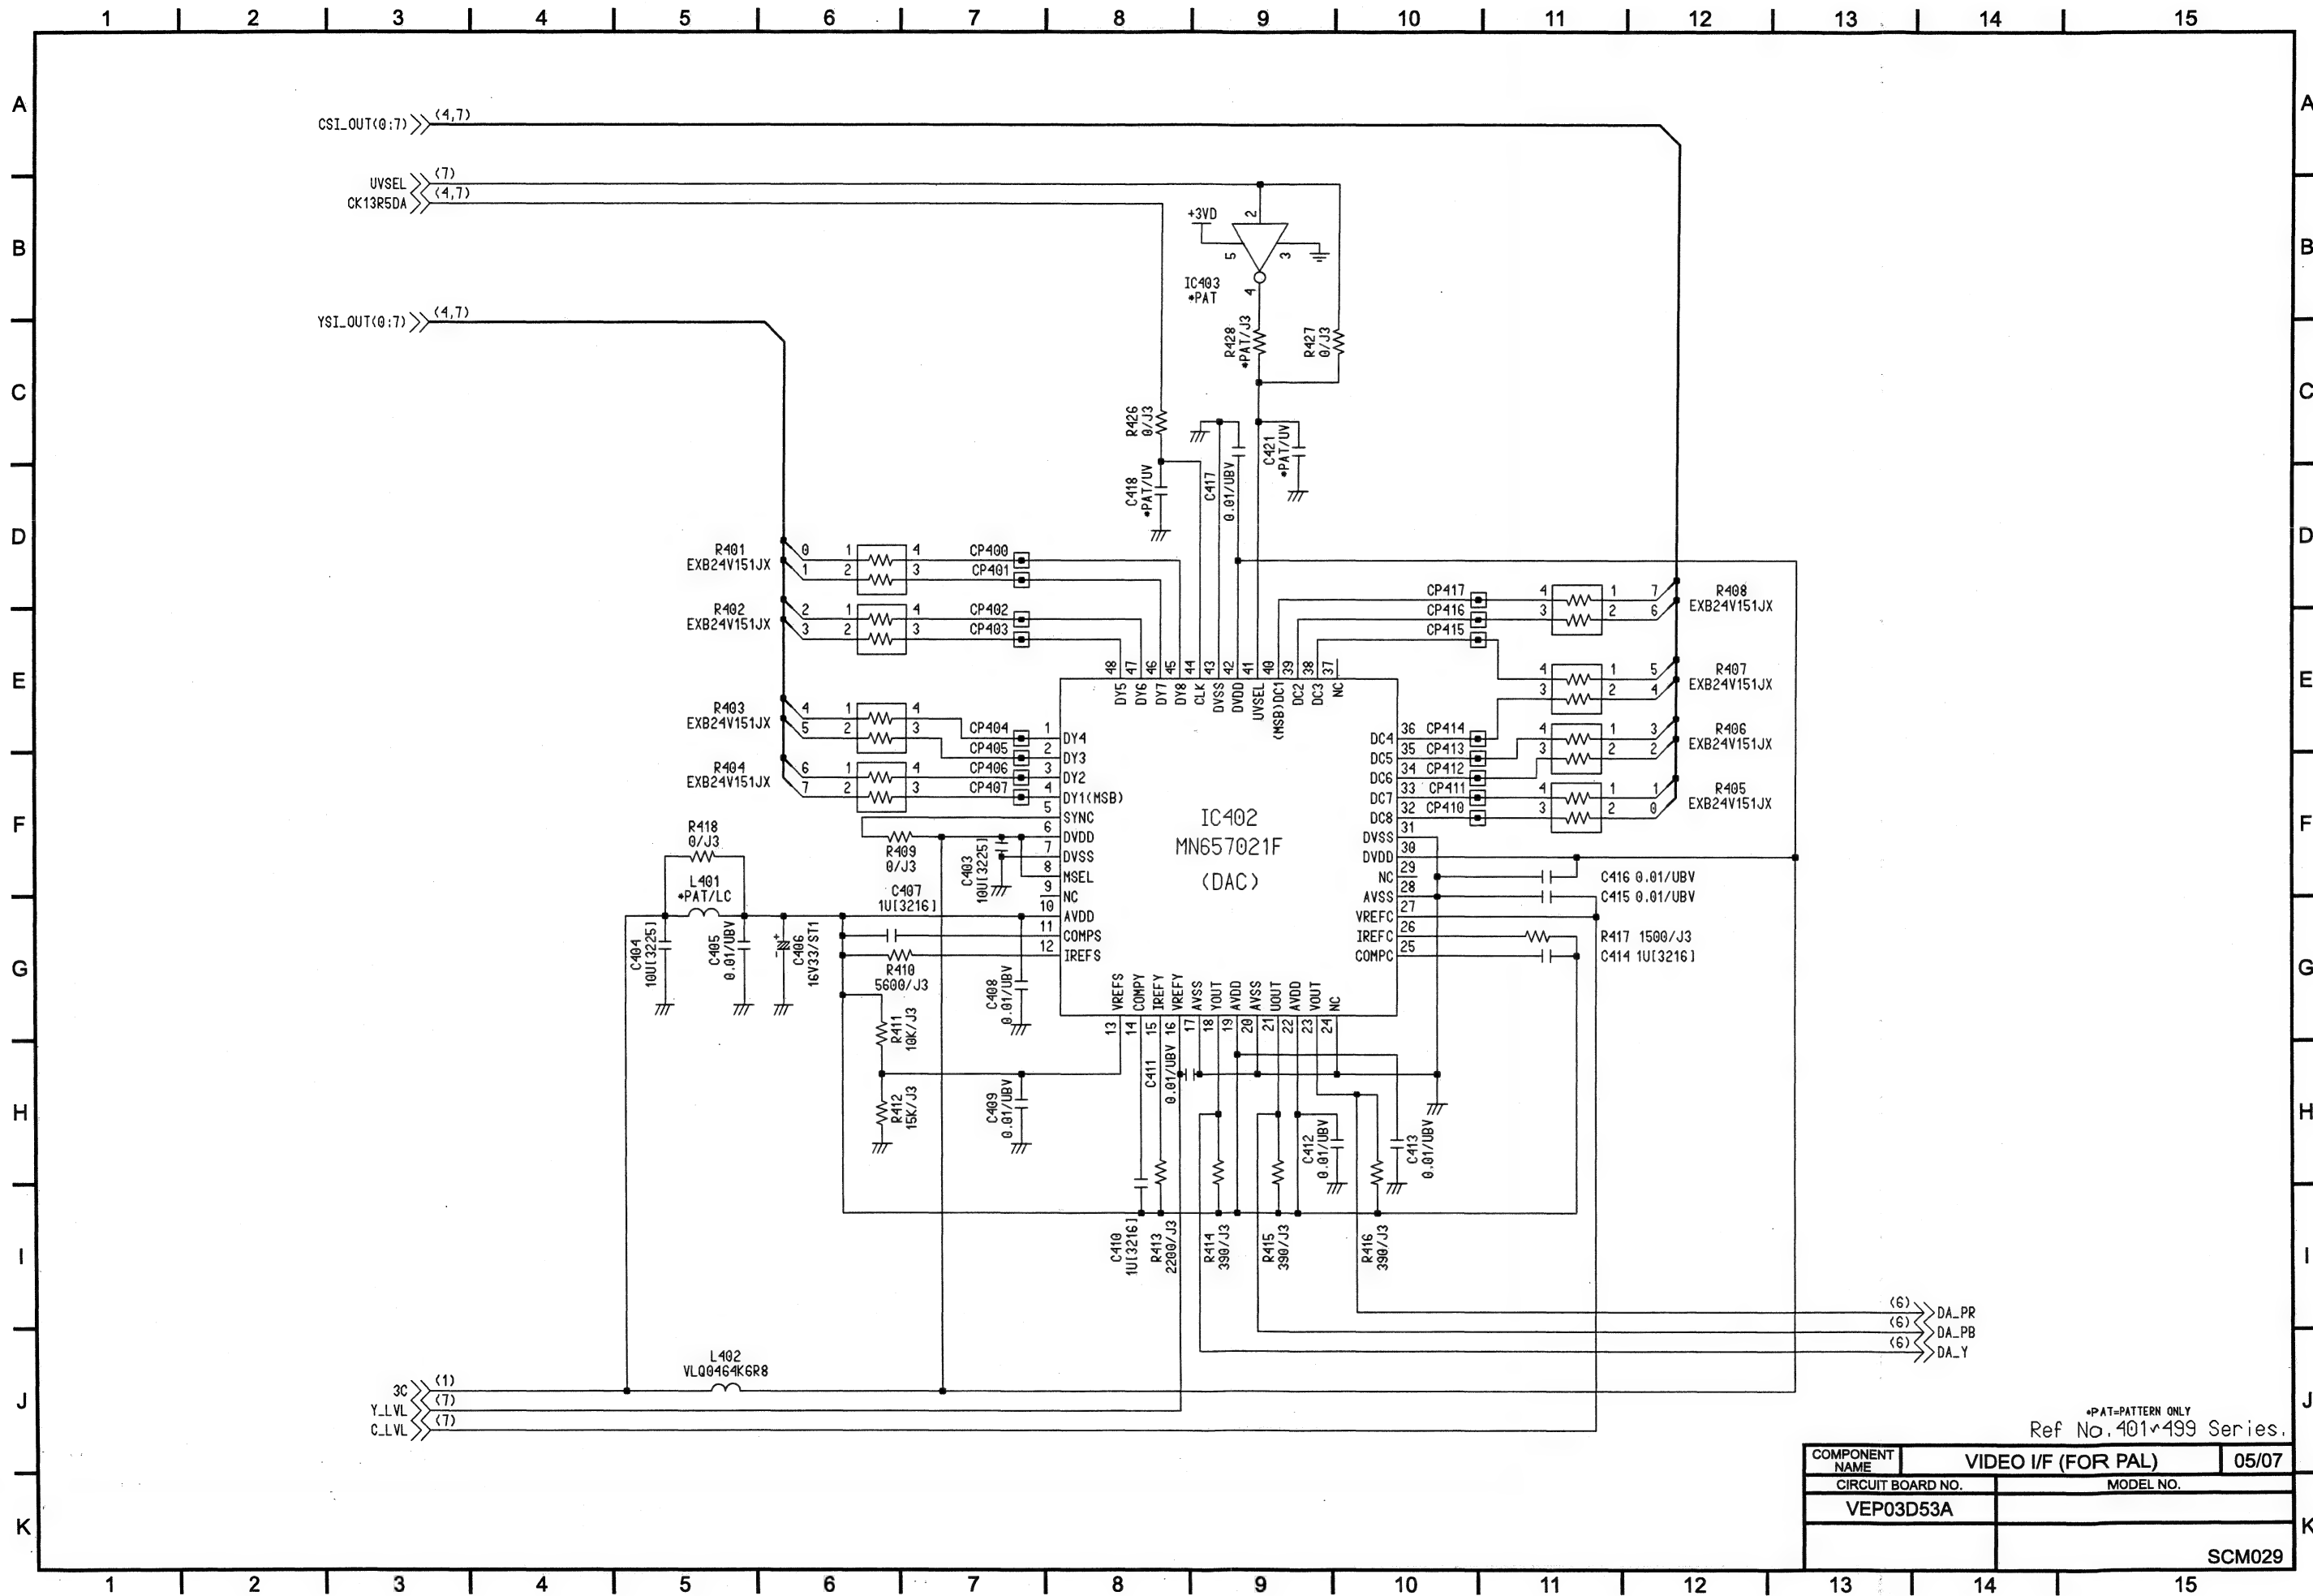


*PAT=PATTERN ONLY
Ref No.401~499 Series.

COMPONENT NAME	VIDEO I/F (FOR PAL)	05/07
CIRCUIT BOARD NO.	MODEL NO.	
VEP03D53A		
SCM029		

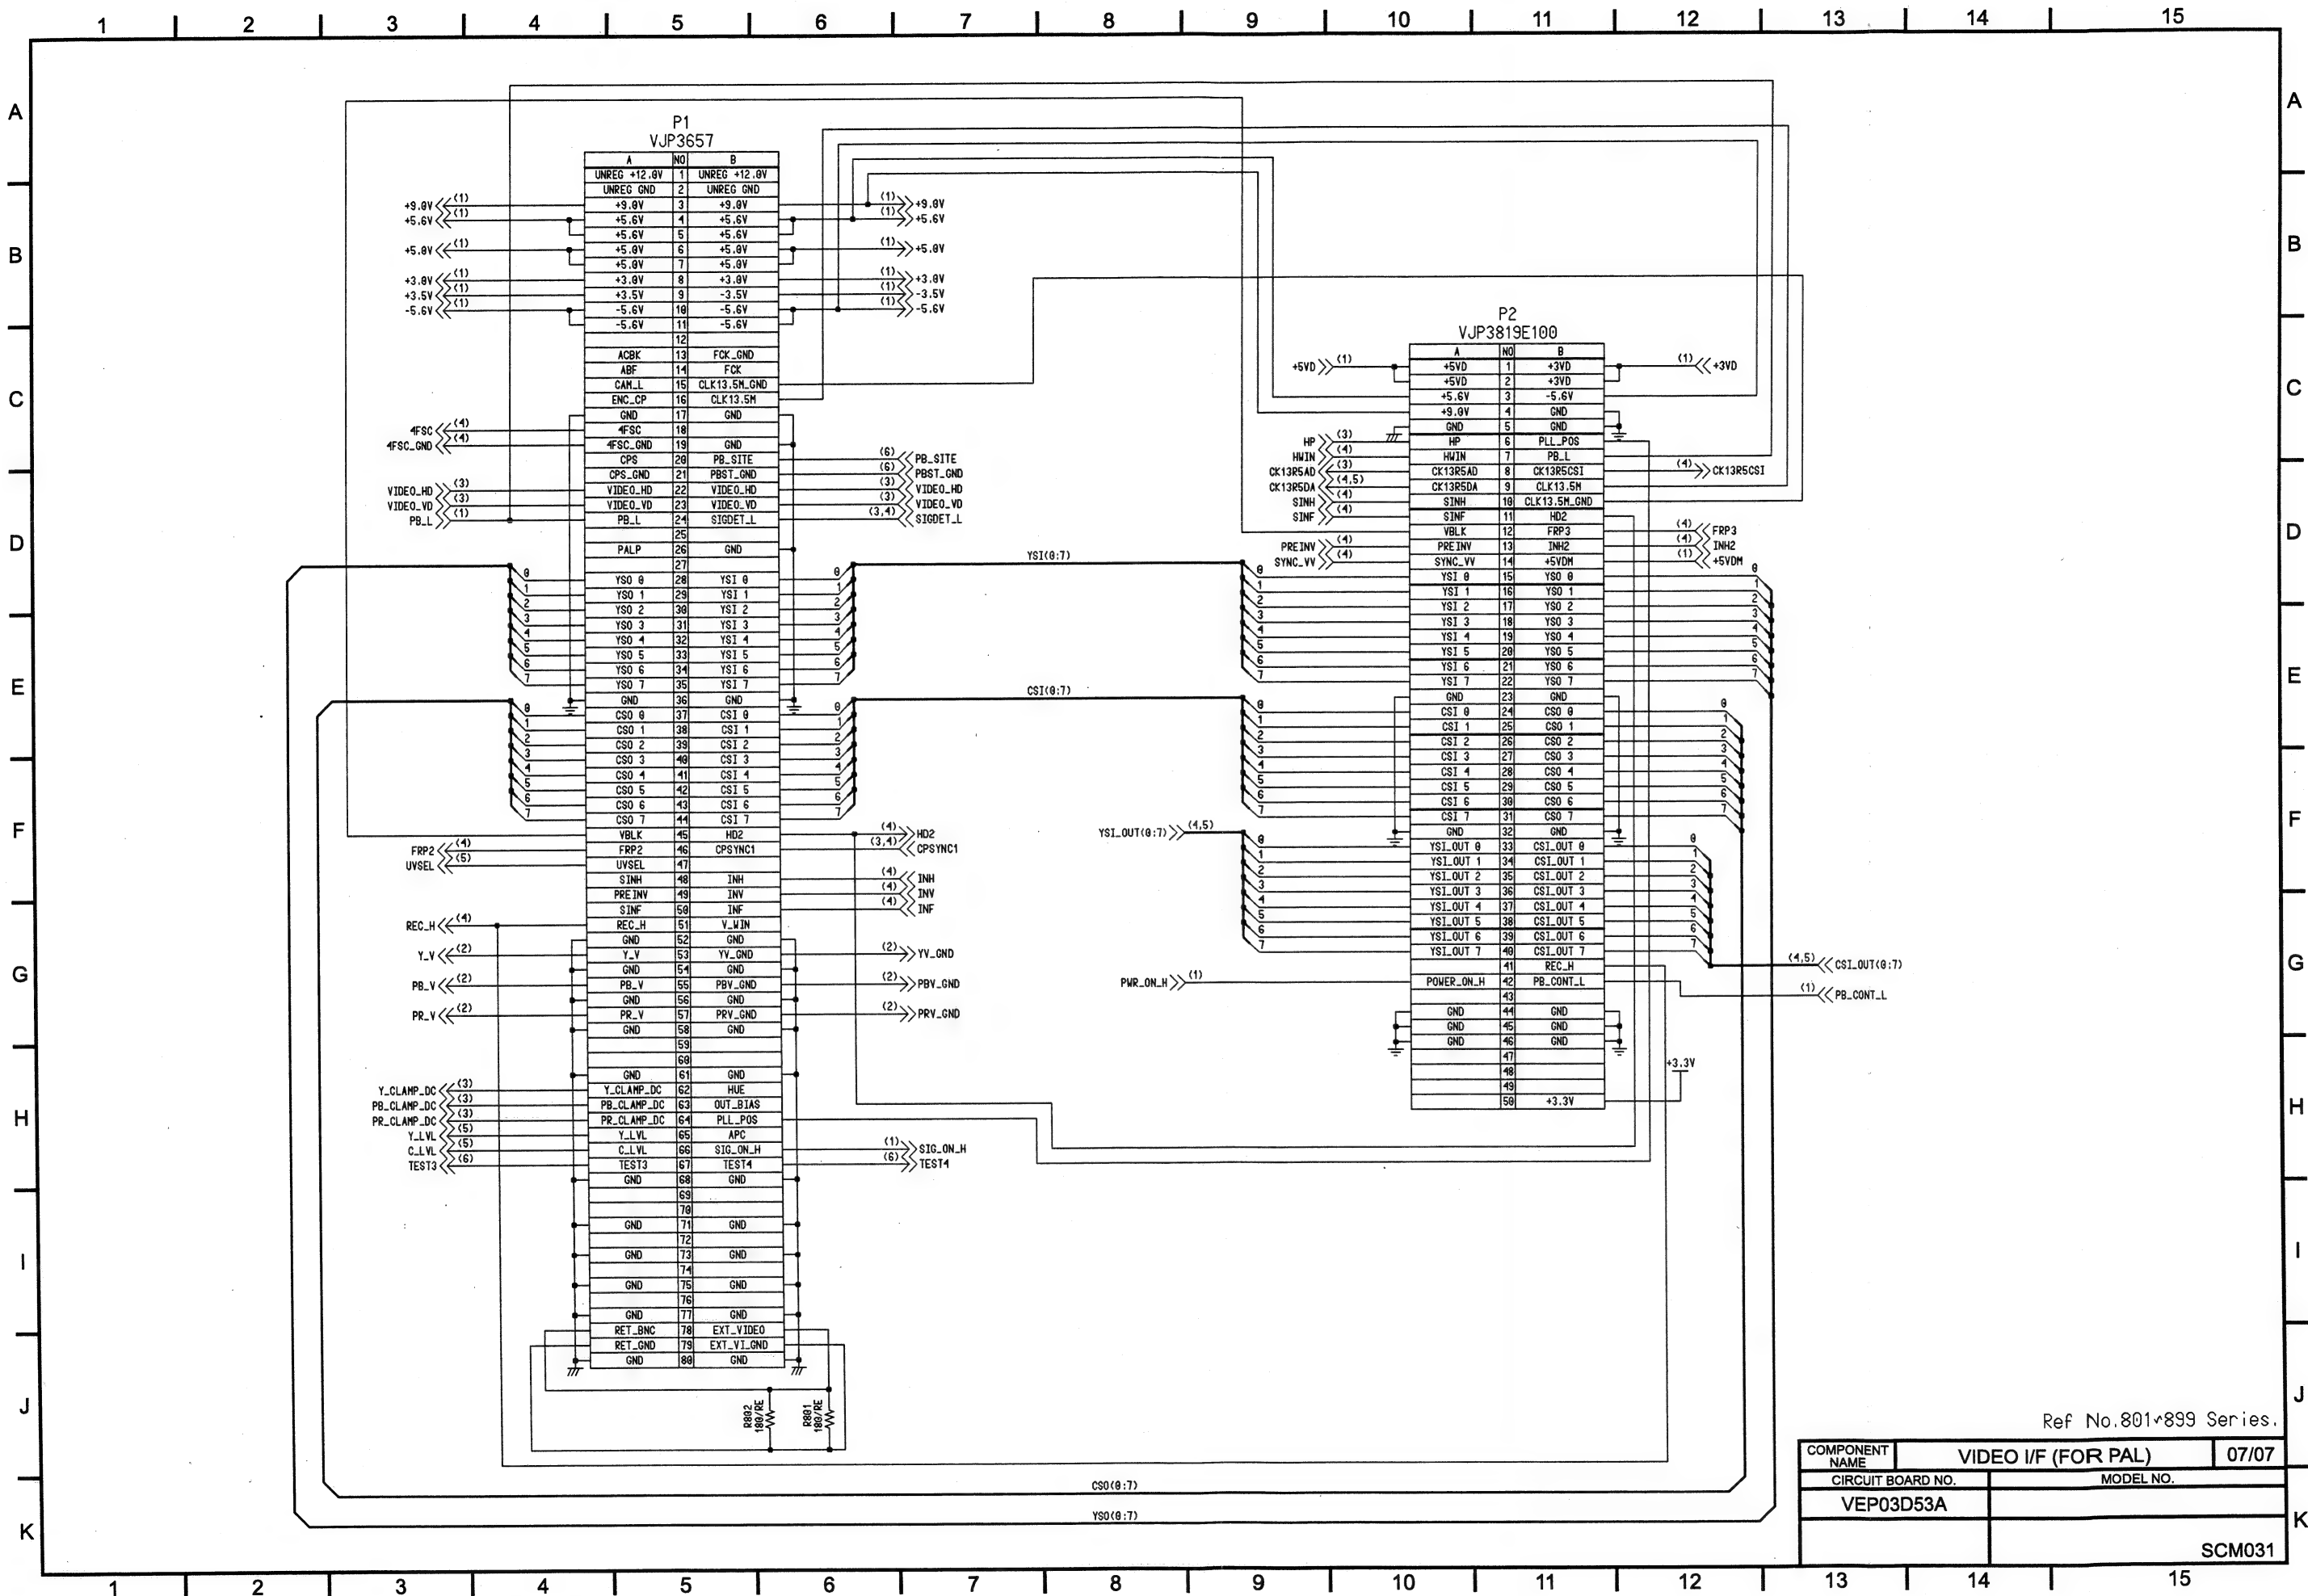

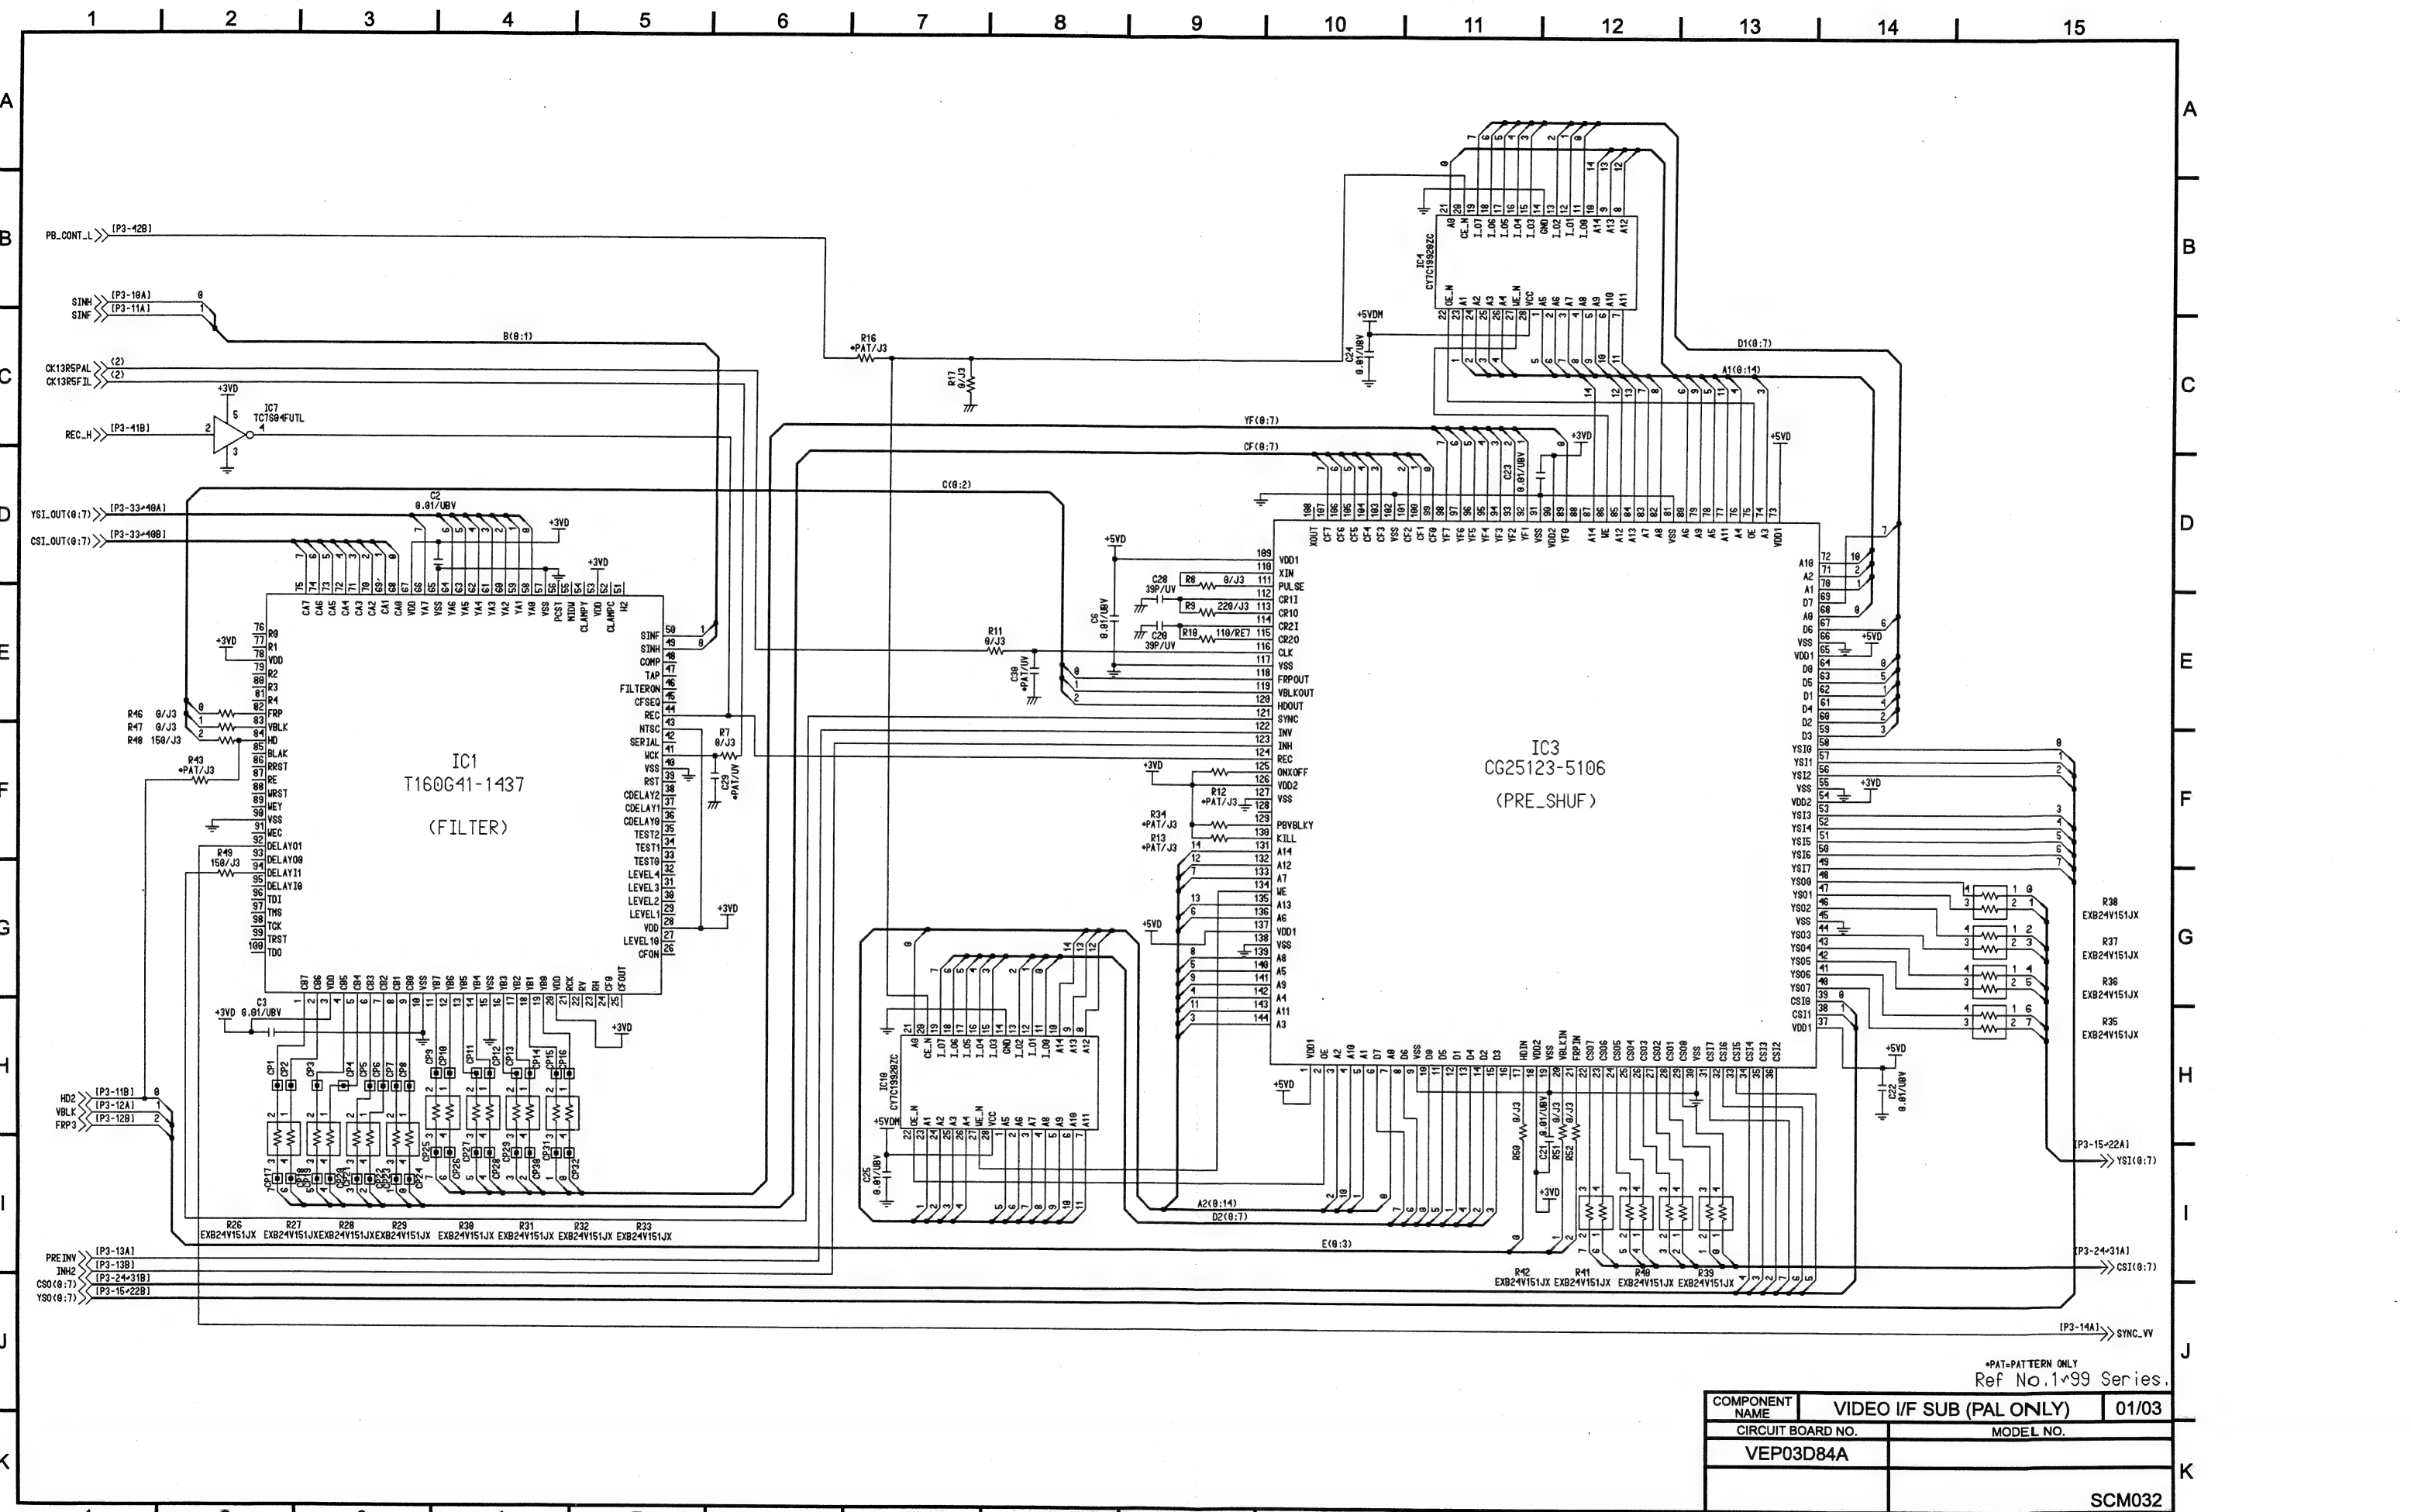



*PAT=PAT PATTERN ONLY Ref No.1*99 Series.		
COMPONENT NAME	VIDEO I/F SUB (PAL ONLY)	01/03
CIRCUIT BOARD NO.	MODEL NO.	
VEP03D84A		
	SCM032	

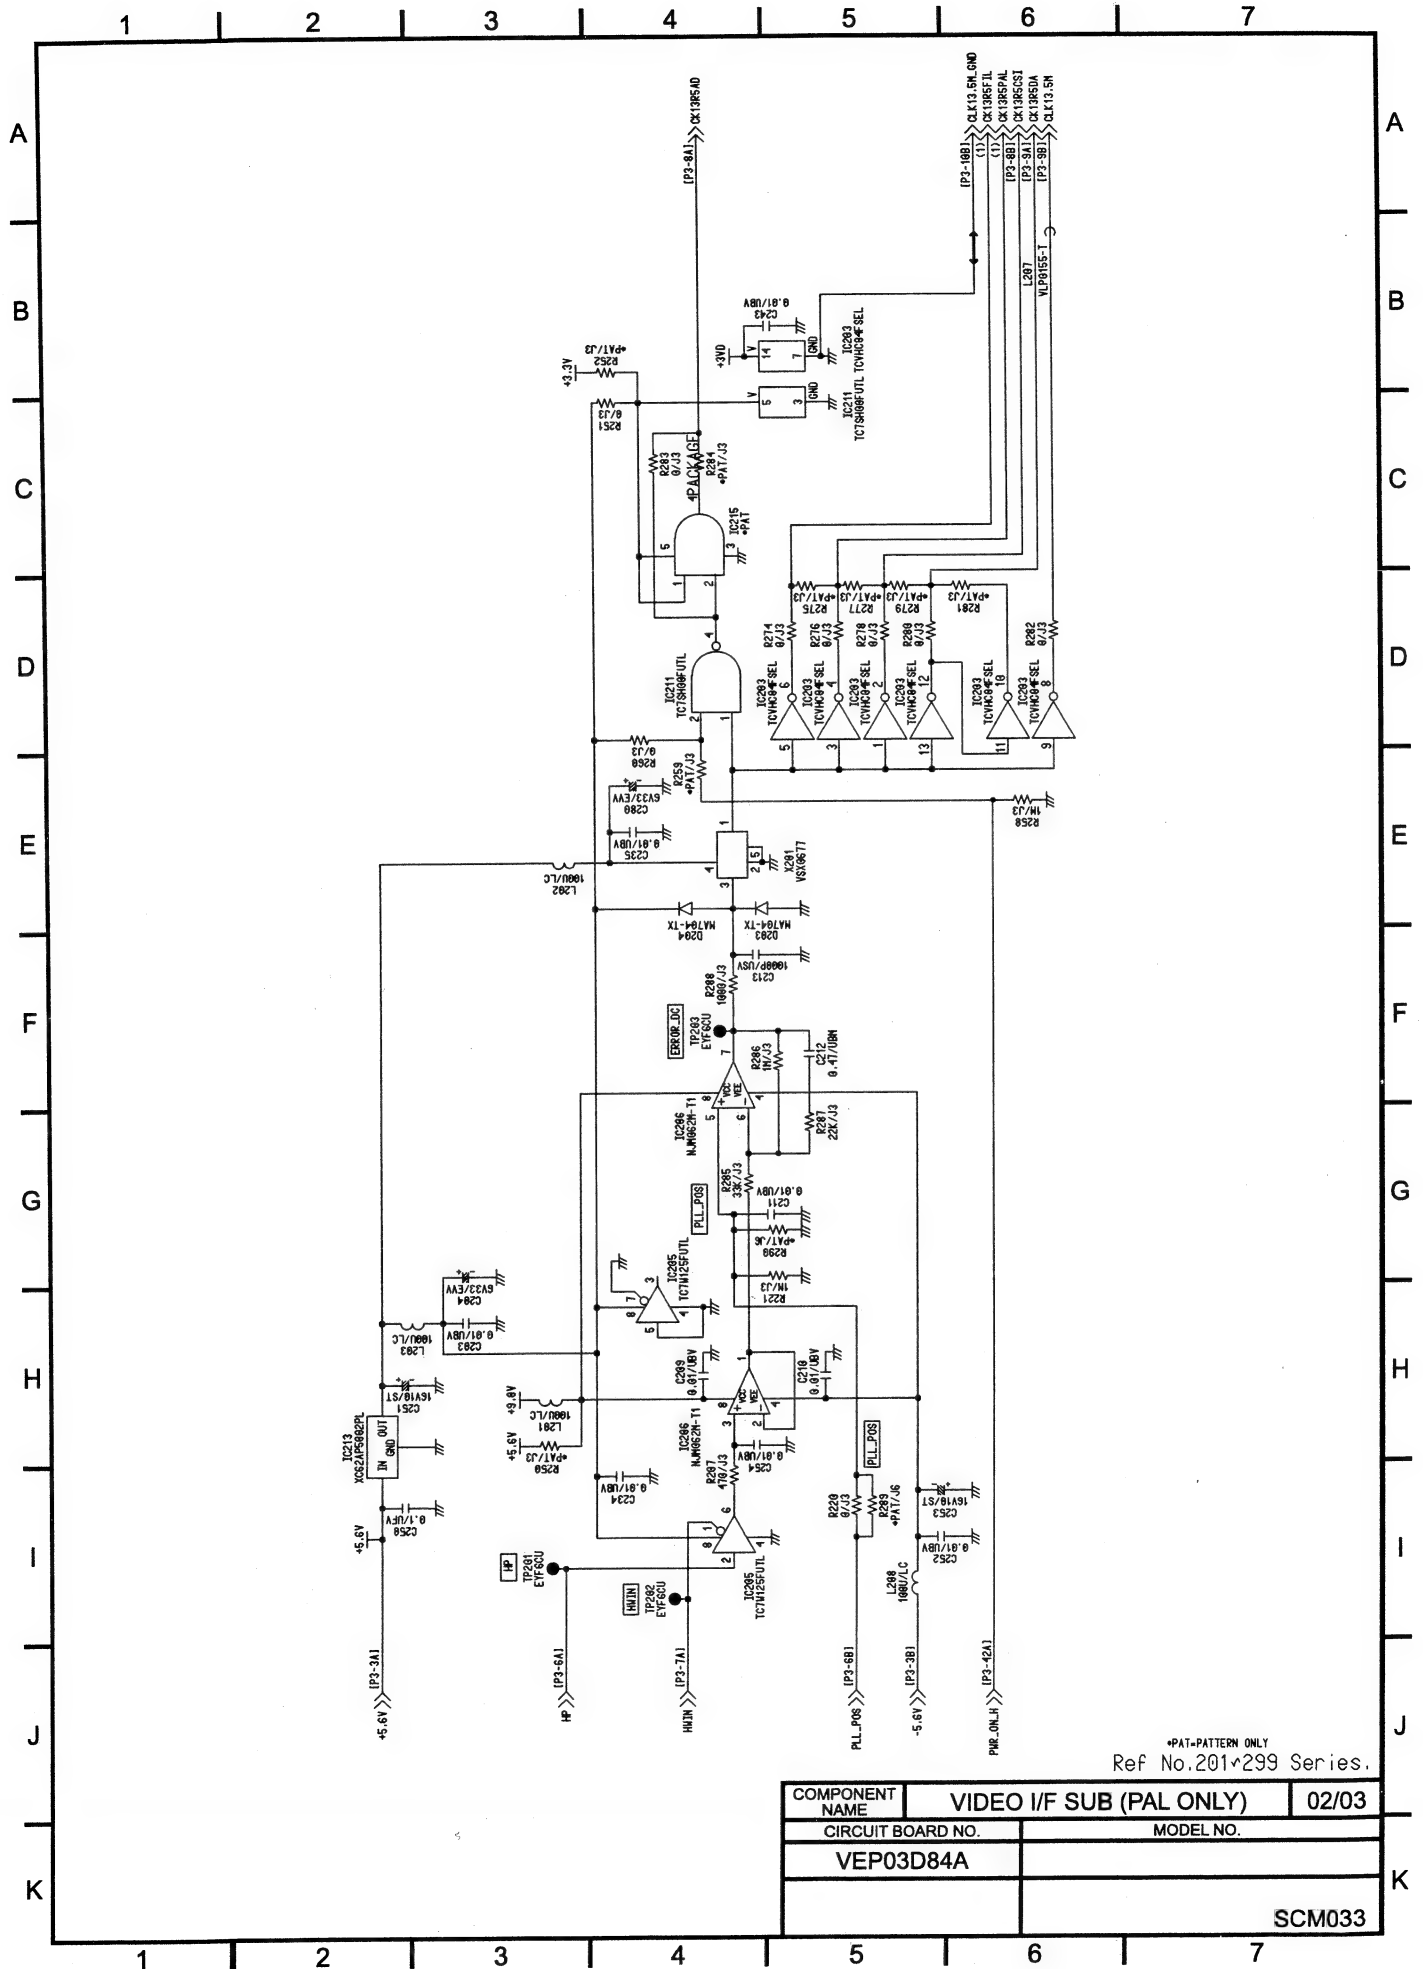


*PAT-PATTERN ONLY
Ref No.201*299 Series.

COMPONENT NAME	VIDEO I/F SUB (PAL ONLY)	02/03
CIRCUIT BOARD NO.		MODEL NO.
VEP03D84A		
		SCM033

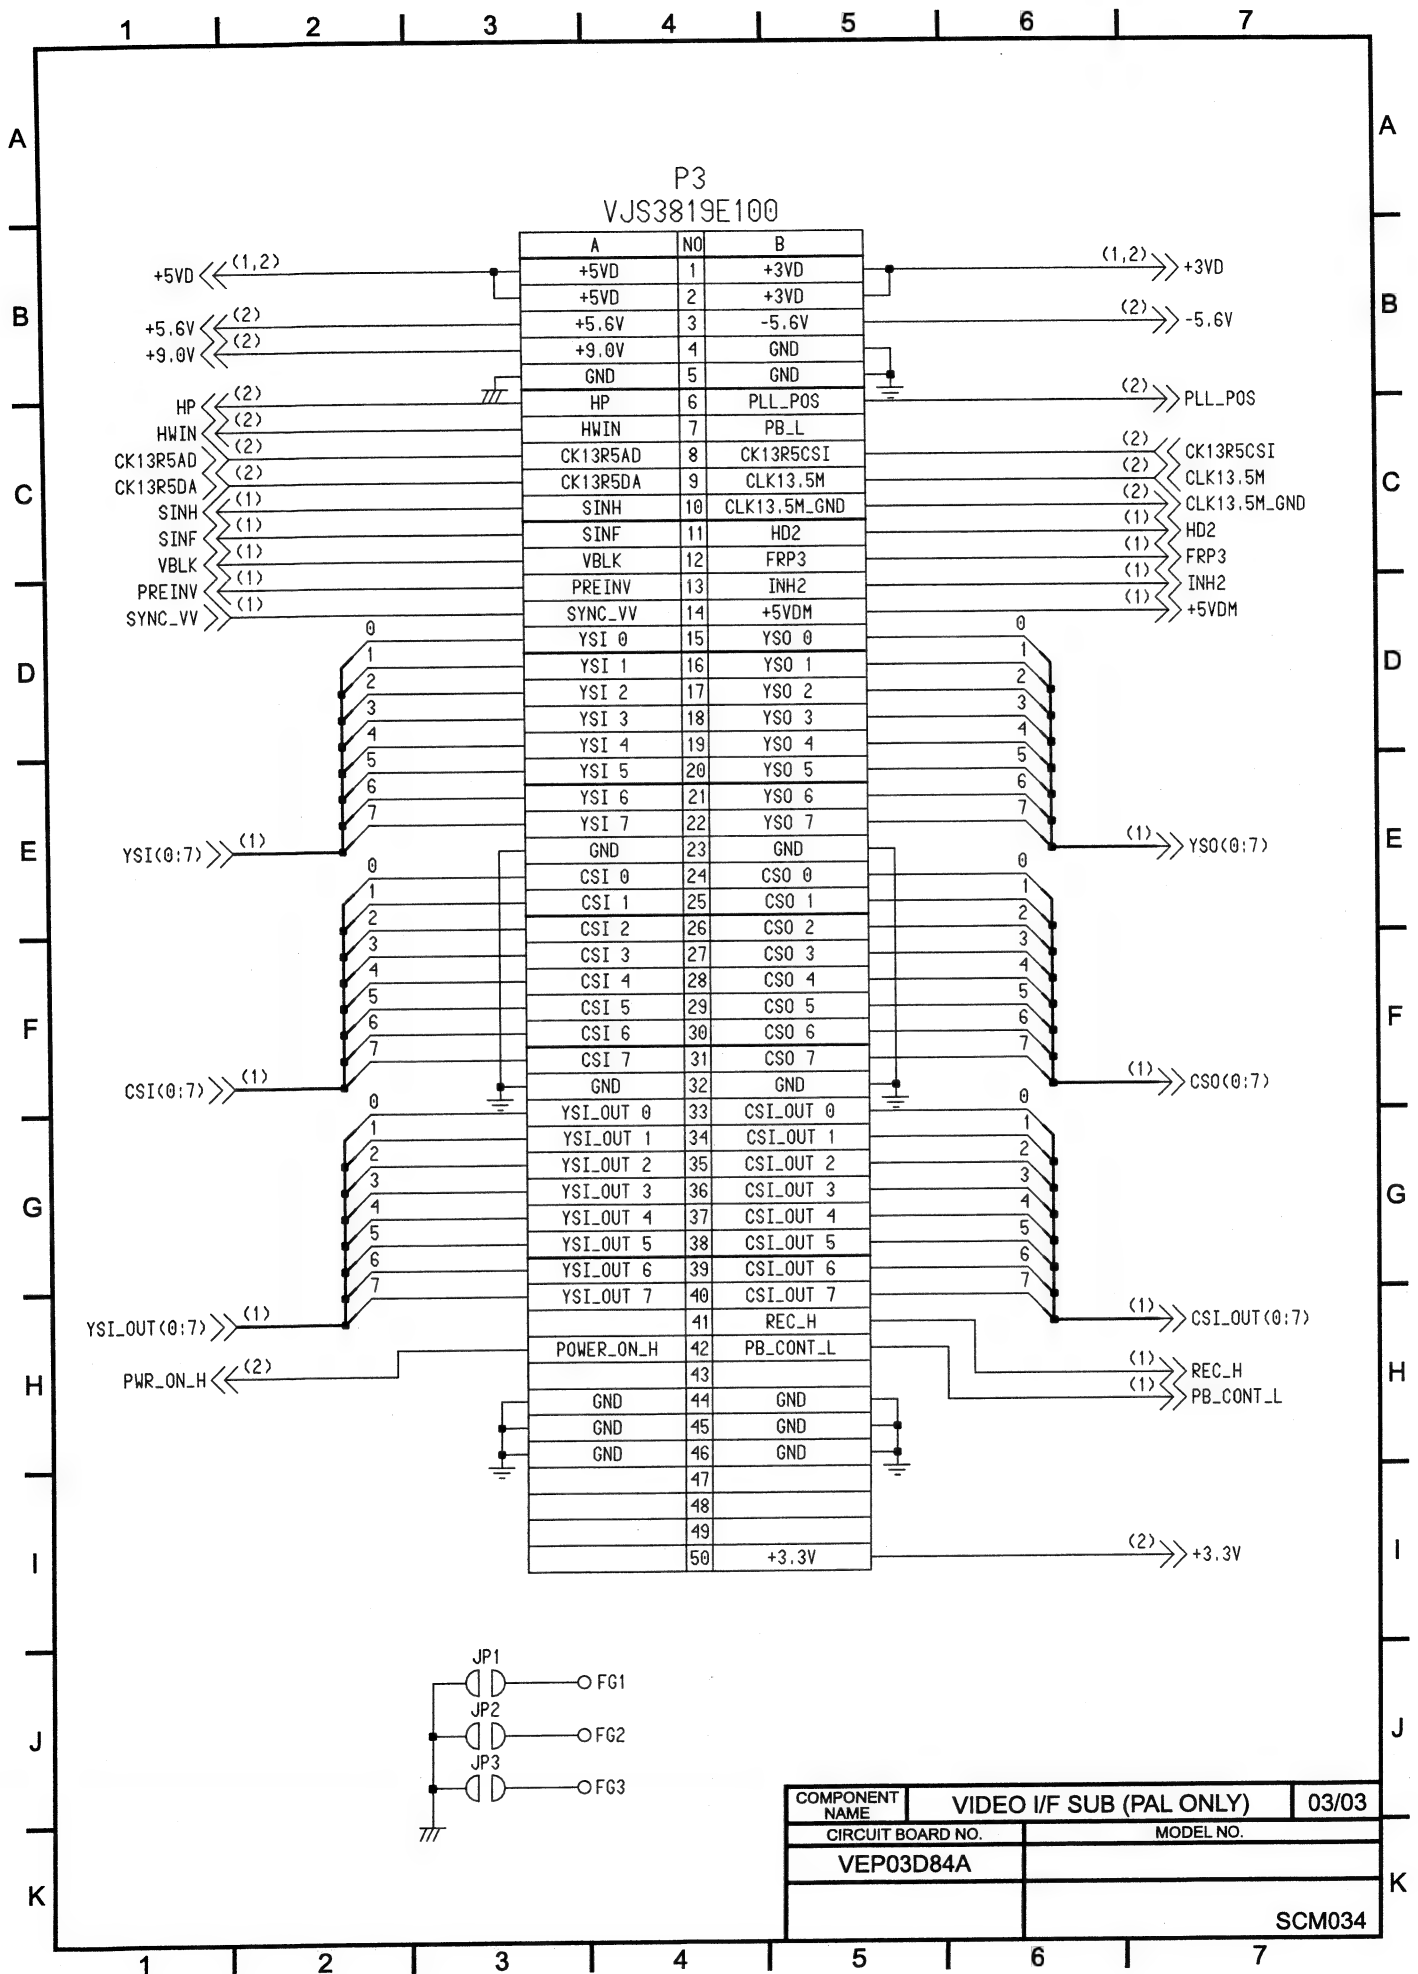


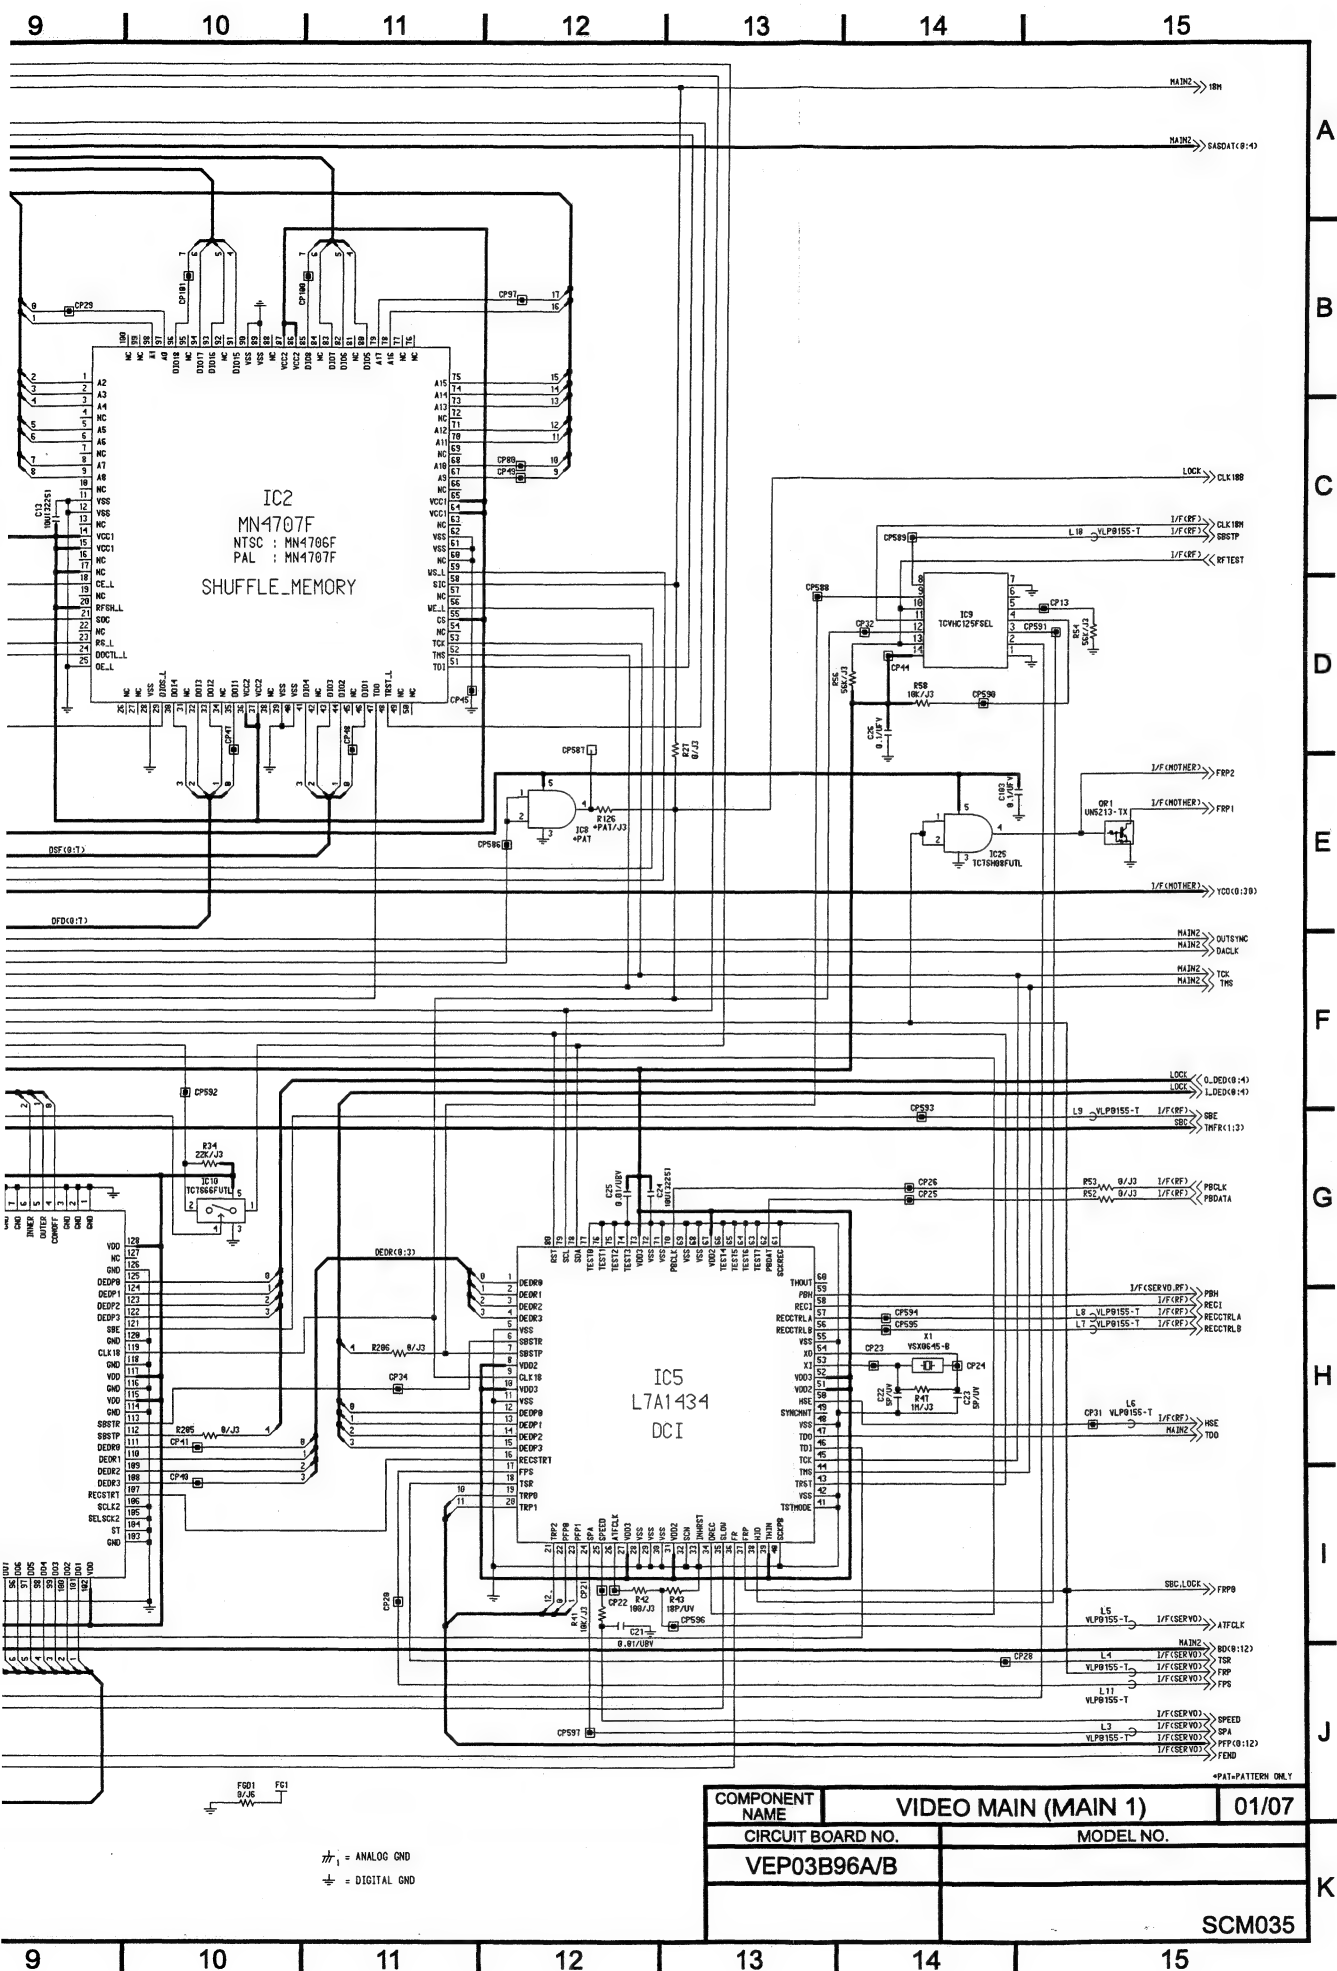


COMPONENT NAME	VIDEO MAIN (MAIN 1)		01/07
CIRCUIT BOARD NO.		MODEL NO.	
VEP03B96A/B			
		SCM035	

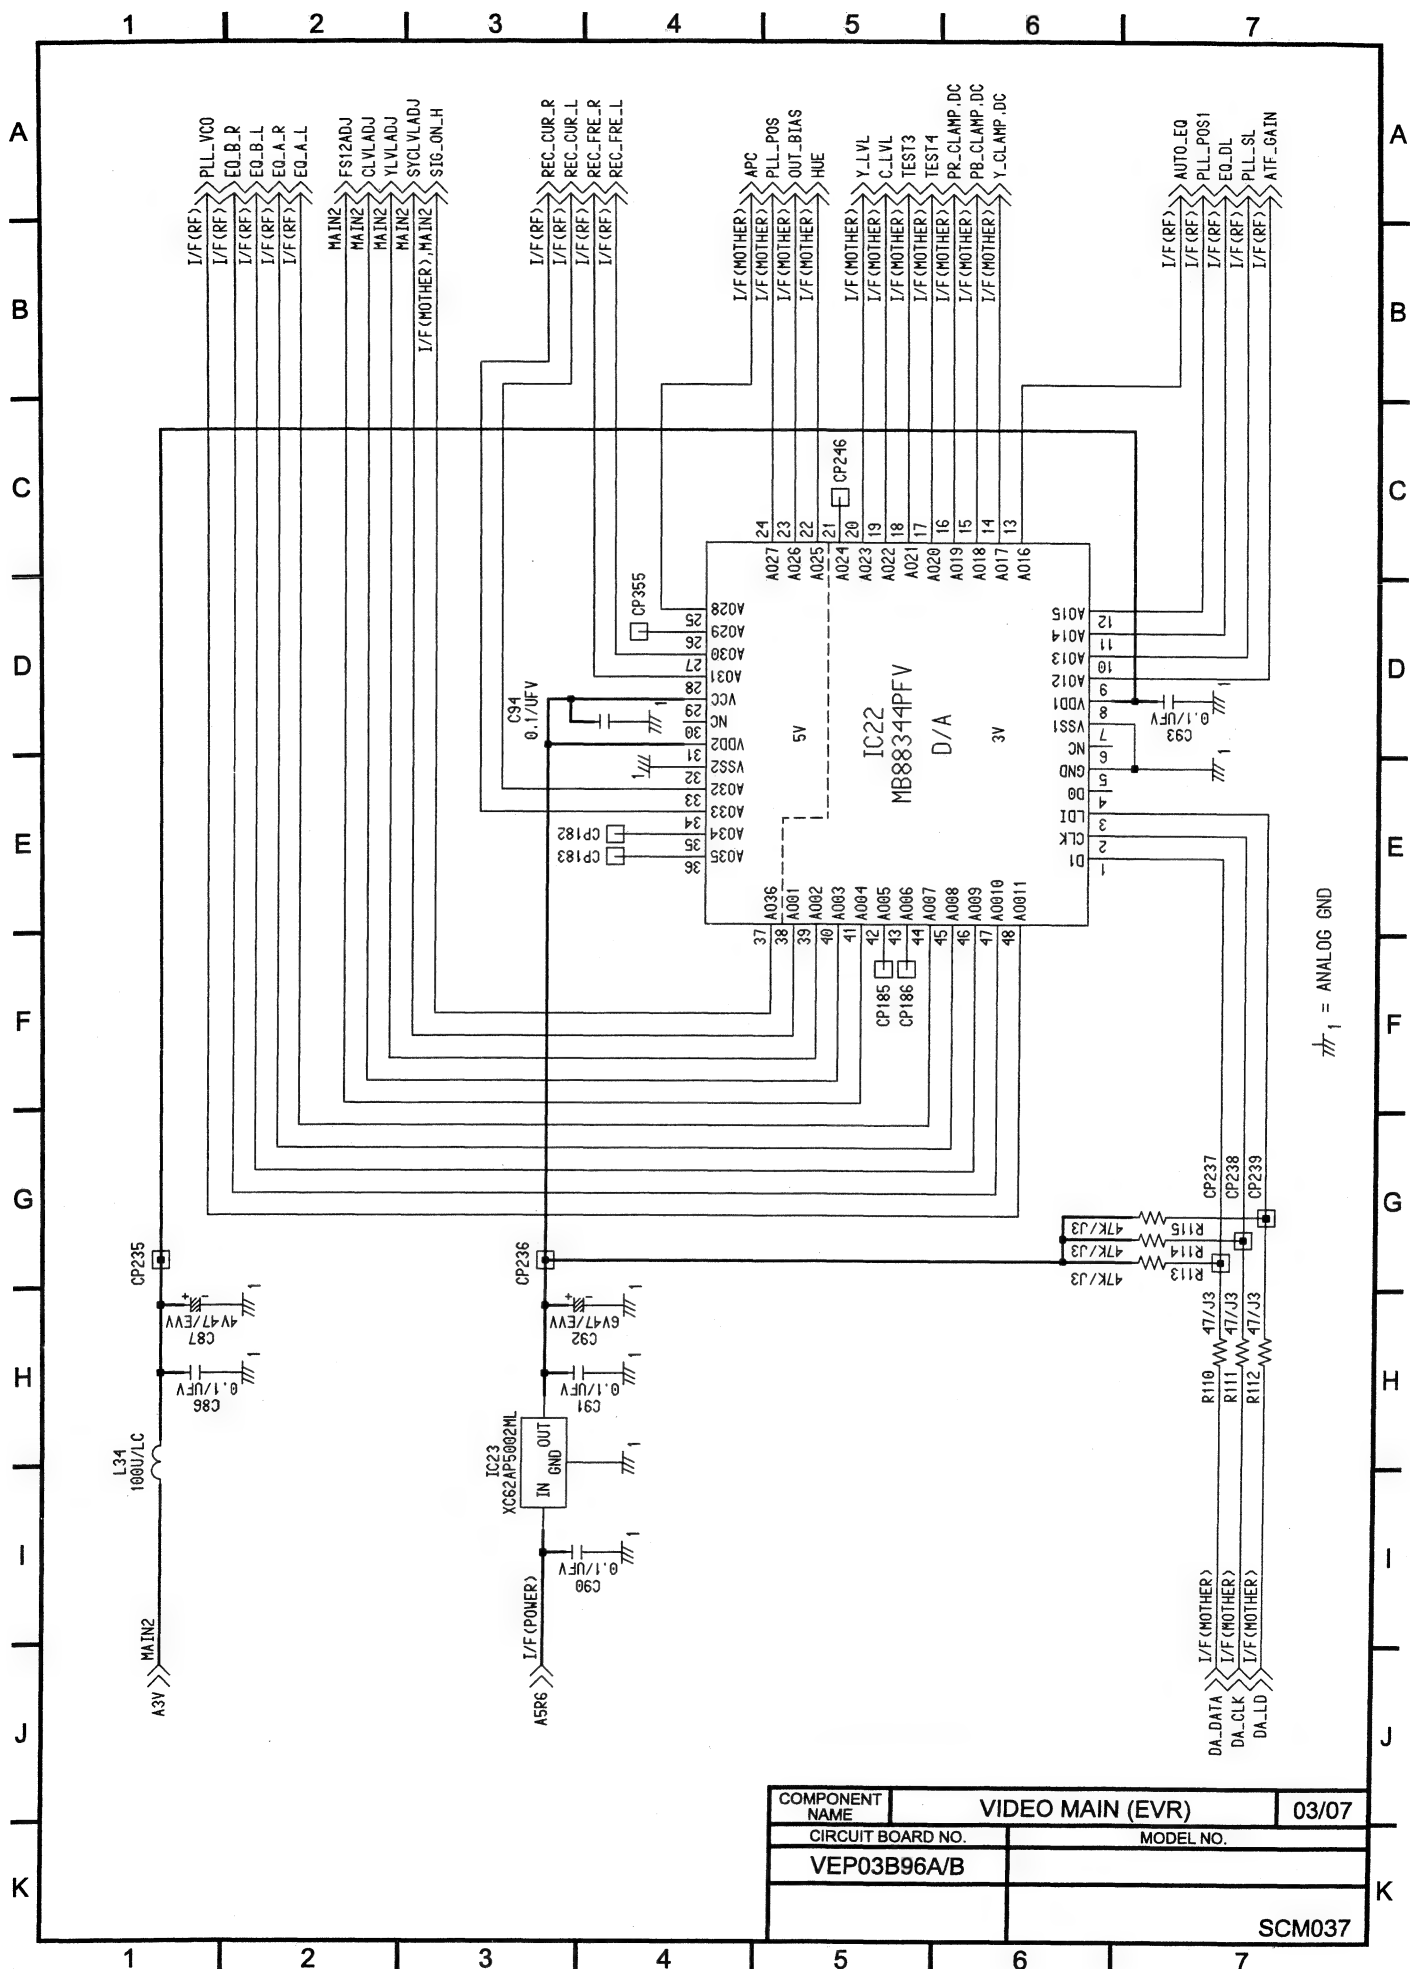


COMPONENT NAME	VIDEO MAIN (EVR)		03/07
CIRCUIT BOARD NO.	MODEL NO.		
VEP03B96A/B			
			SCM037

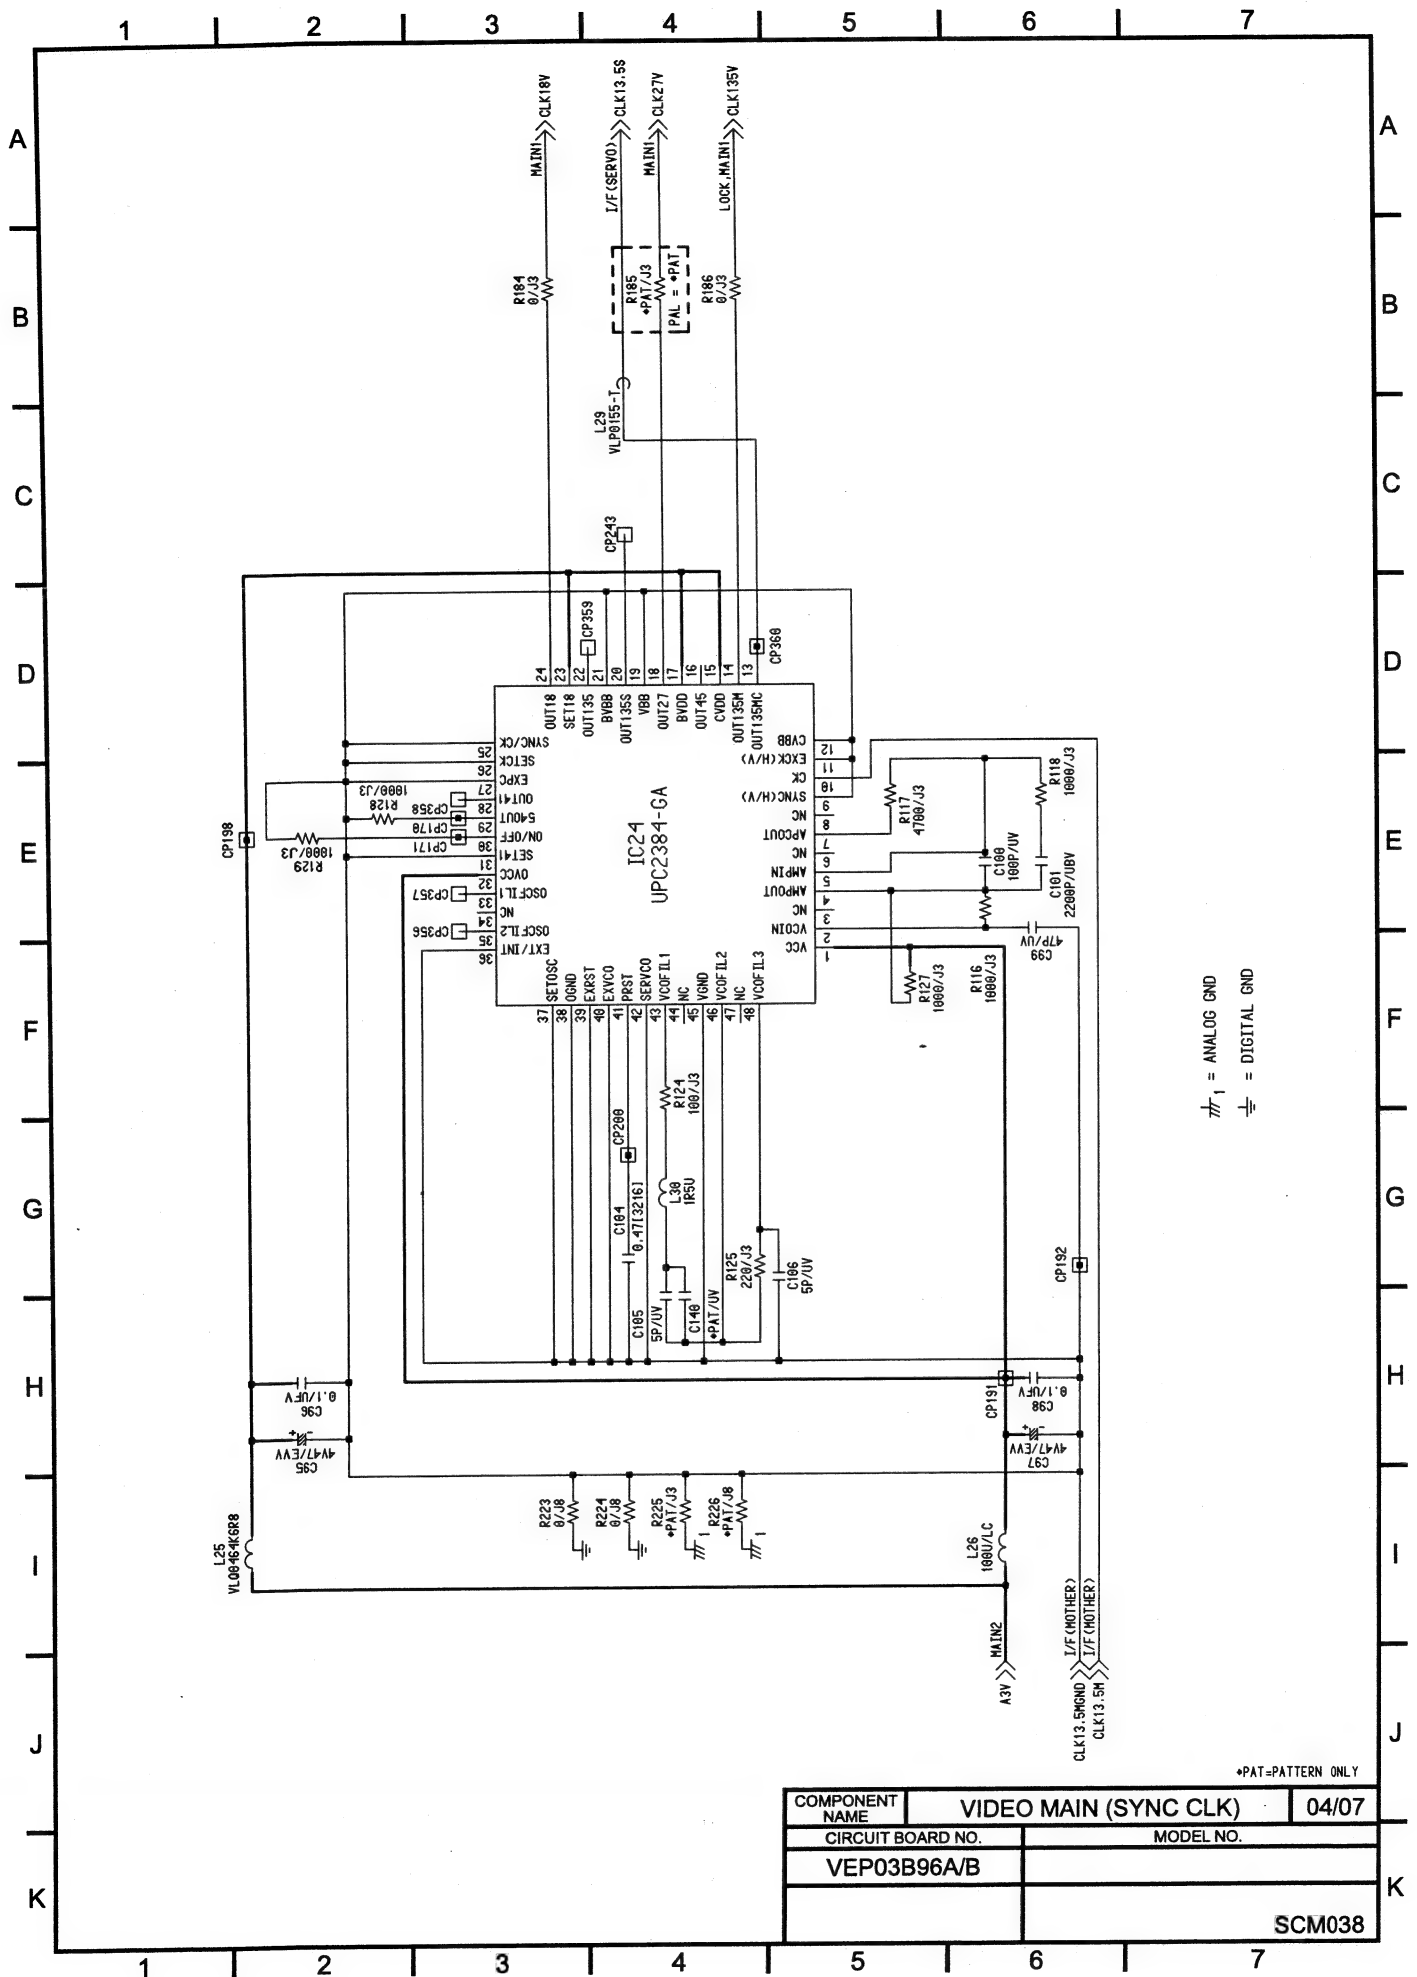

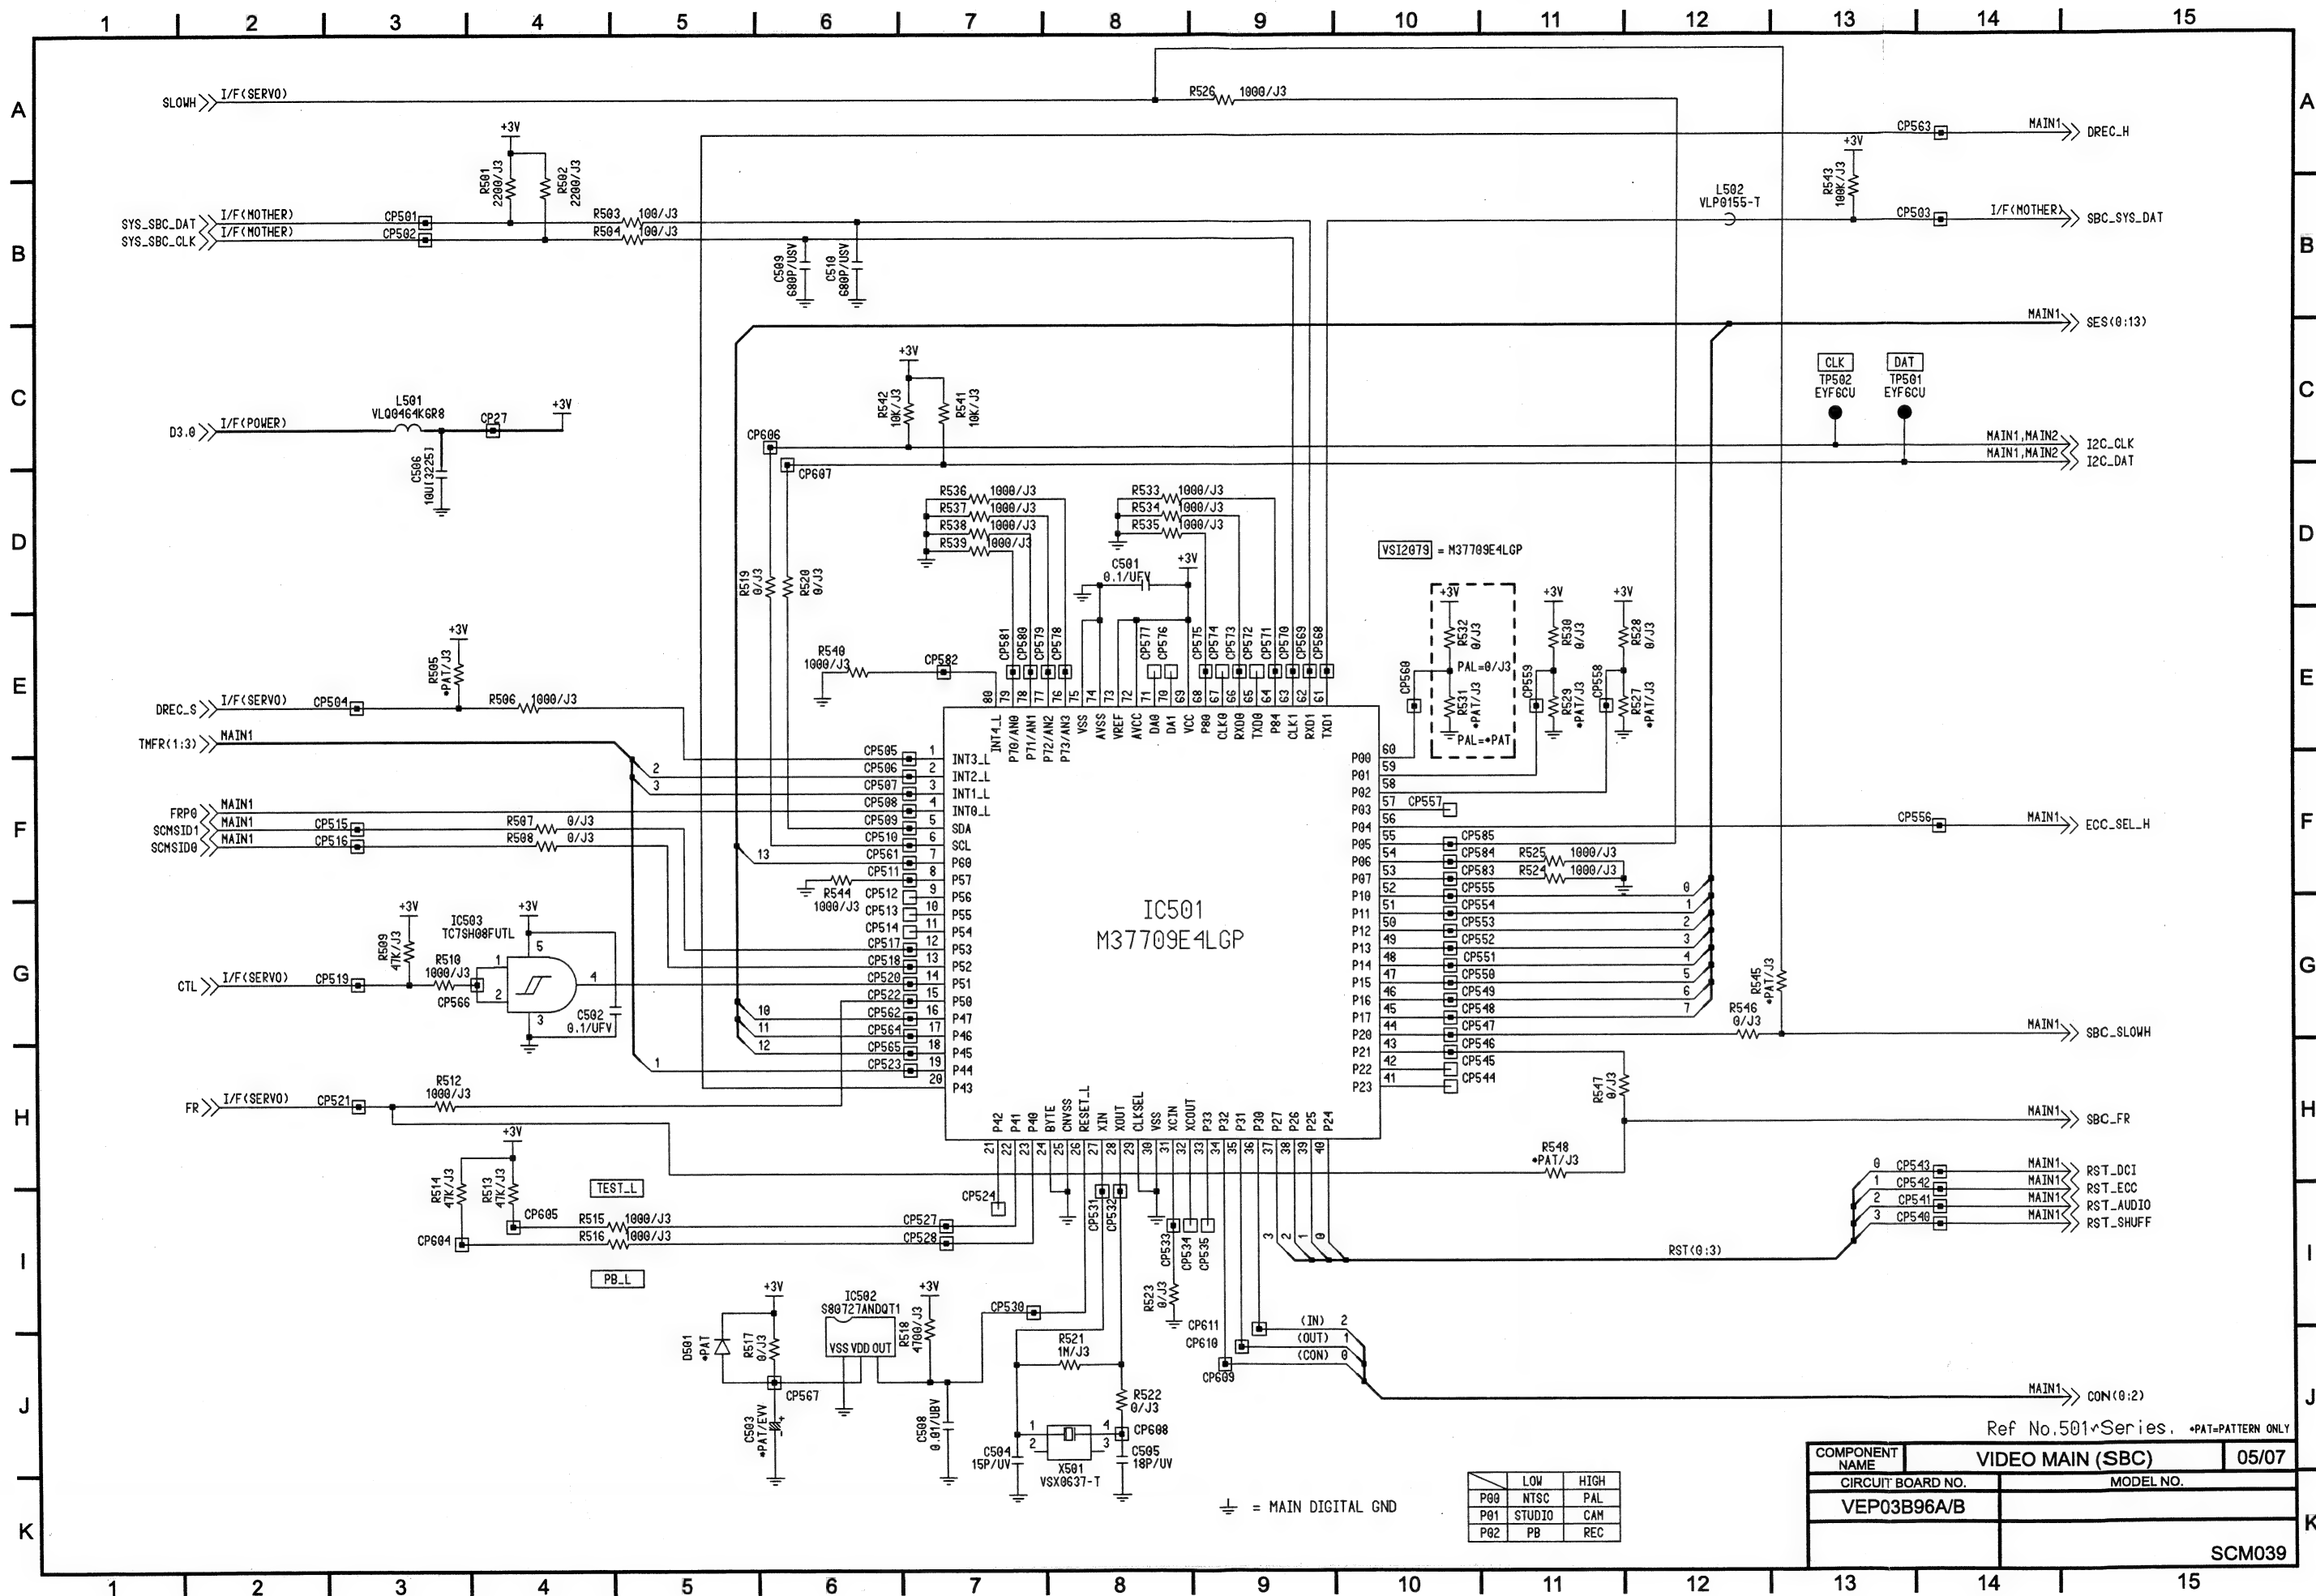



COMPONENT NAME	VIDEO MAIN (SBC)	05/07
CIRCUIT BOARD NO.	MODEL NO.	
VEP03B96A/B		
		SCM039

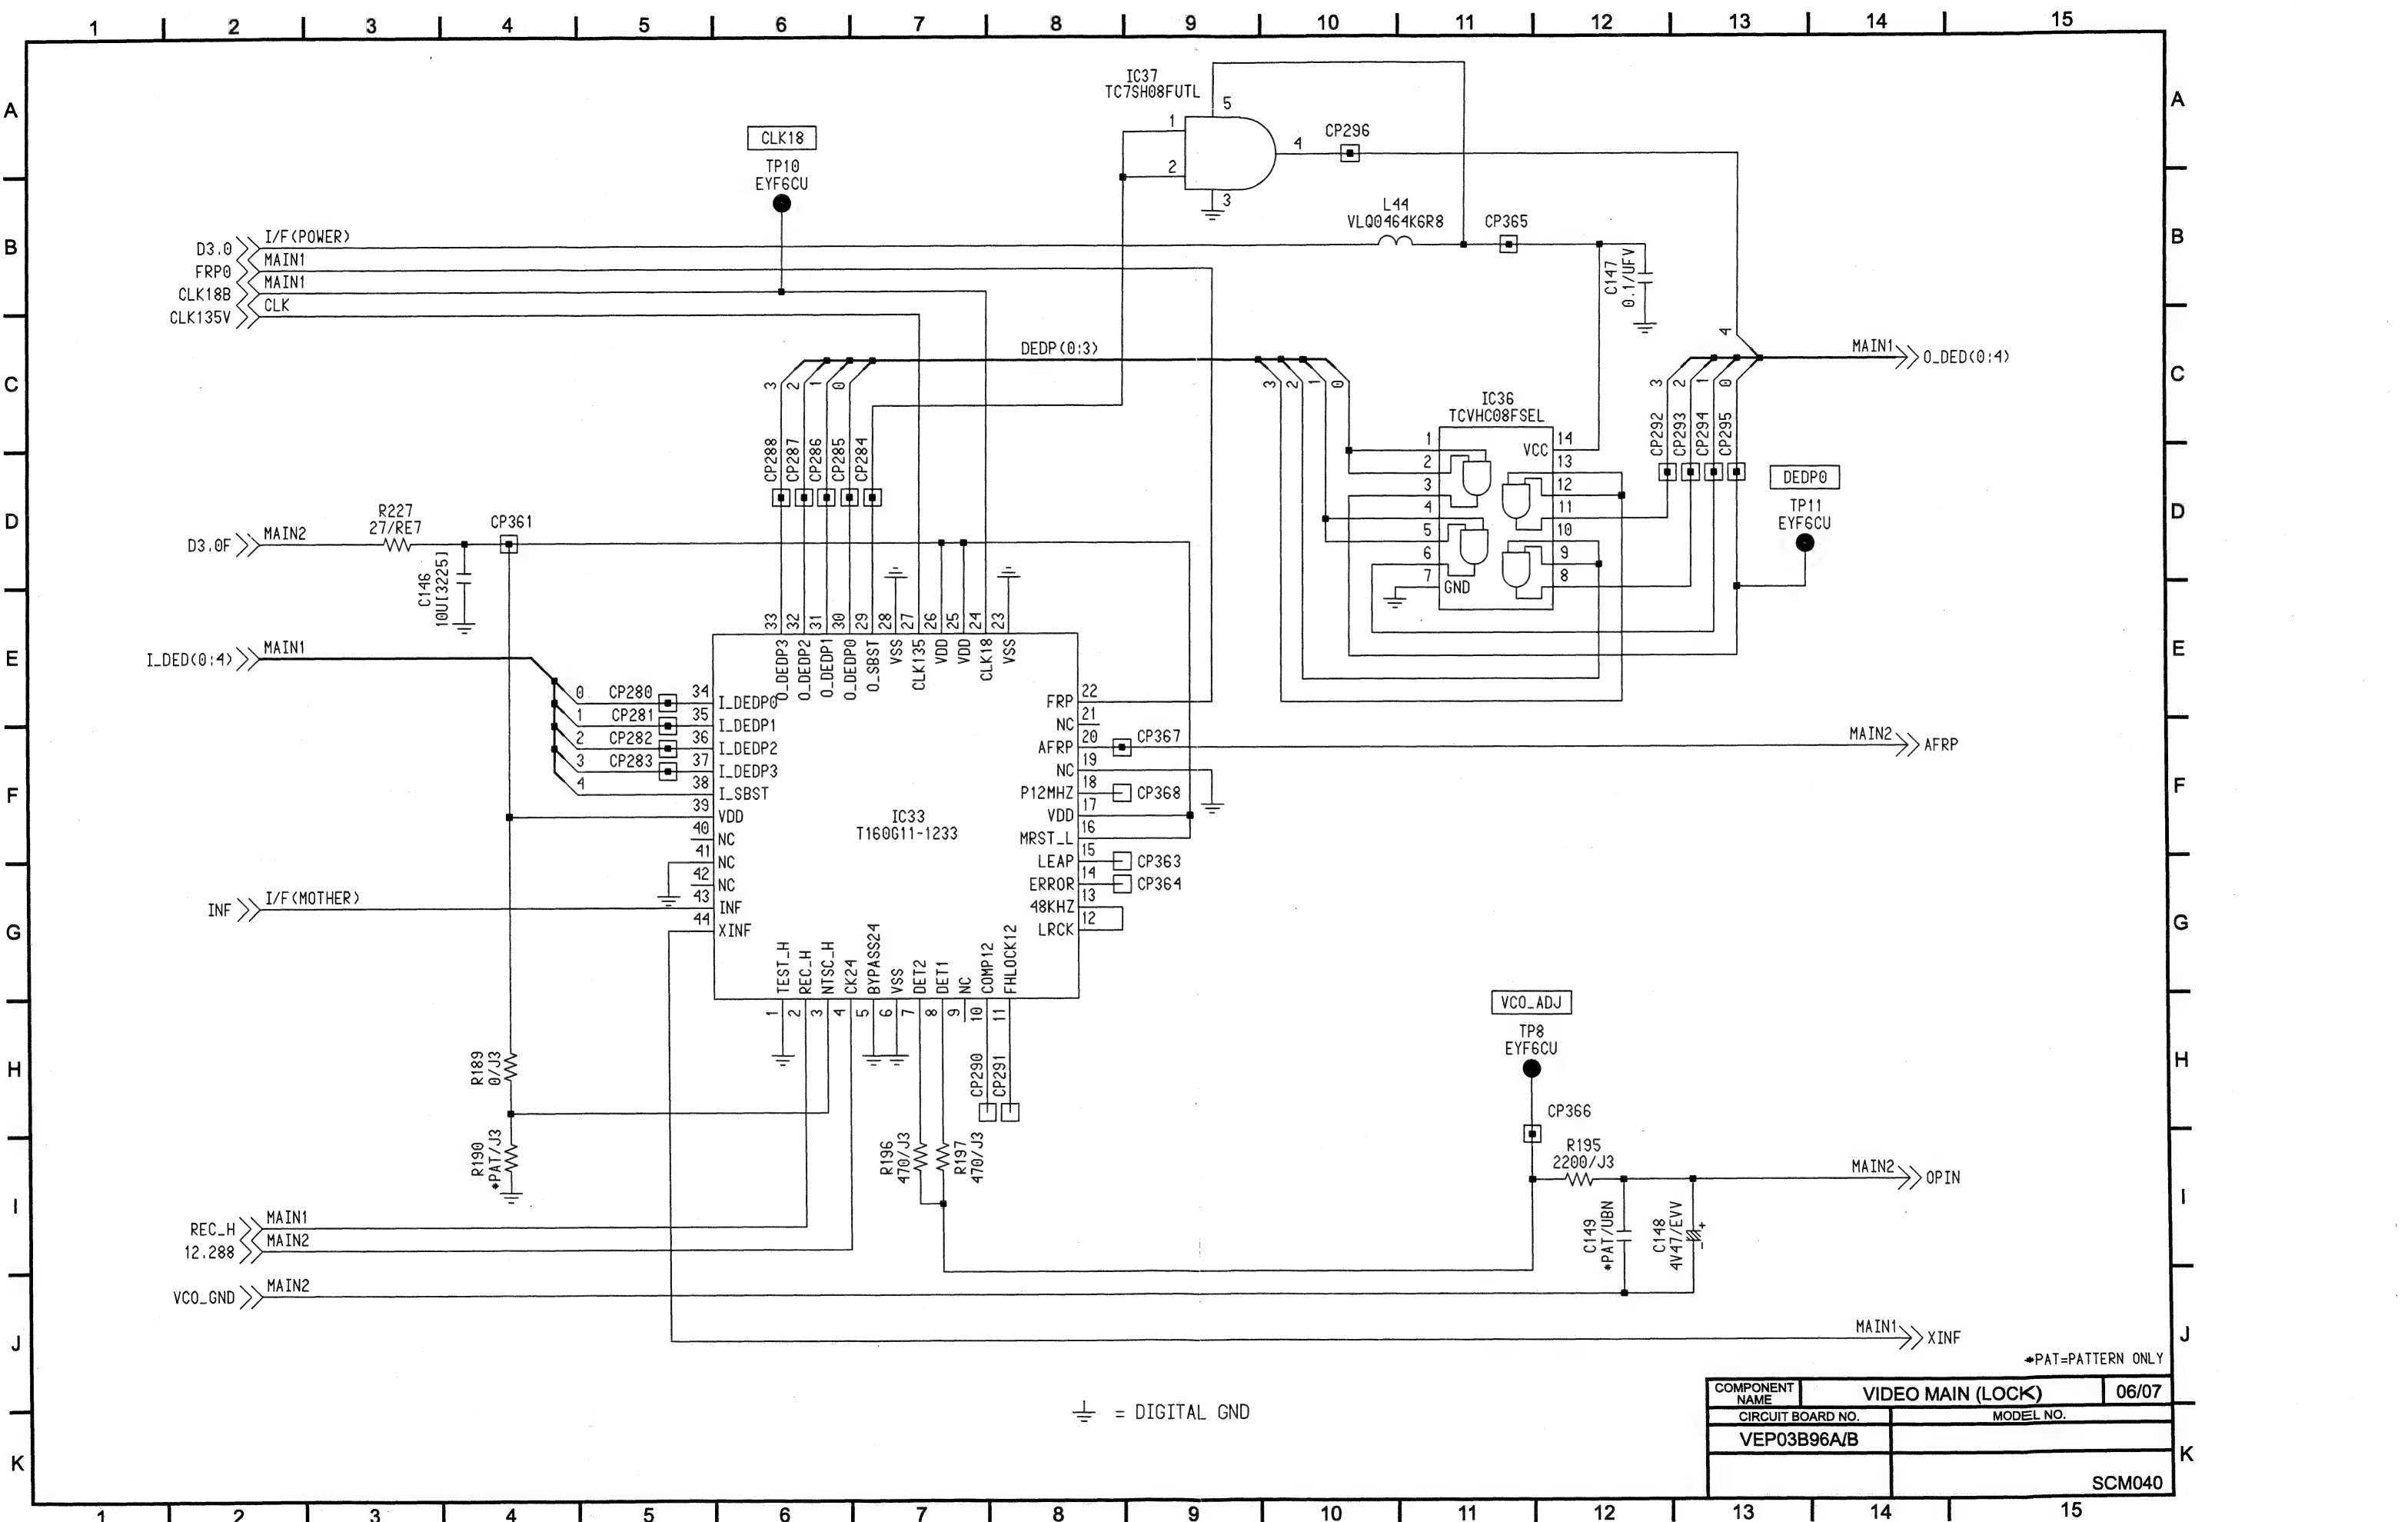



⏏ = DIGITAL GND

COMPONENT NAME	VIDEO MAIN (LOCK)	06/07
CIRCUIT BOARD NO.	VEP03B96A/B	MODEL NO.
		SCM040

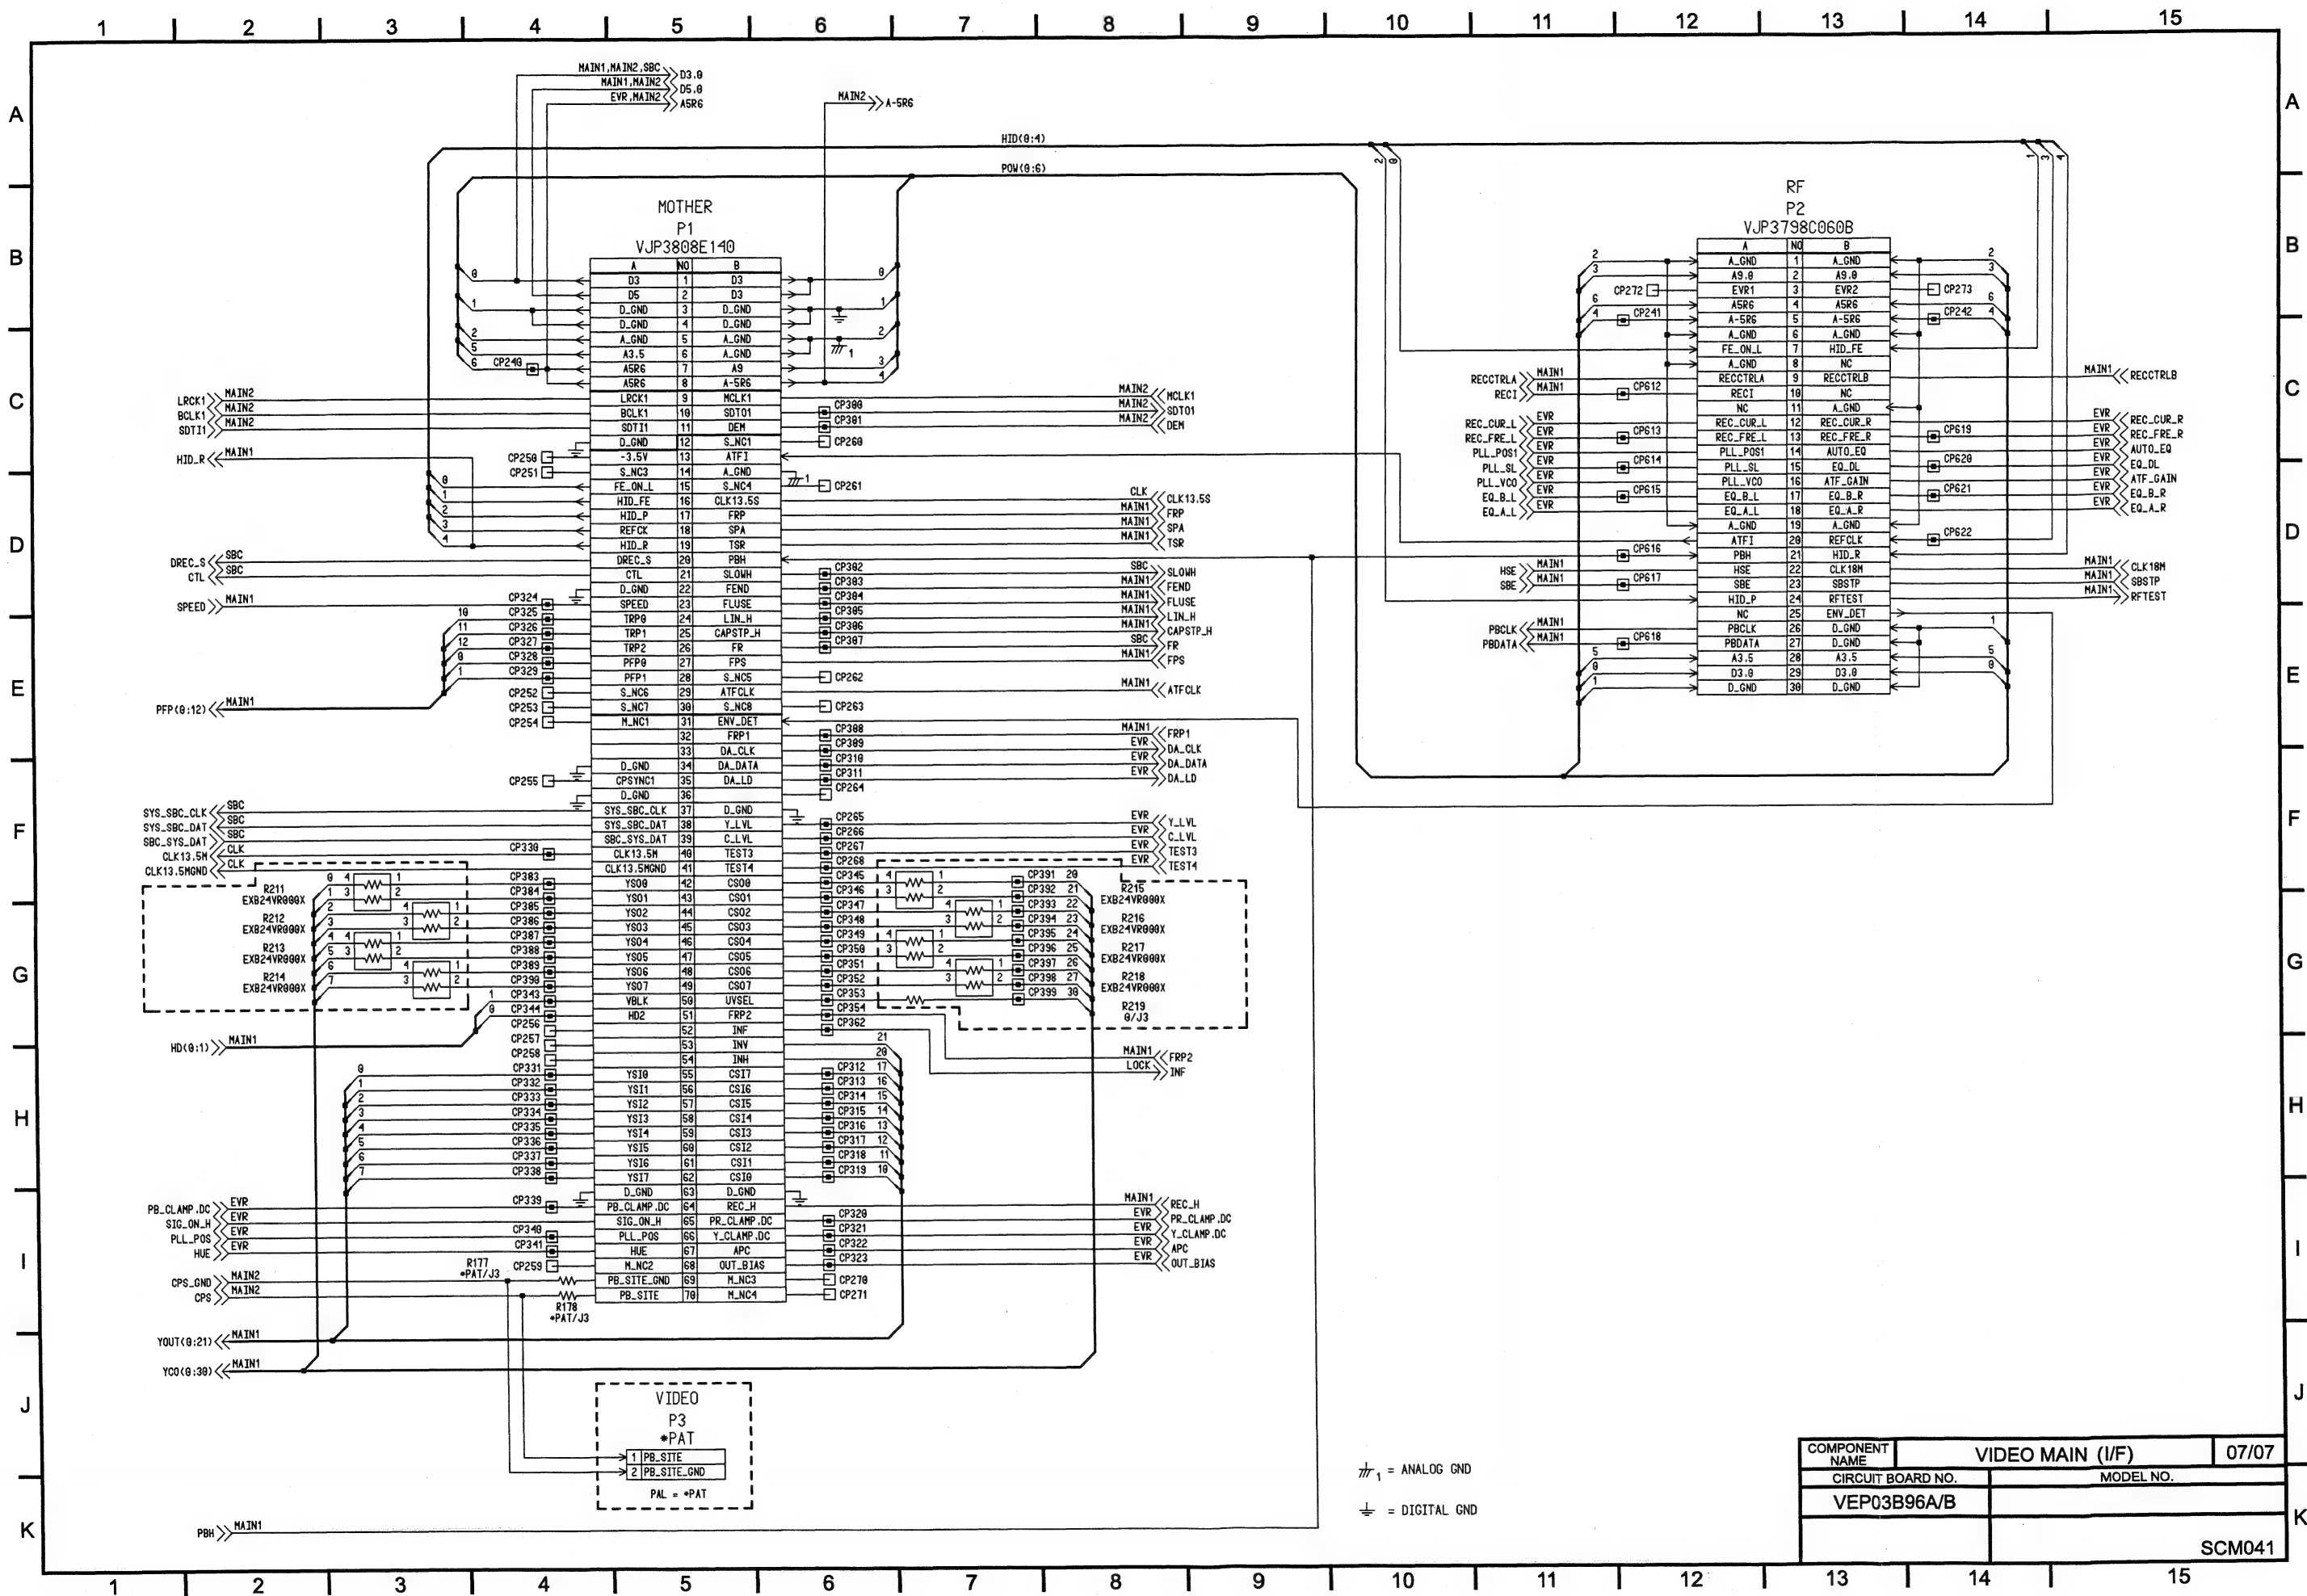


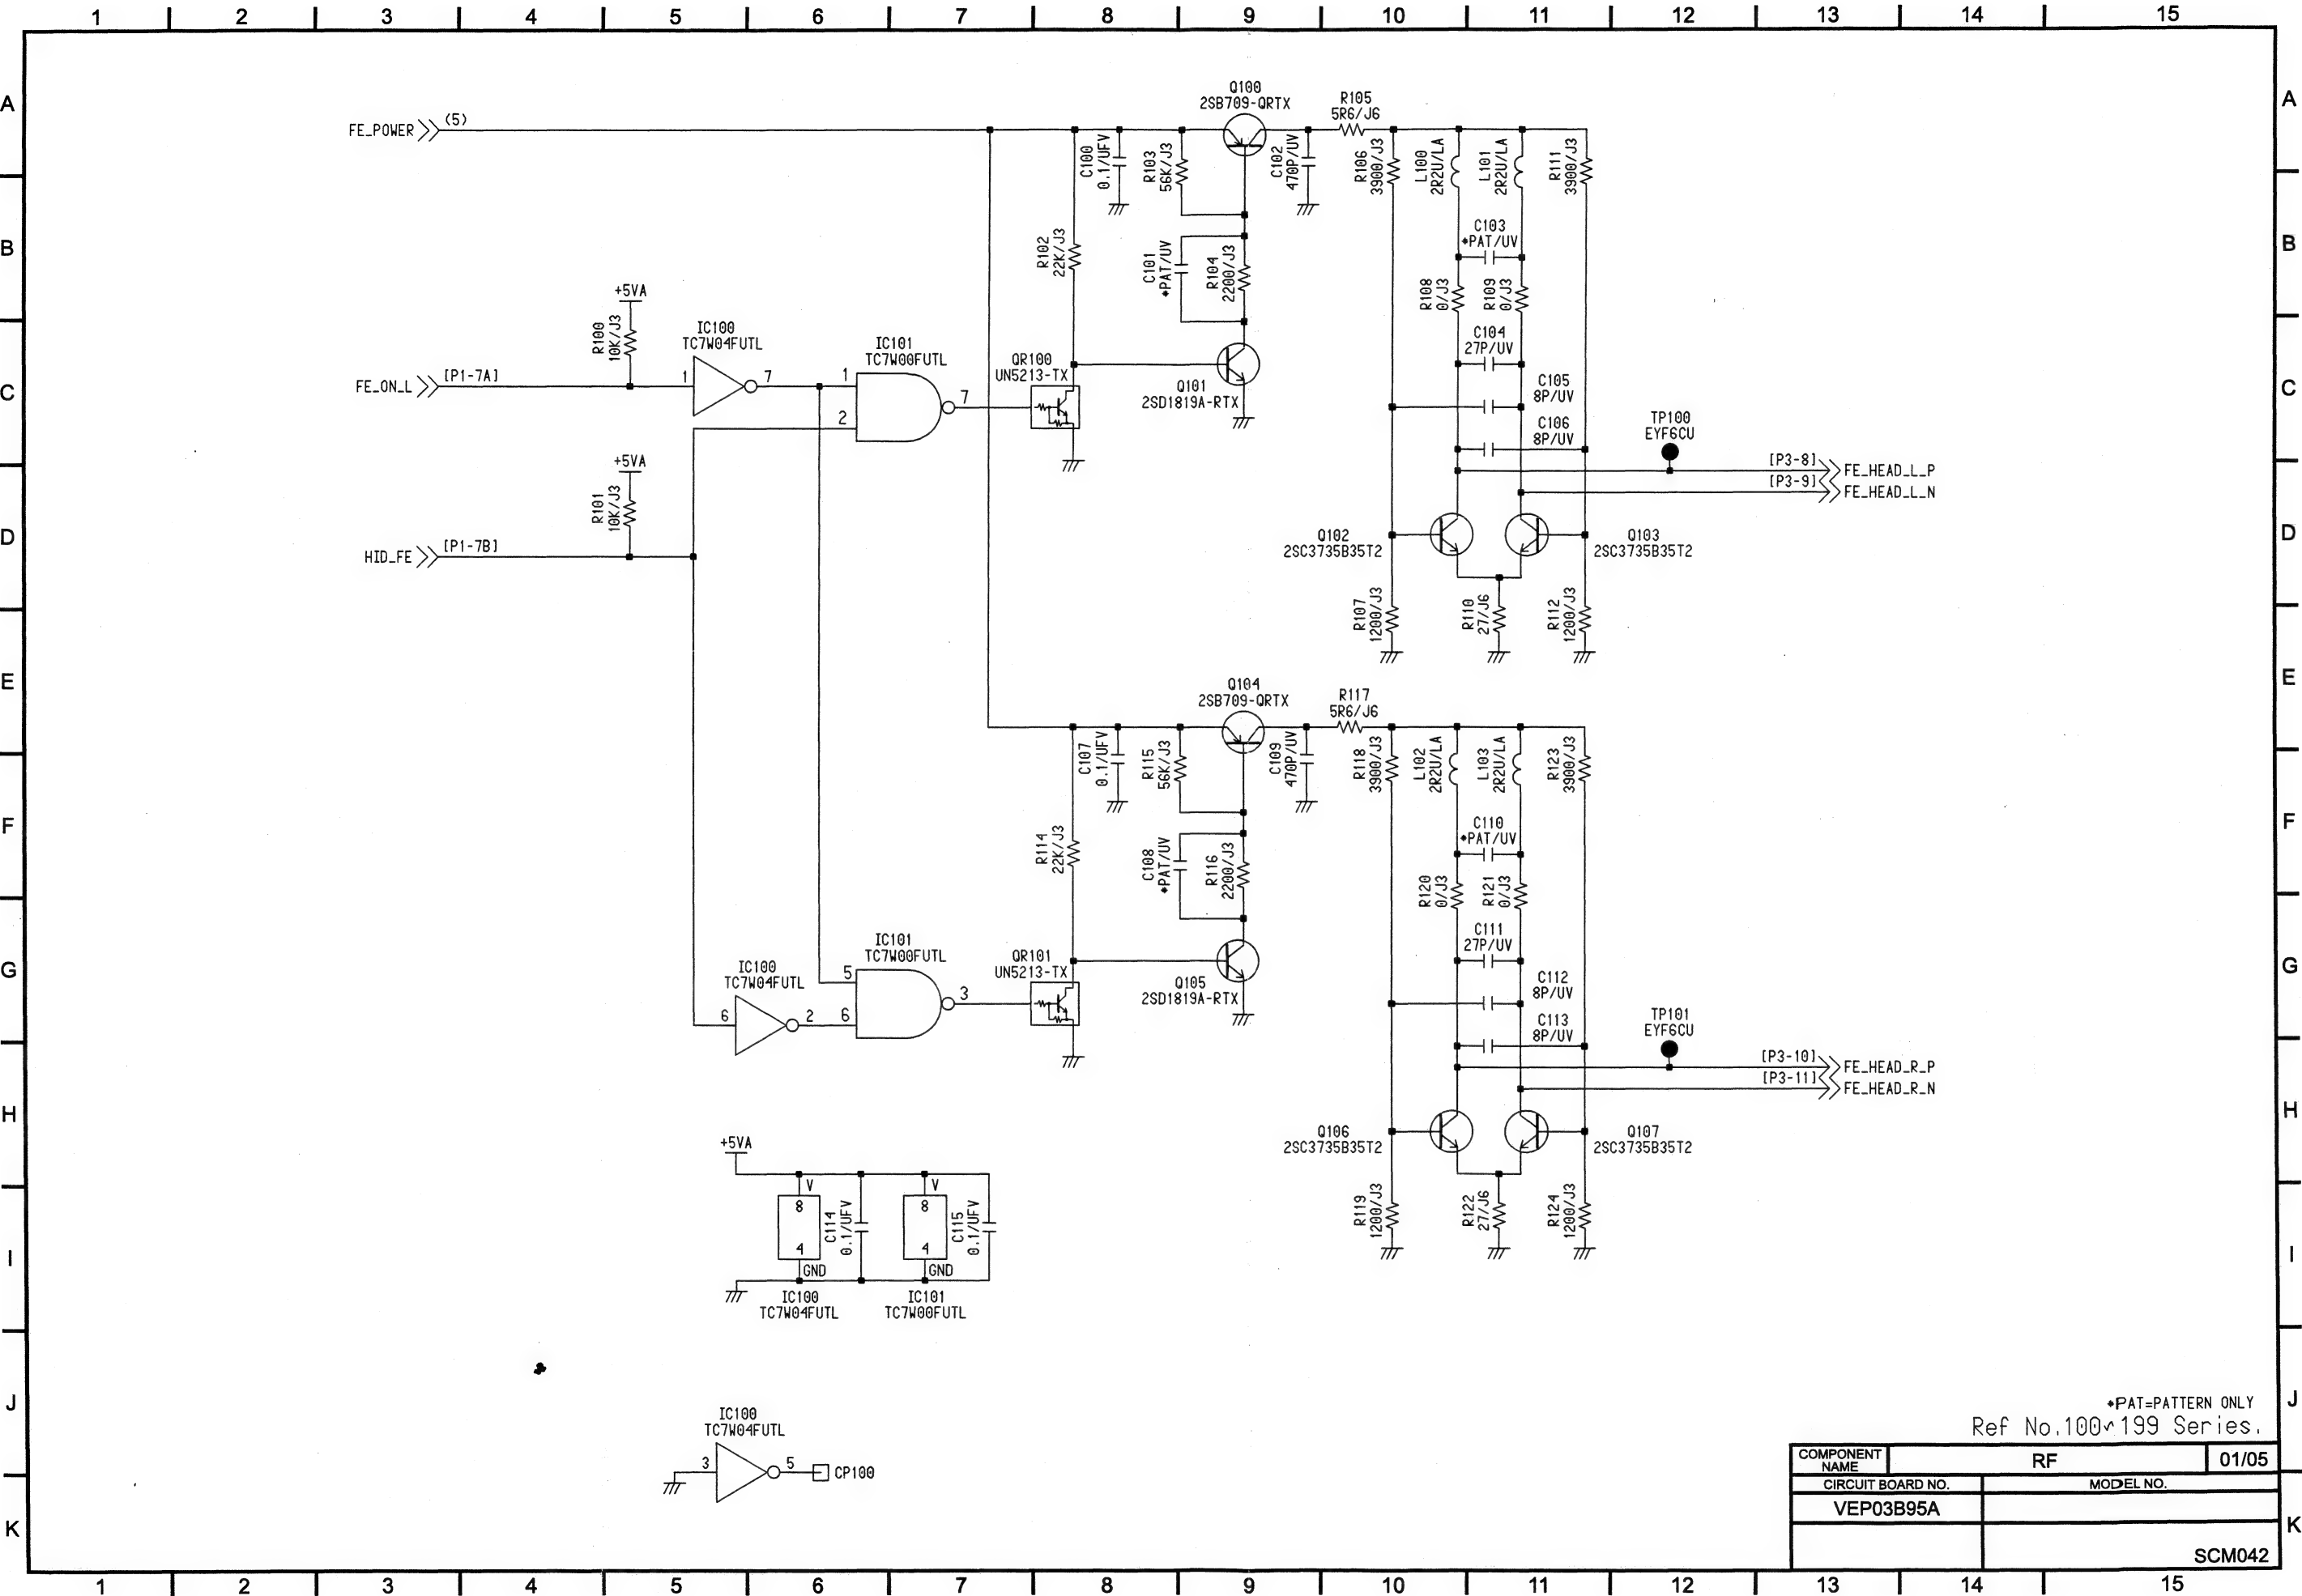

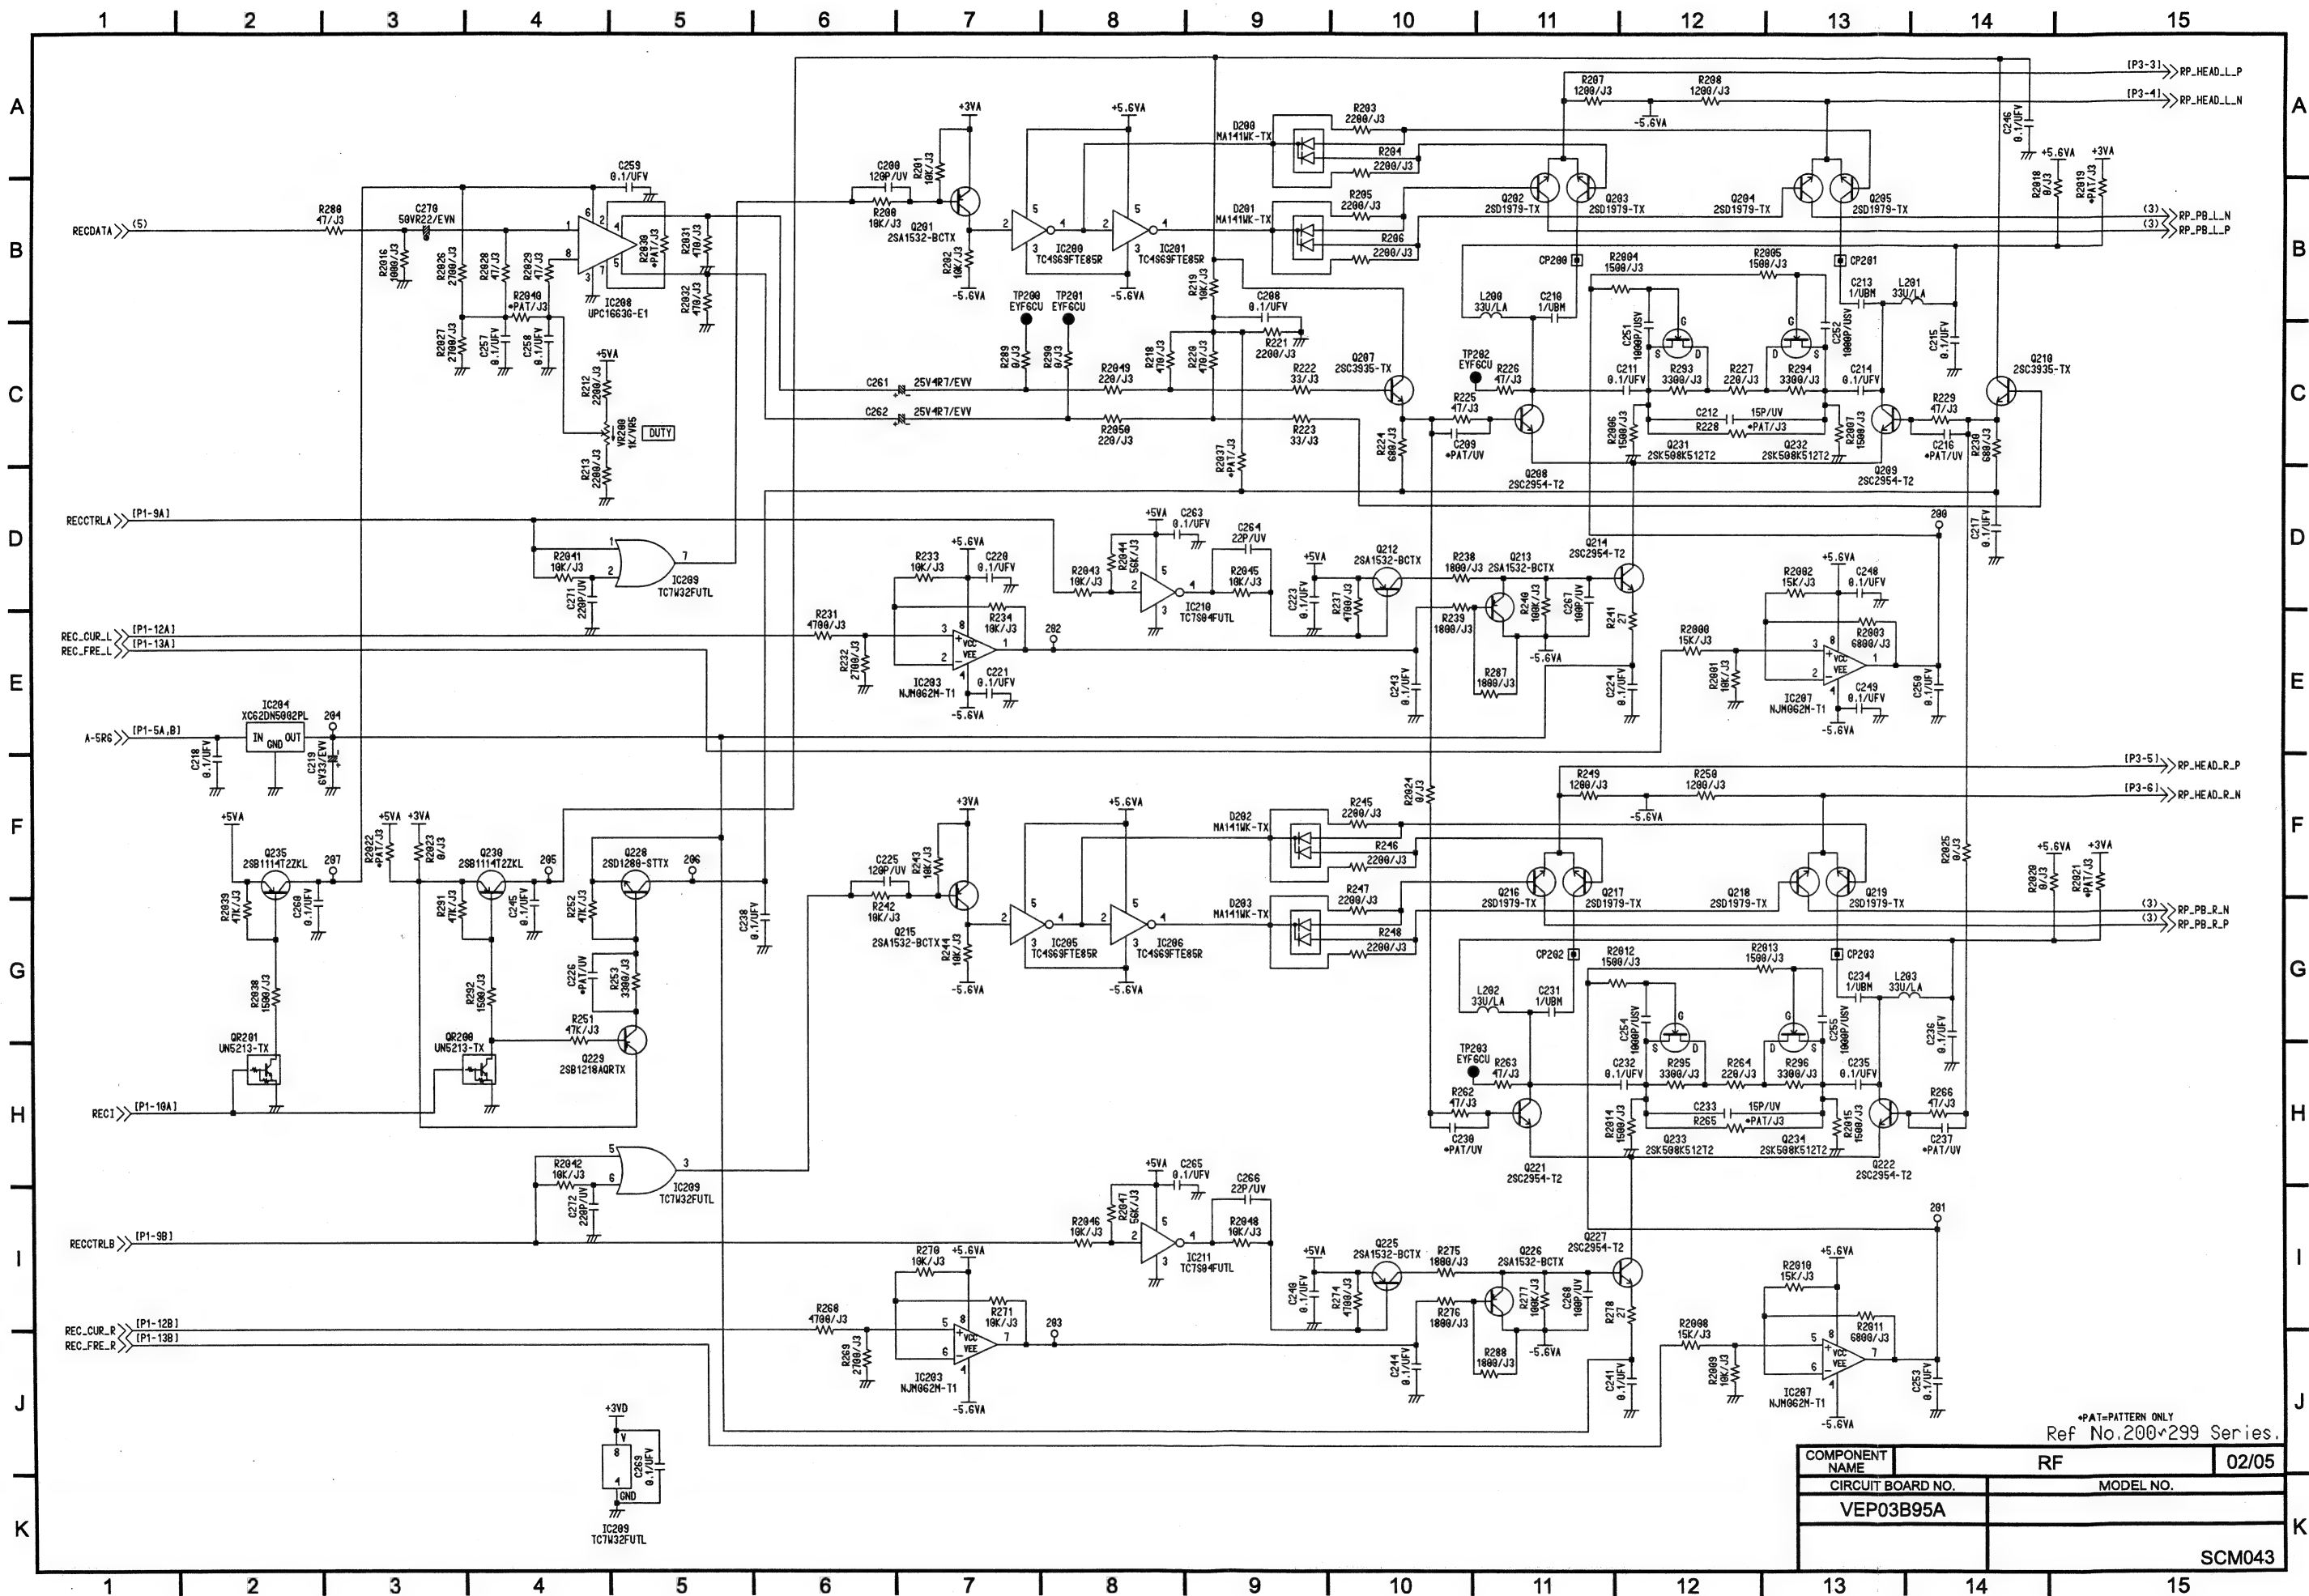

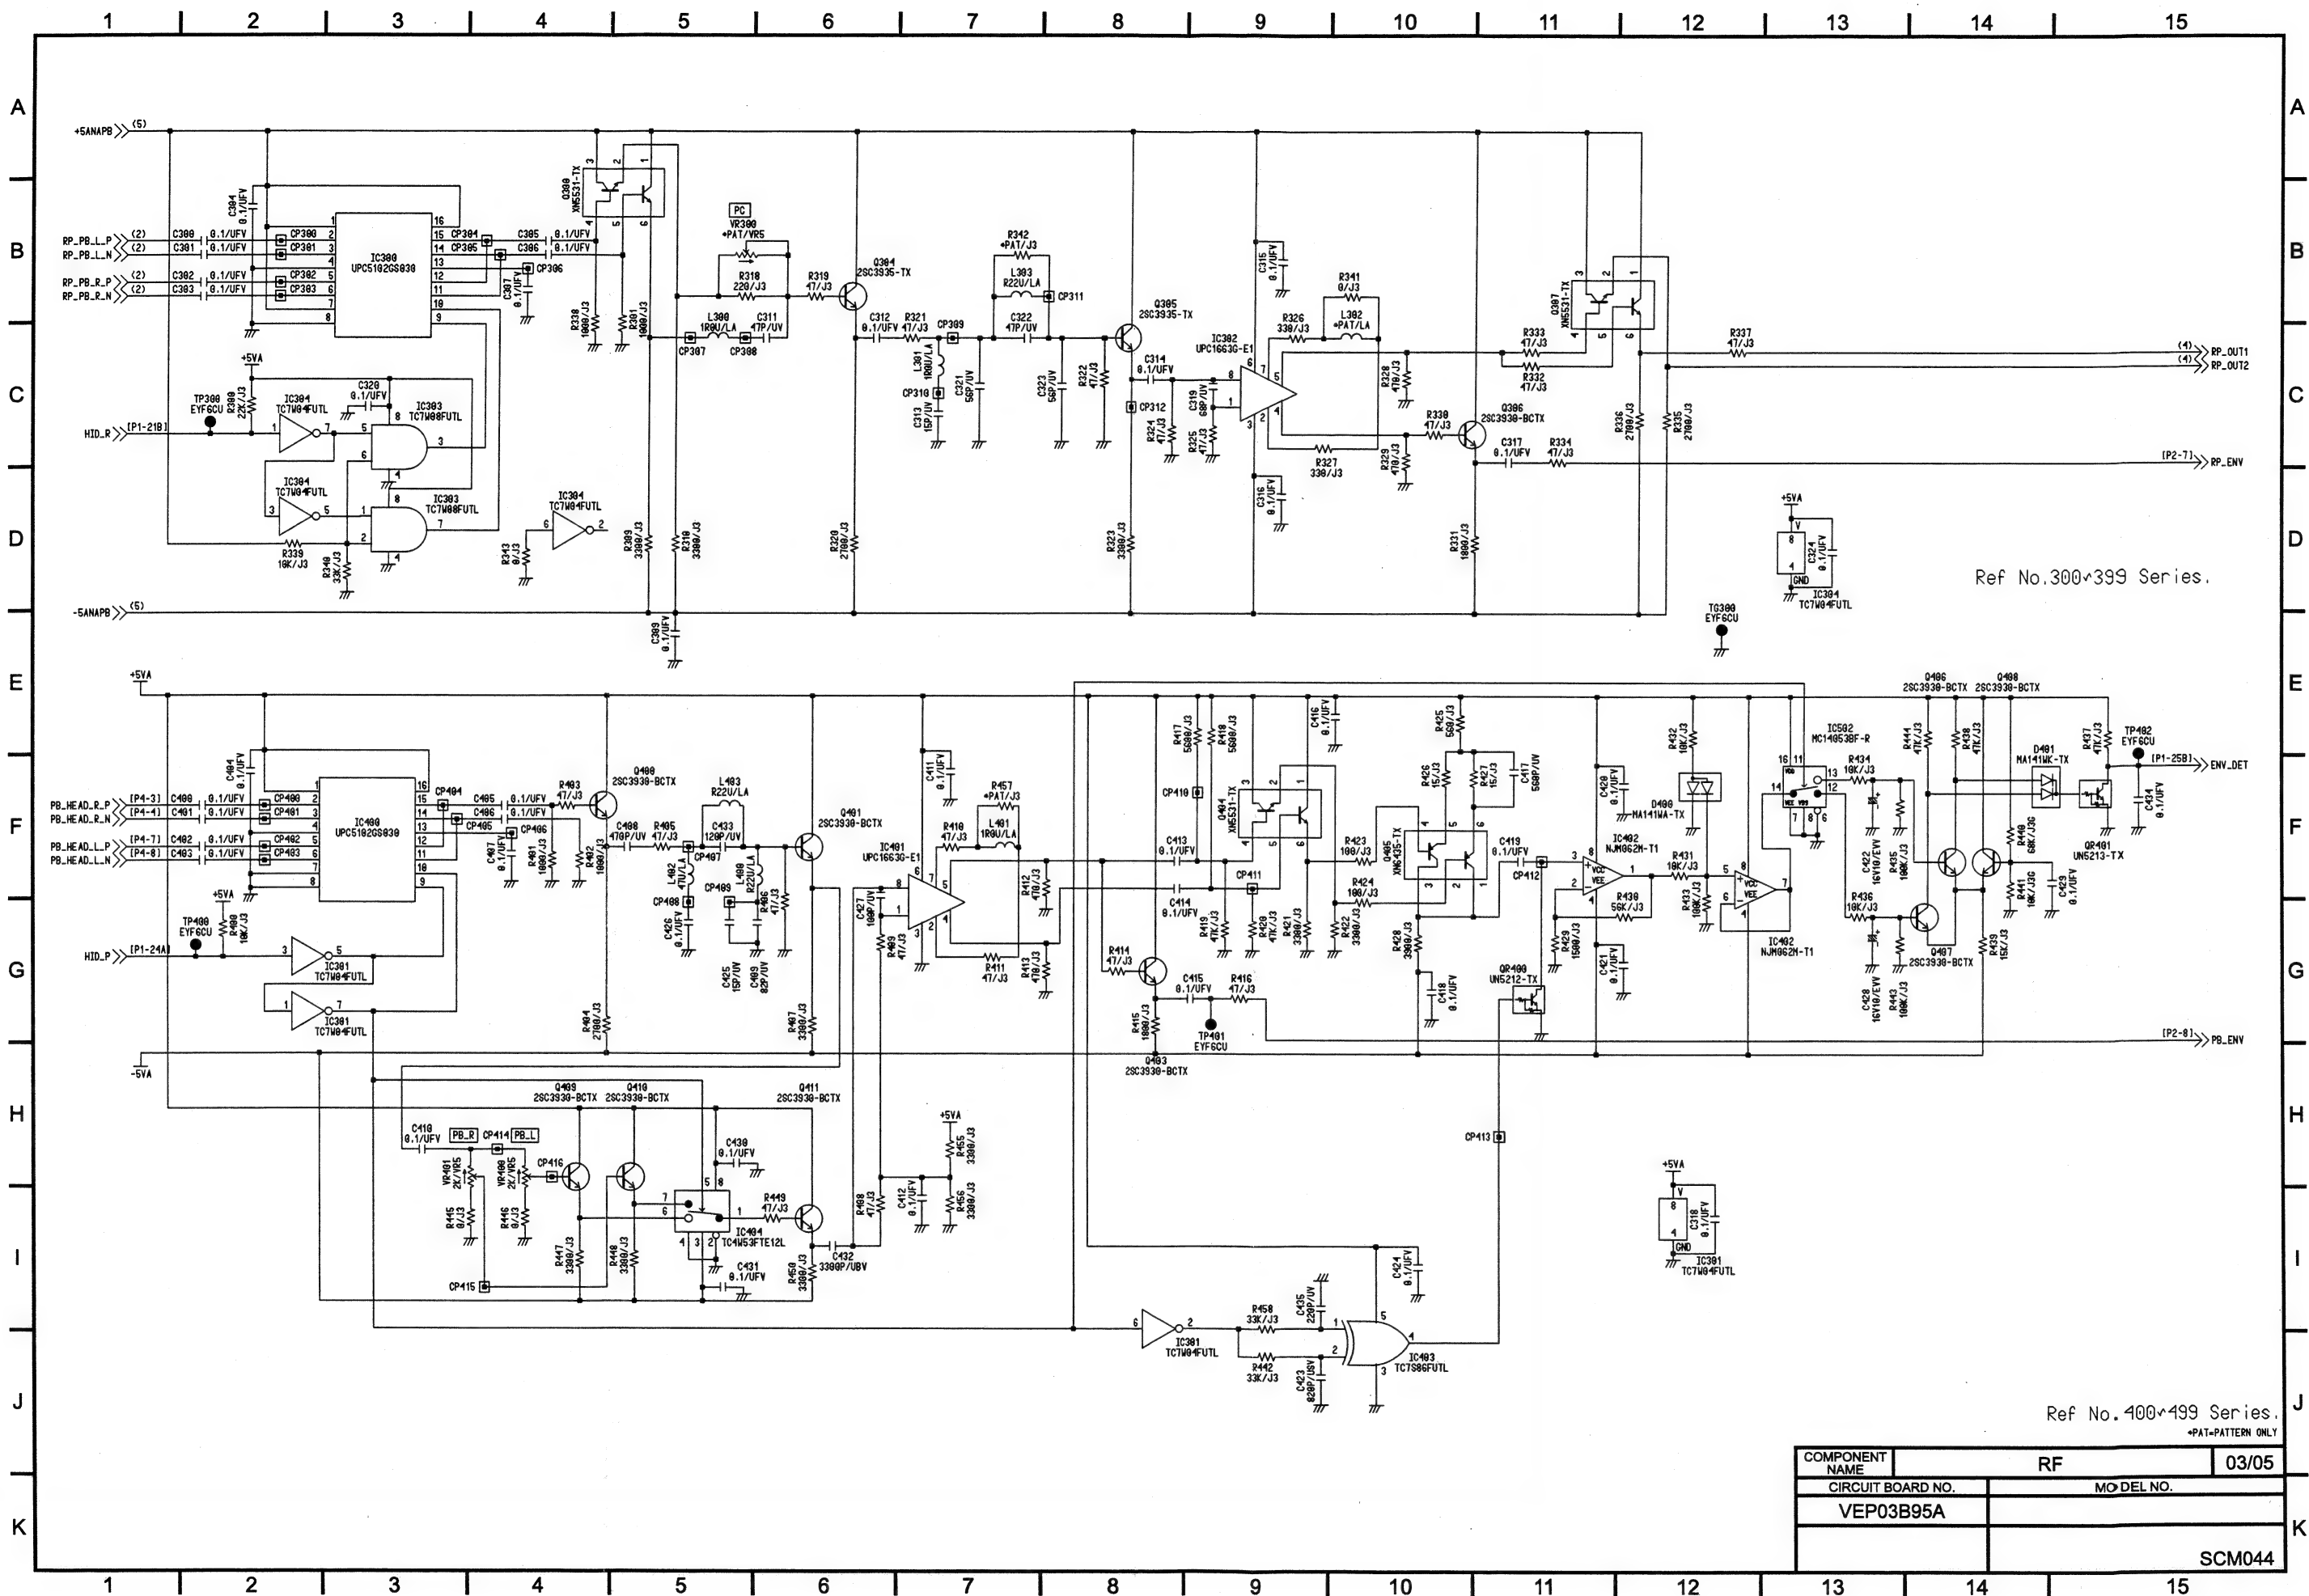



COMPONENT NAME	RF	03/05
CIRCUIT BOARD NO.	MODEL NO.	
VEP03B95A		
	SCM044	

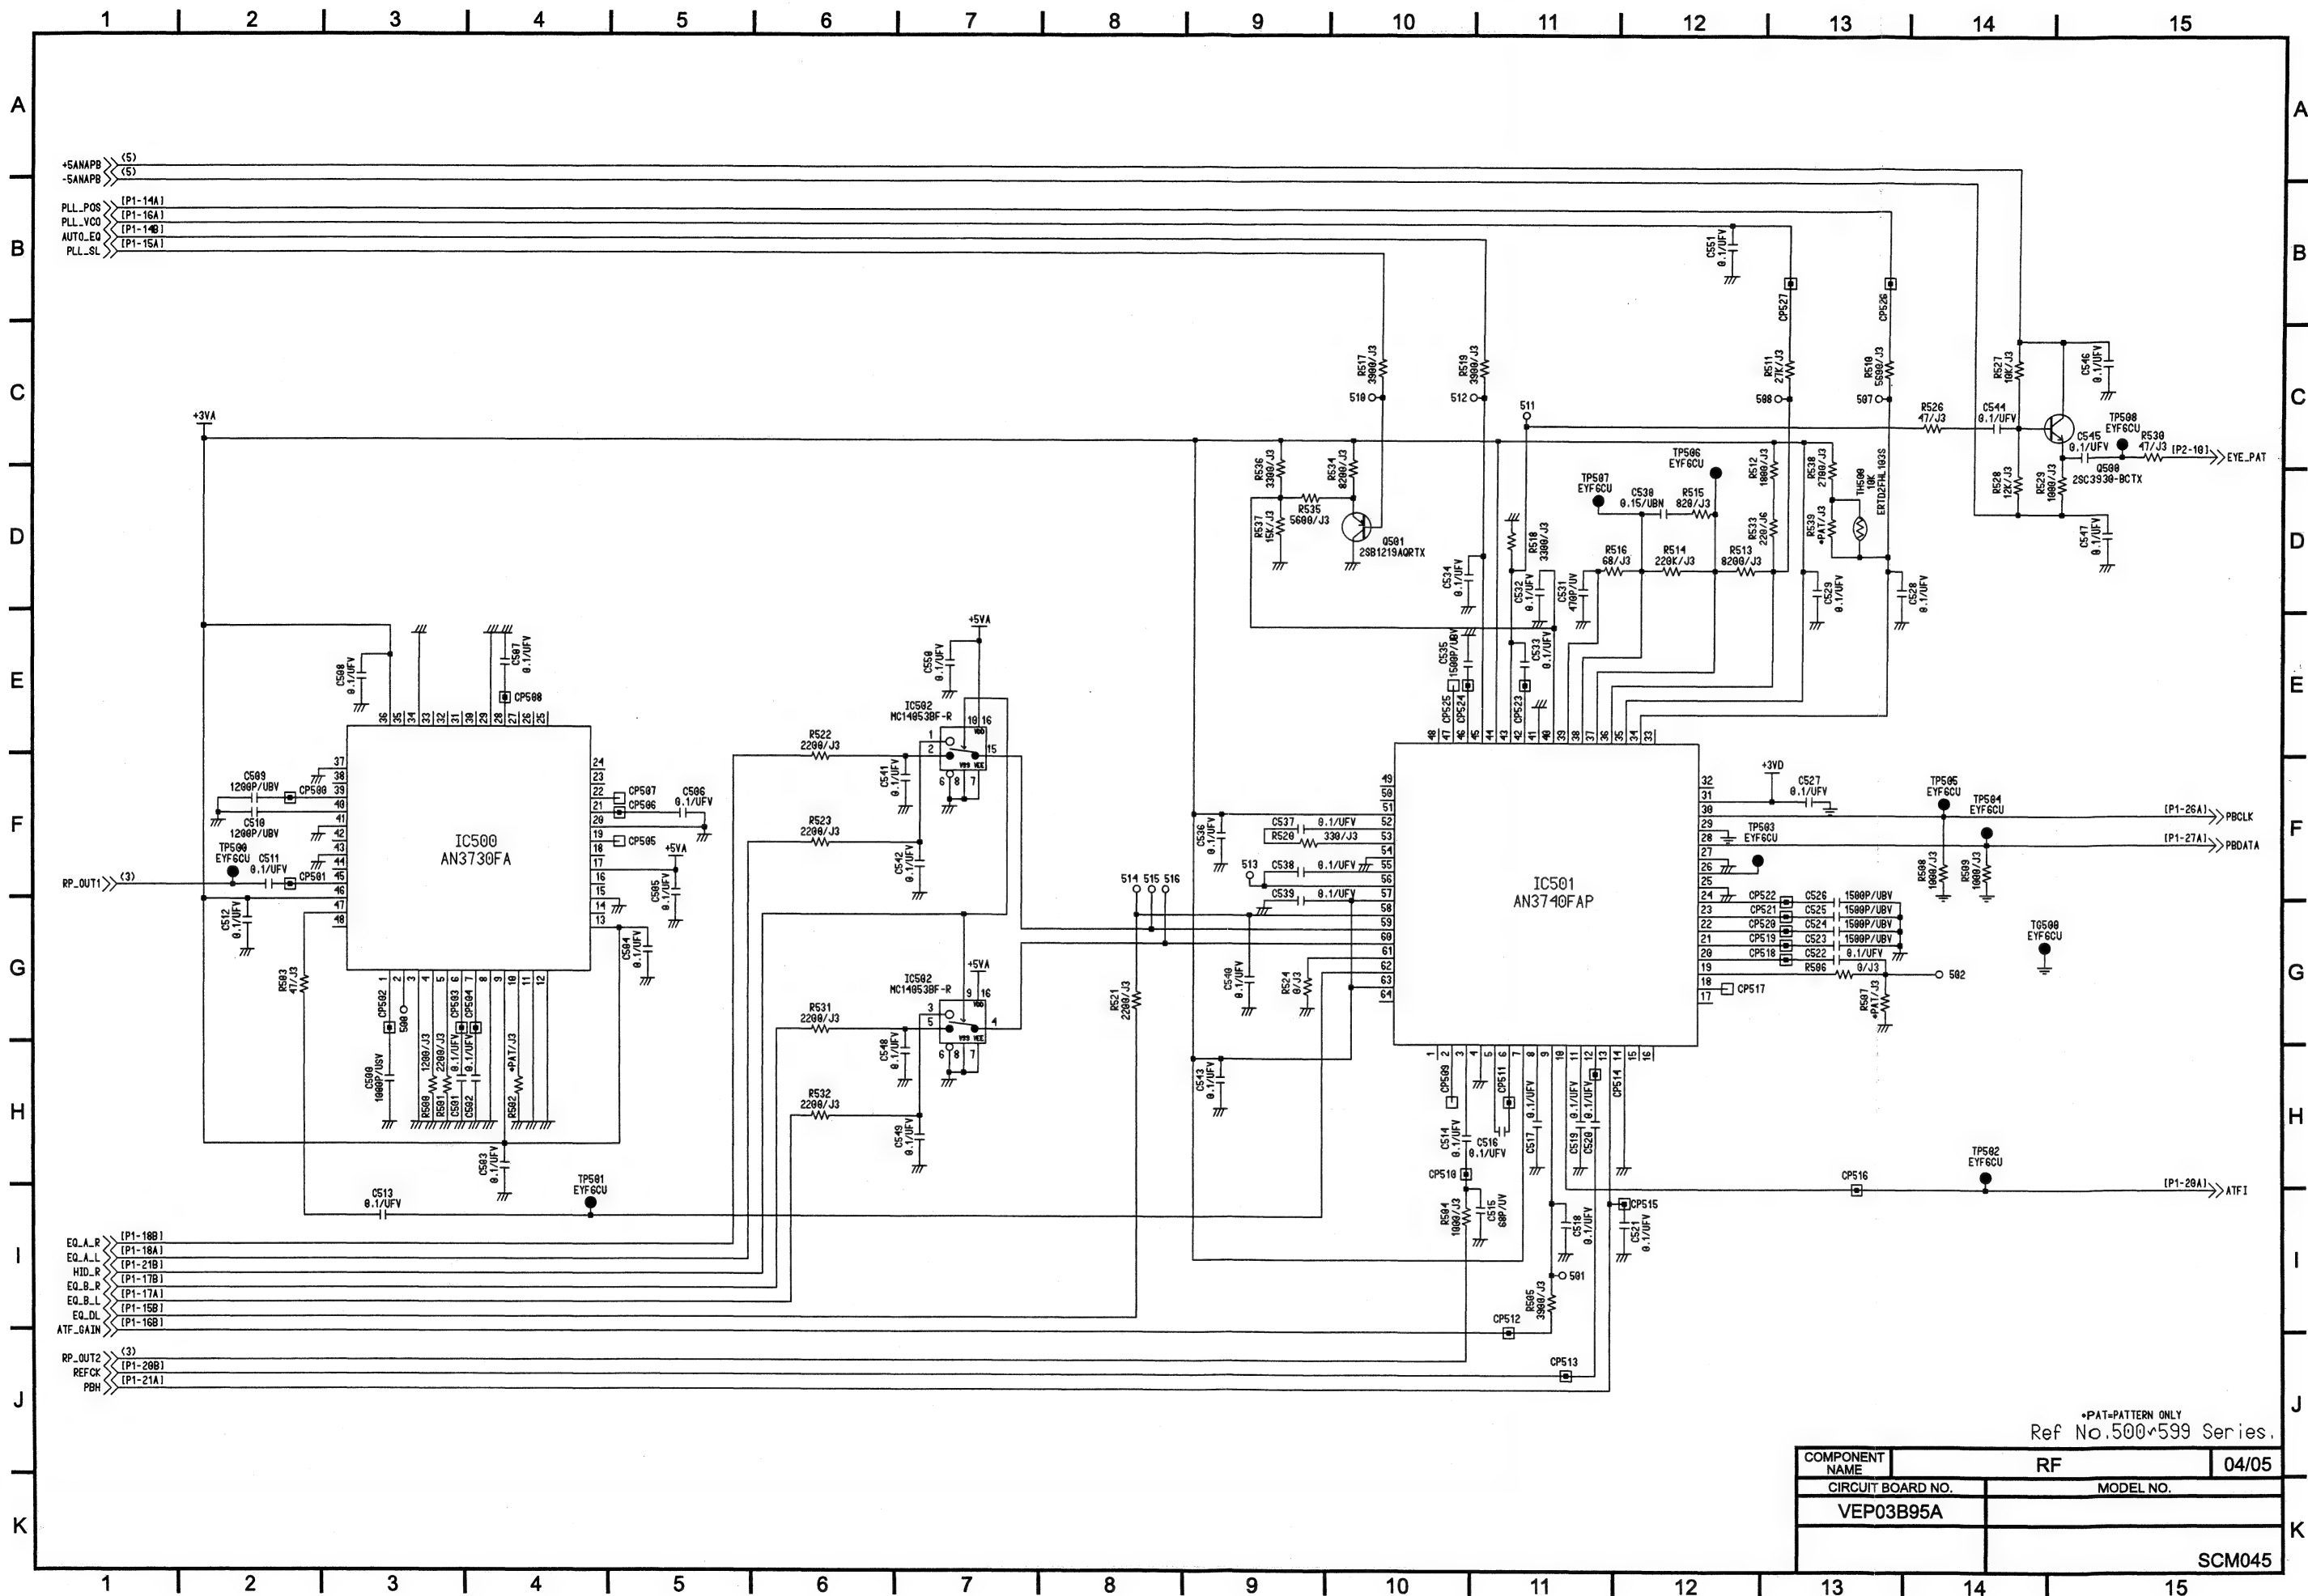


*PAT=PATTERN ONLY
Ref No.500x599 Series.


COMPONENT NAME	RF	04/05
CIRCUIT BOARD NO.	MODEL NO.	
VEP03B95A		
		SCM045

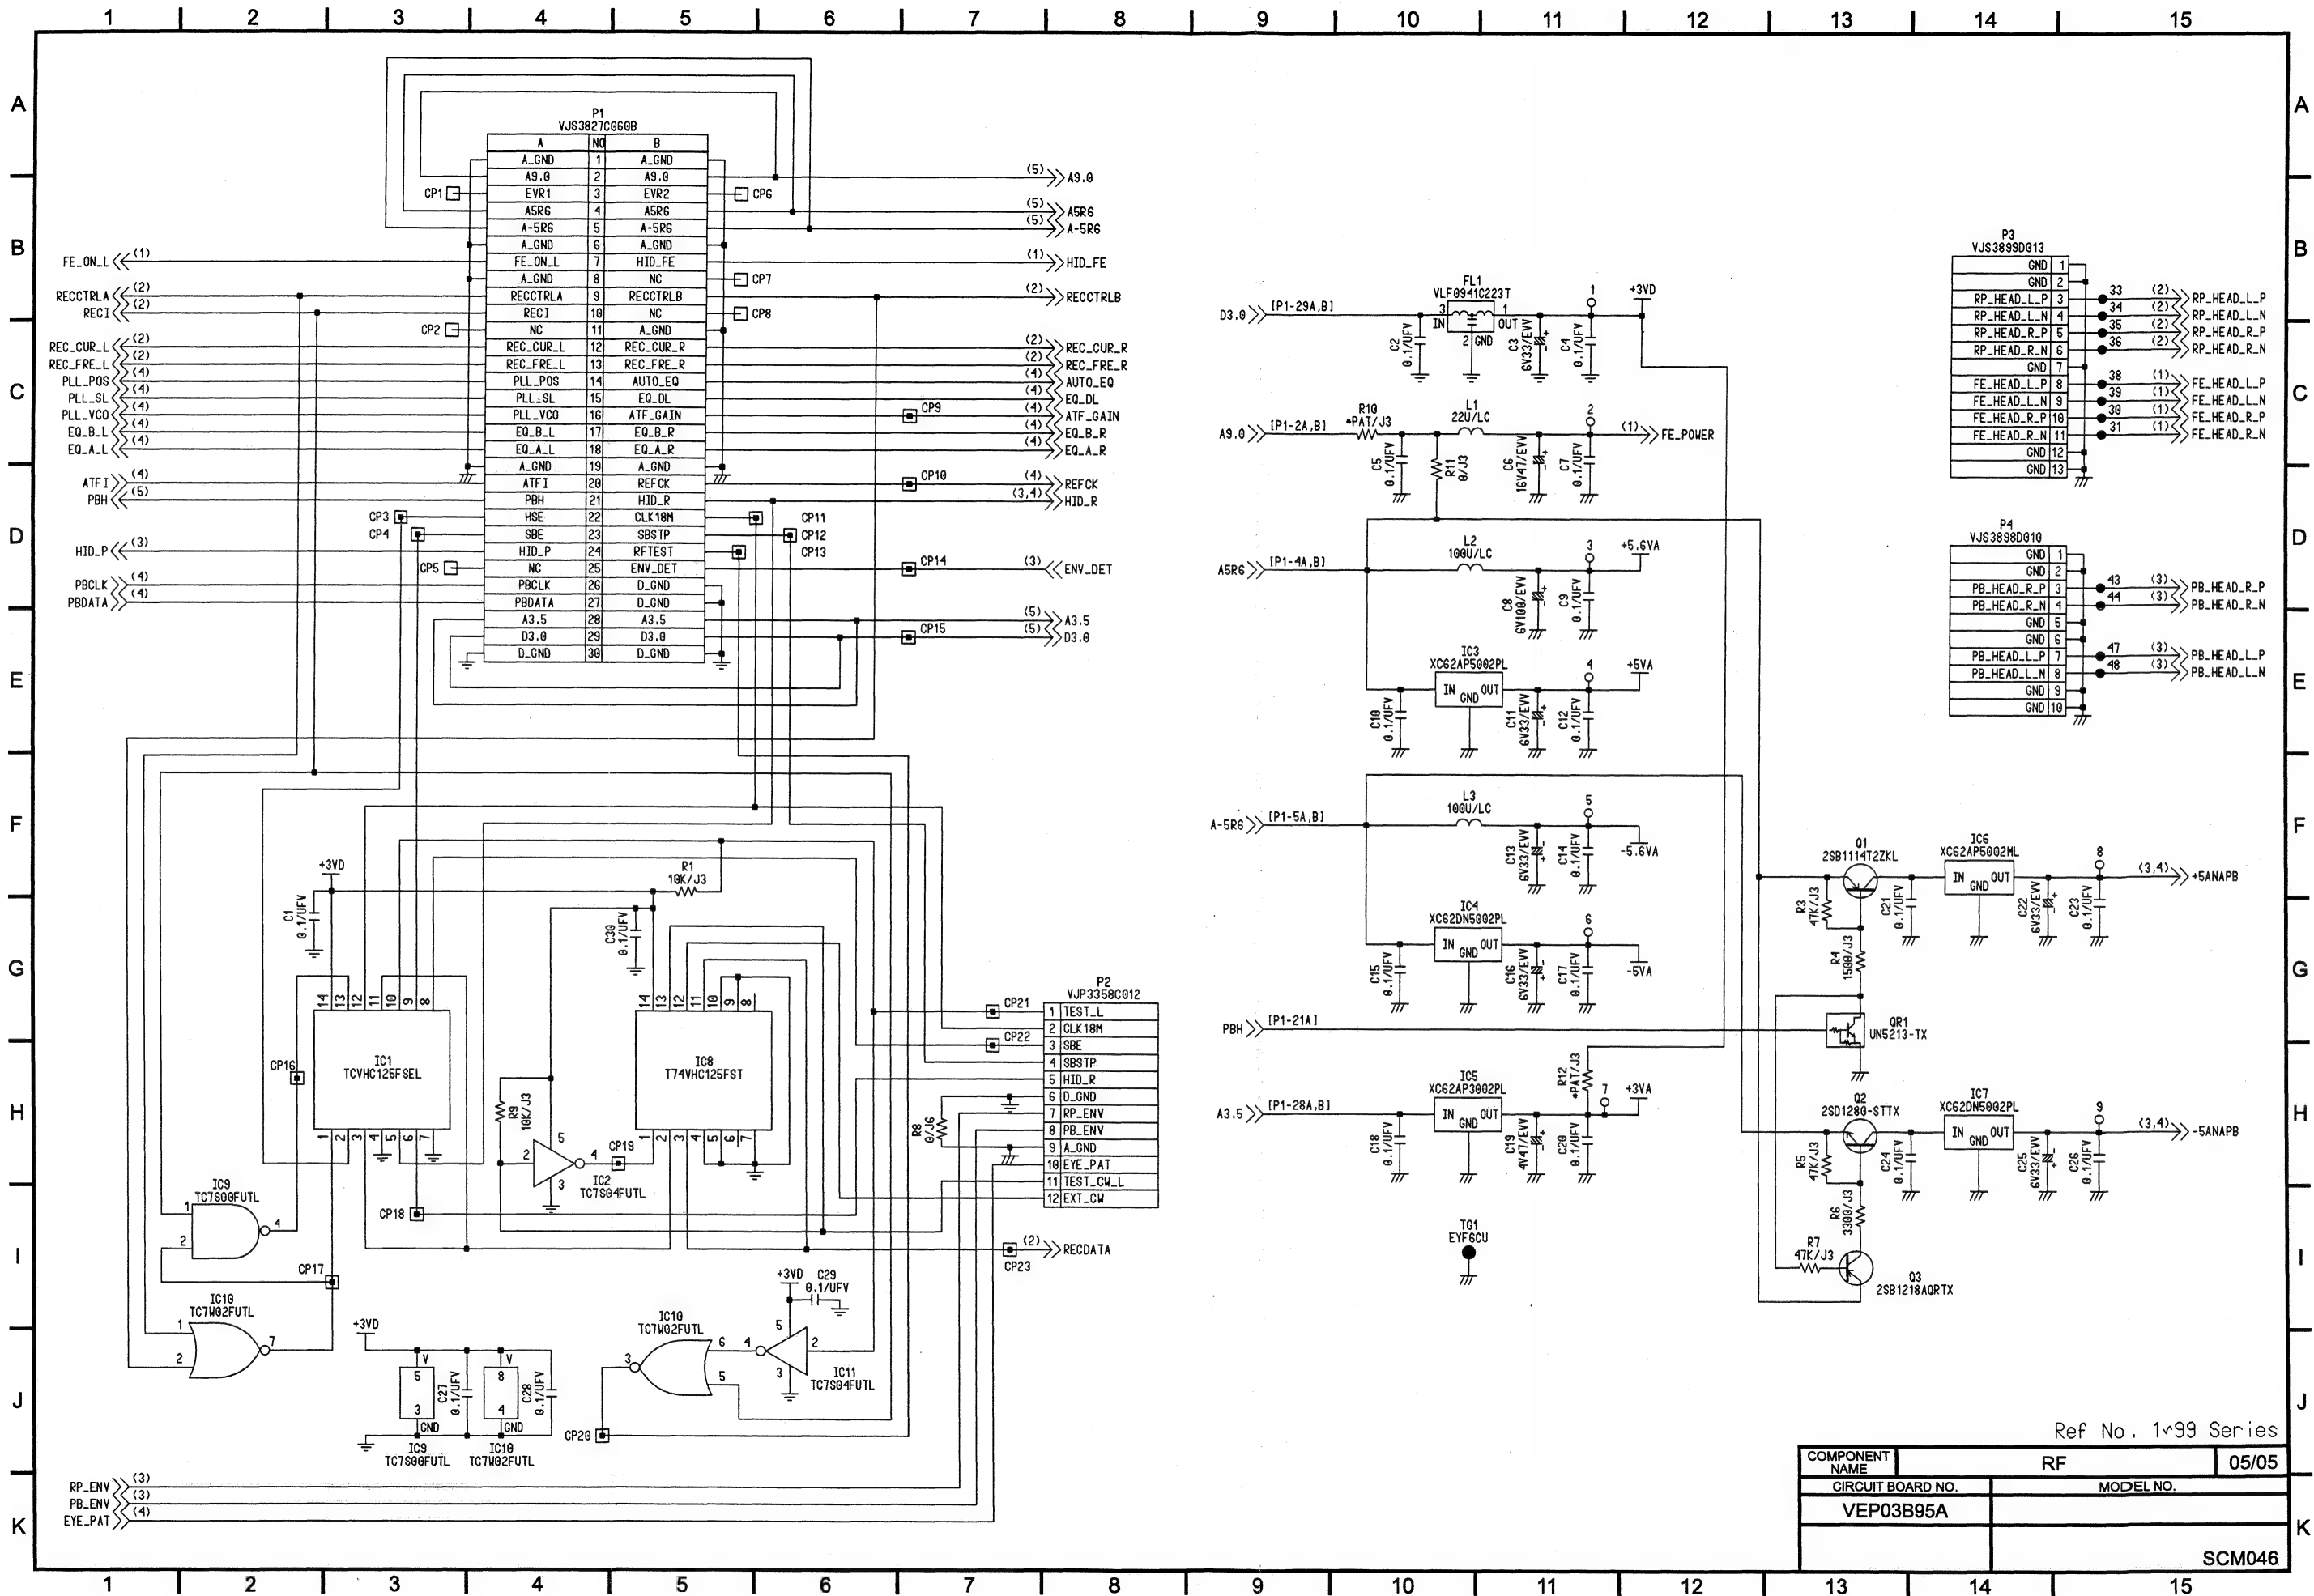

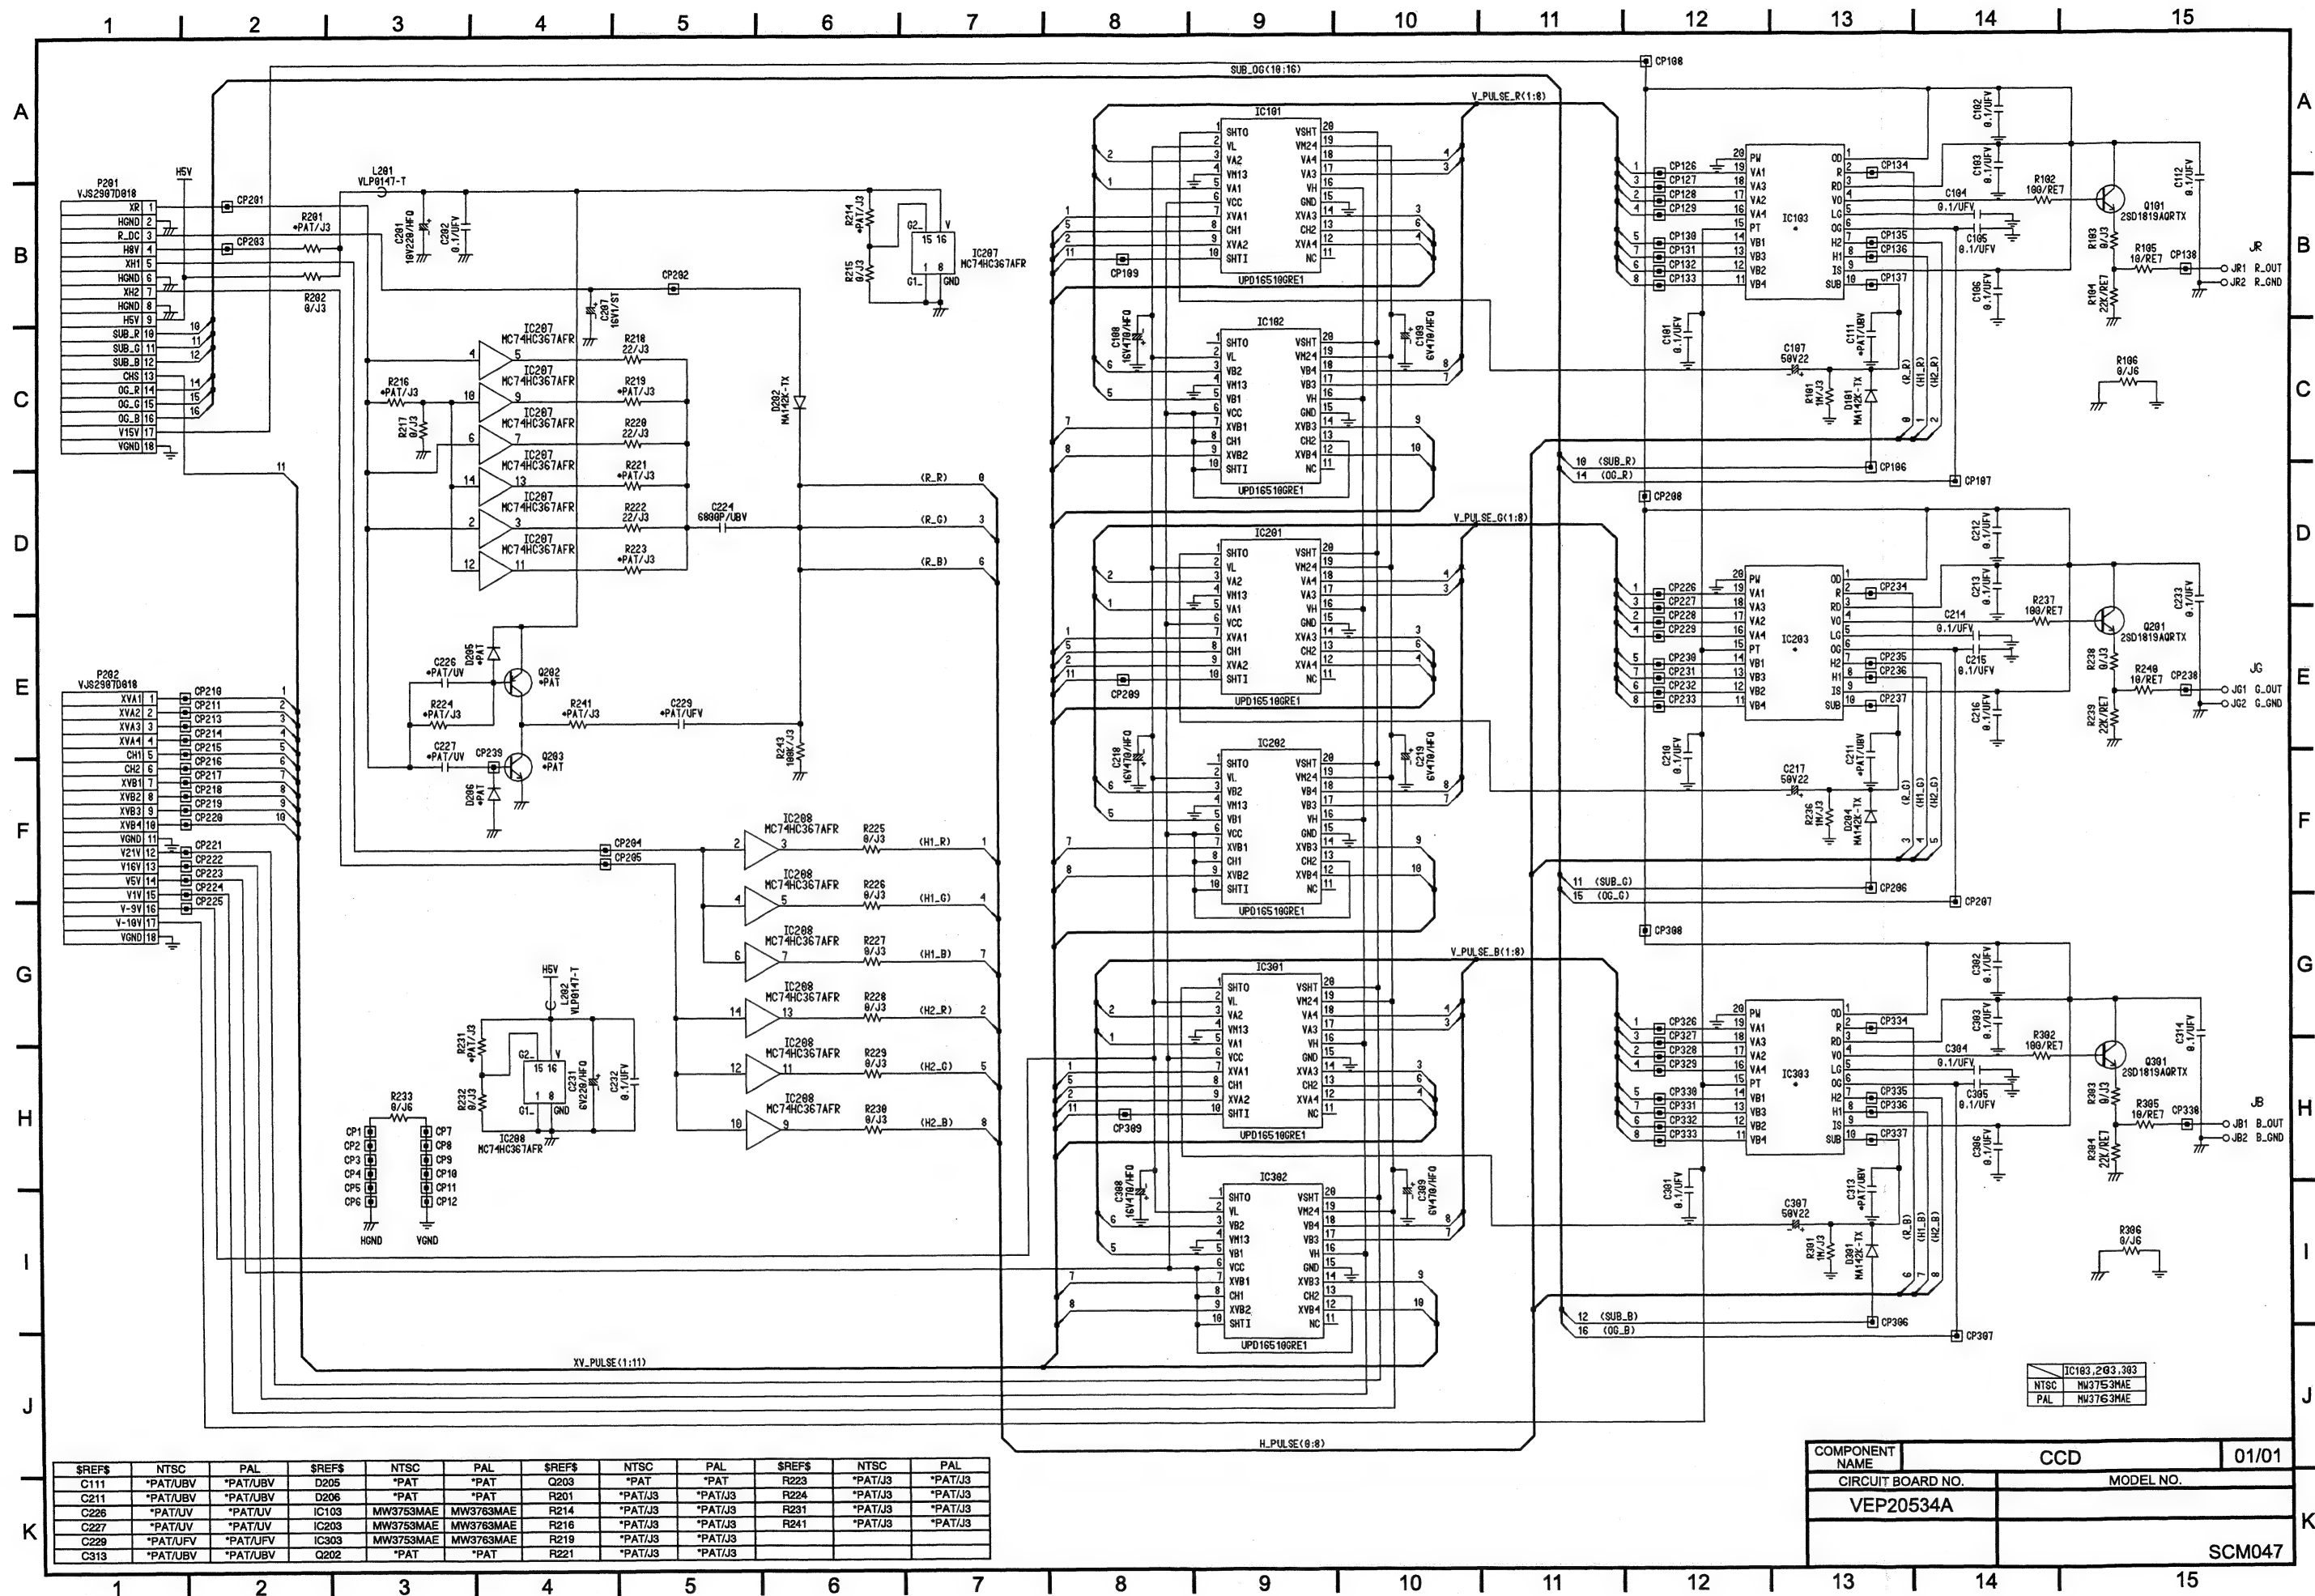

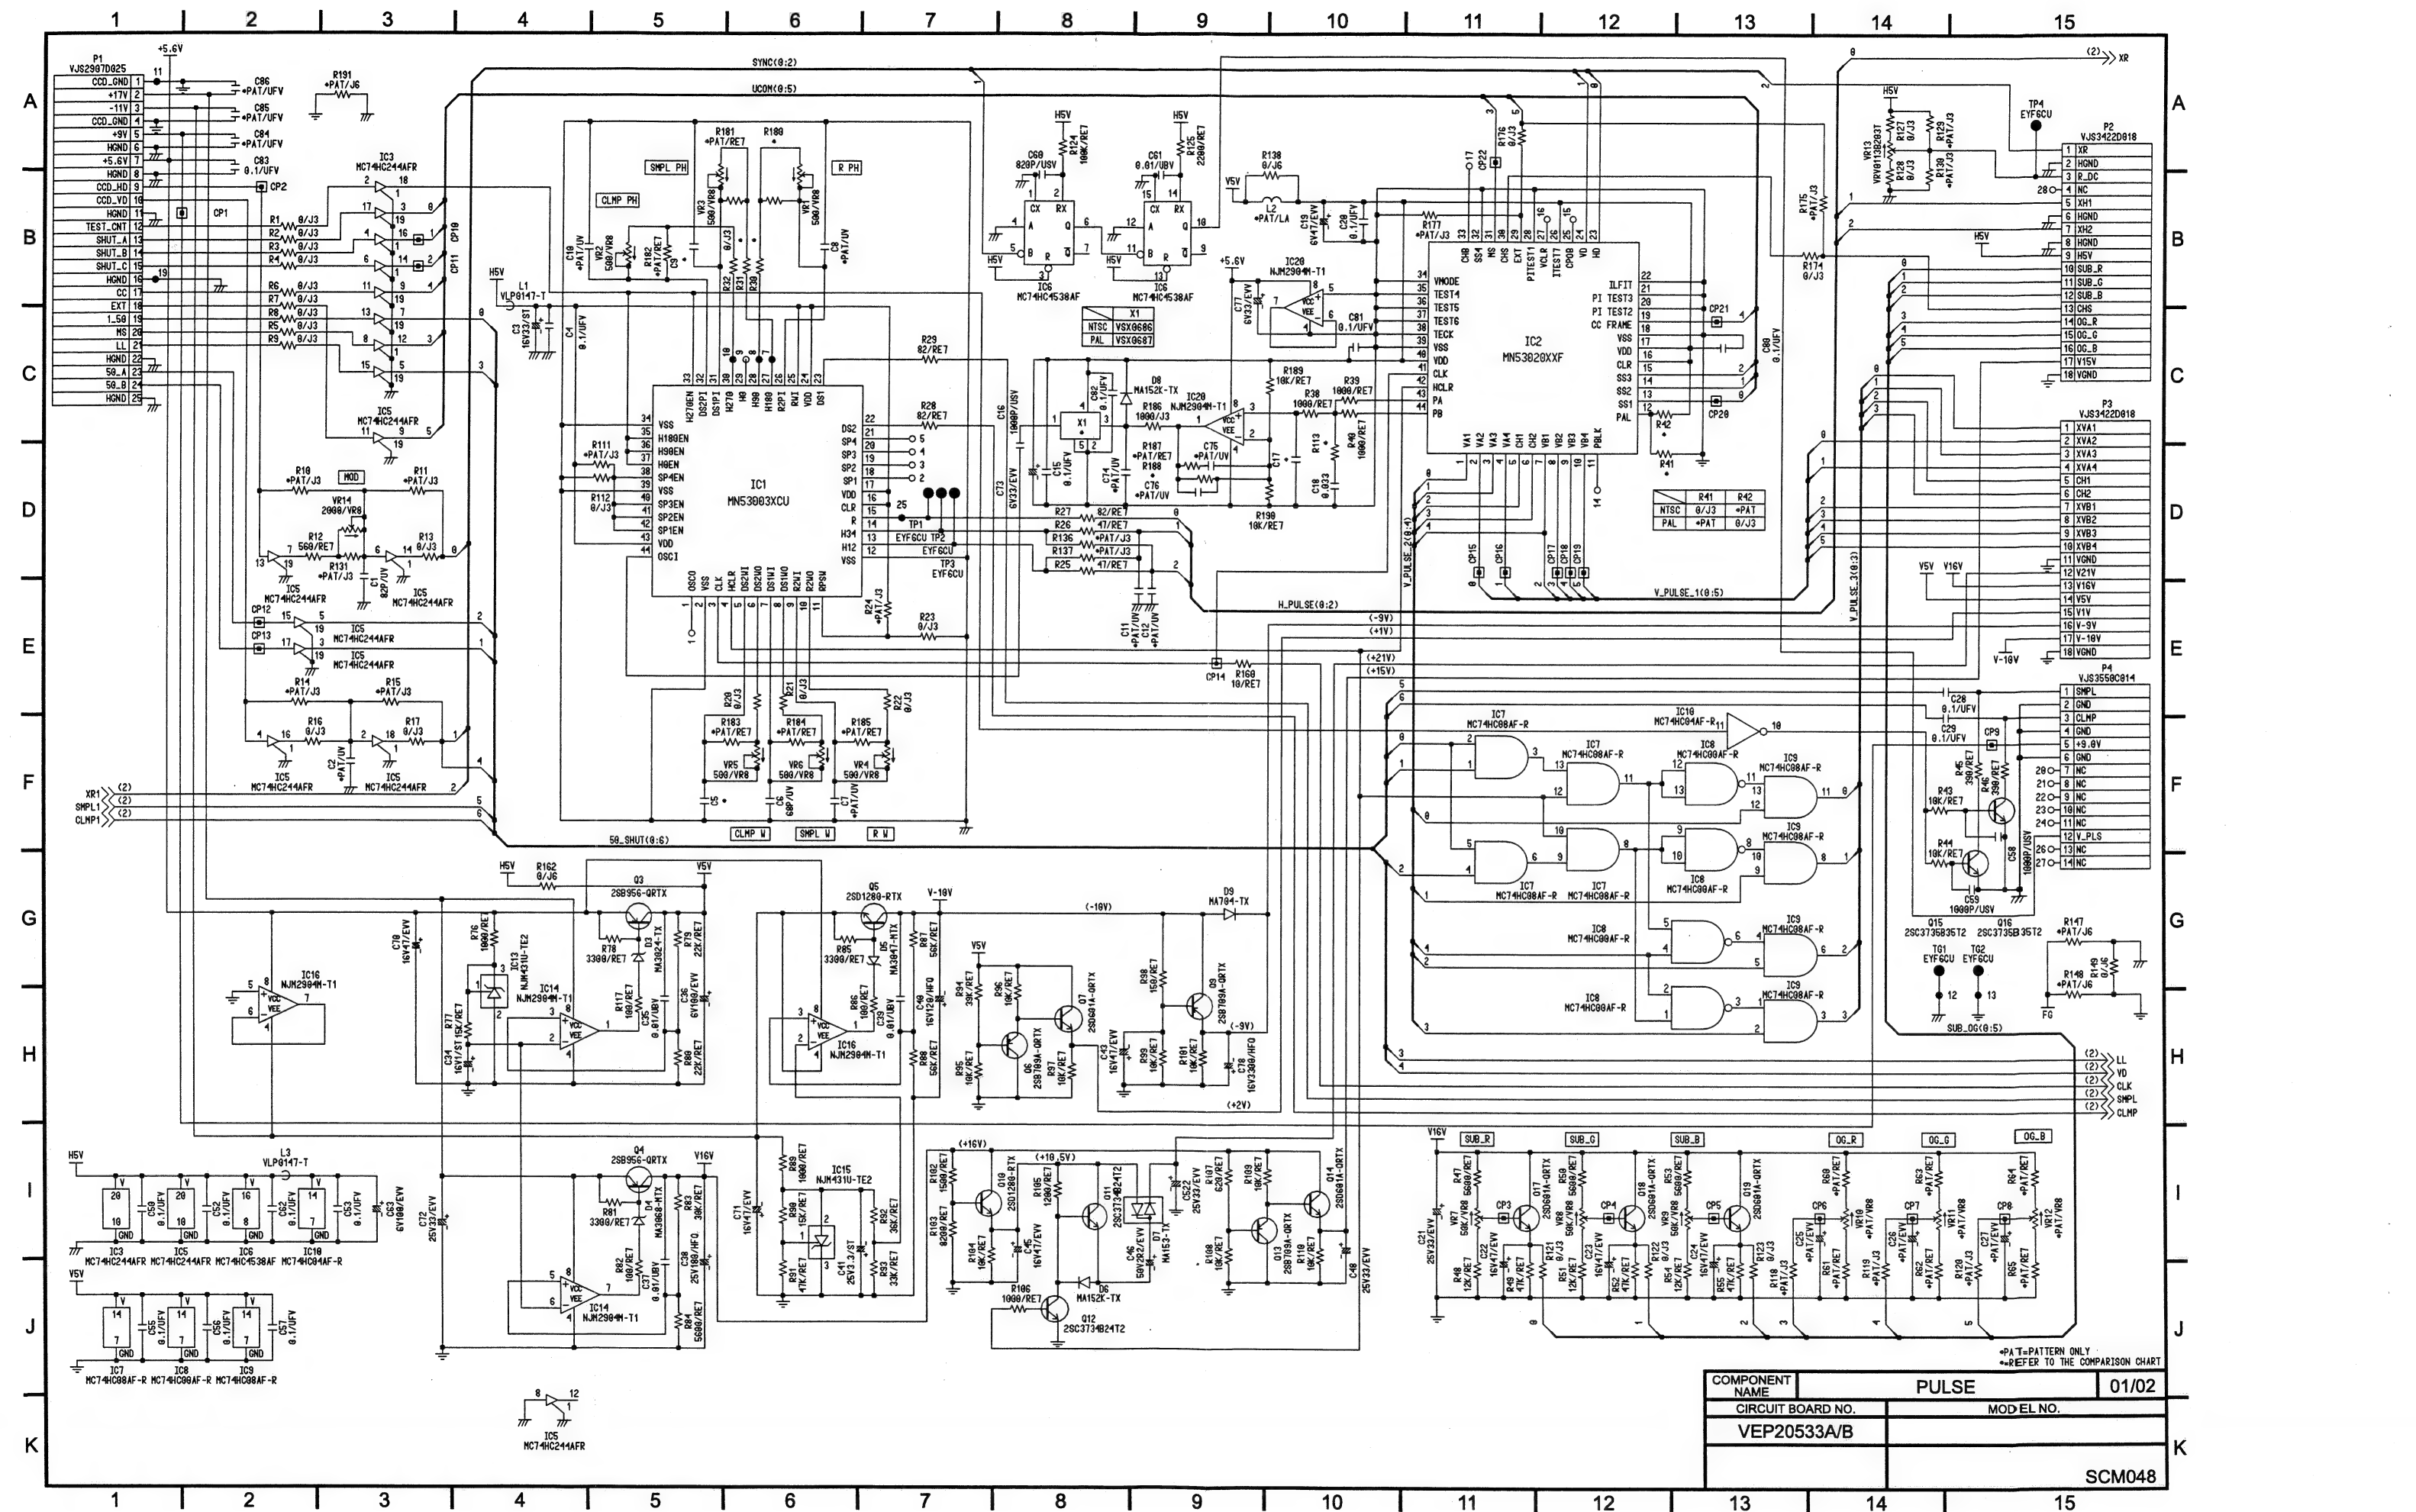


COMPONENT NAME	PULSE		01/02
CIRCUIT BOARD NO.	MODEL NO.		
VEP20533A/B			
	SCM048		

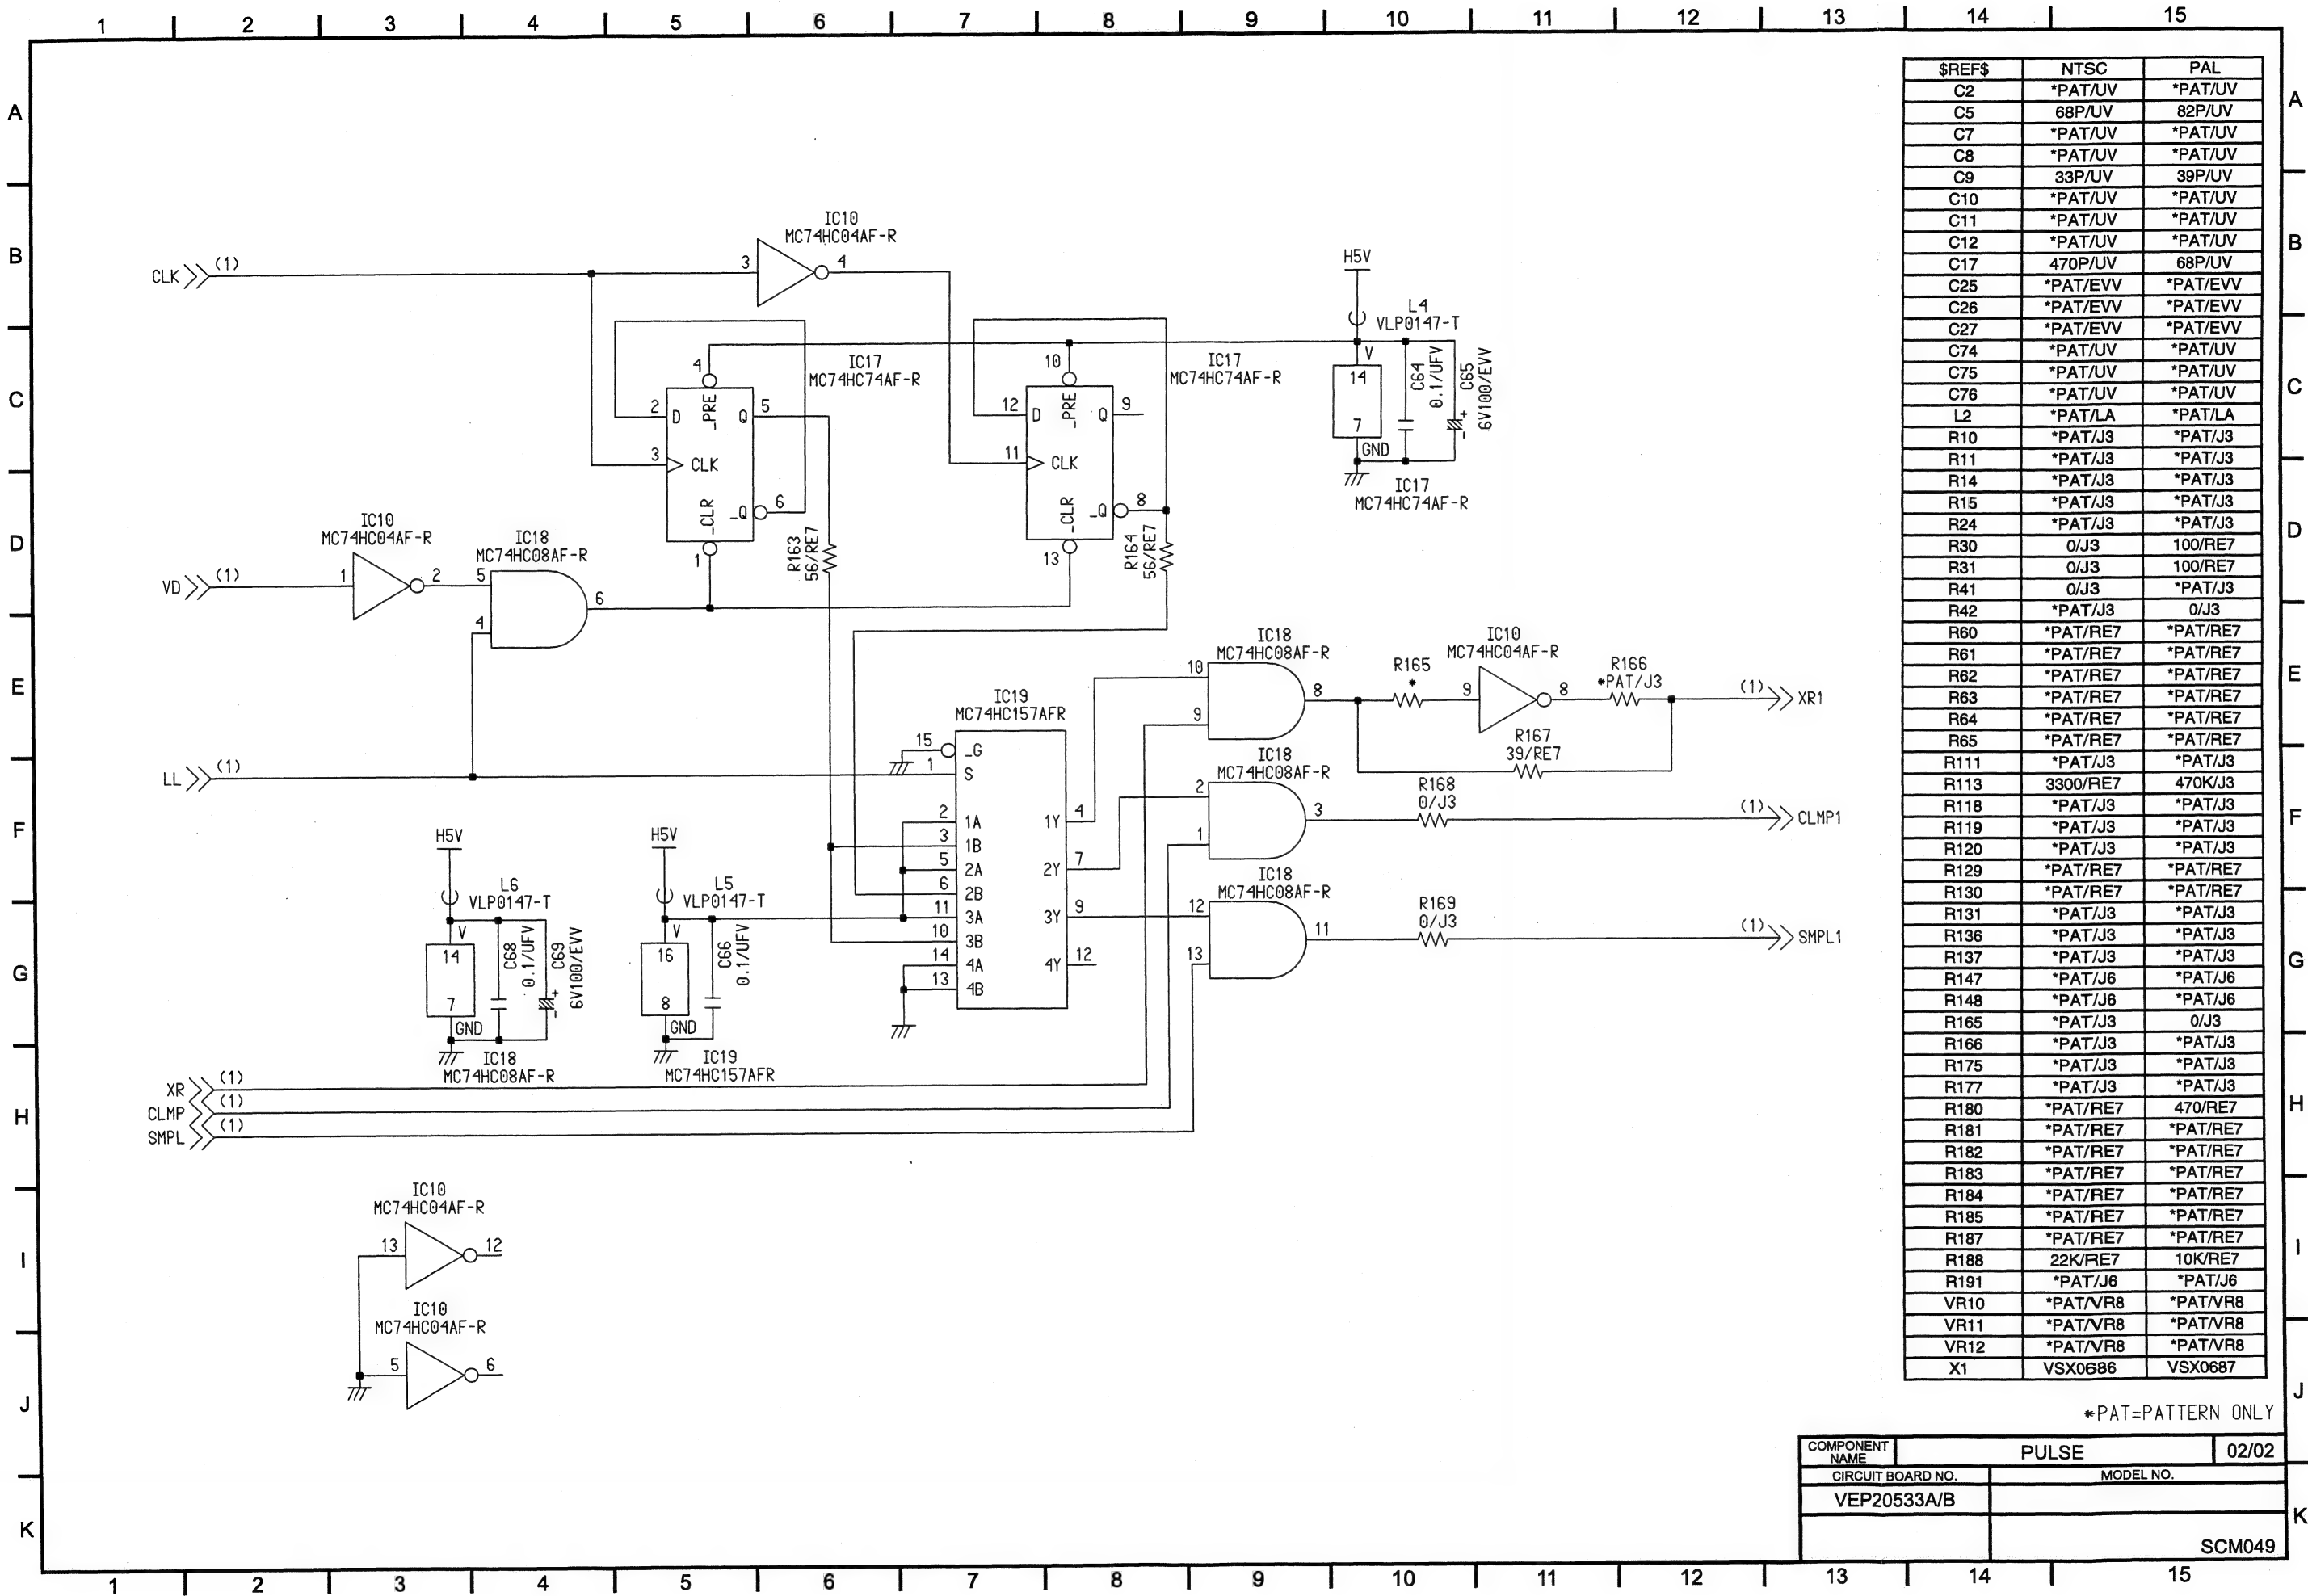


\$REF\$	NTSC	PAL
C2	*PAT/UV	*PAT/UV
C5	68P/UV	82P/UV
C7	*PAT/UV	*PAT/UV
C8	*PAT/UV	*PAT/UV
C9	33P/UV	39P/UV
C10	*PAT/UV	*PAT/UV
C11	*PAT/UV	*PAT/UV
C12	*PAT/UV	*PAT/UV
C17	470P/UV	68P/UV
C25	*PAT/EVV	*PAT/EVV
C26	*PAT/EVV	*PAT/EVV
C27	*PAT/EVV	*PAT/EVV
C74	*PAT/UV	*PAT/UV
C75	*PAT/UV	*PAT/UV
L2	*PAT/LA	*PAT/LA
R10	*PAT/J3	*PAT/J3
R11	*PAT/J3	*PAT/J3
R14	*PAT/J3	*PAT/J3
R15	*PAT/J3	*PAT/J3
R24	*PAT/J3	*PAT/J3
R30	0/J3	100/RE7
R31	0/J3	100/RE7
R41	0/J3	*PAT/J3
R42	*PAT/J3	0/J3
R60	*PAT/RE7	*PAT/RE7
R61	*PAT/RE7	*PAT/RE7
R62	*PAT/RE7	*PAT/RE7
R63	*PAT/RE7	*PAT/RE7
R64	*PAT/RE7	*PAT/RE7
R65	*PAT/RE7	*PAT/RE7
R111	*PAT/J3	*PAT/J3
R113	3300/RE7	470K/J3
R118	*PAT/J3	*PAT/J3
R119	*PAT/J3	*PAT/J3
R120	*PAT/J3	*PAT/J3
R129	*PAT/RE7	*PAT/RE7
R130	*PAT/RE7	*PAT/RE7
R131	*PAT/J3	*PAT/J3
R136	*PAT/J3	*PAT/J3
R137	*PAT/J3	*PAT/J3
R147	*PAT/J6	*PAT/J6
R148	*PAT/J6	*PAT/J6
R165	*PAT/J3	0/J3
R166	*PAT/J3	*PAT/J3
R175	*PAT/J3	*PAT/J3
R177	*PAT/J3	*PAT/J3
R180	*PAT/RE7	470/RE7
R181	*PAT/RE7	*PAT/RE7
R182	*PAT/RE7	*PAT/RE7
R183	*PAT/RE7	*PAT/RE7
R184	*PAT/RE7	*PAT/RE7
R185	*PAT/RE7	*PAT/RE7
R187	*PAT/RE7	*PAT/RE7
R188	22K/RE7	10K/RE7
R191	*PAT/J6	*PAT/J6
VR10	*PAT/VR8	*PAT/VR8
VR11	*PAT/VR8	*PAT/VR8
VR12	*PAT/VR8	*PAT/VR8
X1	VSX0686	VSX0687

*PAT=PATTERN ONLY


COMPONENT NAME	PULSE	02/02
CIRCUIT BOARD NO.	MODEL NO.	
VEP20533A/B		
		SCM049

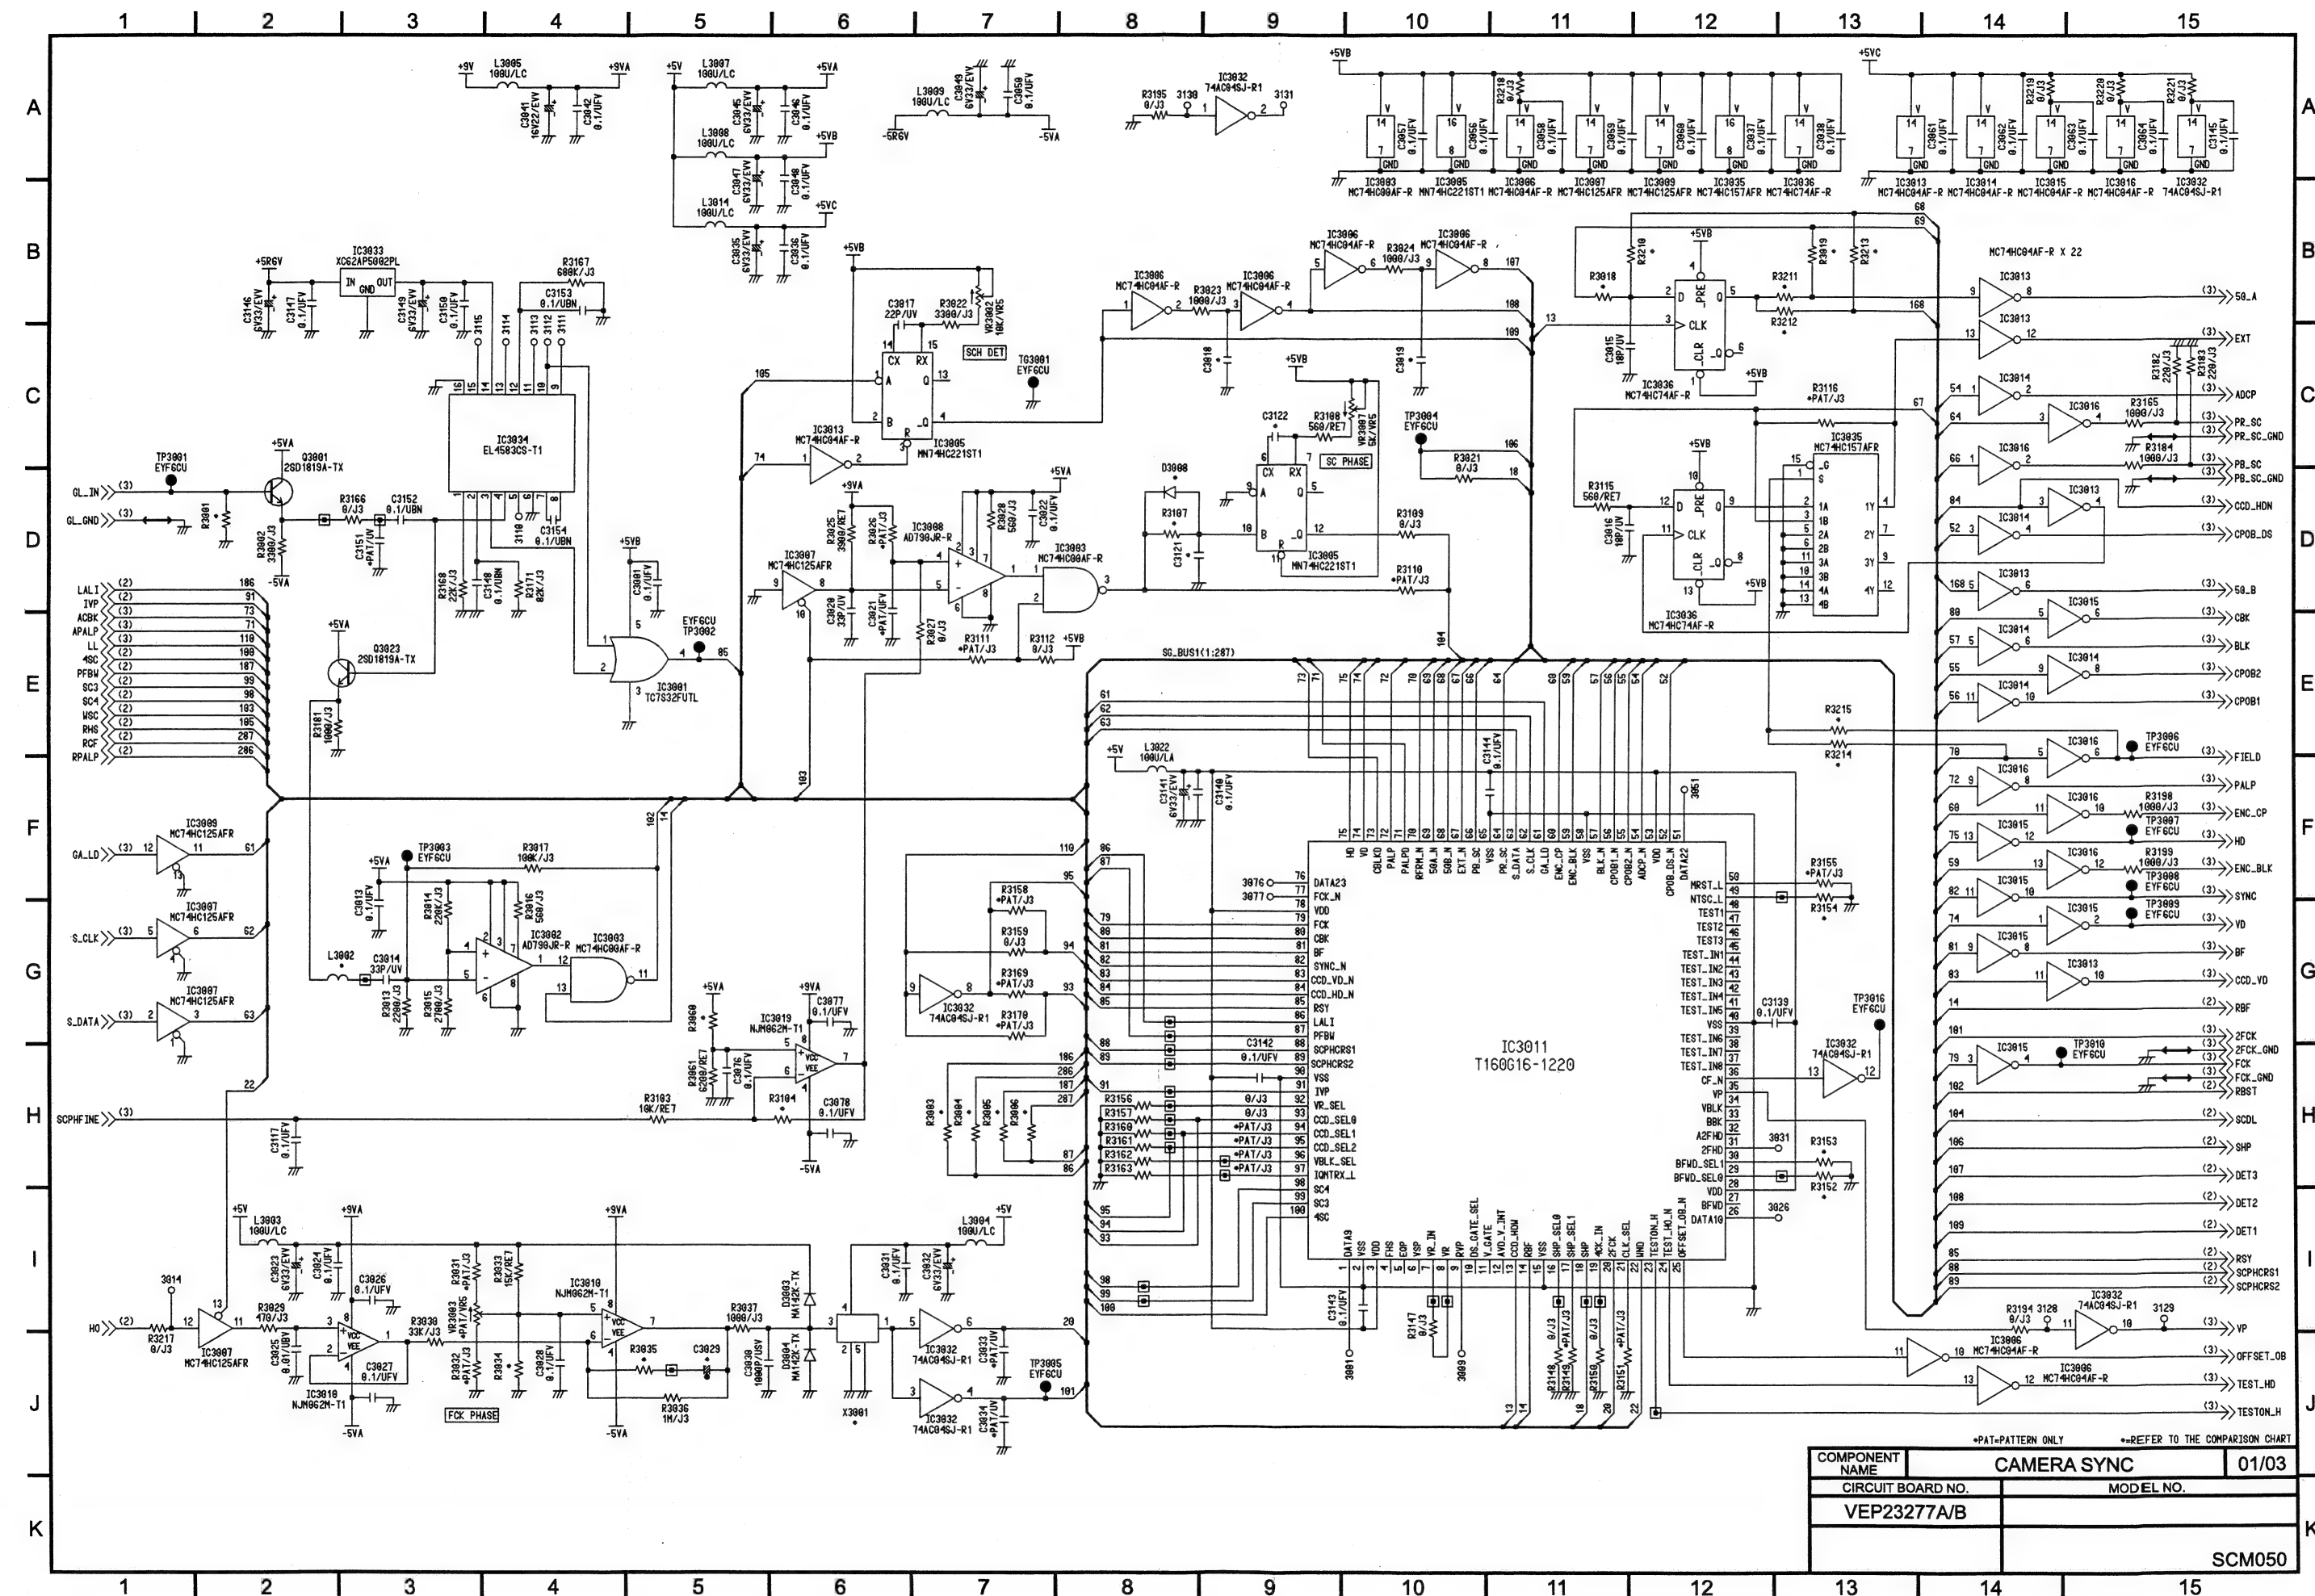

COMPONENT NAME		CAMERA SYNC		01/03	
CIRCUIT BOARD NO.			MODEL NO.		
VEP23277A/B					
			SCM050		

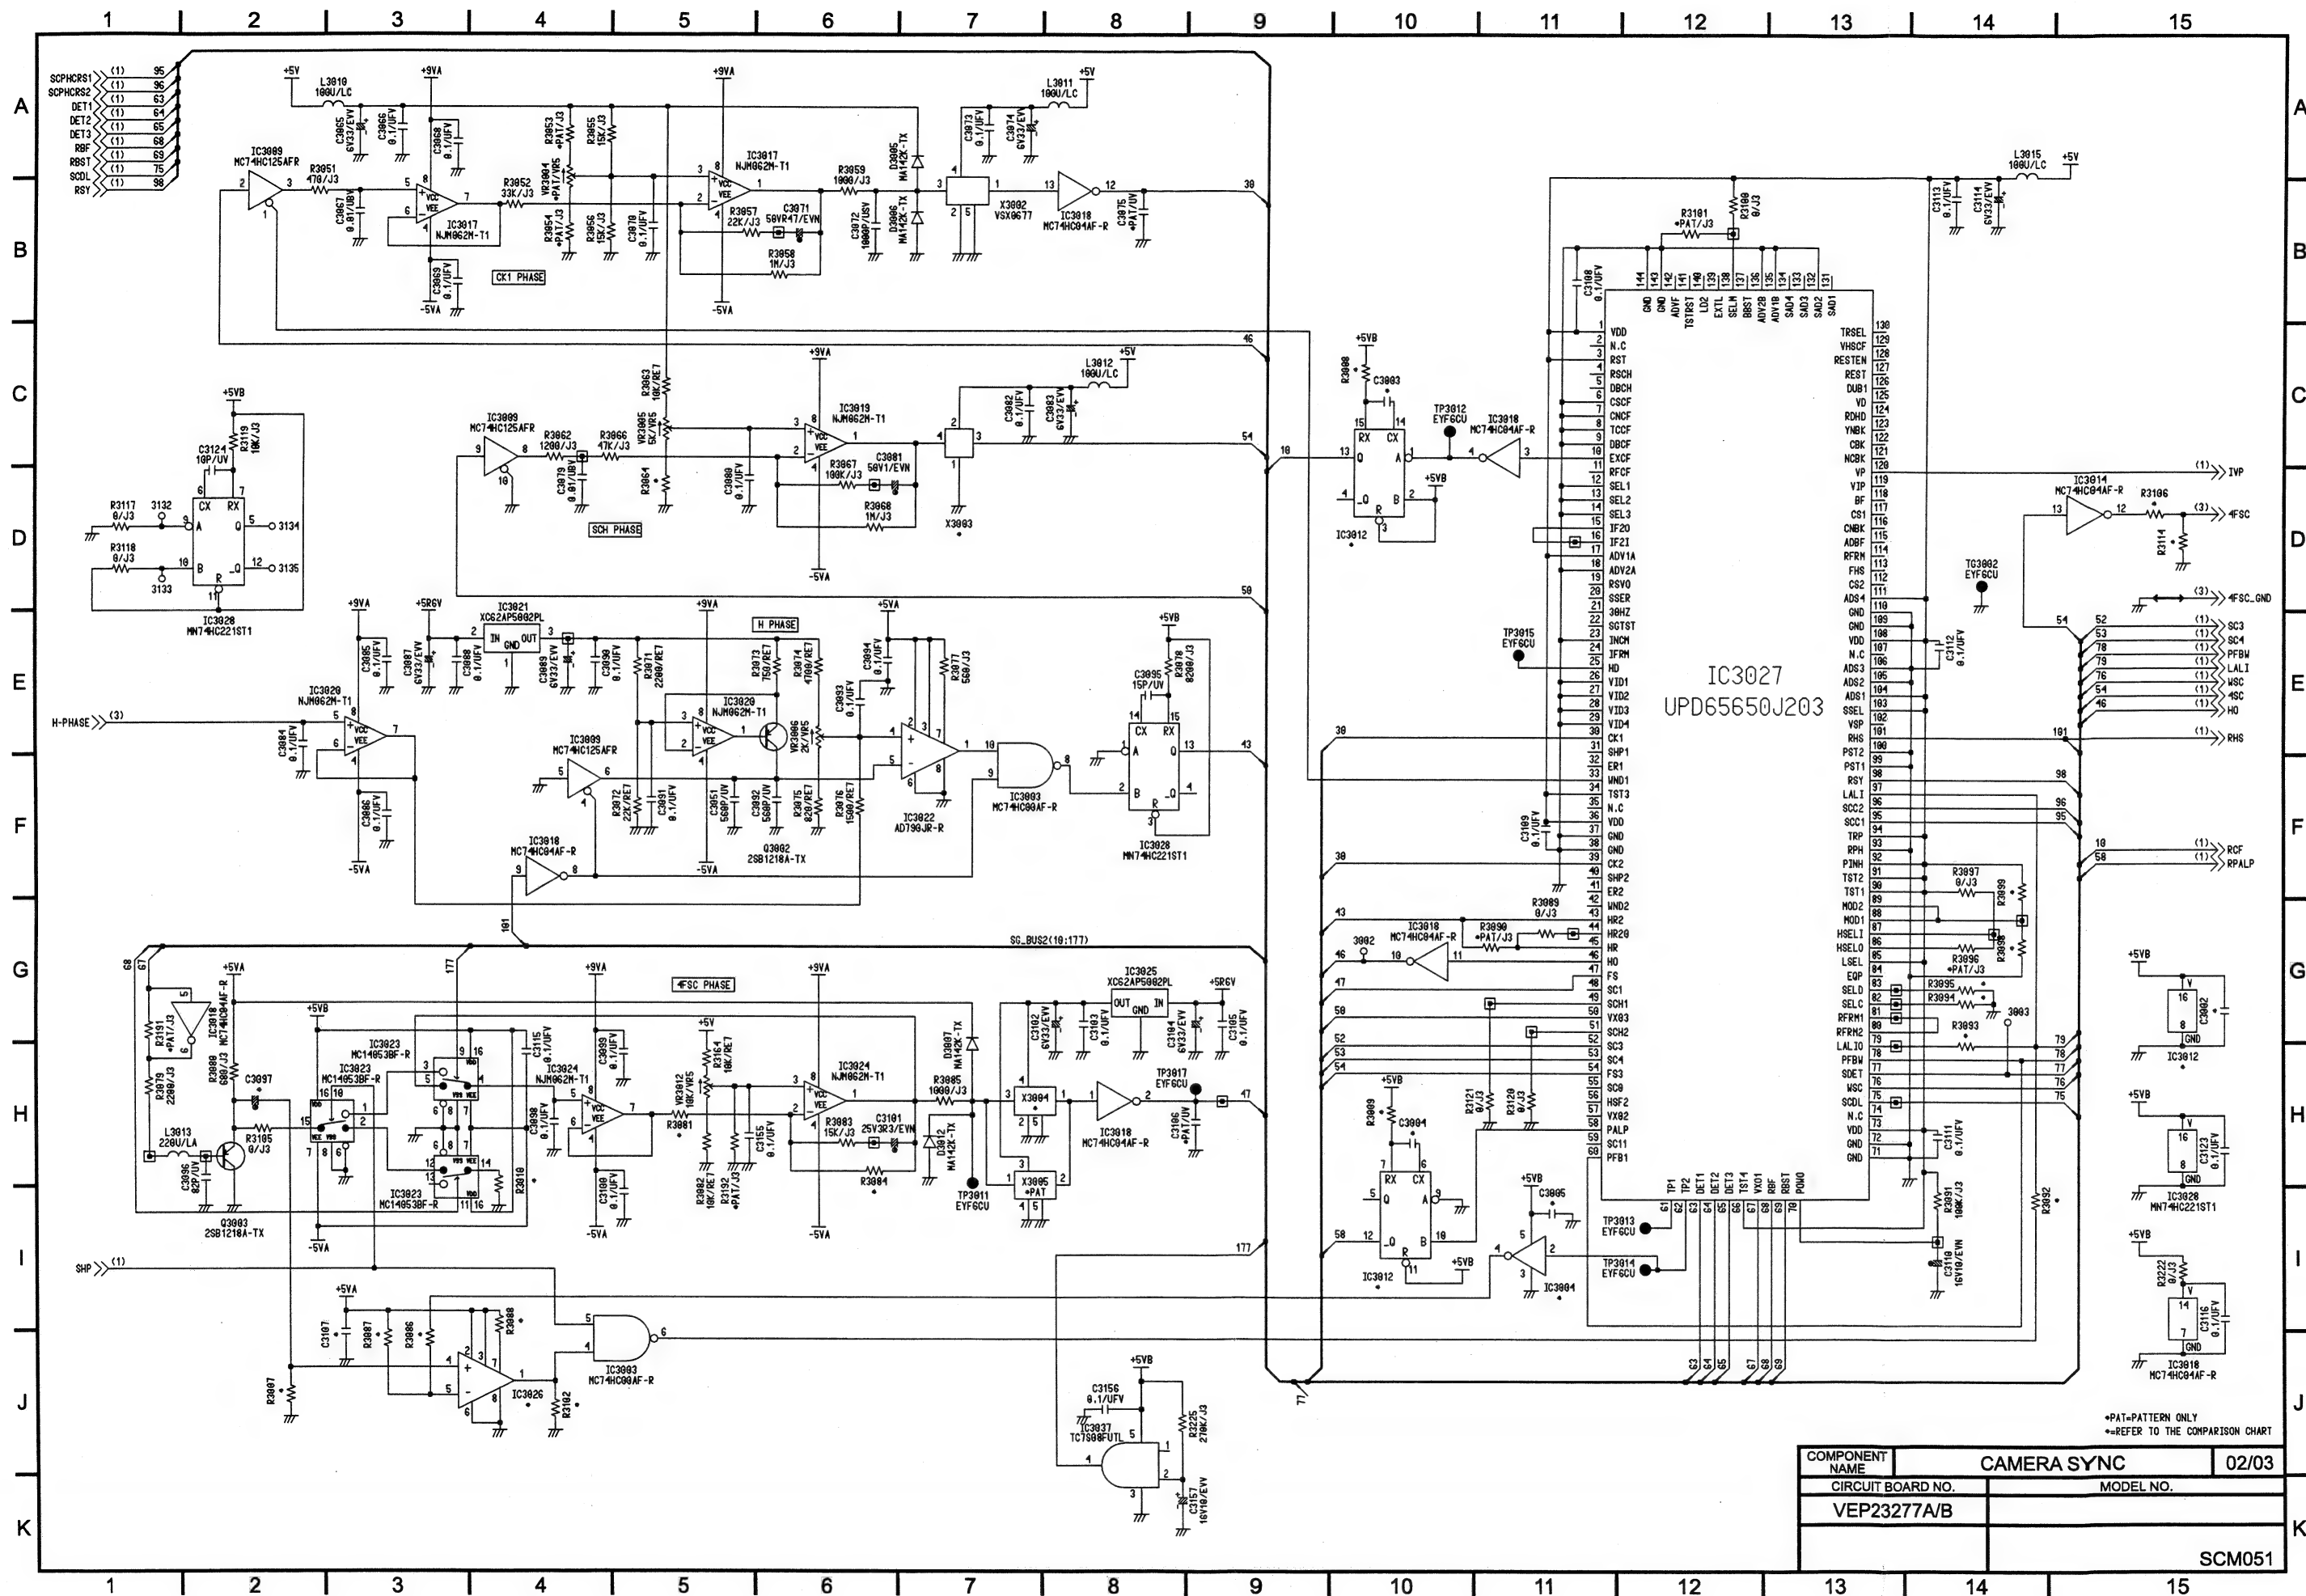


COMPONENT NAME	CAMERA SYNC	02/03
CIRCUIT BOARD NO.	MODEL NO.	
VEP23277A/B		
	SCM051	

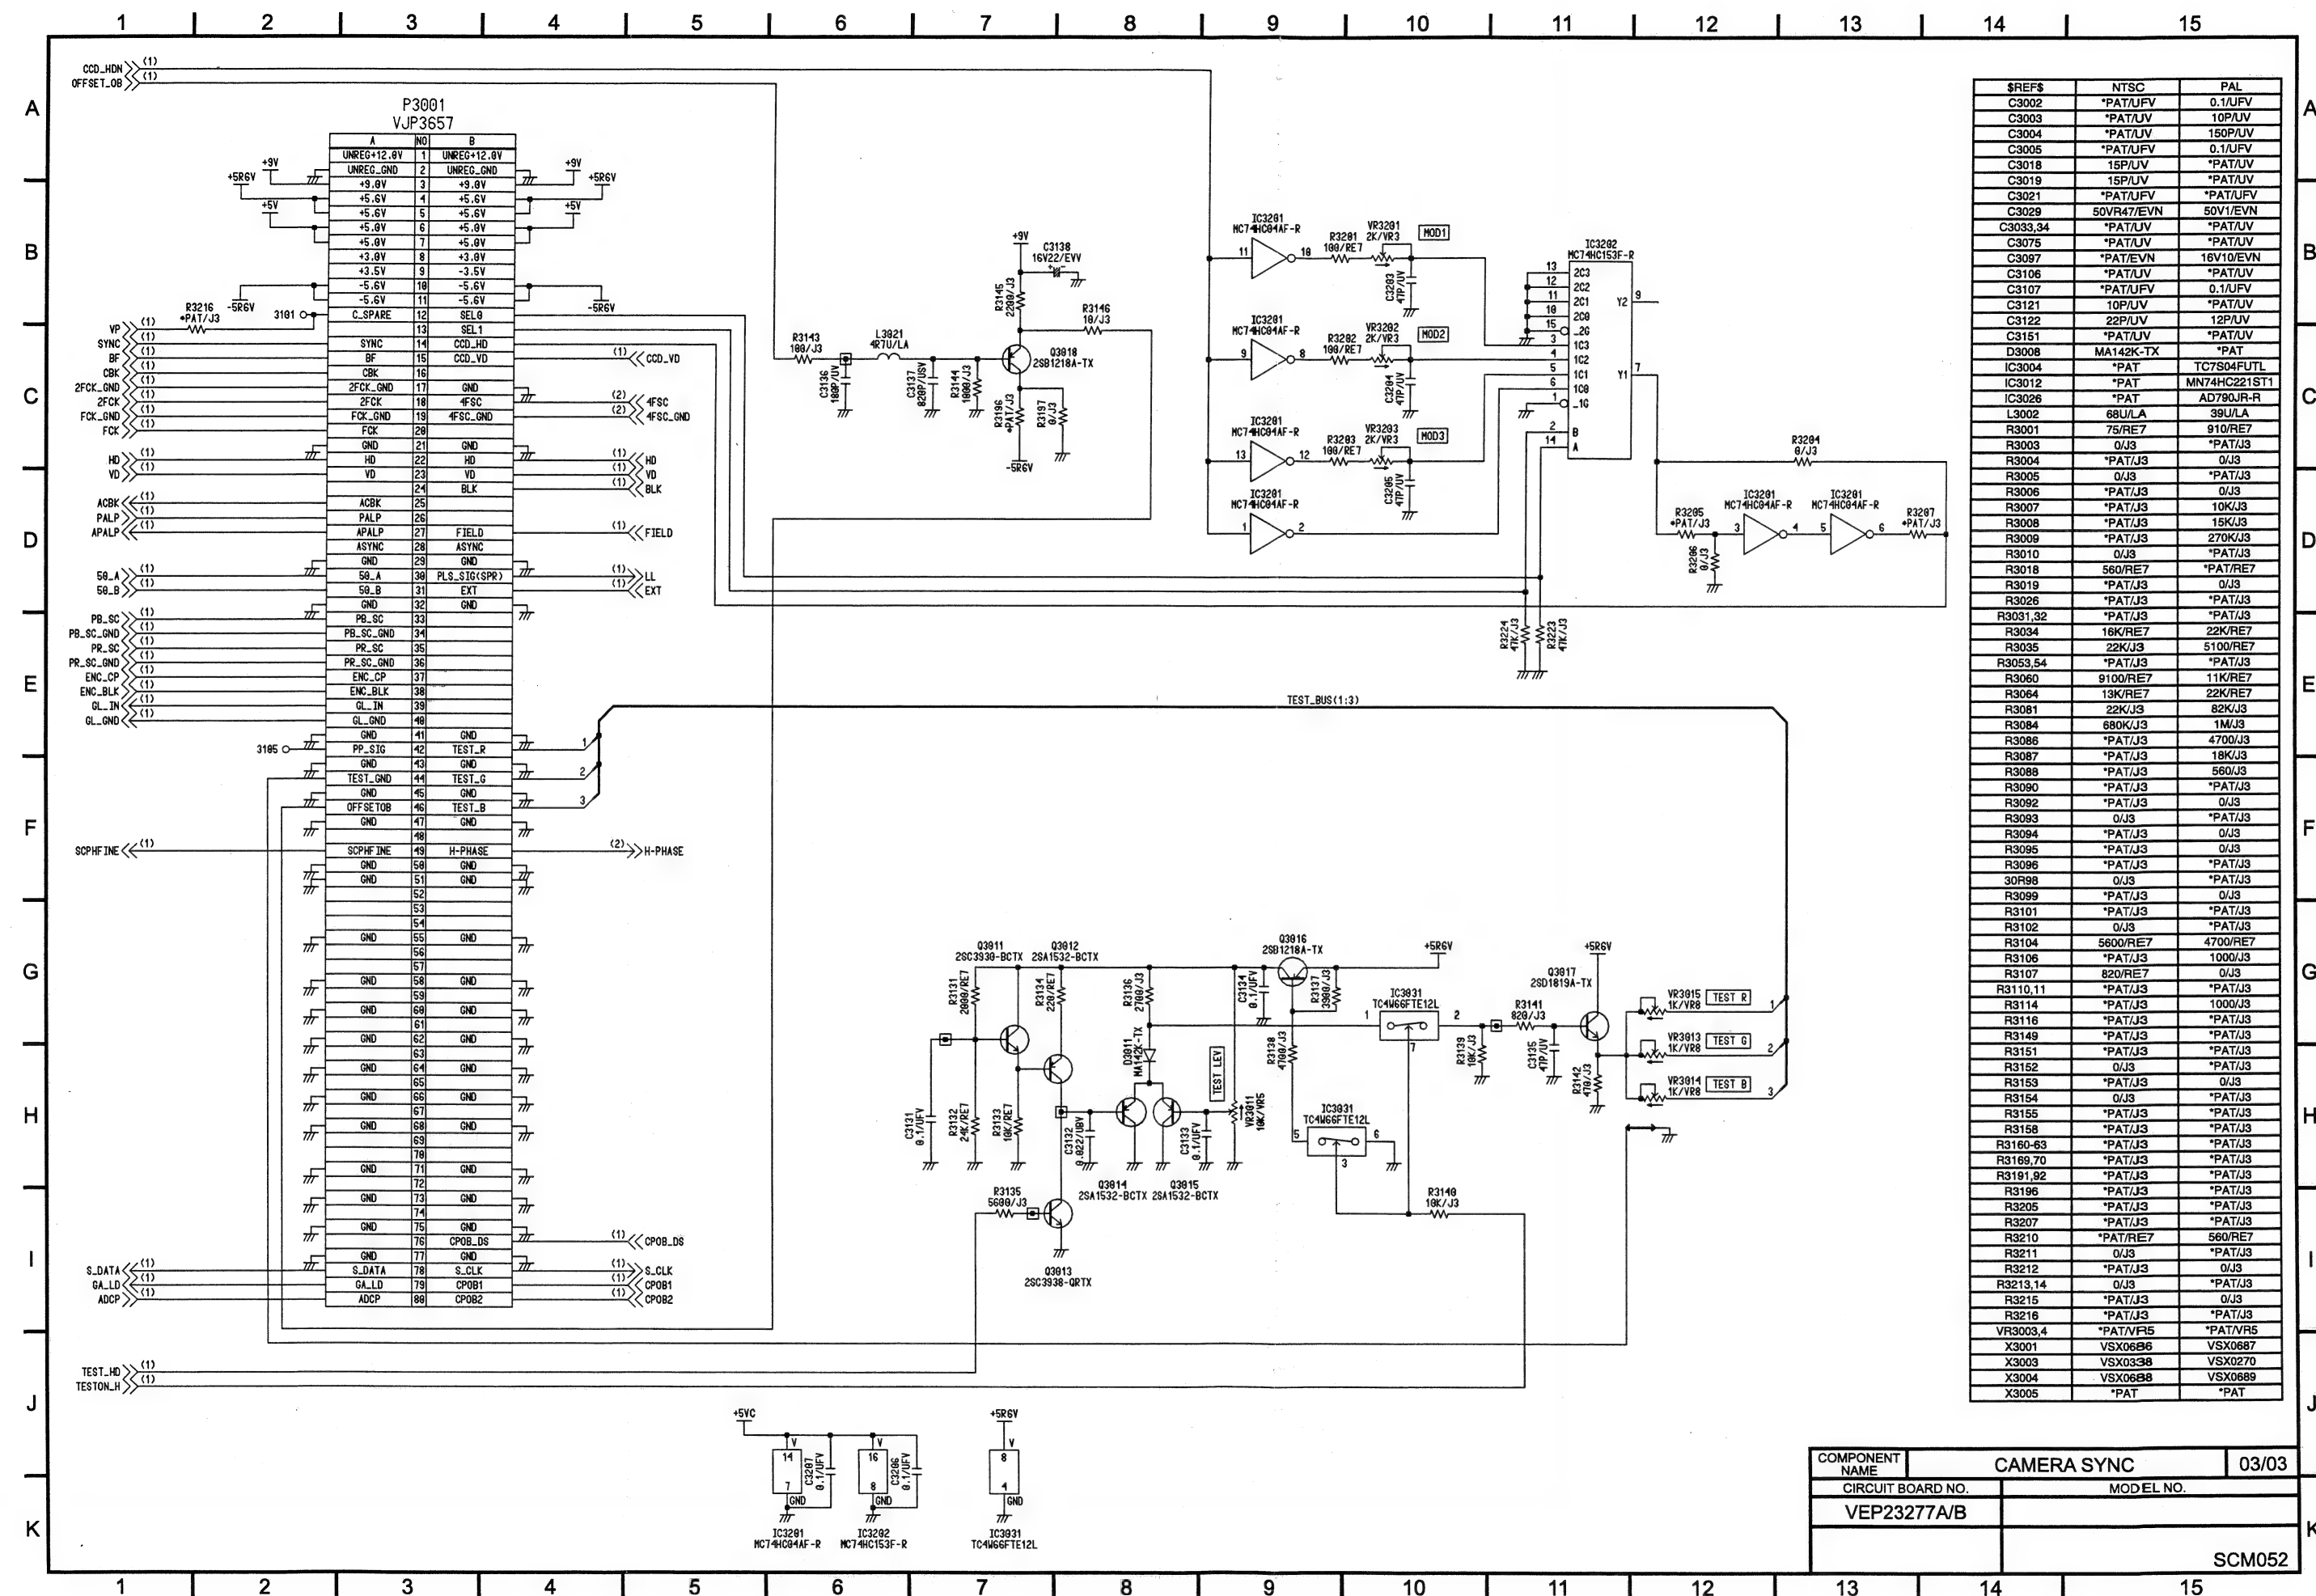


\$REF\$	NTSC	PAL
C3002	*PAT/UJV	0.1/UJV
C3003	*PAT/UJV	10P/UJV
C3004	*PAT/UJV	150P/UJV
C3005	*PAT/UJV	0.1/UJV
C3018	15P/UJV	*PAT/UJV
C3019	15P/UJV	*PAT/UJV
C3021	*PAT/UJV	*PAT/UJV
C3029	50VR47/EVN	50V1/EVN
C3033,34	*PAT/UJV	*PAT/UJV
C3075	*PAT/UJV	*PAT/UJV
C3087	*PAT/EVN	16V10/EVN
C3106	*PAT/UJV	*PAT/UJV
C3107	*PAT/UJV	0.1/UJV
C3121	10P/UJV	*PAT/UJV
C3122	22P/UJV	12P/UJV
C3151	*PAT/UJV	*PAT/UJV
D3008	MA142K-TX	*PAT
IC3004	*PAT	TC7504FUTL
IC3012	*PAT	MN74HC221ST
IC3026	*PAT	AD790JR-R
L3002	68U/LA	39U/LA
R3001	75/RE7	910/RE7
R3003	0/J3	*PAT/J3
R3004	*PAT/J3	0/J3
R3005	0/J3	*PAT/J3
R3006	*PAT/J3	0/J3
R3007	*PAT/J3	10K/J3
R3008	*PAT/J3	15K/J3
R3009	*PAT/J3	270K/J3
R3010	0/J3	*PAT/J3
R3018	560/RE7	*PAT/RE7
R3019	*PAT/J3	0/J3
R3026	*PAT/J3	*PAT/J3
R3031,32	*PAT/J3	*PAT/J3
R3034	16K/RE7	22K/RE7
R3035	22K/J3	5100/RE7
R3053,54	*PAT/J3	*PAT/J3
R3060	9100/RE7	11K/RE7
R3064	13K/RE7	22K/RE7
R3081	22K/J3	82K/J3
R3084	680K/J3	1M/J3
R3086	*PAT/J3	4700/J3
R3087	*PAT/J3	18K/J3
R3088	*PAT/J3	560/J3
R3090	*PAT/J3	*PAT/J3
R3092	*PAT/J3	0/J3
R3093	0/J3	*PAT/J3
R3094	*PAT/J3	0/J3
R3095	*PAT/J3	0/J3
R3096	*PAT/J3	*PAT/J3
R3098	0/J3	*PAT/J3
R3099	*PAT/J3	0/J3
R3101	*PAT/J3	*PAT/J3
R3102	0/J3	*PAT/J3
R3104	5600/RE7	4700/RE7
R3106	*PAT/J3	1000/J3
R3107	820/RE7	0/J3
R3110,11	*PAT/J3	*PAT/J3
R3114	*PAT/J3	1000/J3
R3116	*PAT/J3	*PAT/J3
R3149	*PAT/J3	*PAT/J3
R3151	*PAT/J3	*PAT/J3
R3152	0/J3	*PAT/J3
R3153	*PAT/J3	0/J3
R3154	0/J3	*PAT/J3
R3155	*PAT/J3	*PAT/J3
R3158	*PAT/J3	*PAT/J3
R3160-63	*PAT/J3	*PAT/J3
R3169,70	*PAT/J3	*PAT/J3
R3191,92	*PAT/J3	*PAT/J3
R3196	*PAT/J3	*PAT/J3
R3205	*PAT/J3	*PAT/J3
R3207	*PAT/J3	*PAT/J3
R3210	*PAT/RE7	560/RE7
R3211	0/J3	*PAT/J3
R3212	*PAT/J3	0/J3
R3213,14	0/J3	*PAT/J3
R3215	*PAT/J3	0/J3
R3216	*PAT/J3	*PAT/J3
VR3003,4	*PAT/VR5	*PAT/VR5
X3001	VSX0606	VSX0687
X3003	VSX0338	VSX0270
X3004	VSX0608	VSX0689
X3005	*PAT	*PAT

COMPONENT NAME	CAMERA SYNC	03/03
CIRCUIT BOARD NO.	MODEL NO.	
VEP23277A/B		
	SCM052	

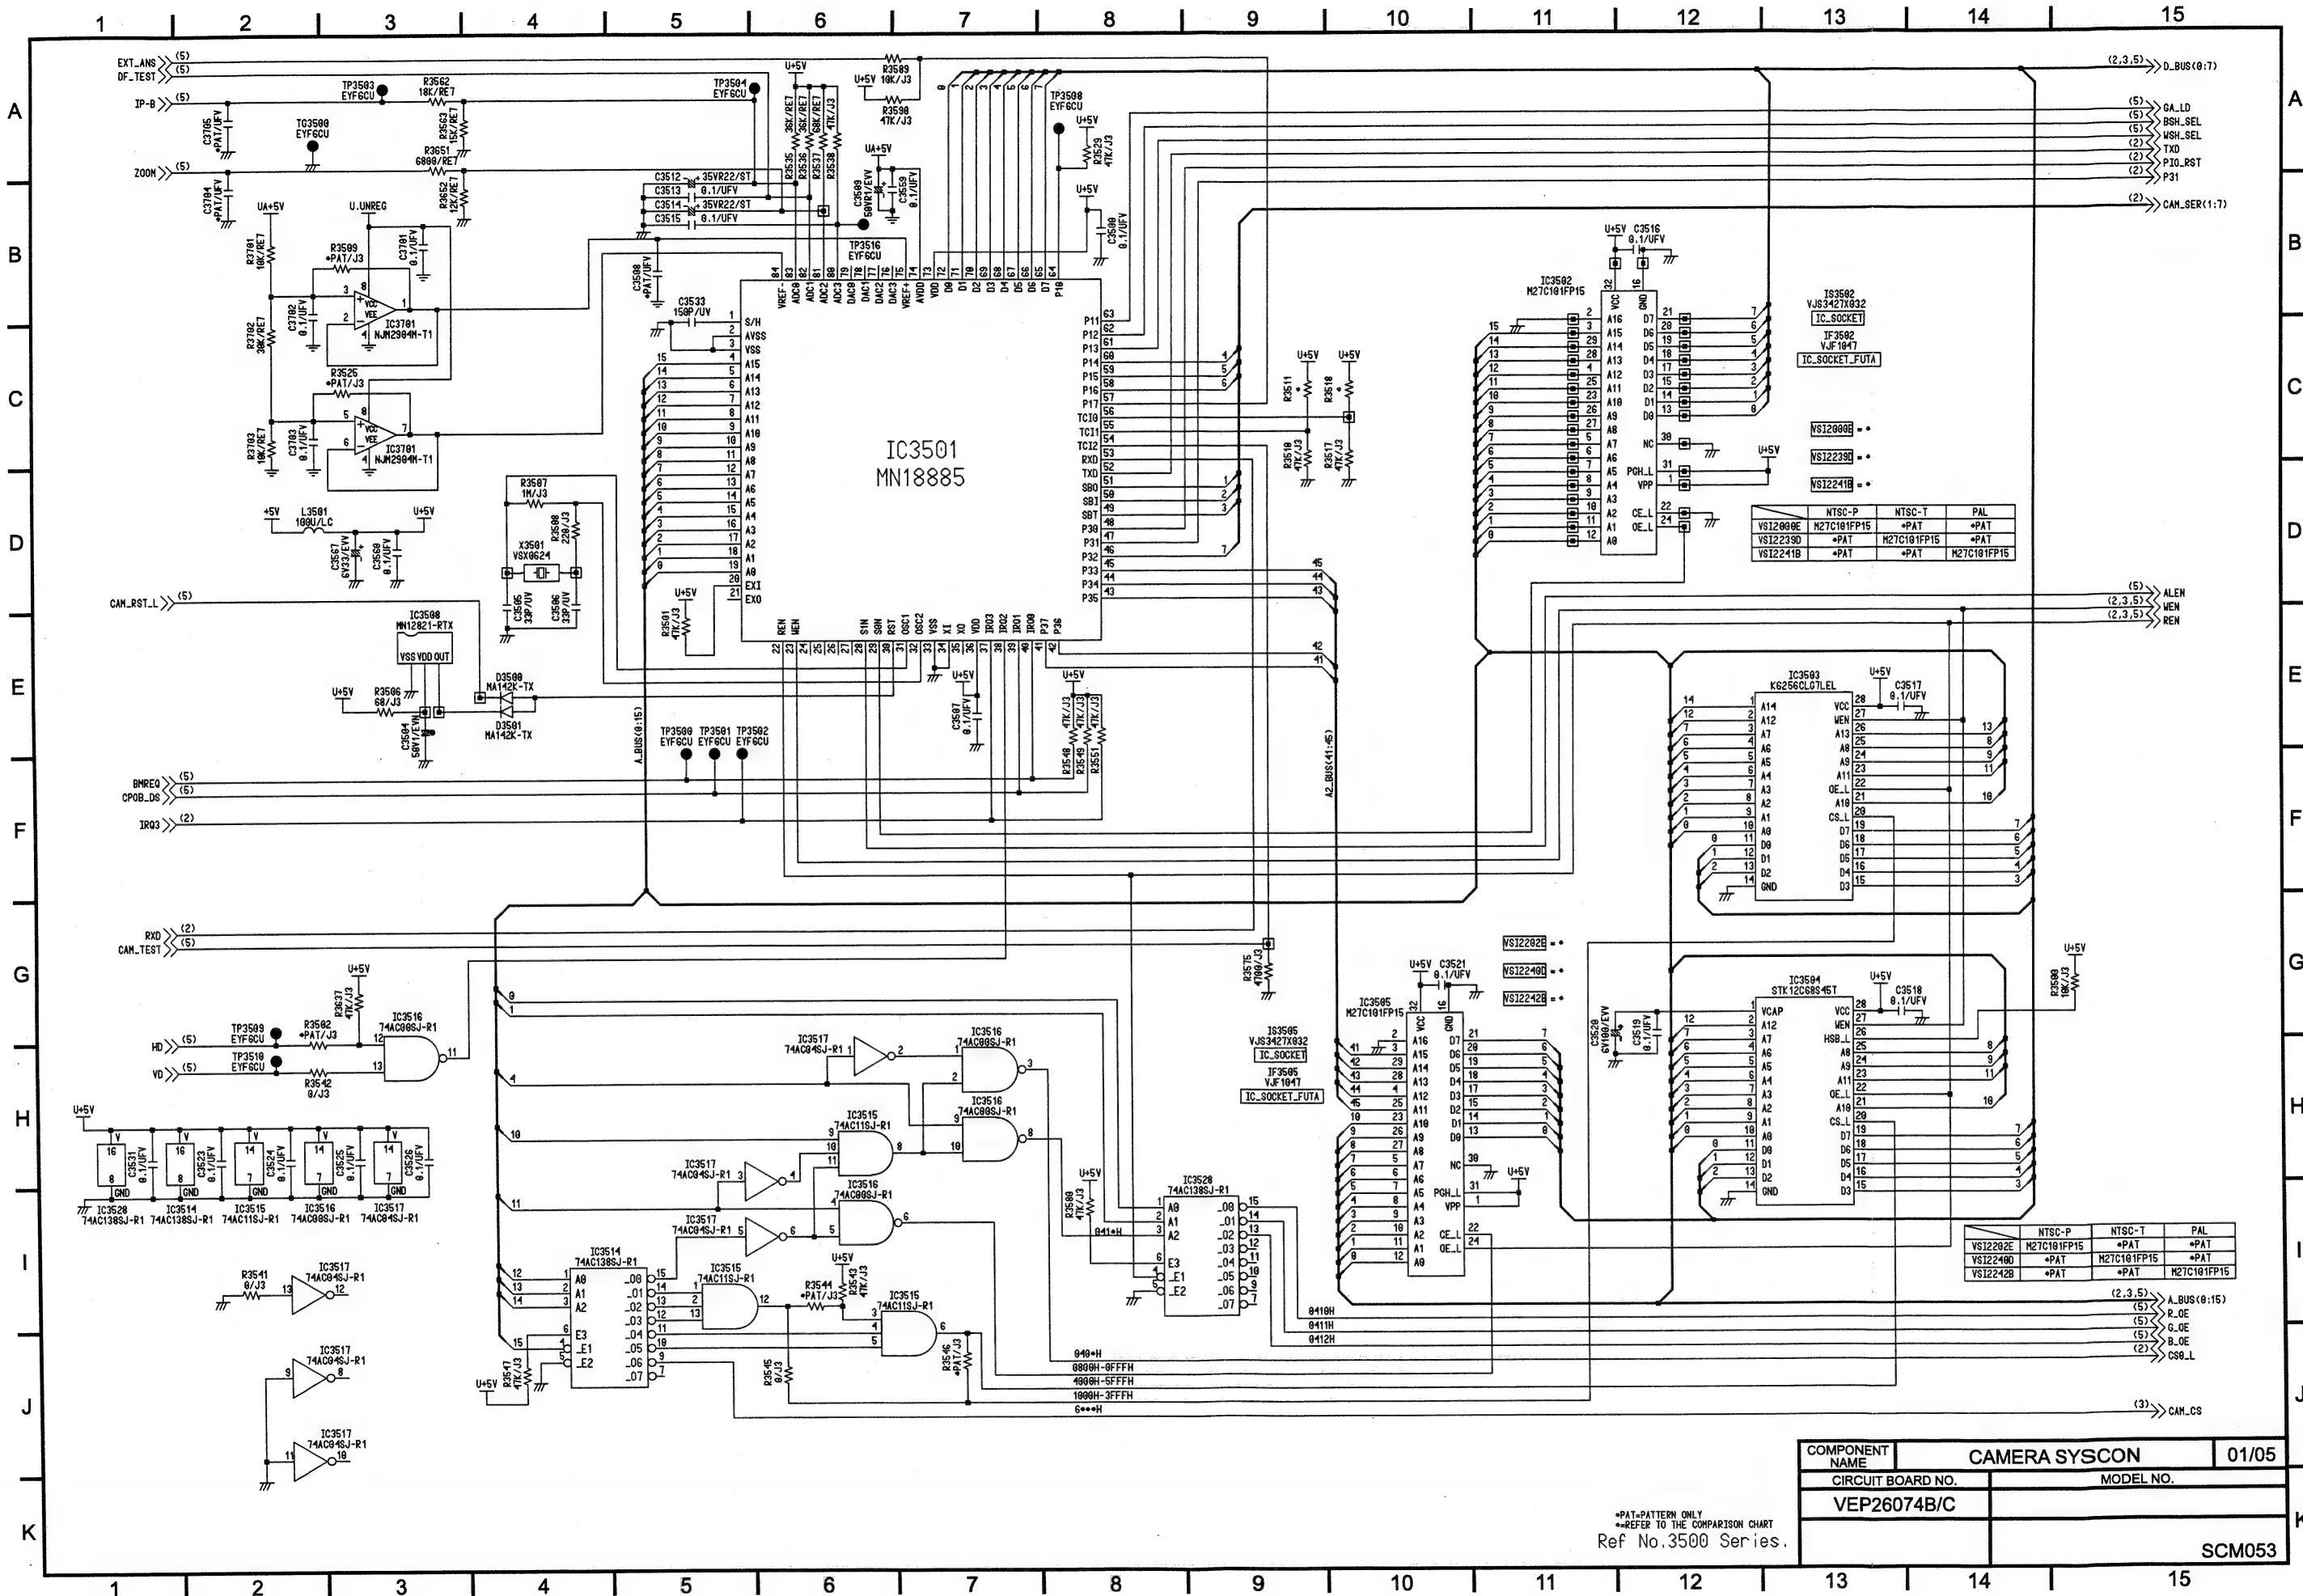

*PAT-PATTERN ONLY
 **REFER TO THE COMPARISON CHART
 Ref No.3500 Series.


COMPONENT NAME	CAMERA SYSCON		01/05
CIRCUIT BOARD NO.	MODEL NO.		
VEP26074B/C			
	SCM053		

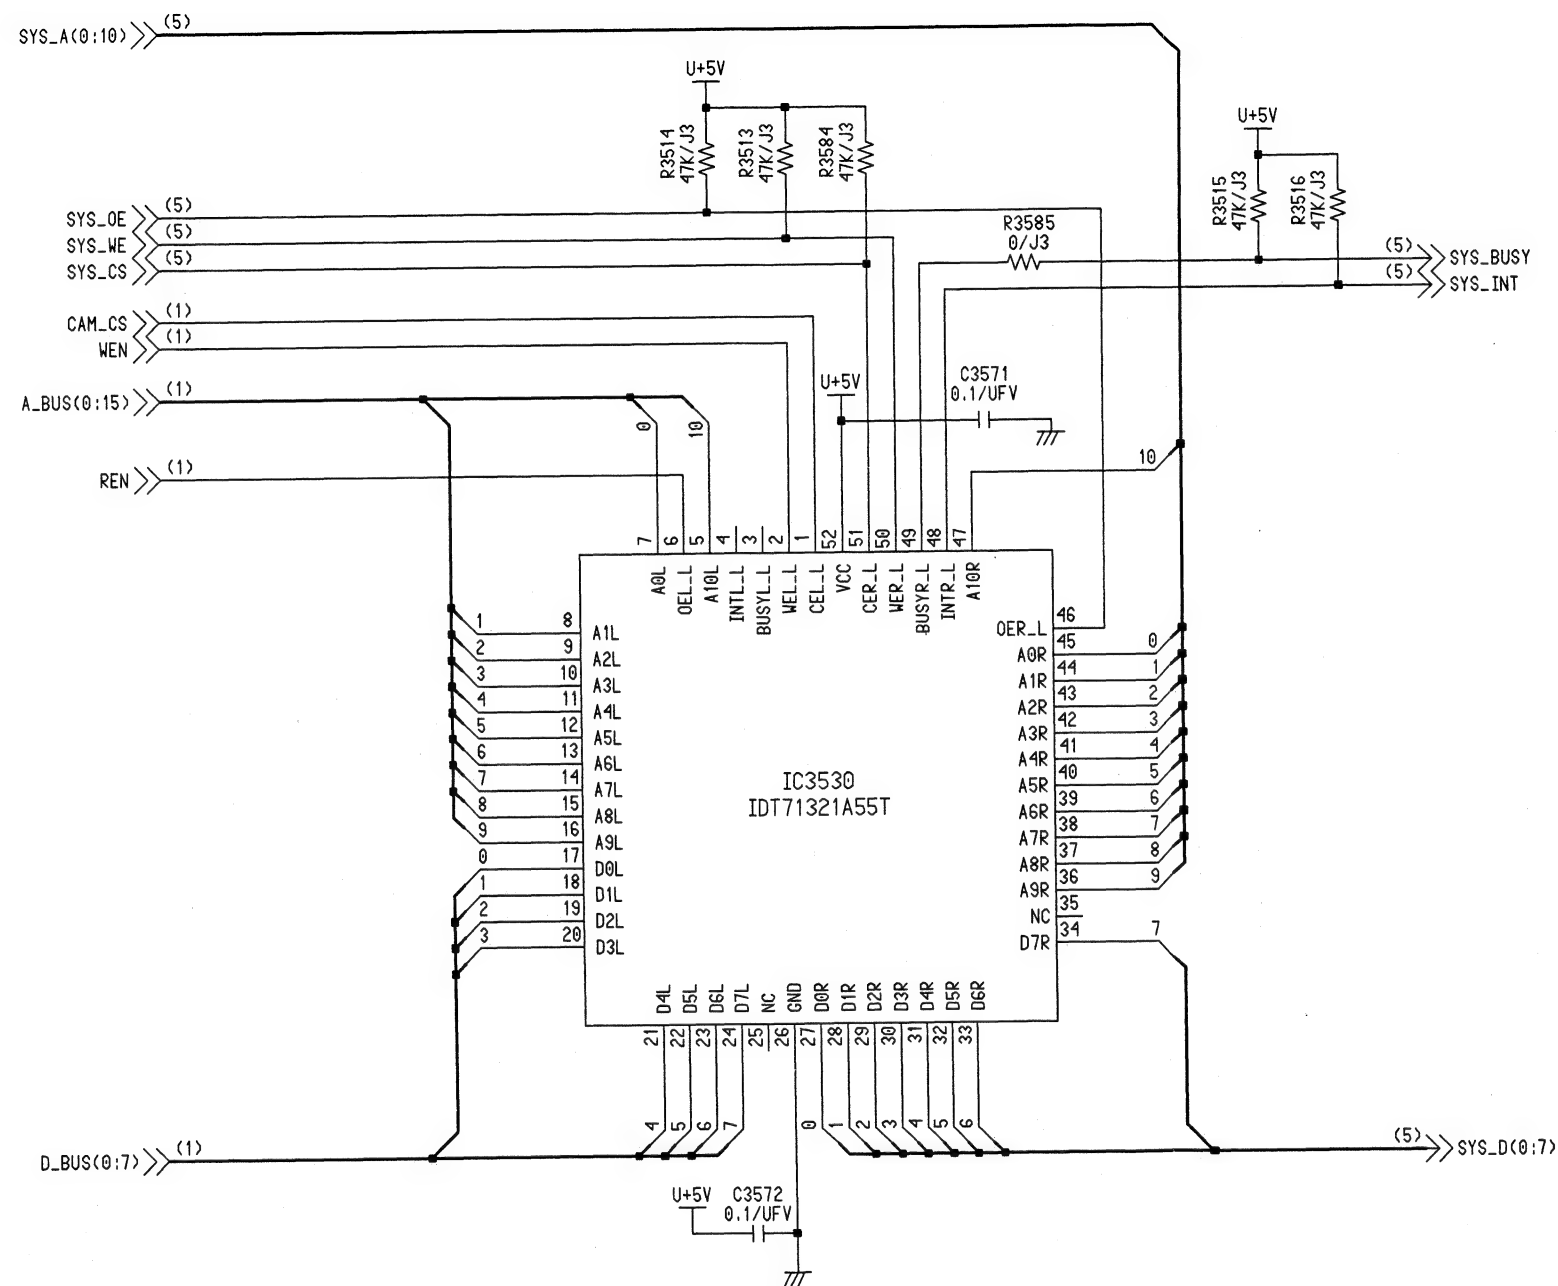

\$REF\$	PAL	NTSC-OVERSEAS	NTSC-JAPAN
C3508	*PAT/UFV	*PAT/UFV	*PAT/UFV
C3704	*PAT/UFV	*PAT/UFV	*PAT/UFV
C3705	*PAT/UFV	*PAT/UFV	*PAT/UFV
R3502	*PAT/J3	*PAT/J3	*PAT/J3
R3509	*PAT/J3	*PAT/J3	*PAT/J3
R3511	10K/J3	*PAT/J3	*PAT/J3
R3518	*PAT/J3	*PAT/J3	10K/J3
R3525	*PAT/J3	*PAT/J3	*PAT/J3
R3544	*PAT/J3	*PAT/J3	*PAT/J3
R3546	*PAT/J3	*PAT/J3	*PAT/J3
R3641	*PAT/J3	*PAT/J3	*PAT/J3
R3642	*PAT/J3	*PAT/J3	*PAT/J3
R3643	*PAT/J3	*PAT/J3	*PAT/J3
R3650	*PAT/J3	*PAT/J3	*PAT/J3
VSI2000D	M27C101FP15	*PAT	*PAT
VSI2202D	M27C101FP15	*PAT	*PAT
VSI2239C	*PAT	M27C101FP15	*PAT
VSI2240C	*PAT	M27C101FP15	*PAT
VSI2241	*PAT	*PAT	M27C101FP15
VSI2242	*PAT	*PAT	M27C101FP15

Ref No.3500 Series.


COMPONENT NAME	CAMERA SYSCON	03/05
CIRCUIT BOARD NO.	MODEL NO.	
VEP26074B/C		
		SCM055

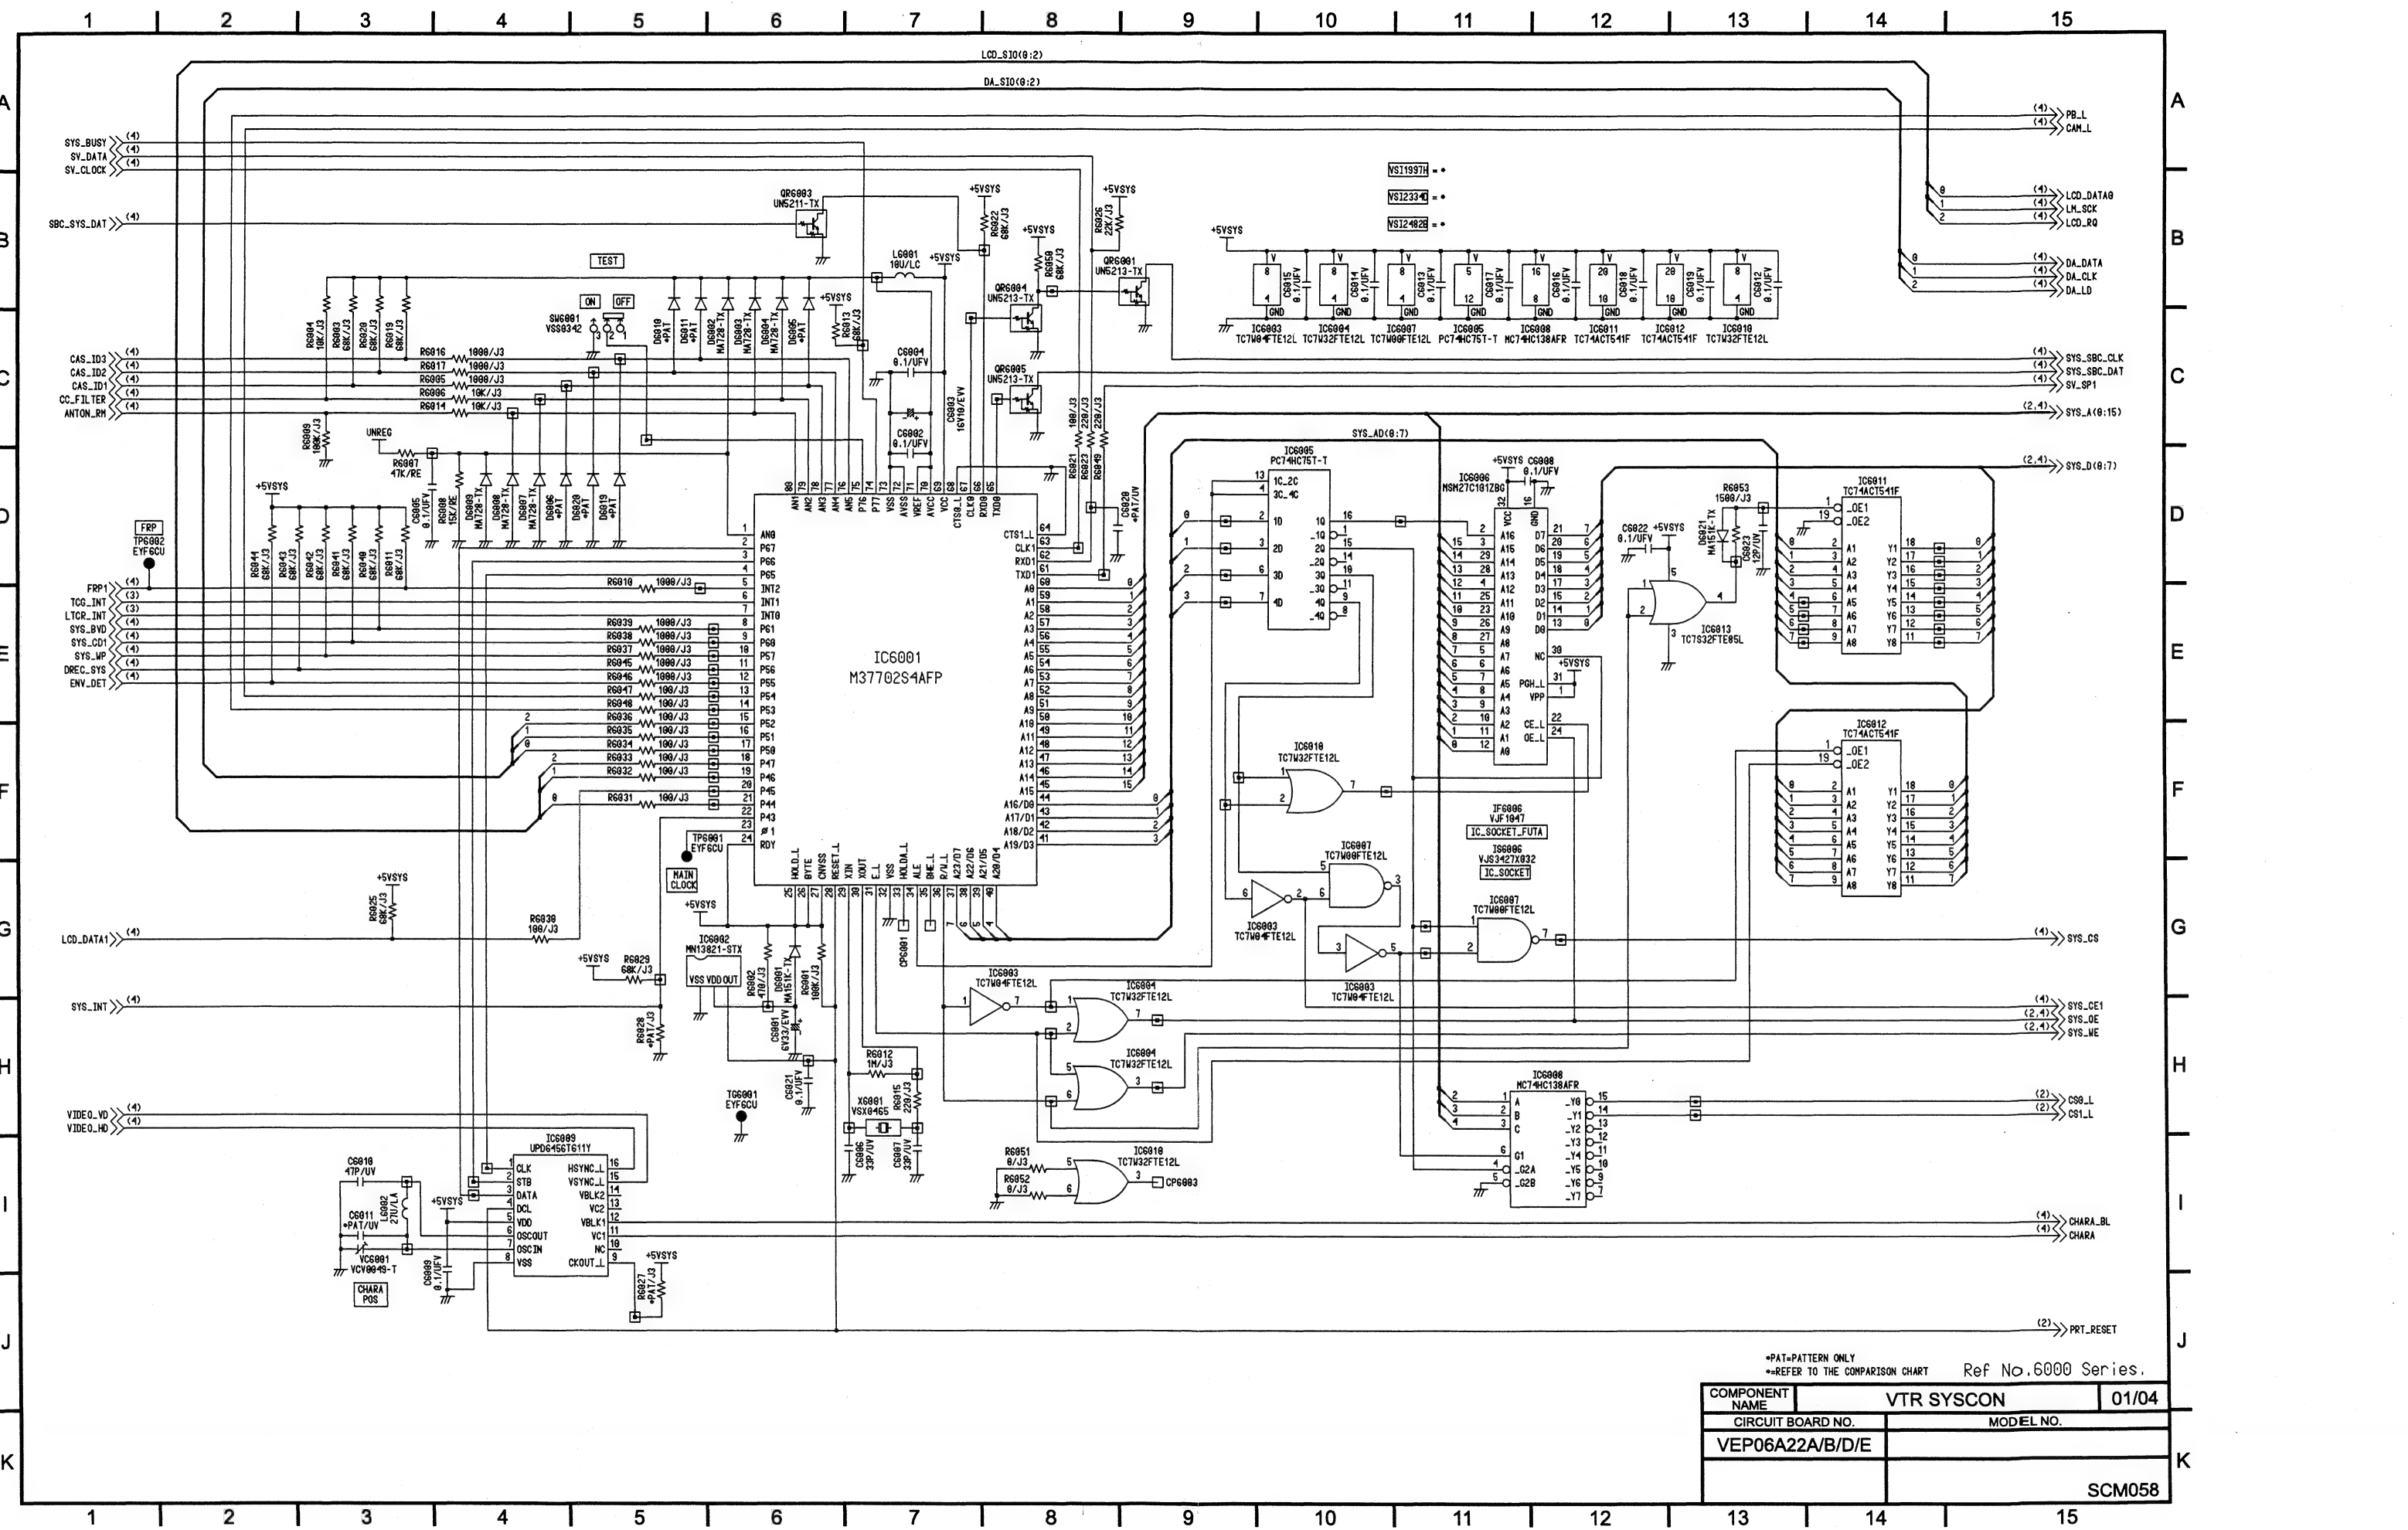

*PAT=PATTERN ONLY
**REFER TO THE COMPARISON CHART


Ref No.6000 Series.

COMPONENT NAME	VTR SYSCON	01/04
CIRCUIT BOARD NO.	MODEL NO.	
VEP06A22A/B/D/E		
		SCM058

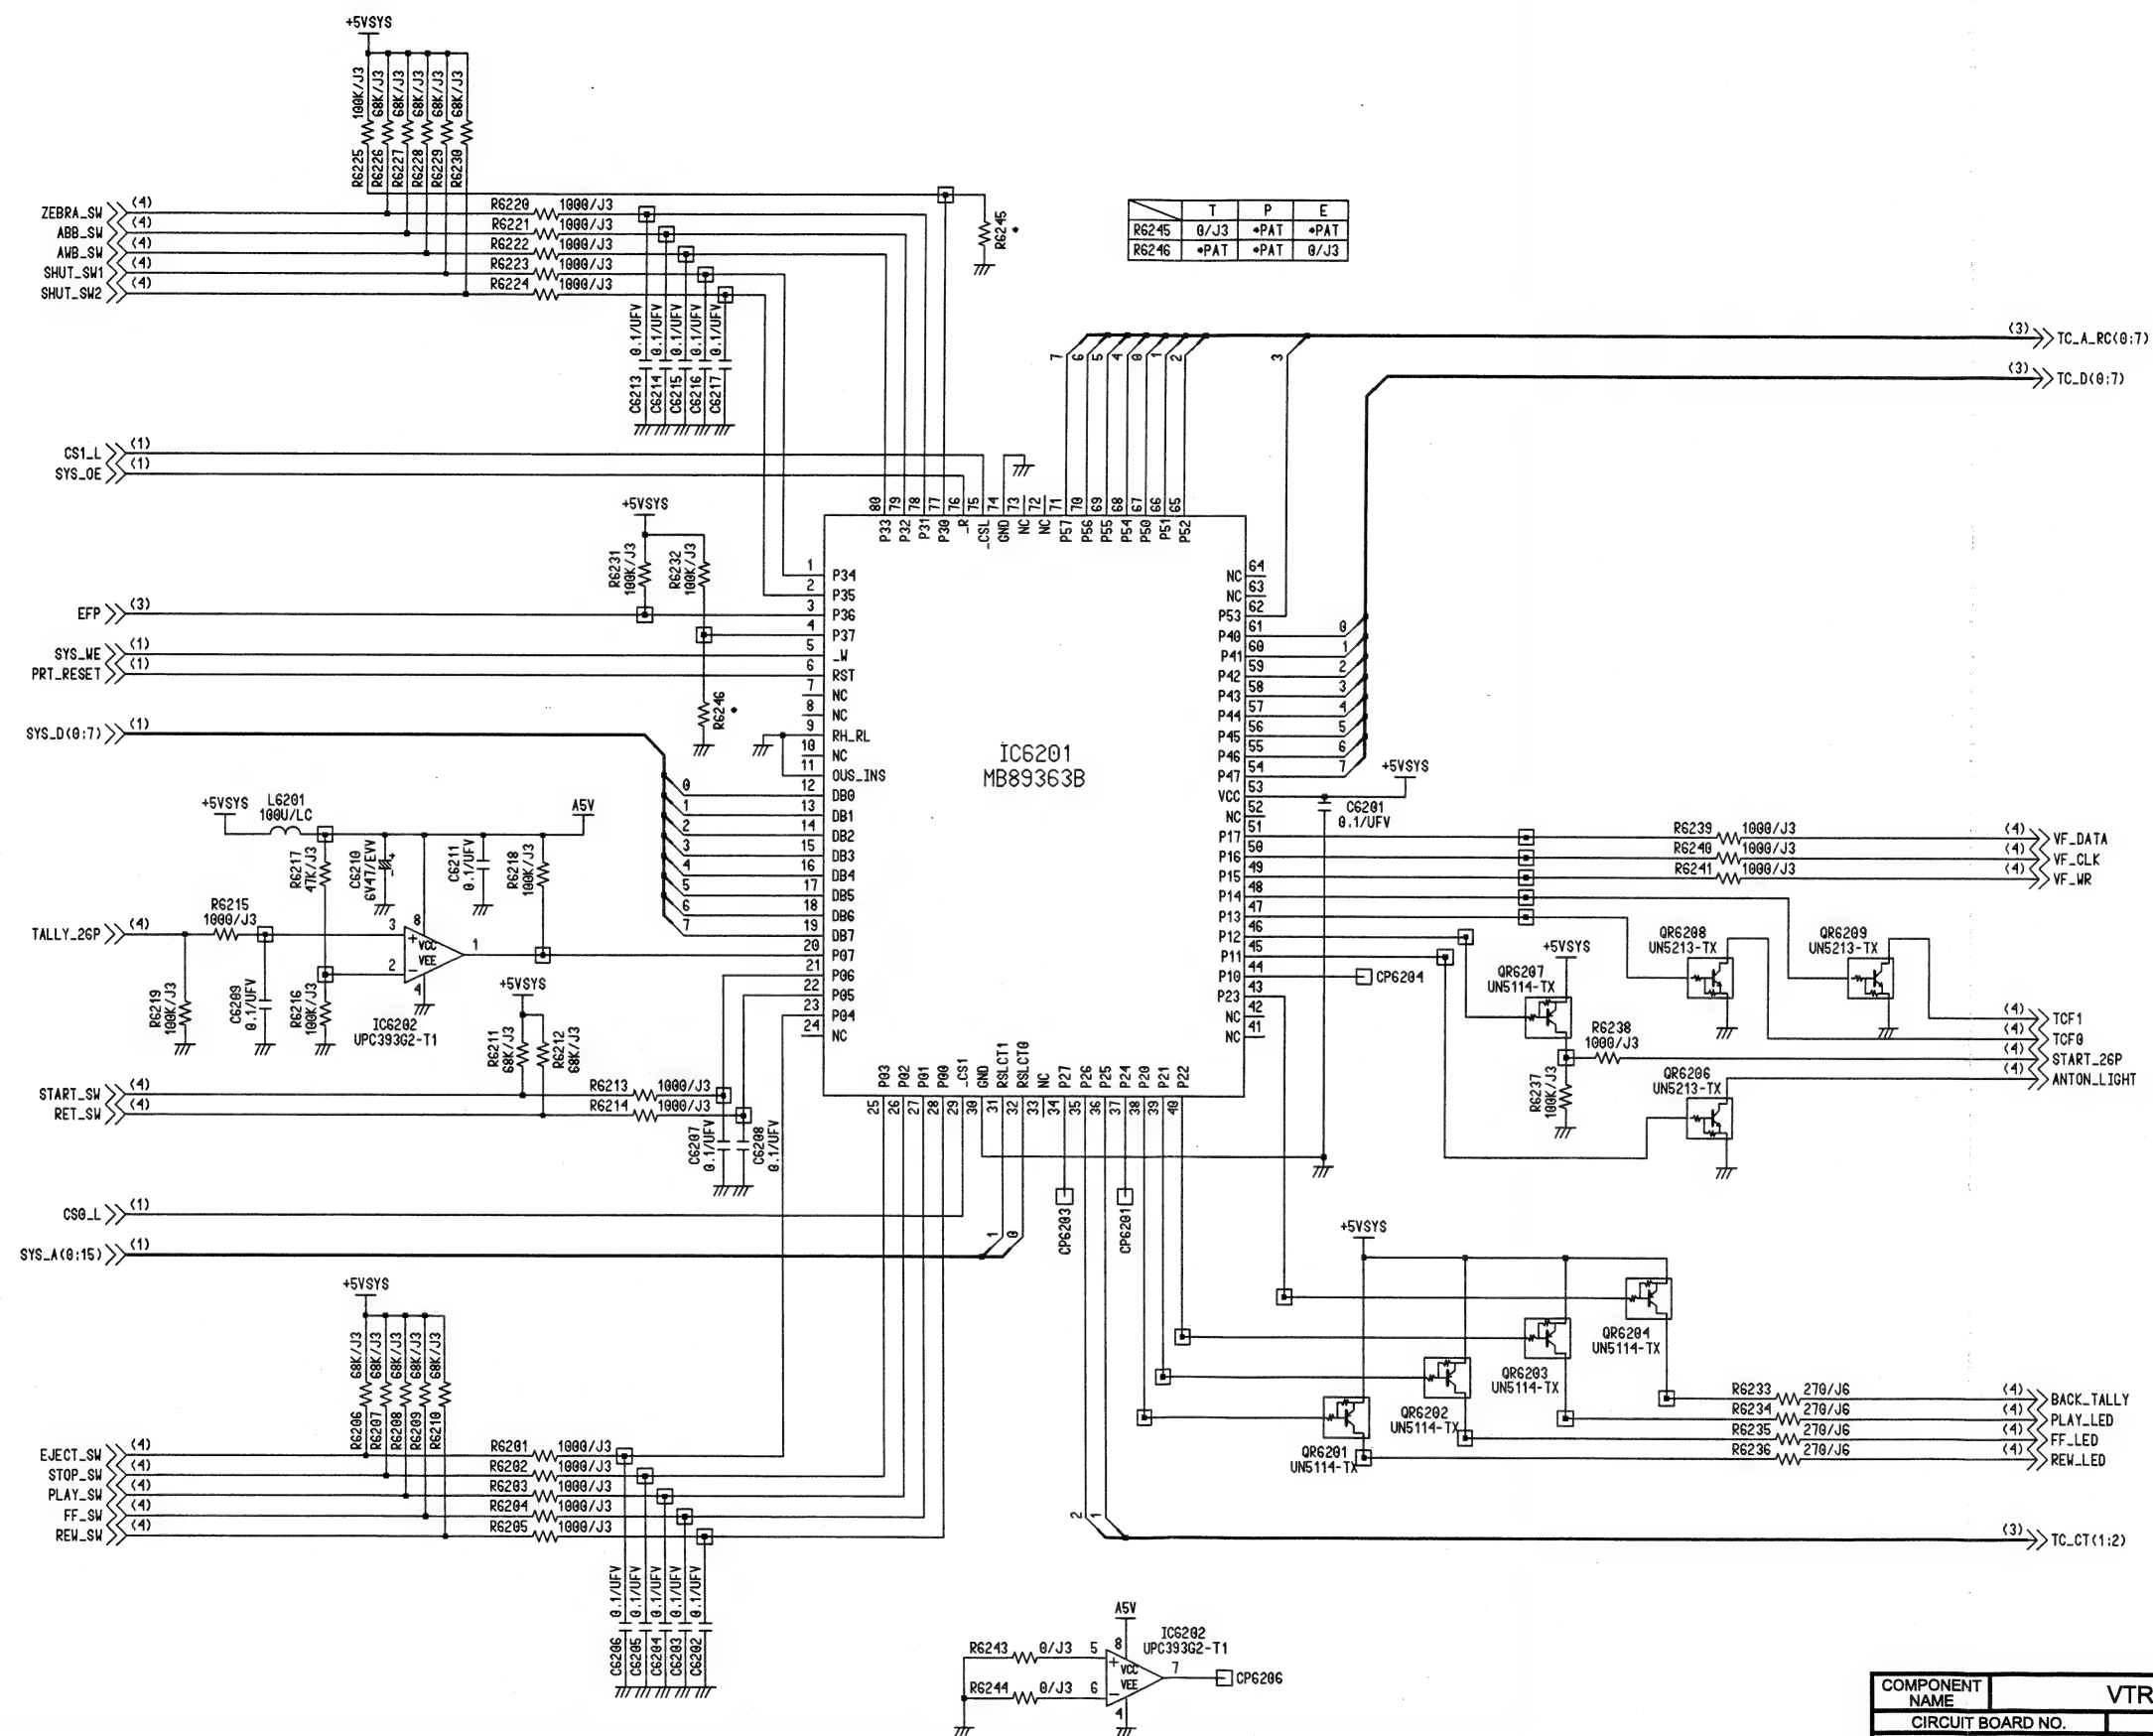

	T	P	E
R6245	0/J3	*PAT	*PAT
R6246	*PAT	*PAT	0/J3


COMPONENT NAME	VTR SYSCON	02/04
CIRCUIT BOARD NO.	MODEL NO.	
VEP06A22A/B/D/E		
		SCM059

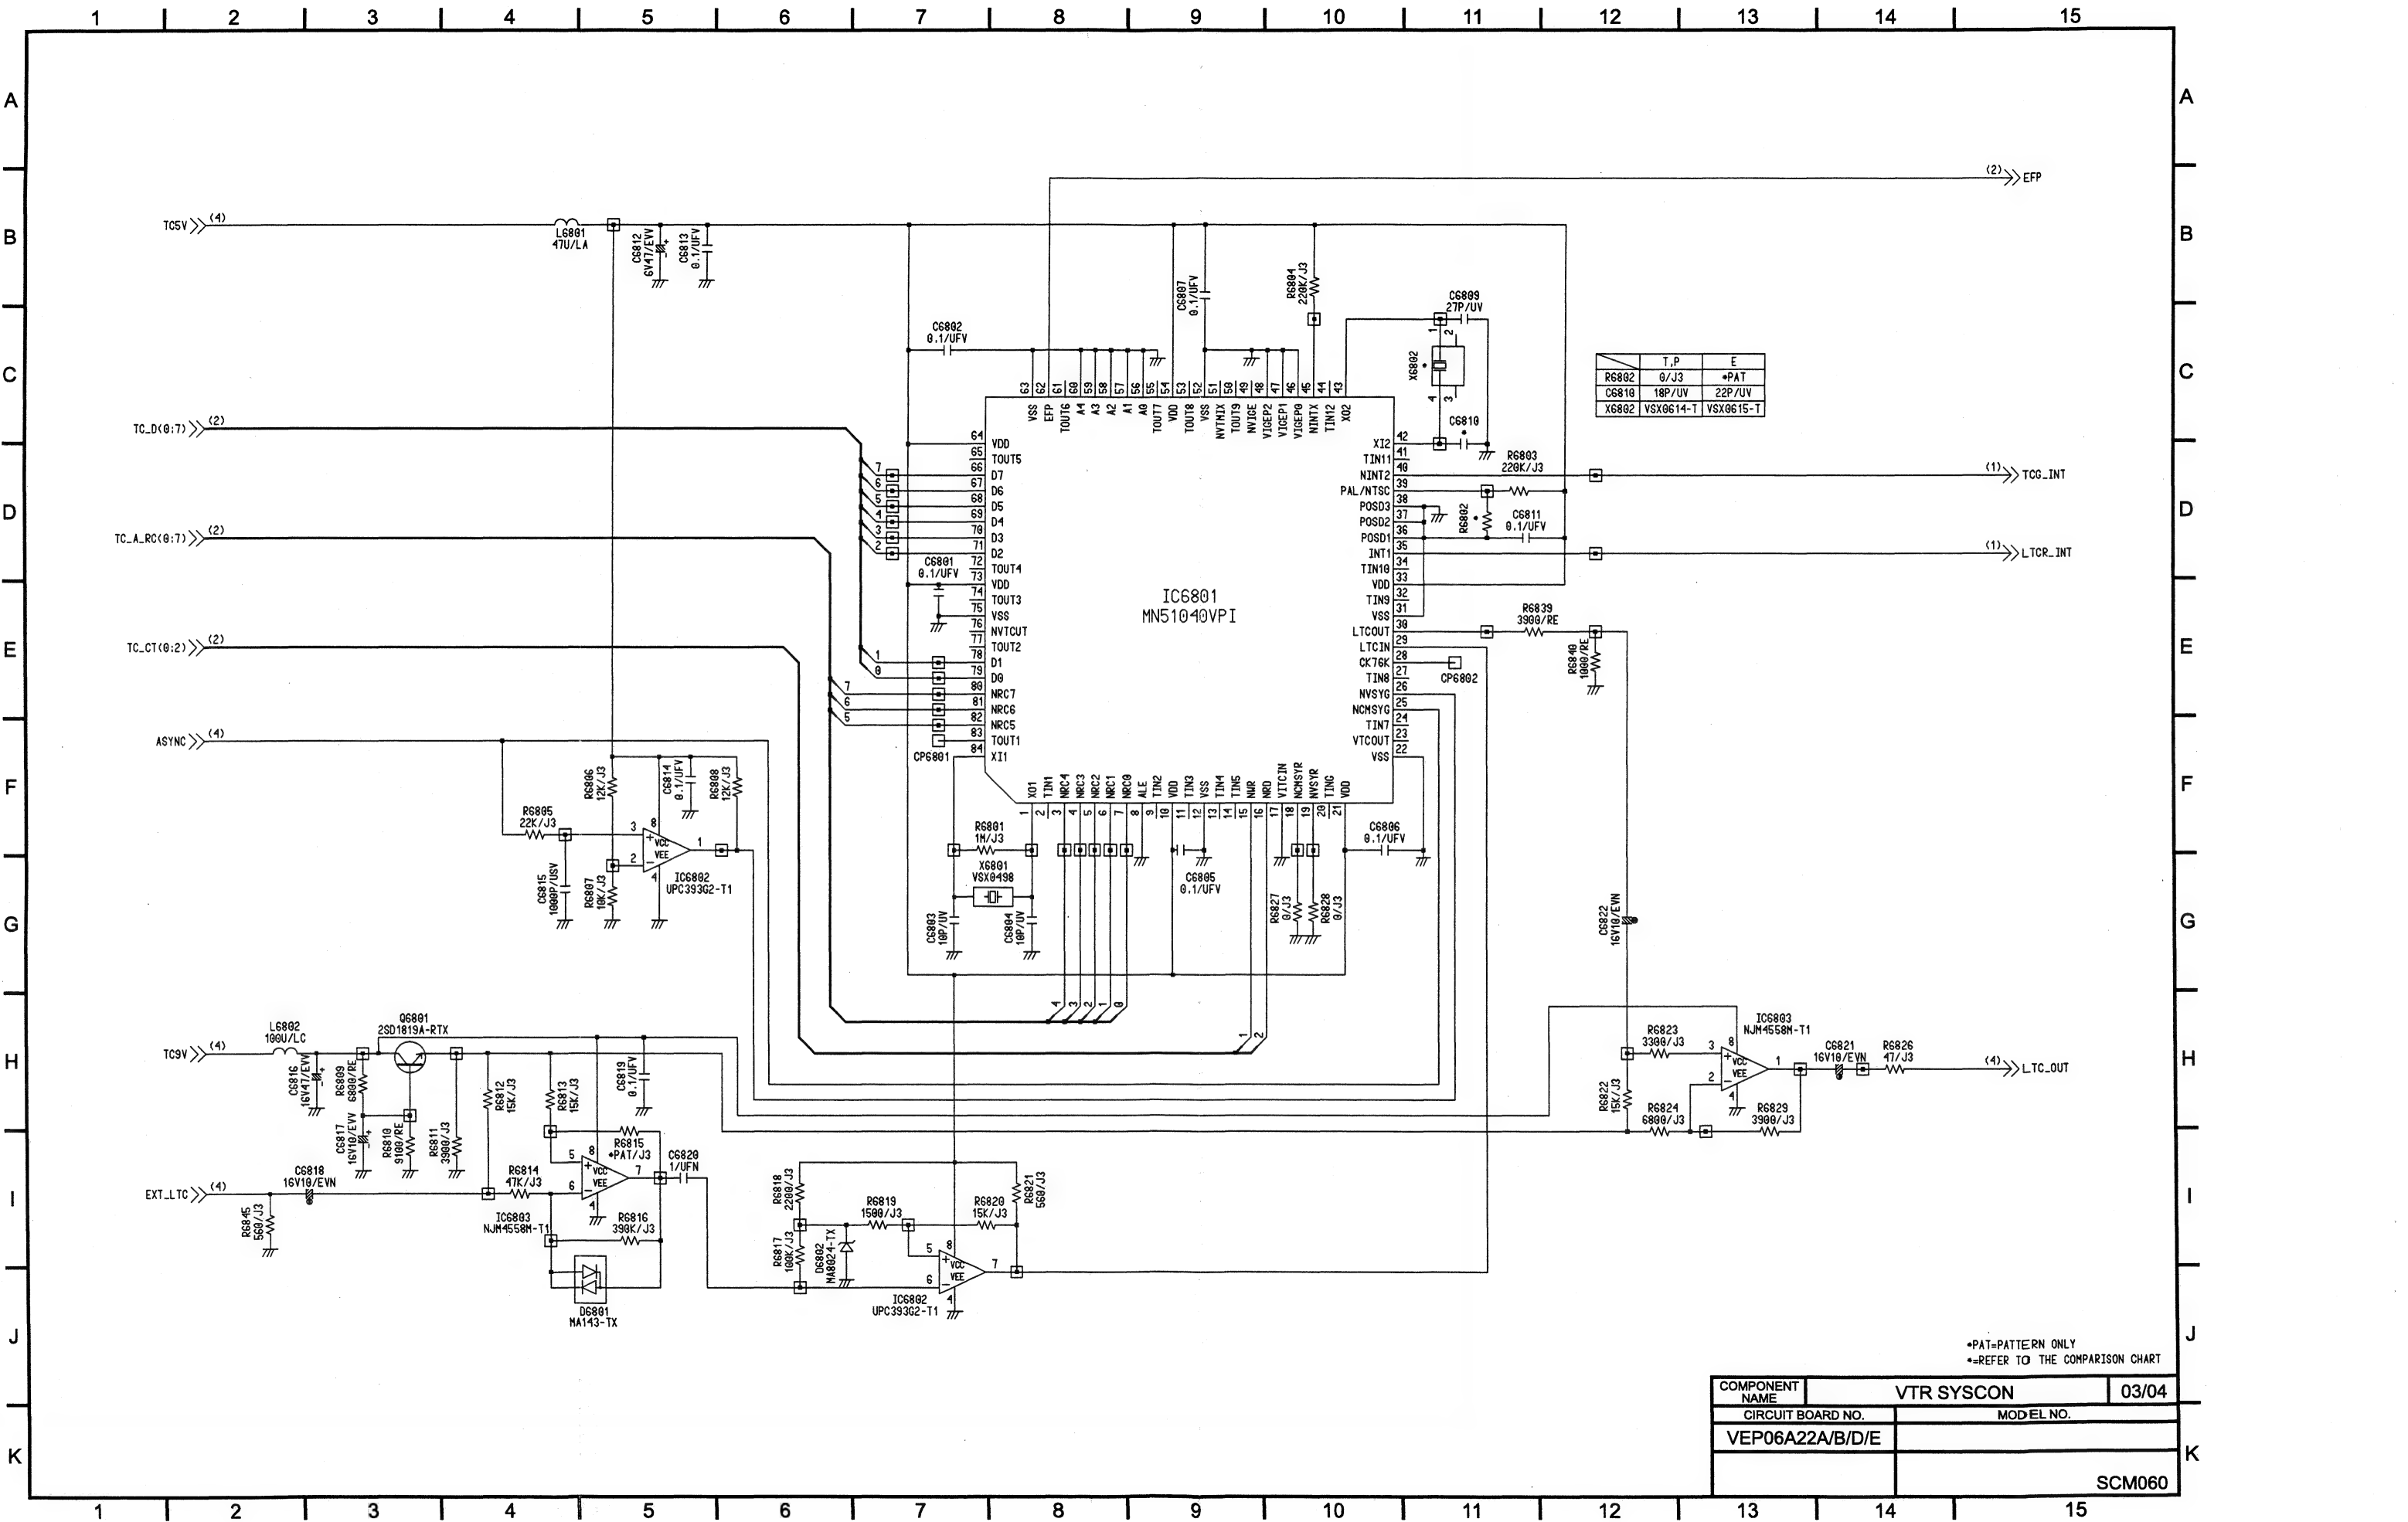


	T.P.	E
R6802	0/J3	*PAT
C6810	18P/UV	22P/UV
X6802	VSX0614-T	VSX0615-T

*PAT=PATTERN ONLY
*REFER TO THE COMPARISON CHART


COMPONENT NAME	VTR SYSCON	03/04
CIRCUIT BOARD NO.	MODEL NO.	
VEP06A22A/B/D/E		
		SCM060

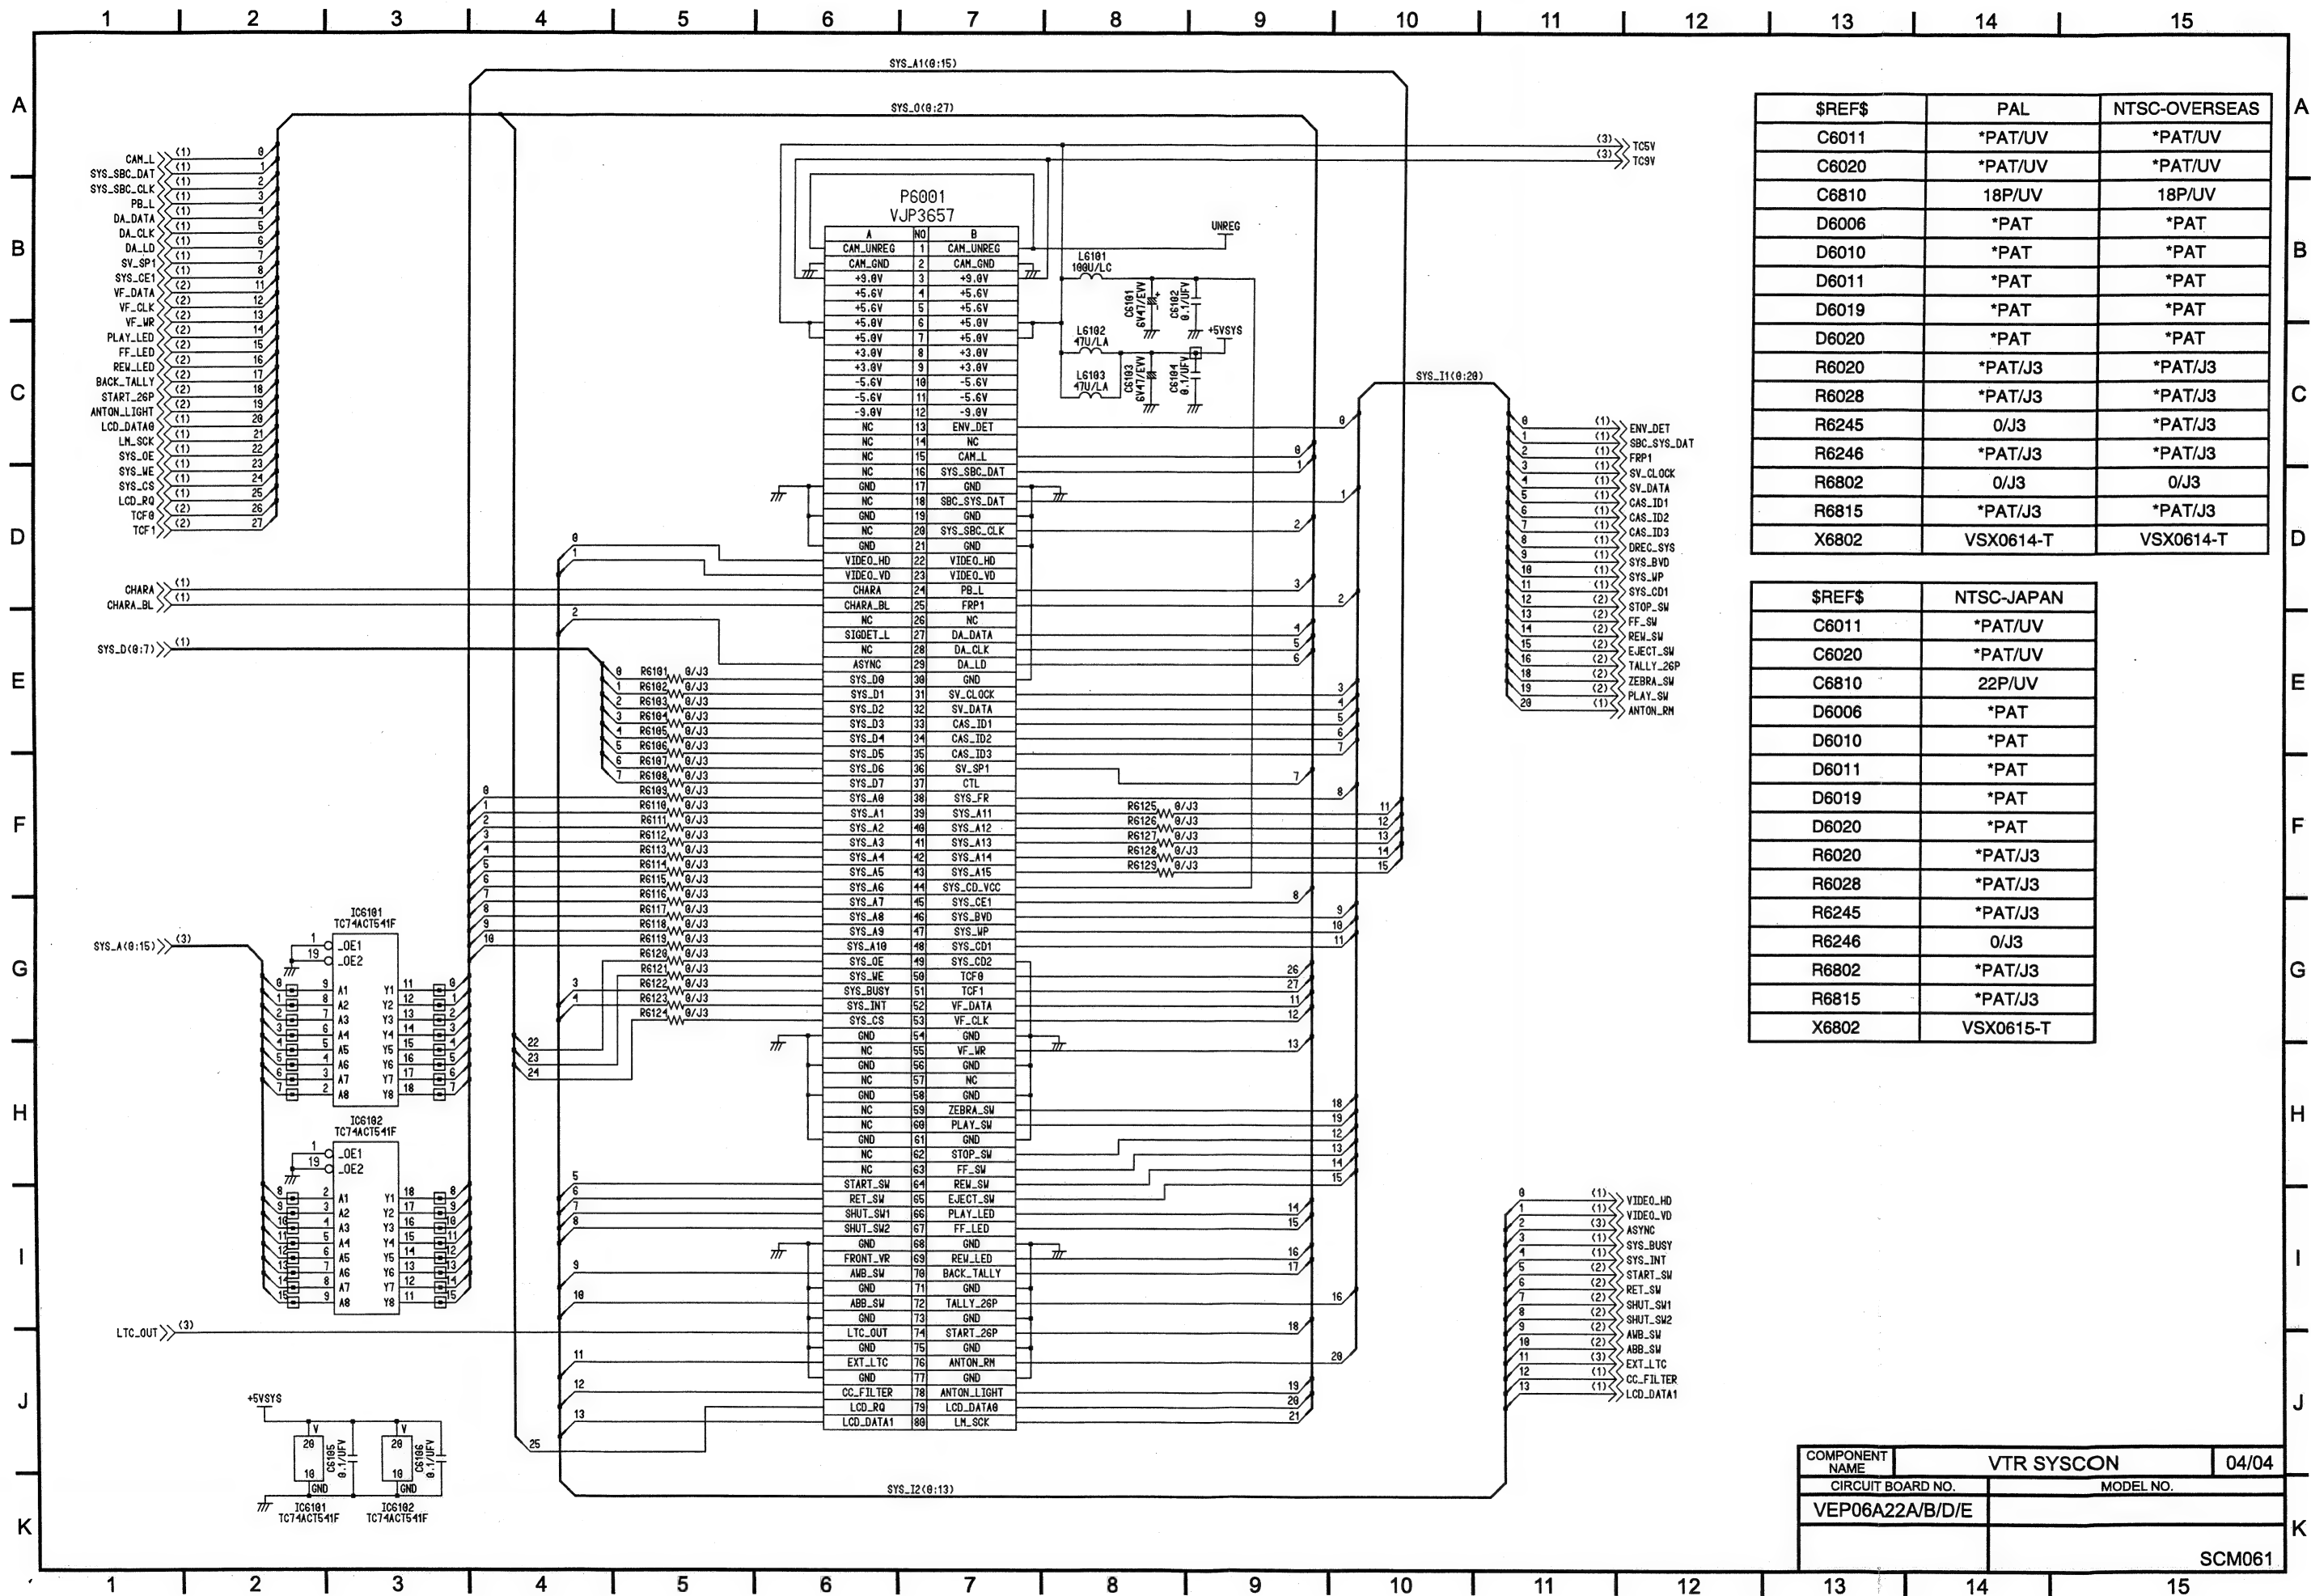


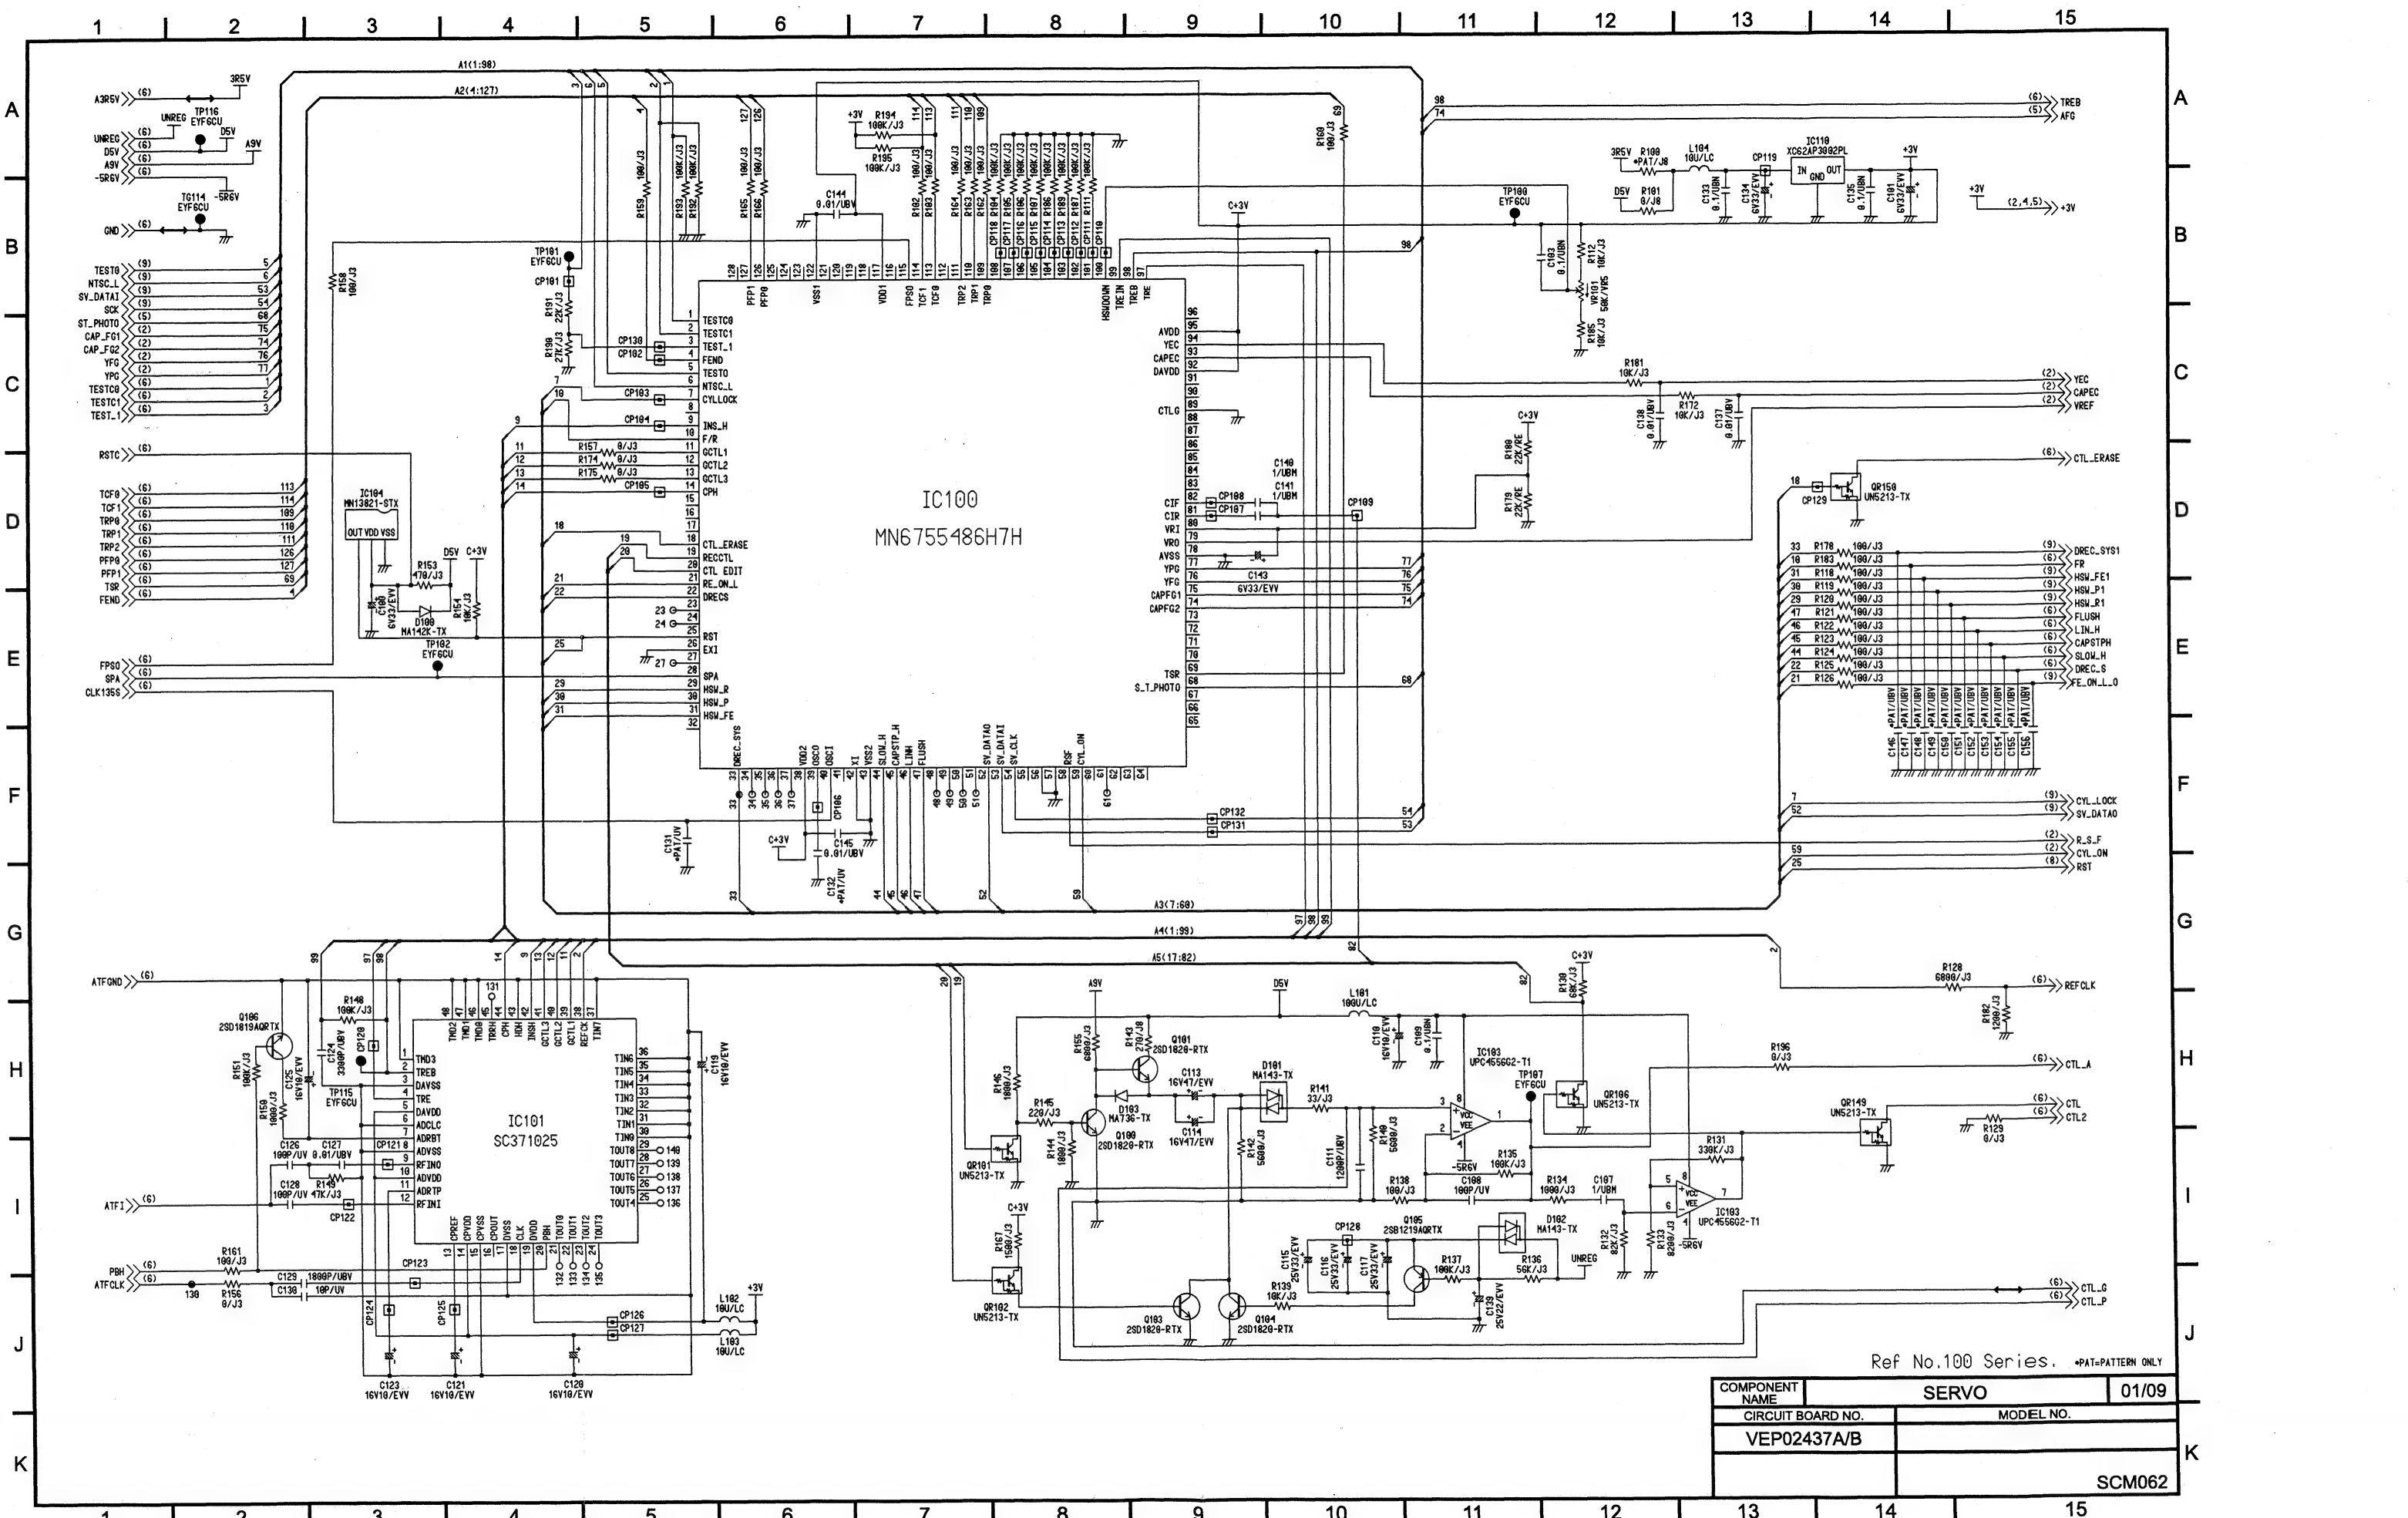



Ref No.100 Series. *PAT=PATTERN ONLY

COMPONENT NAME	SERVO	01/09
CIRCUIT BOARD NO.	MODEL NO.	
VEP02437A/B		
		SCM062

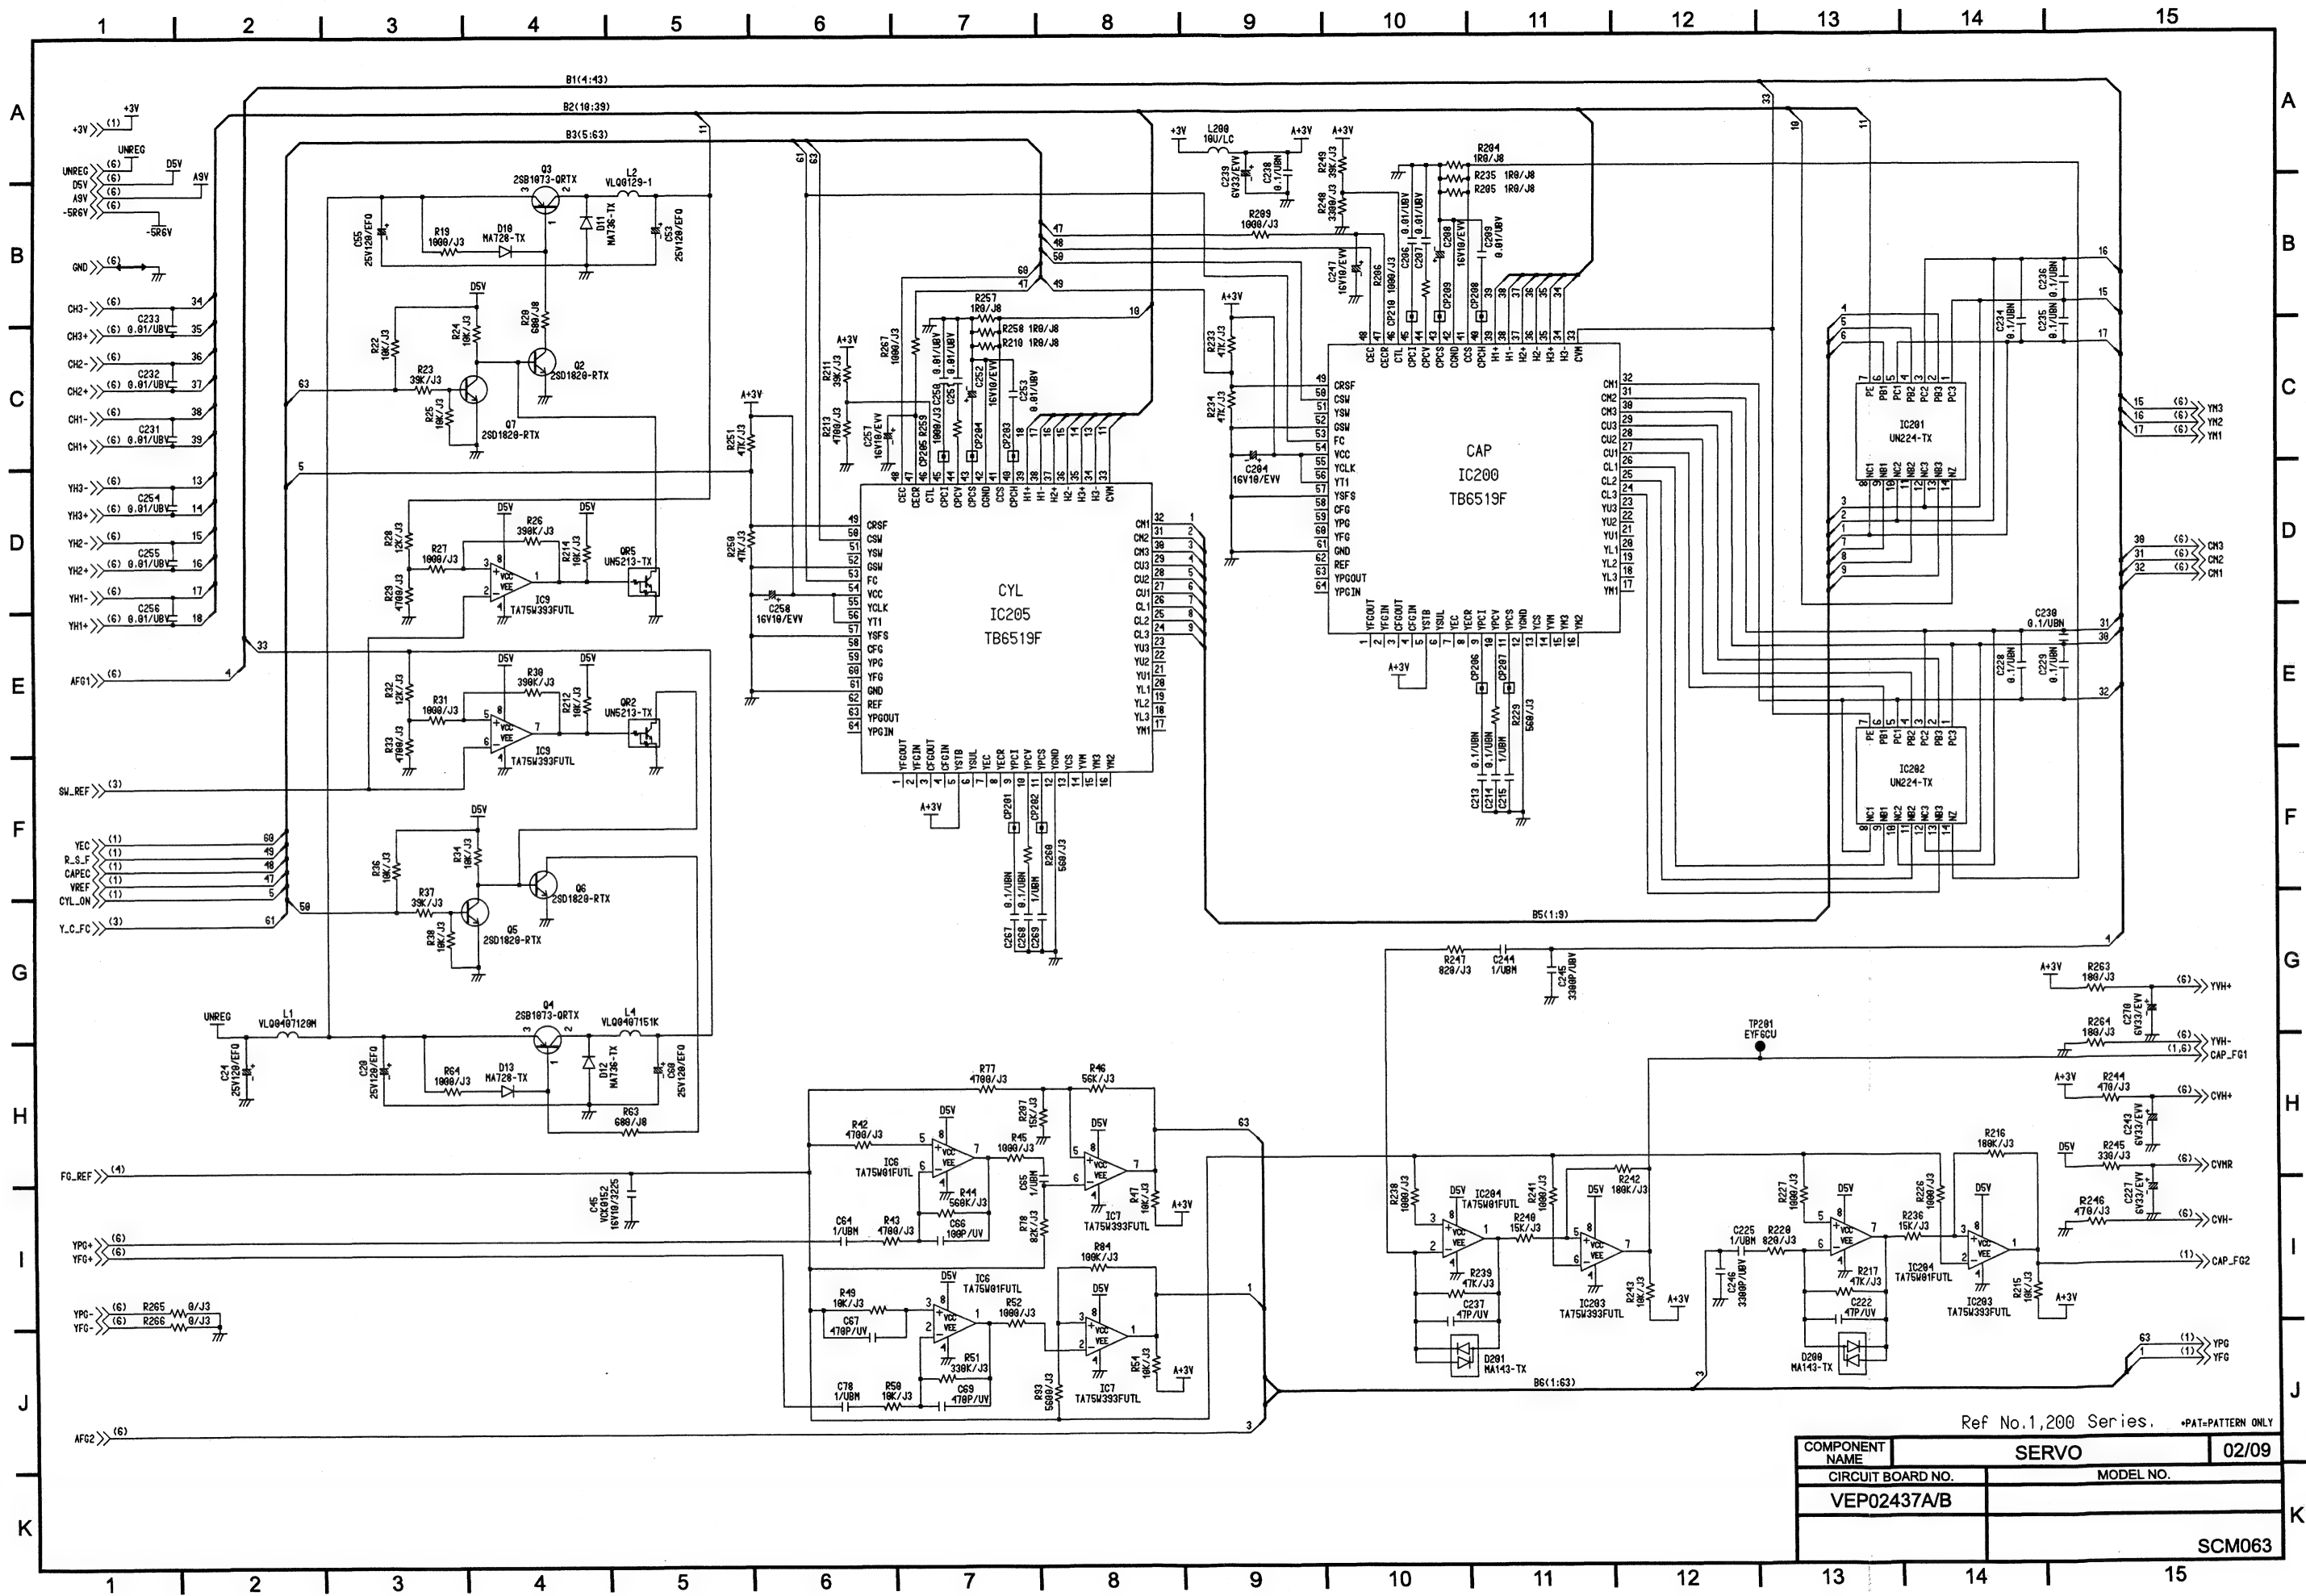

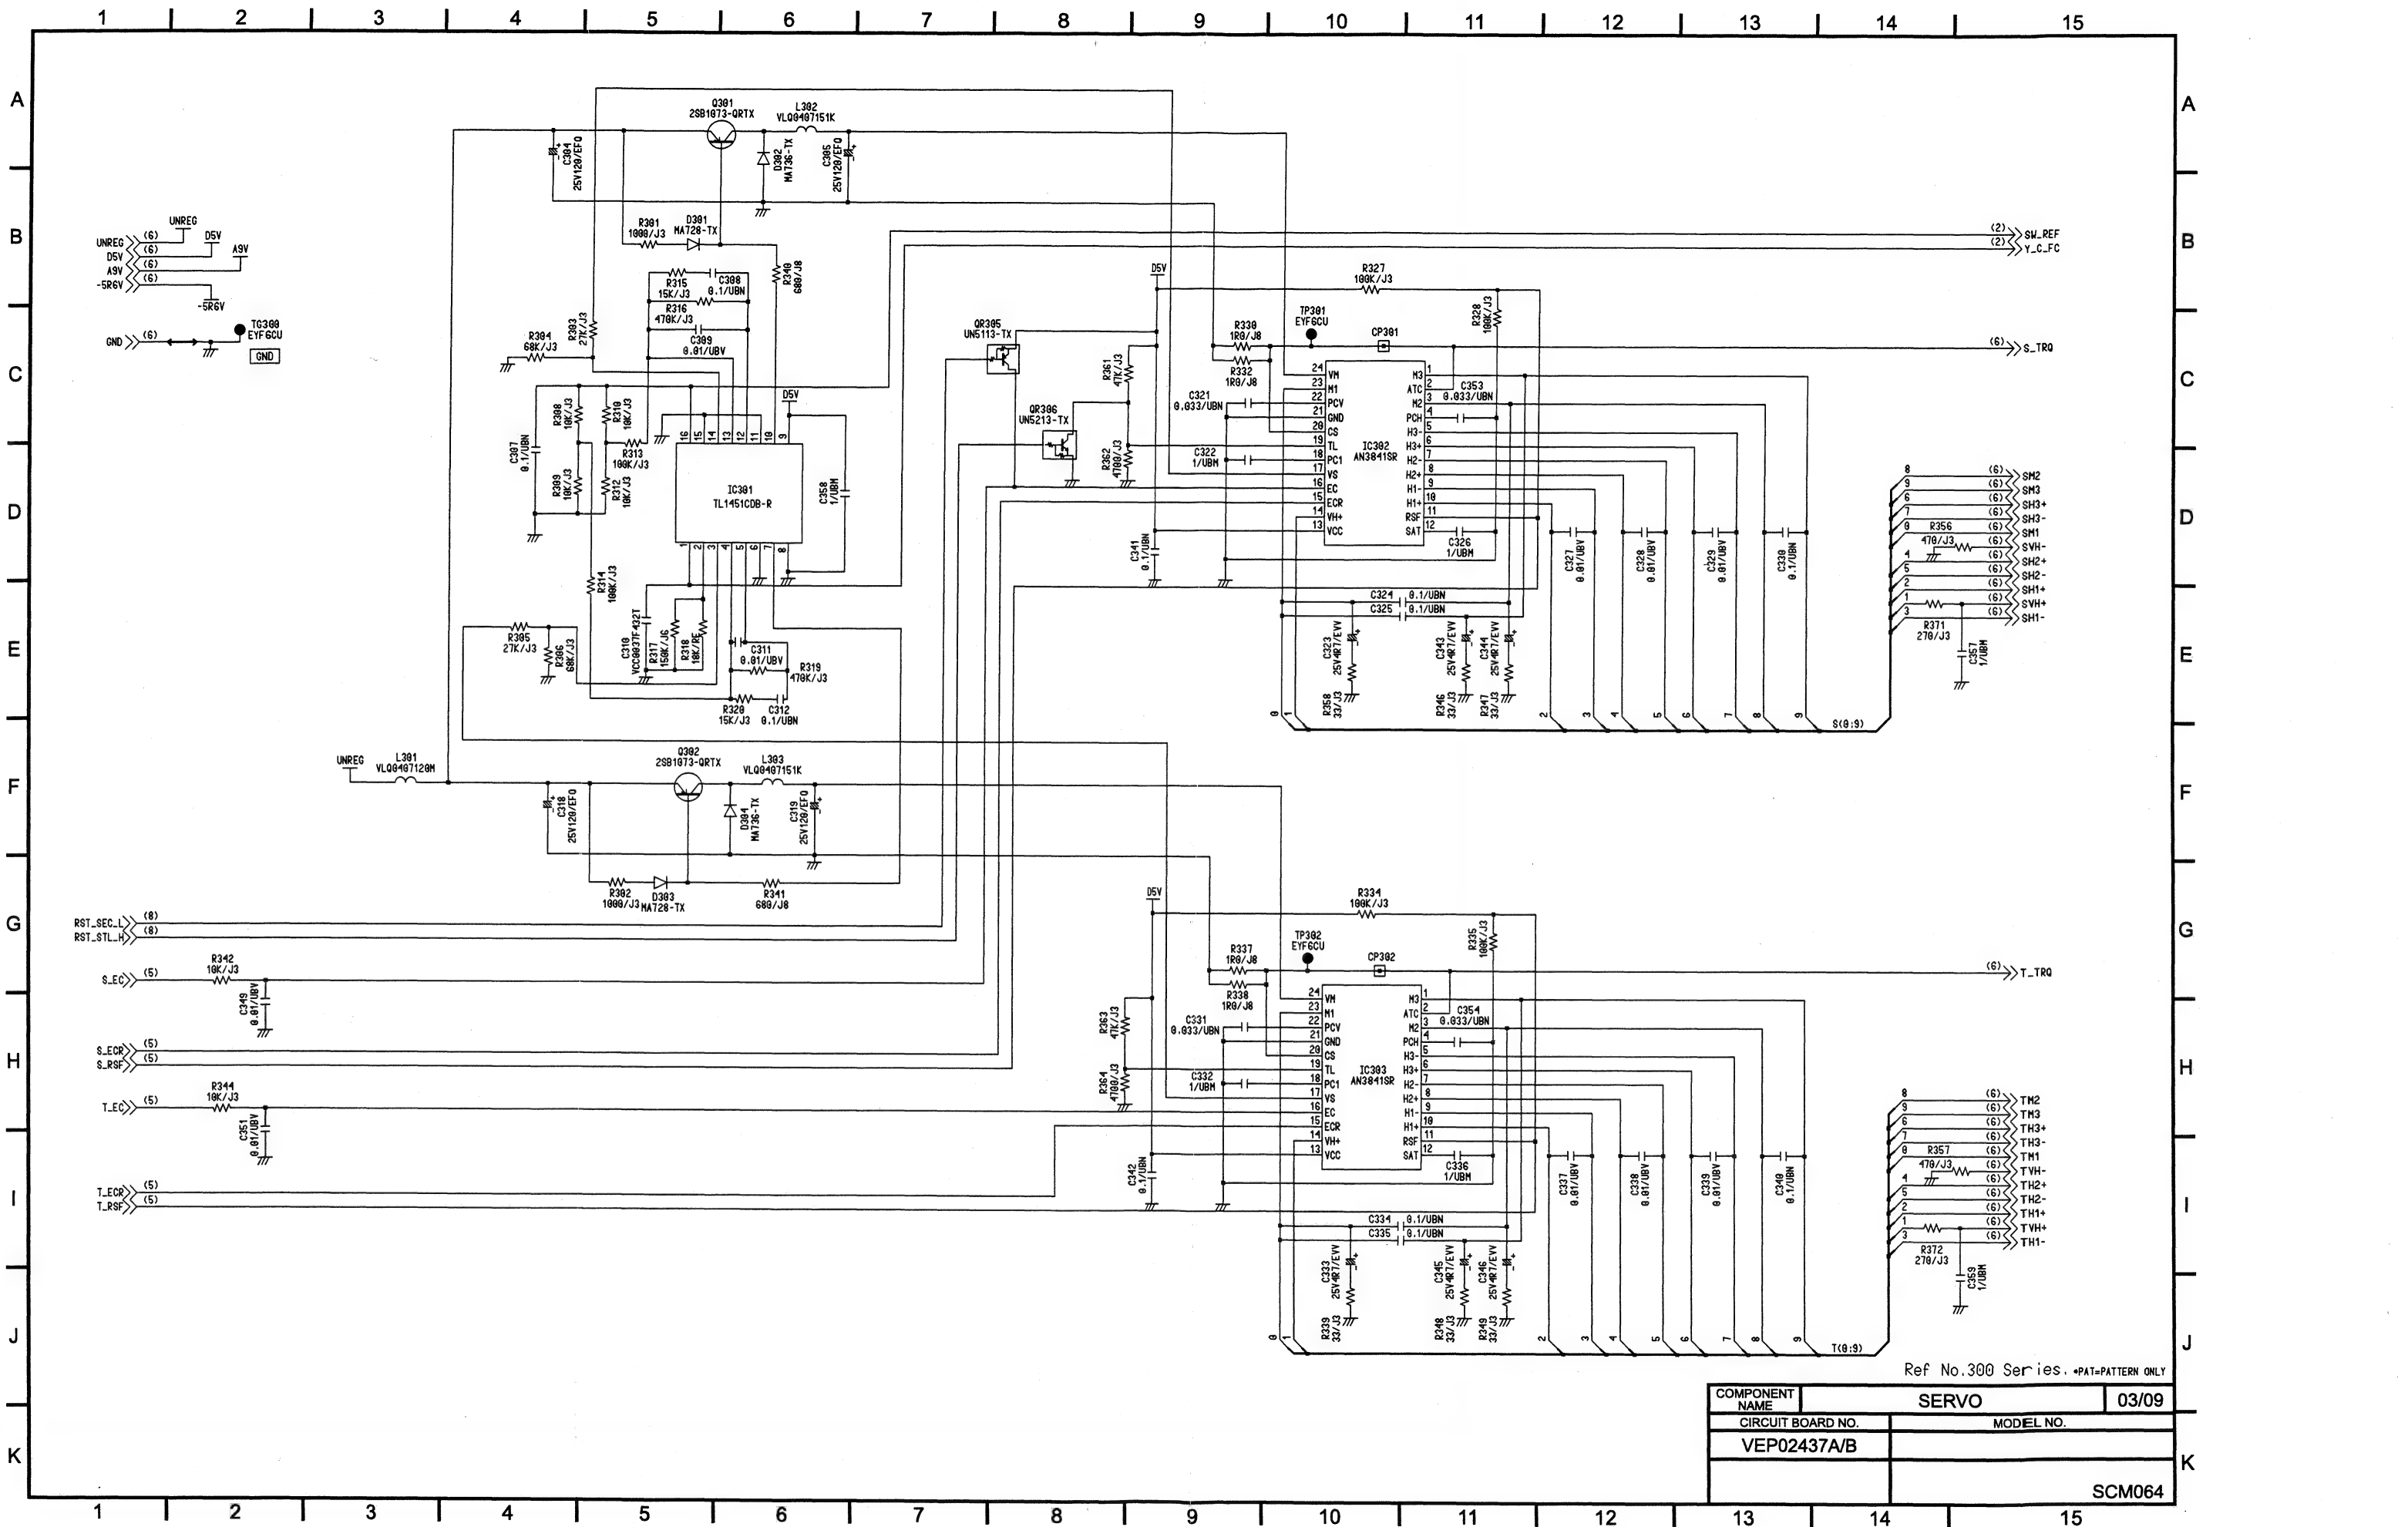


Ref No.300 Series. *PAT=PATTERN ONLY	
COMPONENT NAME	SERVO
CIRCUIT BOARD NO.	03/09
VEP02437A/B	MODEL NO.
	SCM064

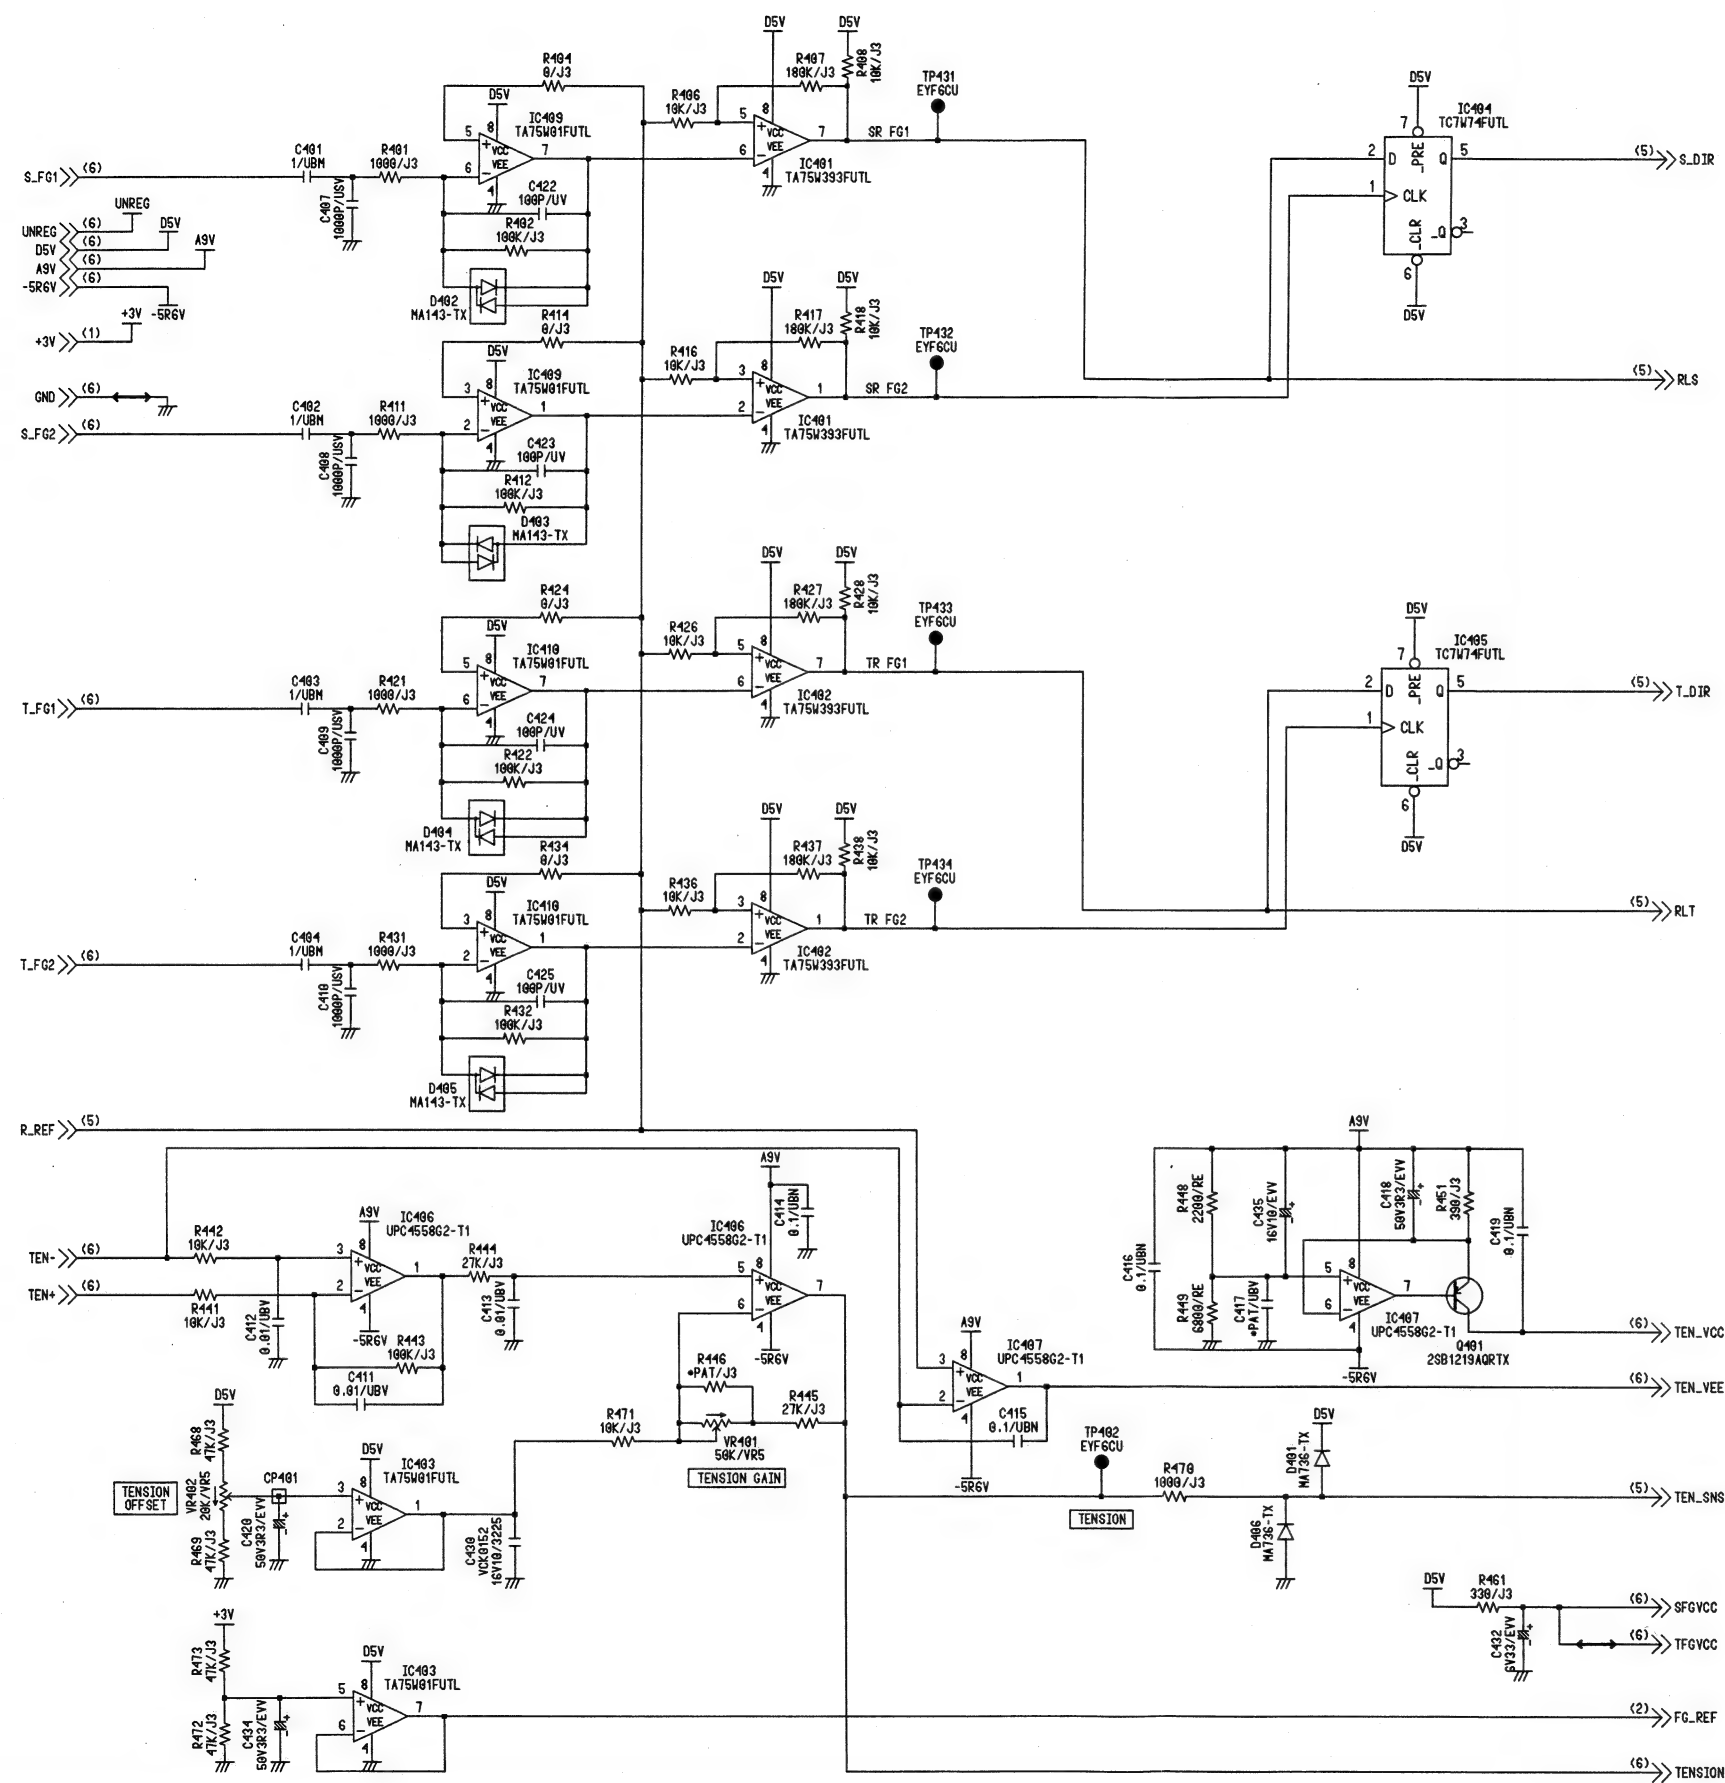



Ref No.400 Series. *PAT=PATTERN ONLY

COMPONENT NAME	SERVO	04/09
CIRCUIT BOARD NO.	VEP02437A/B	MODEL NO.
		SCM065

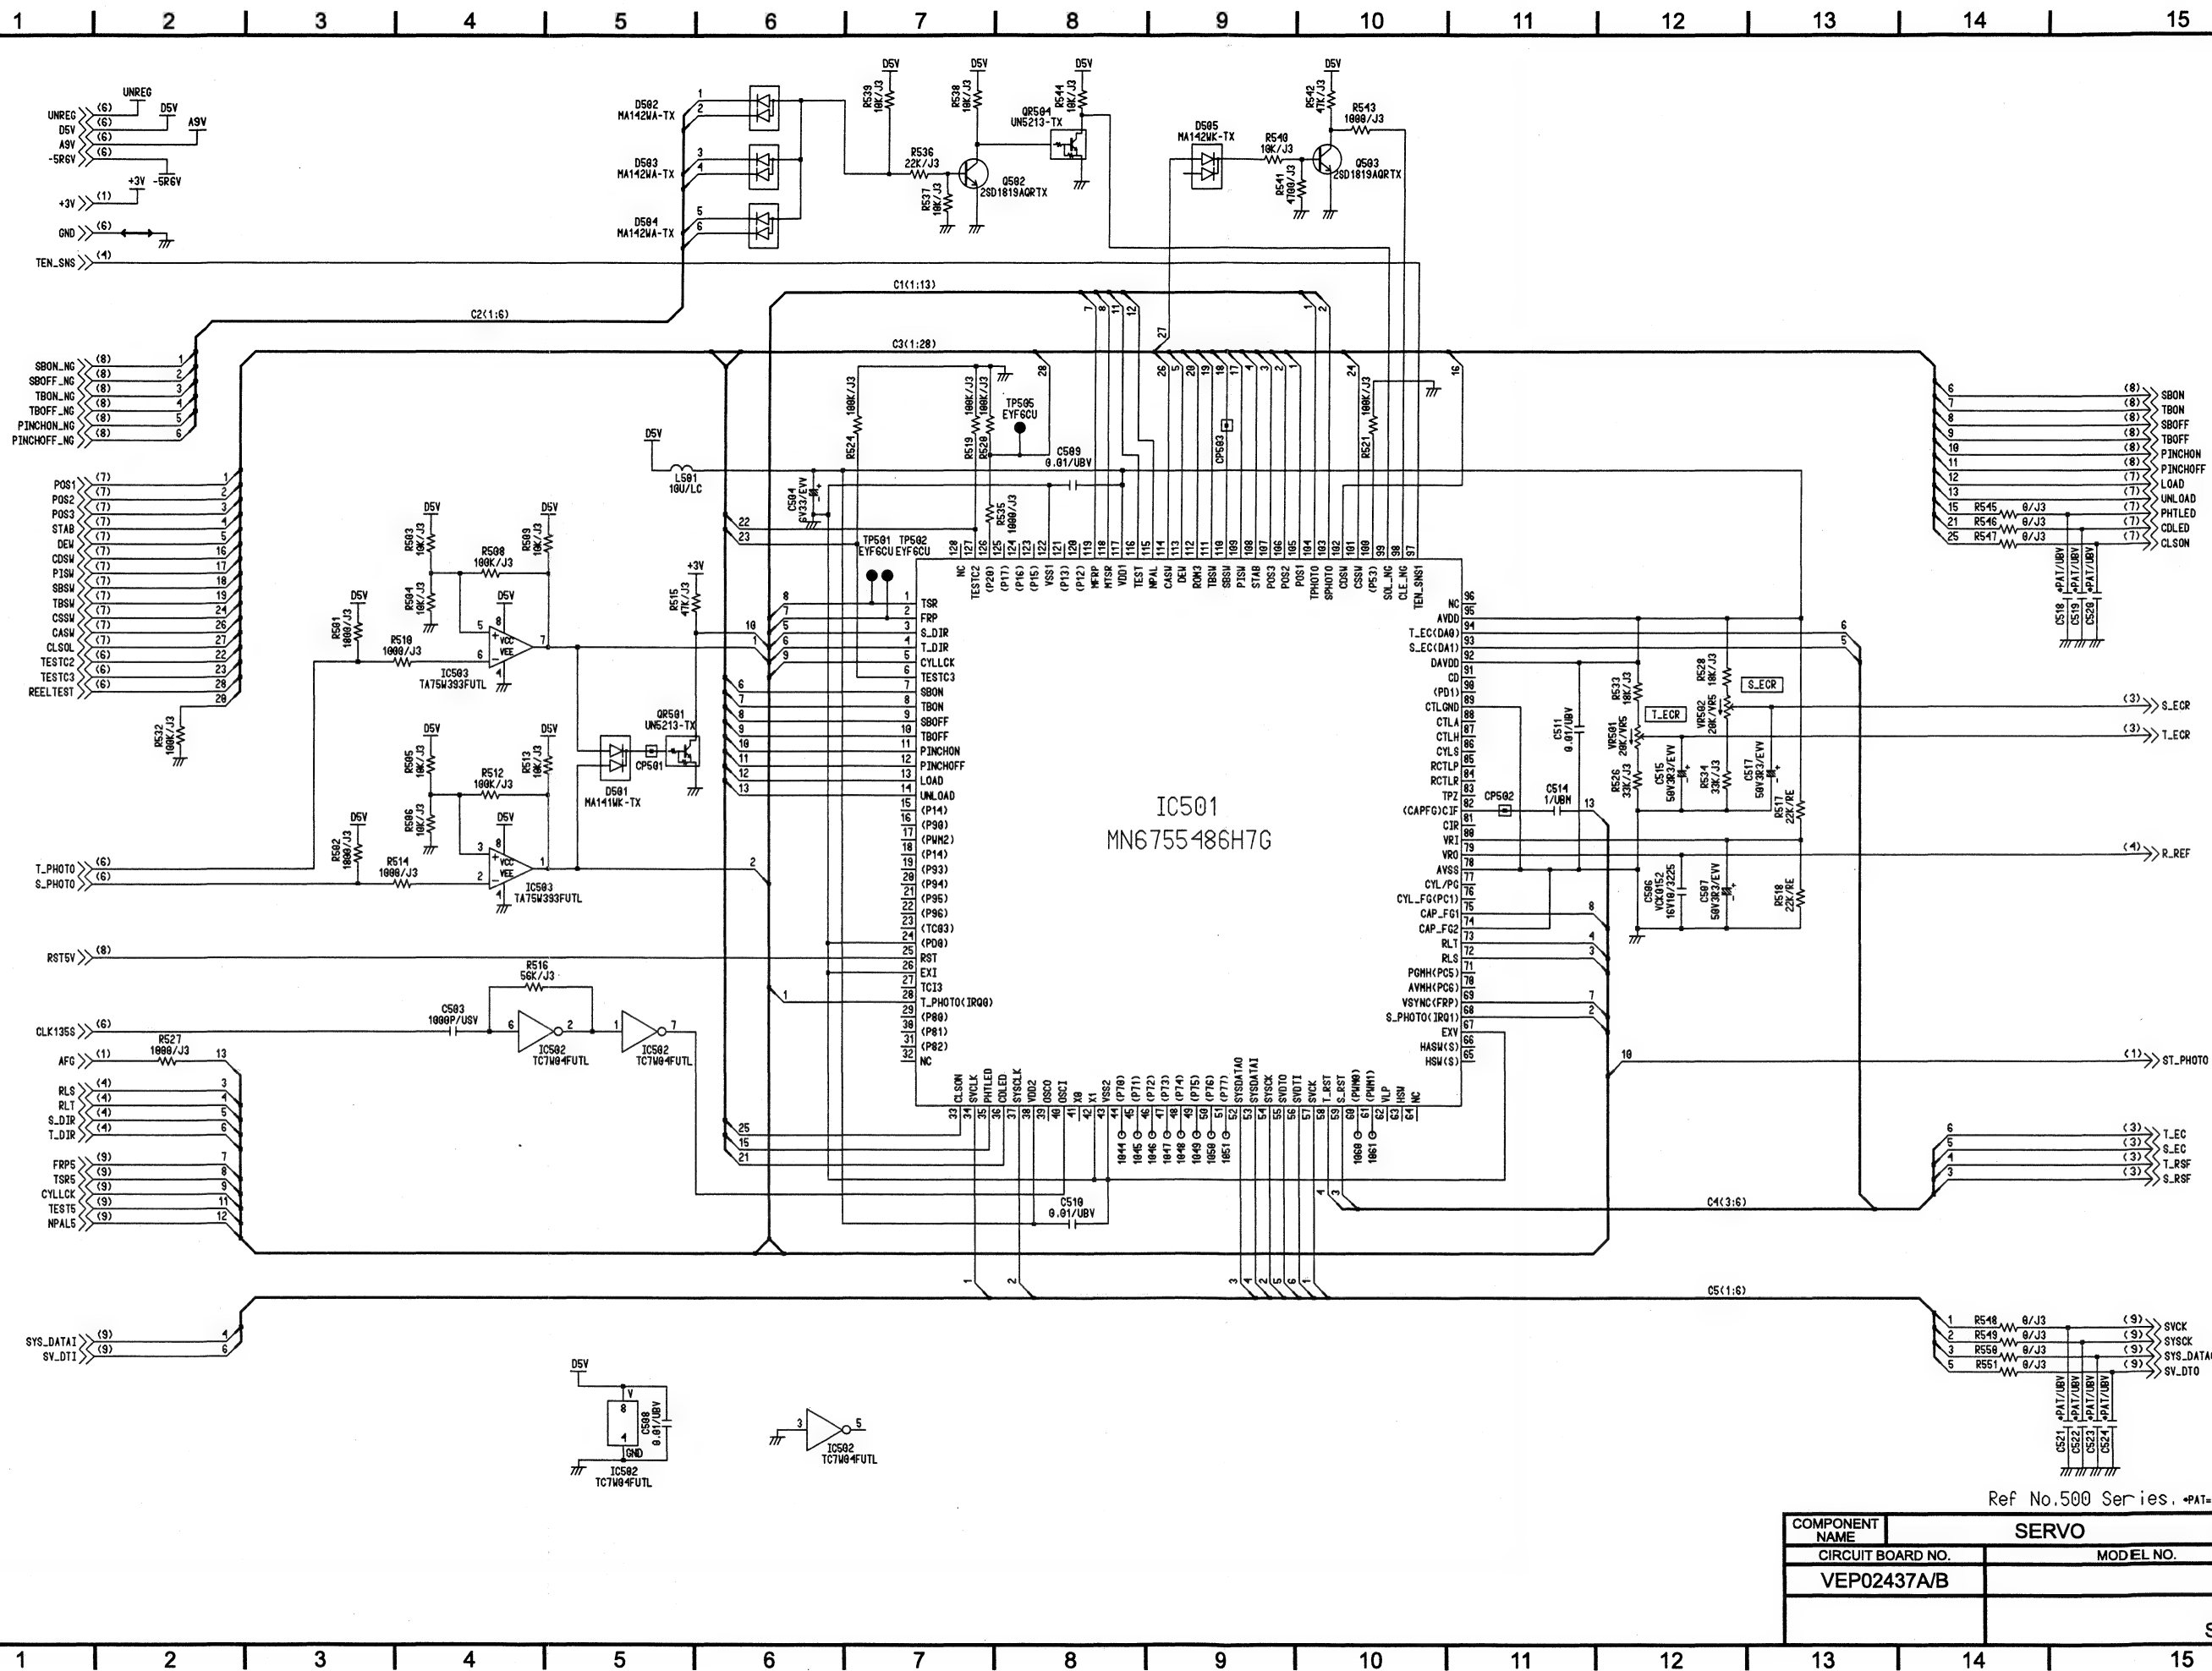


COMPONENT NAME	SERVO	05/09
CIRCUIT BOARD NO.	MODEL NO.	
VEP02437A/B		
	SCM066	

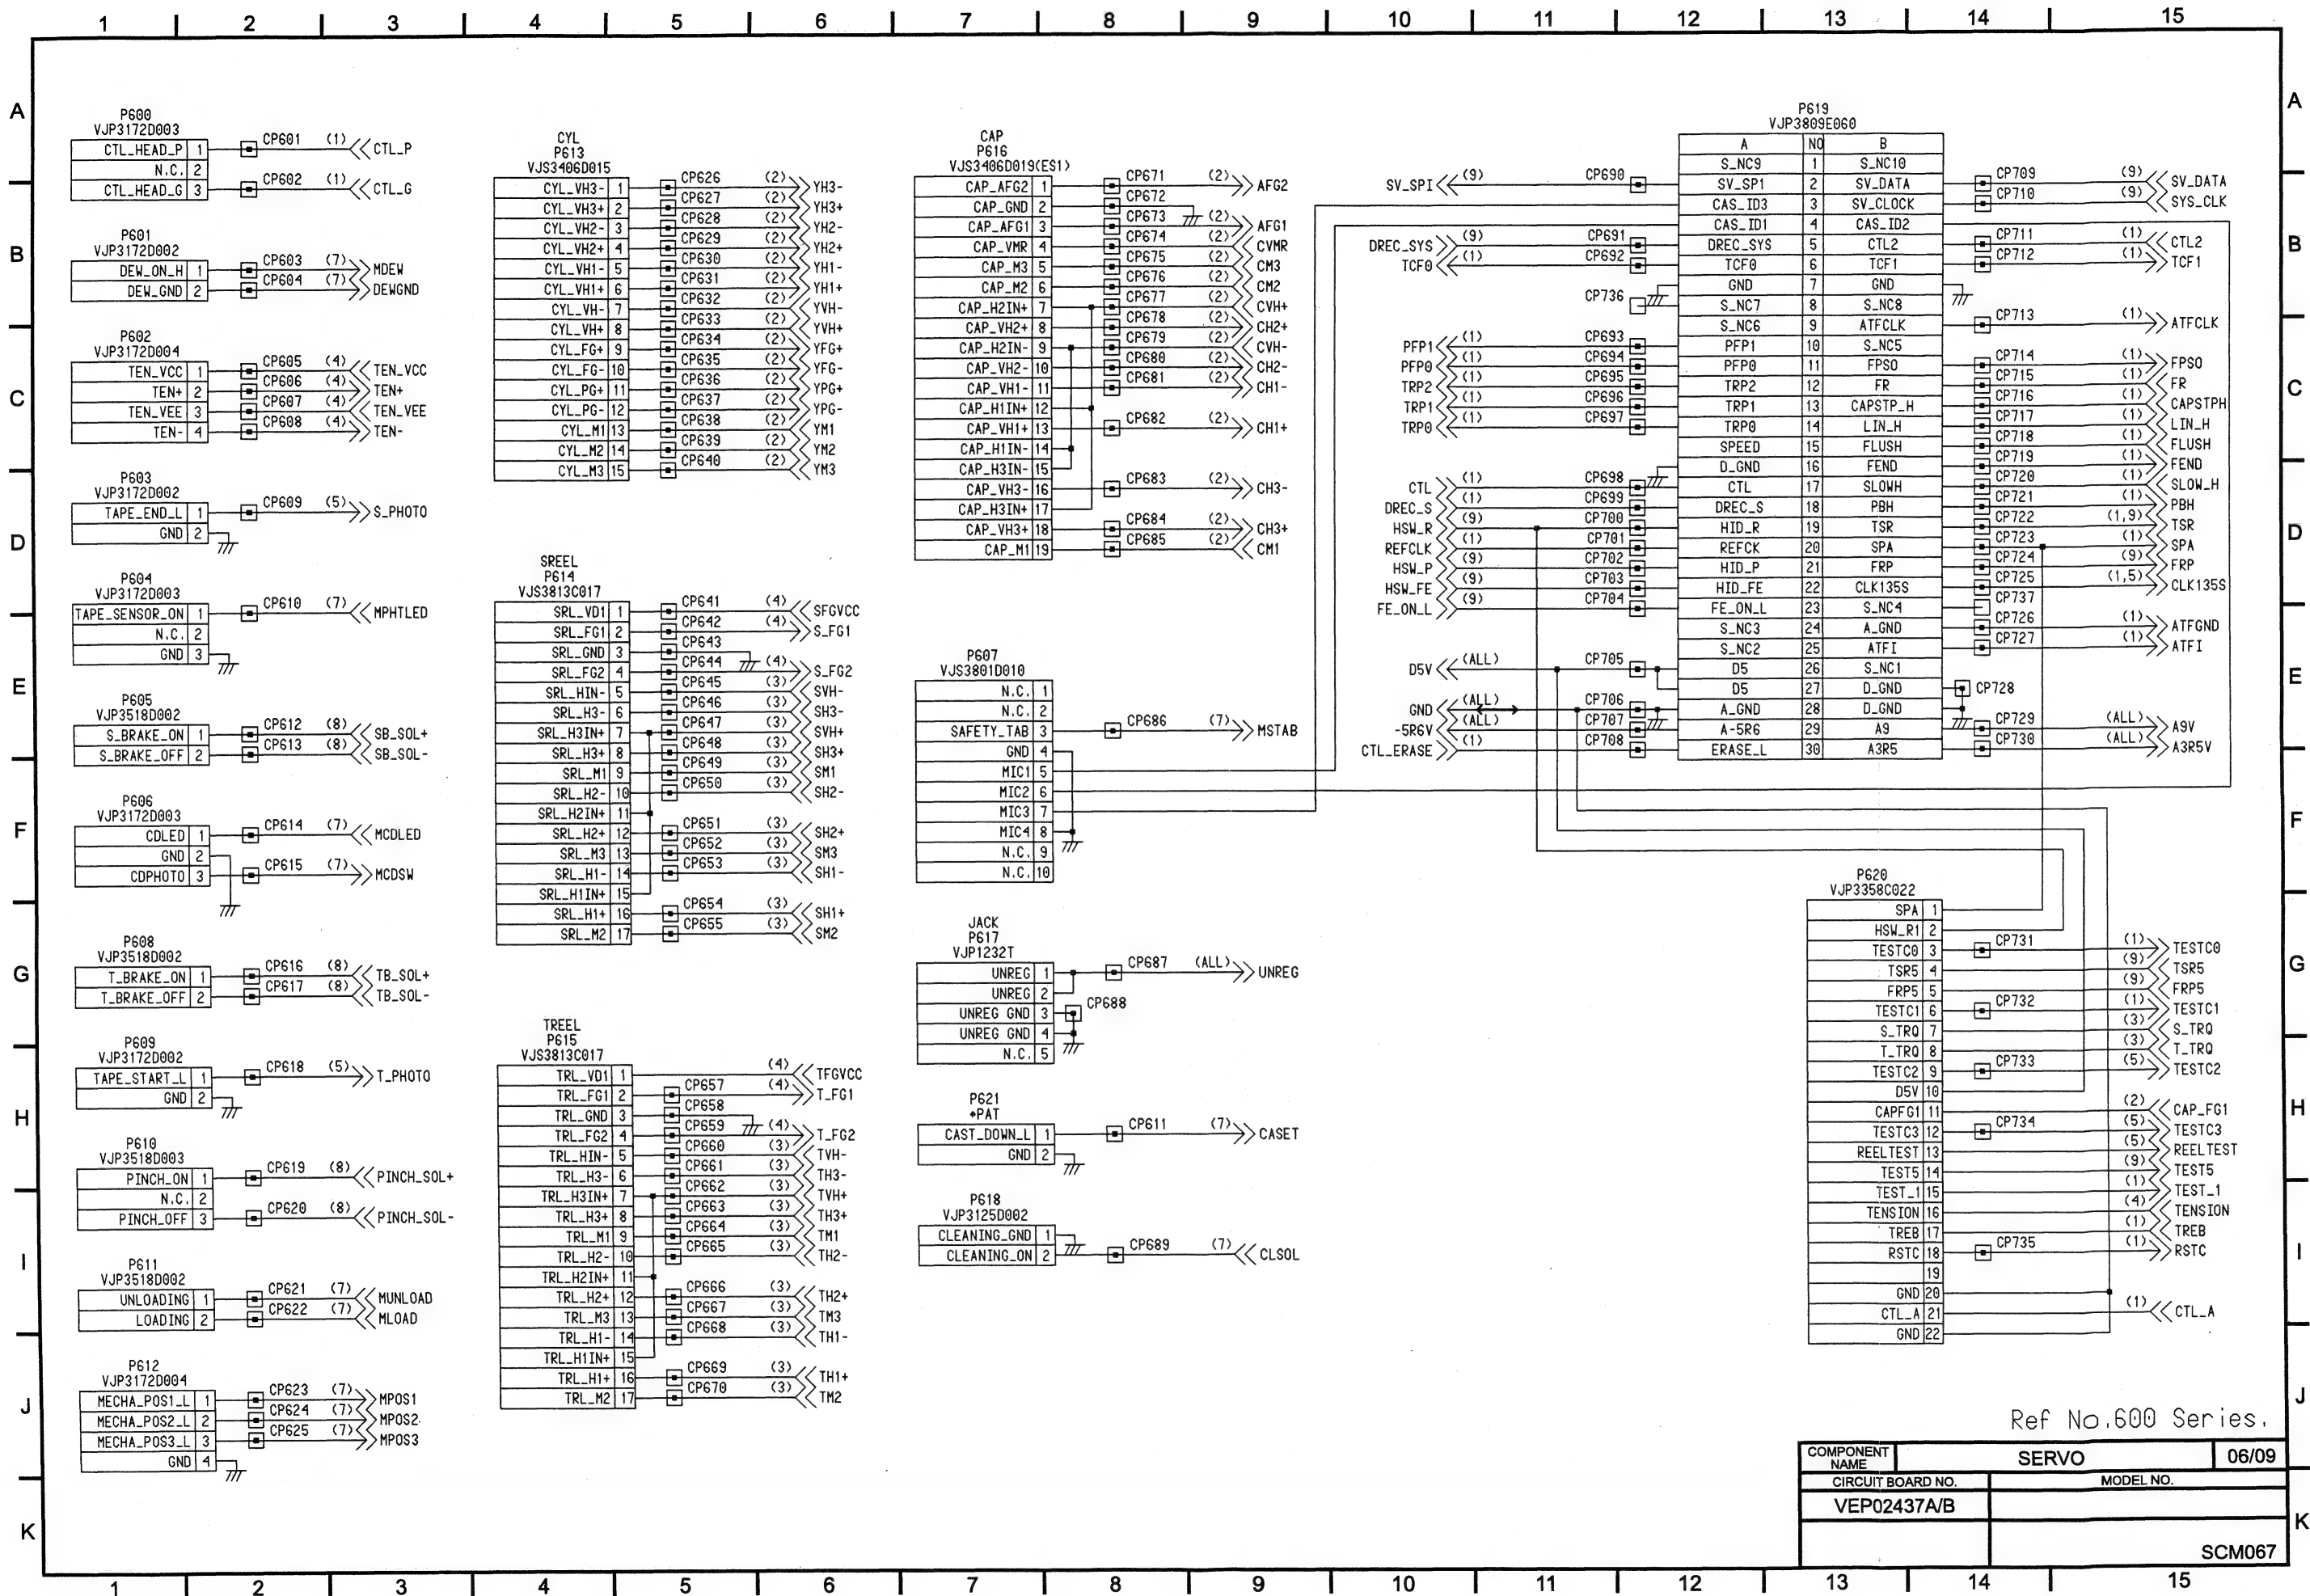


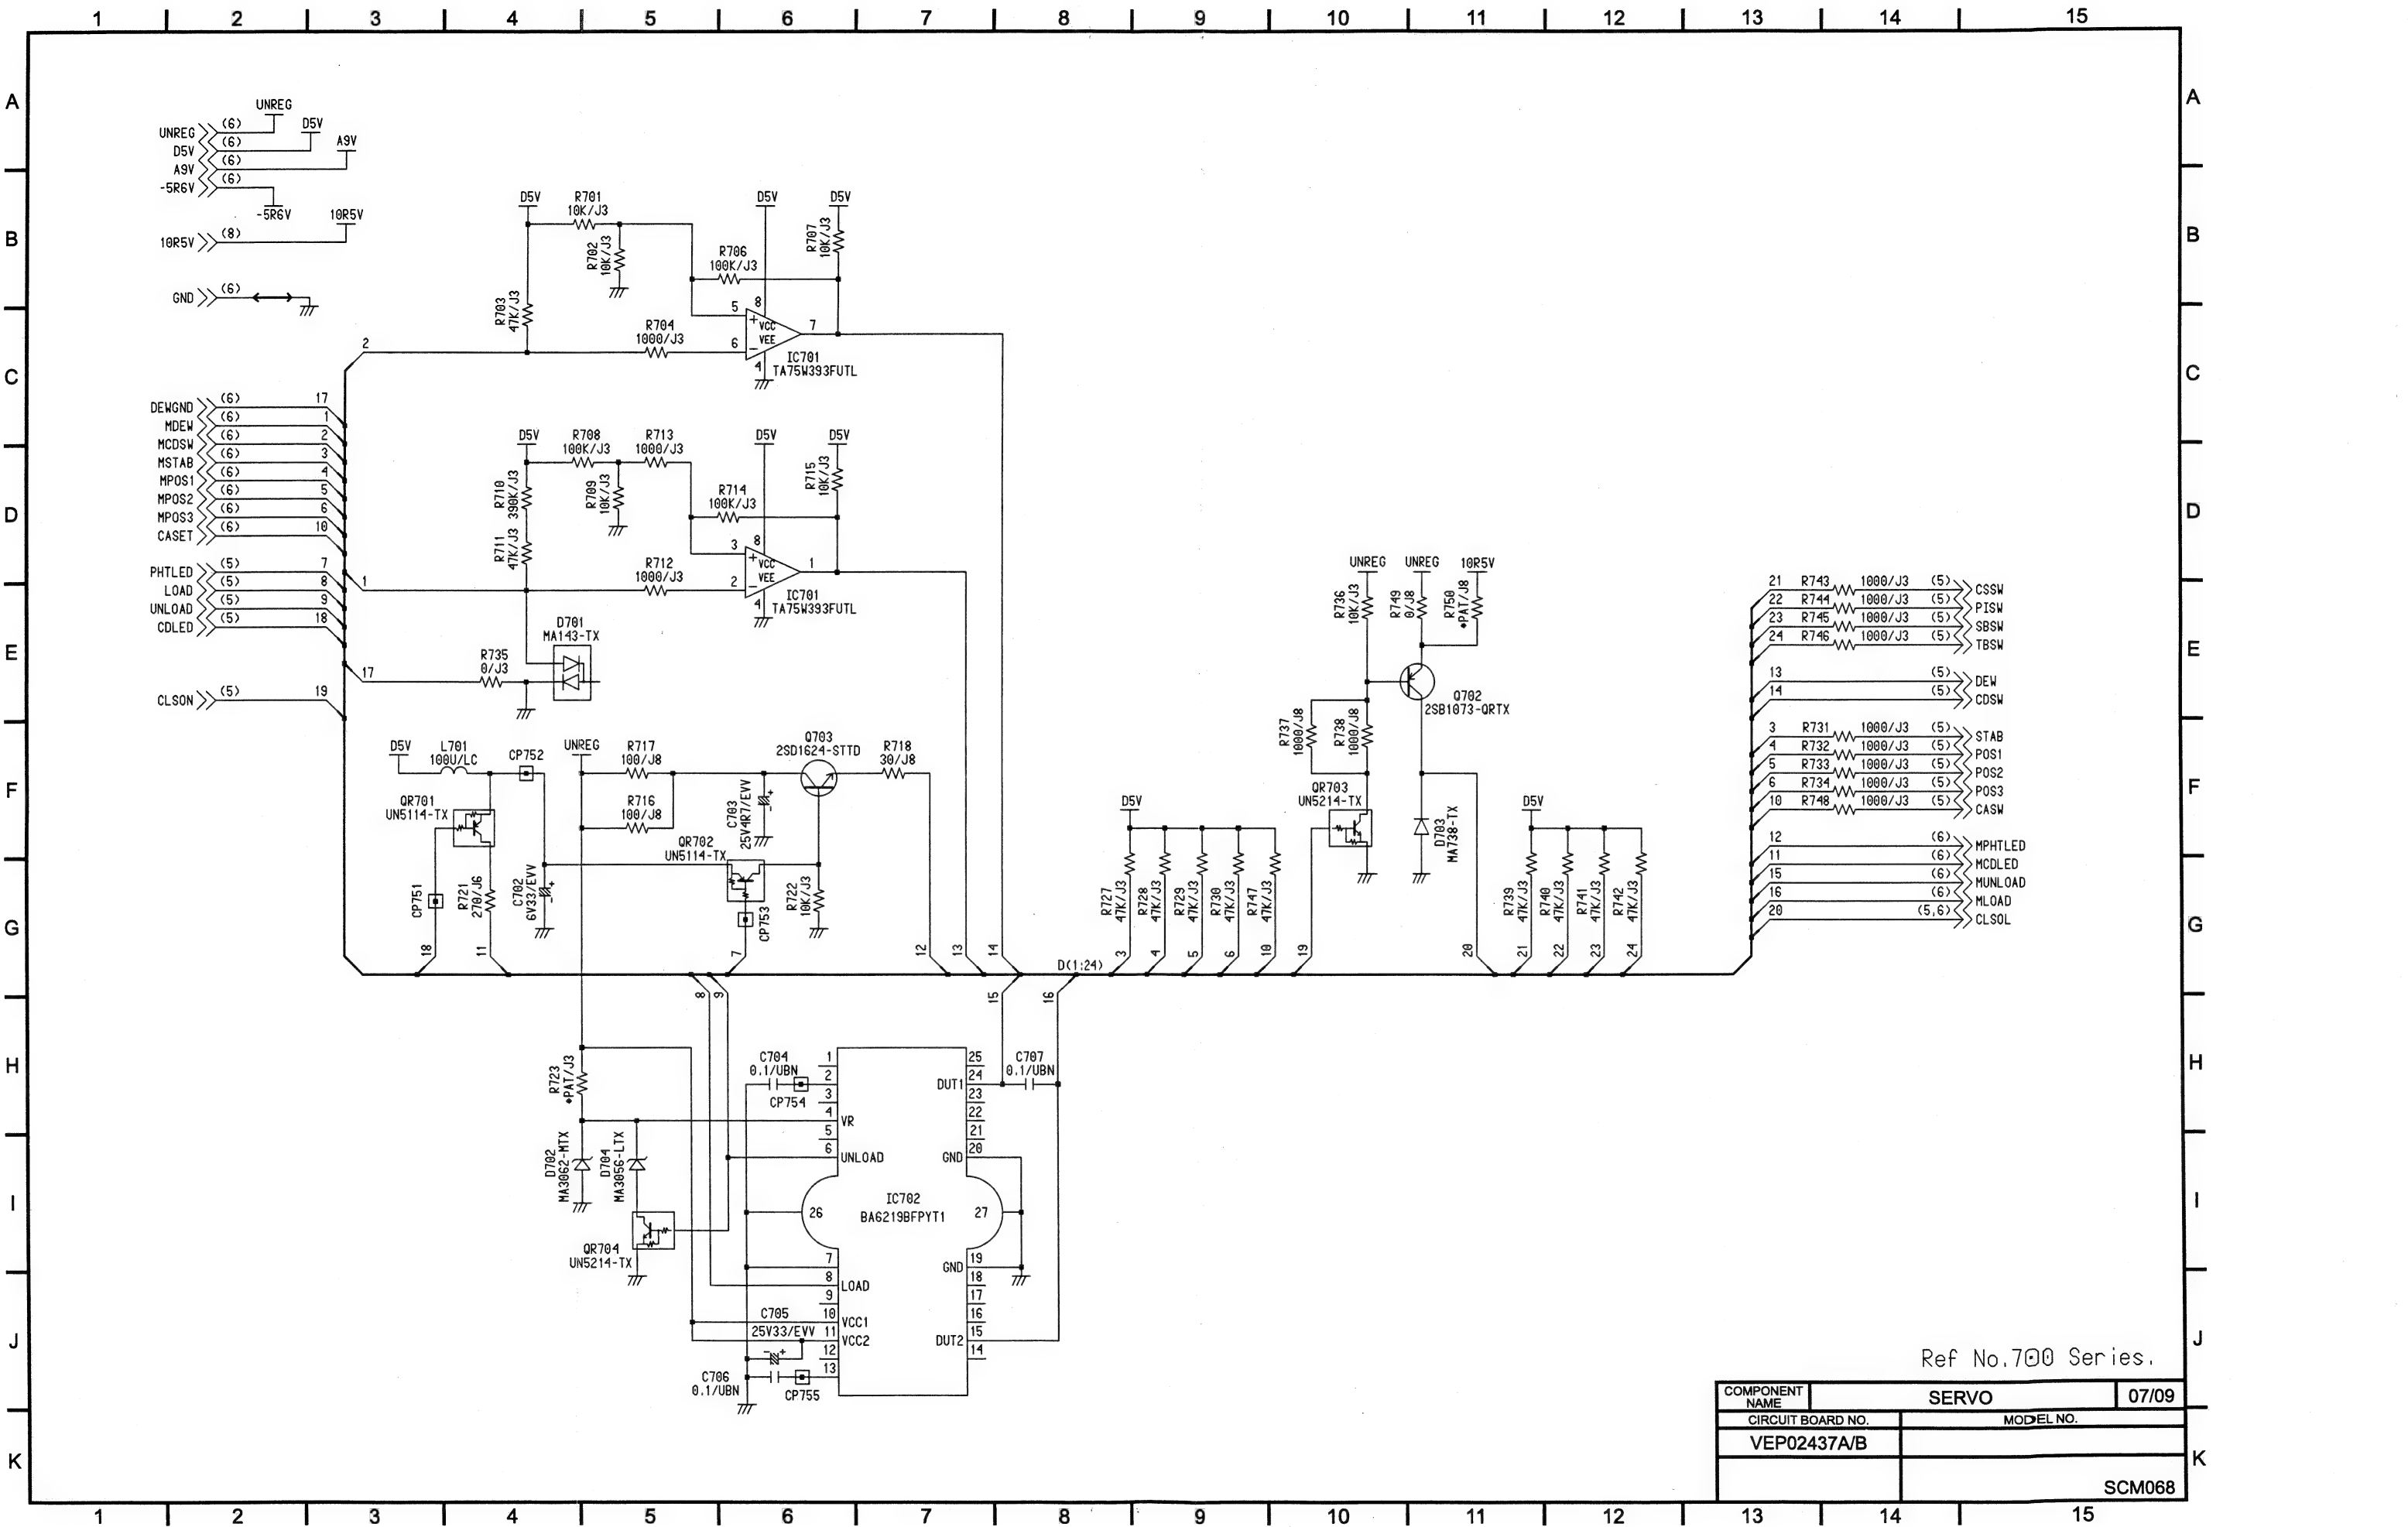


Ref No.700 Series.


COMPONENT NAME	SERVO	07/09
CIRCUIT BOARD NO.	MODEL NO.	
VEP02437A/B		
		SCM068

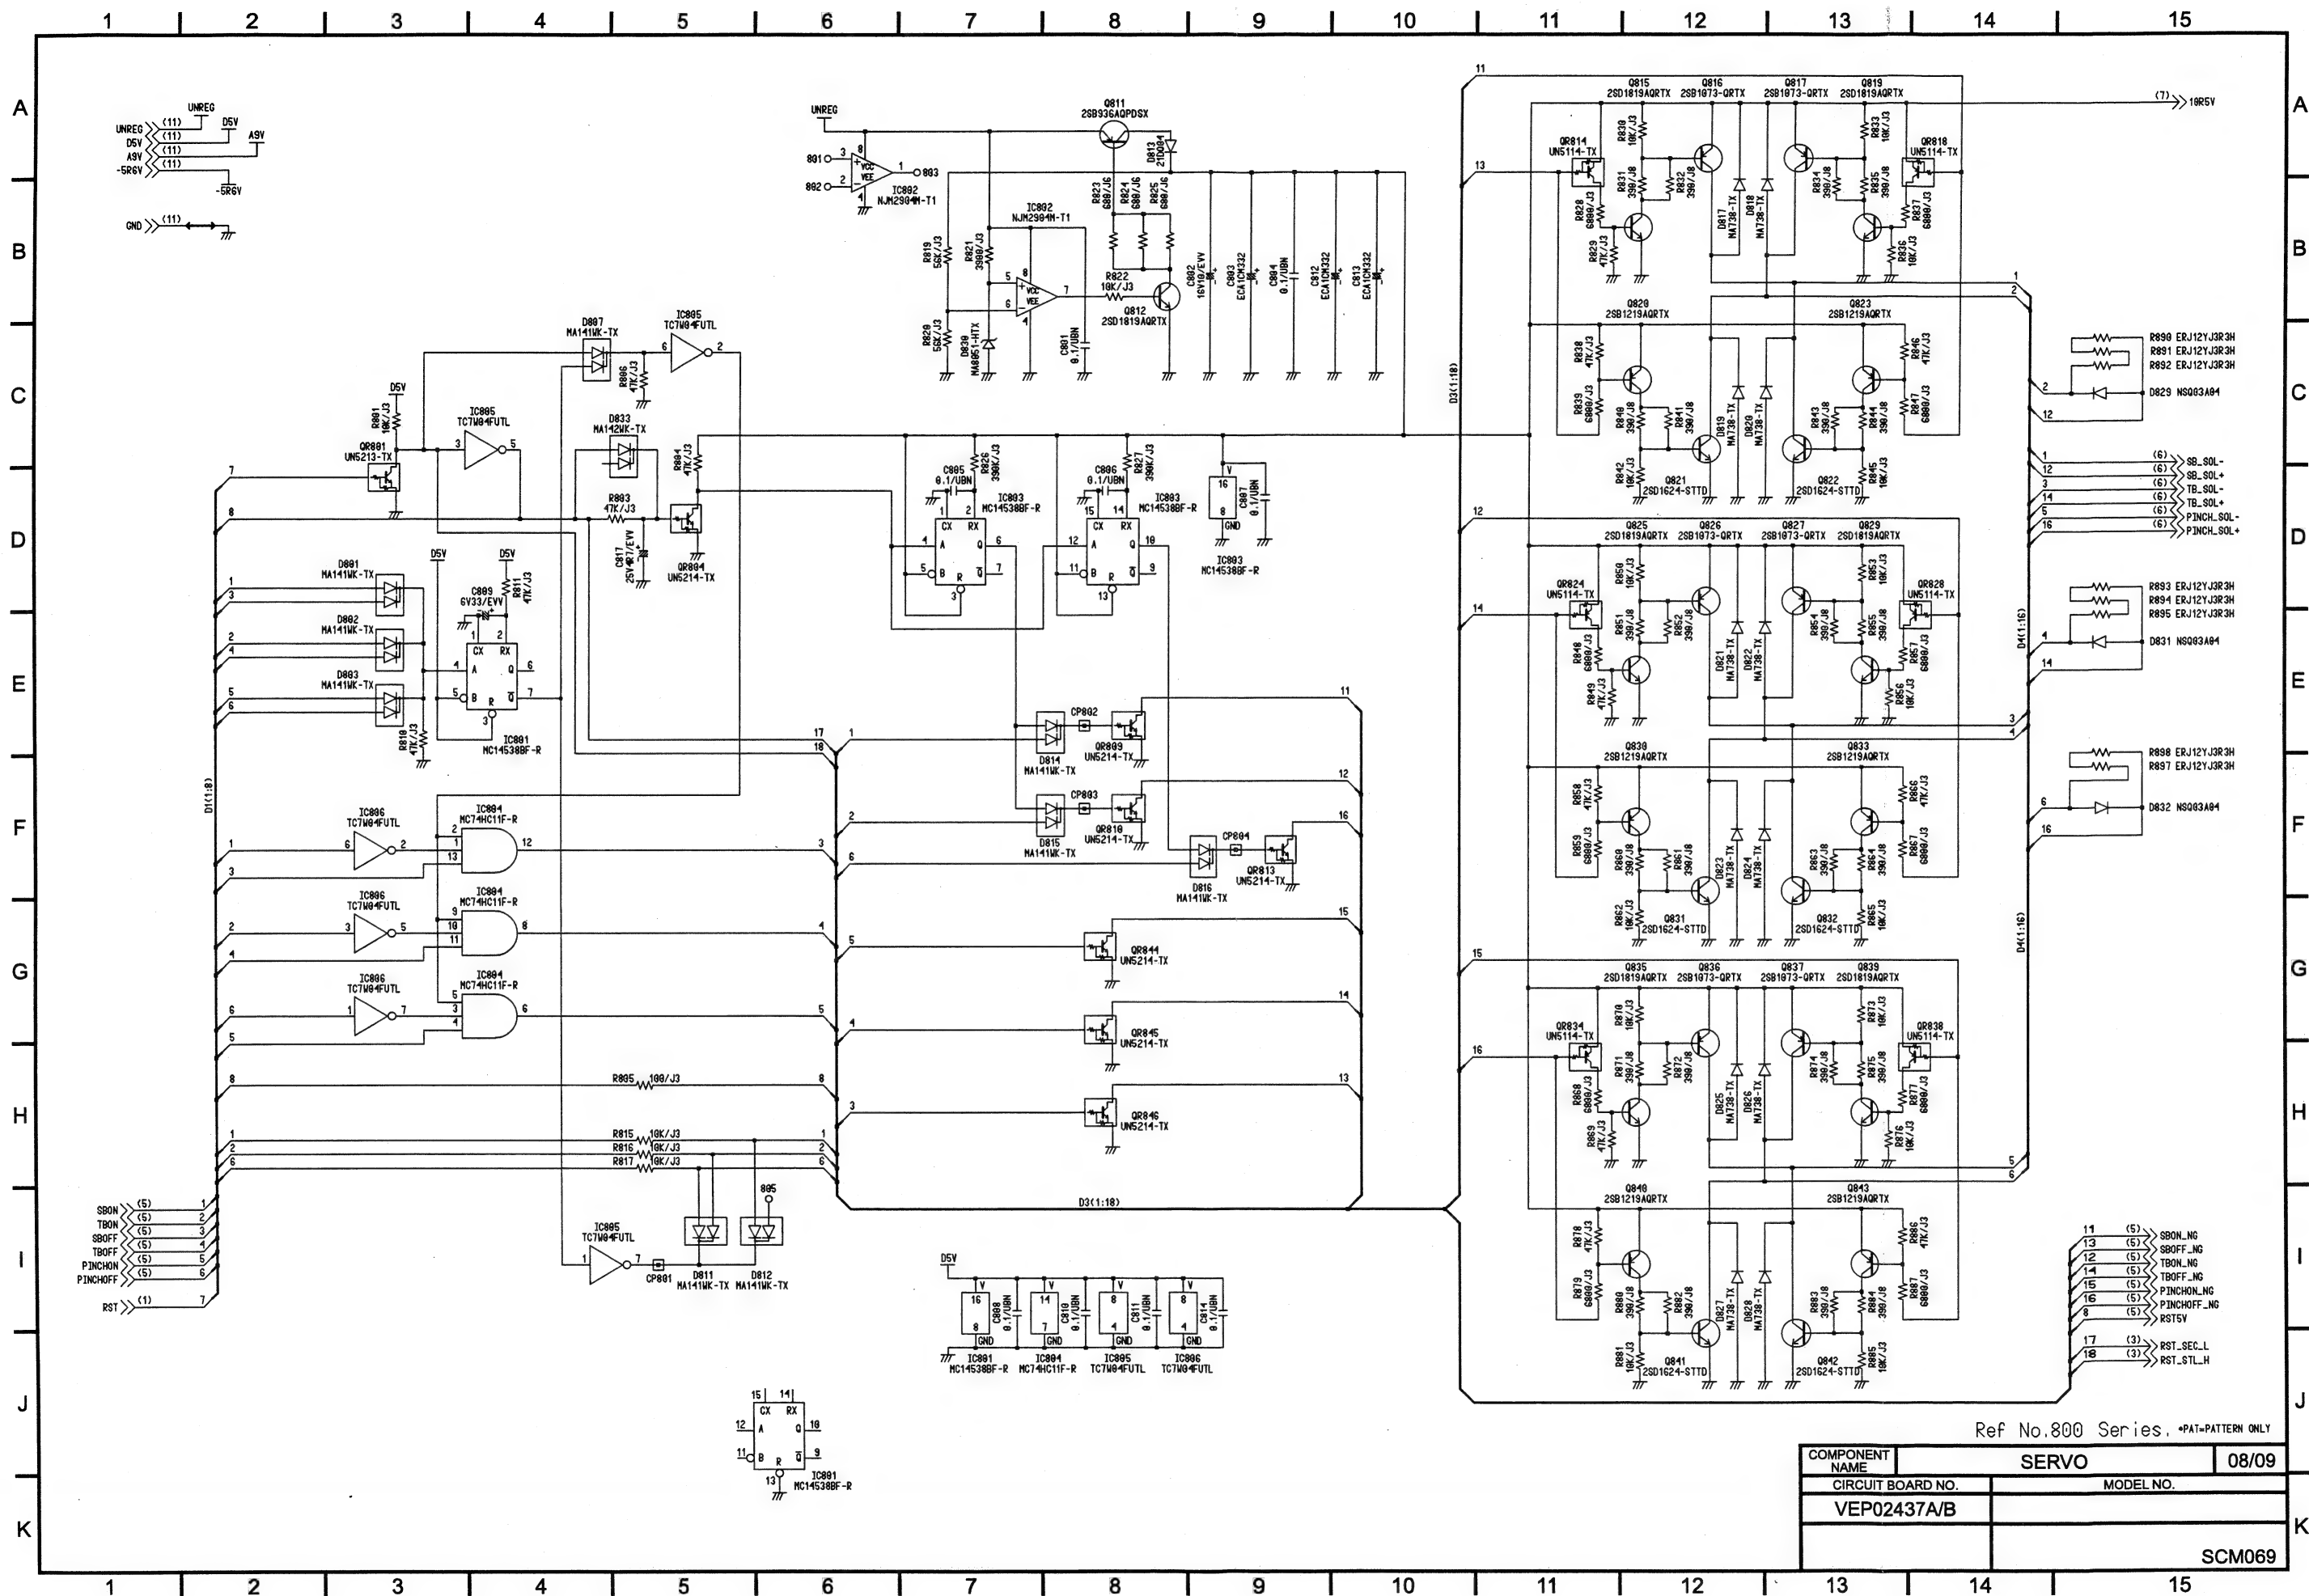

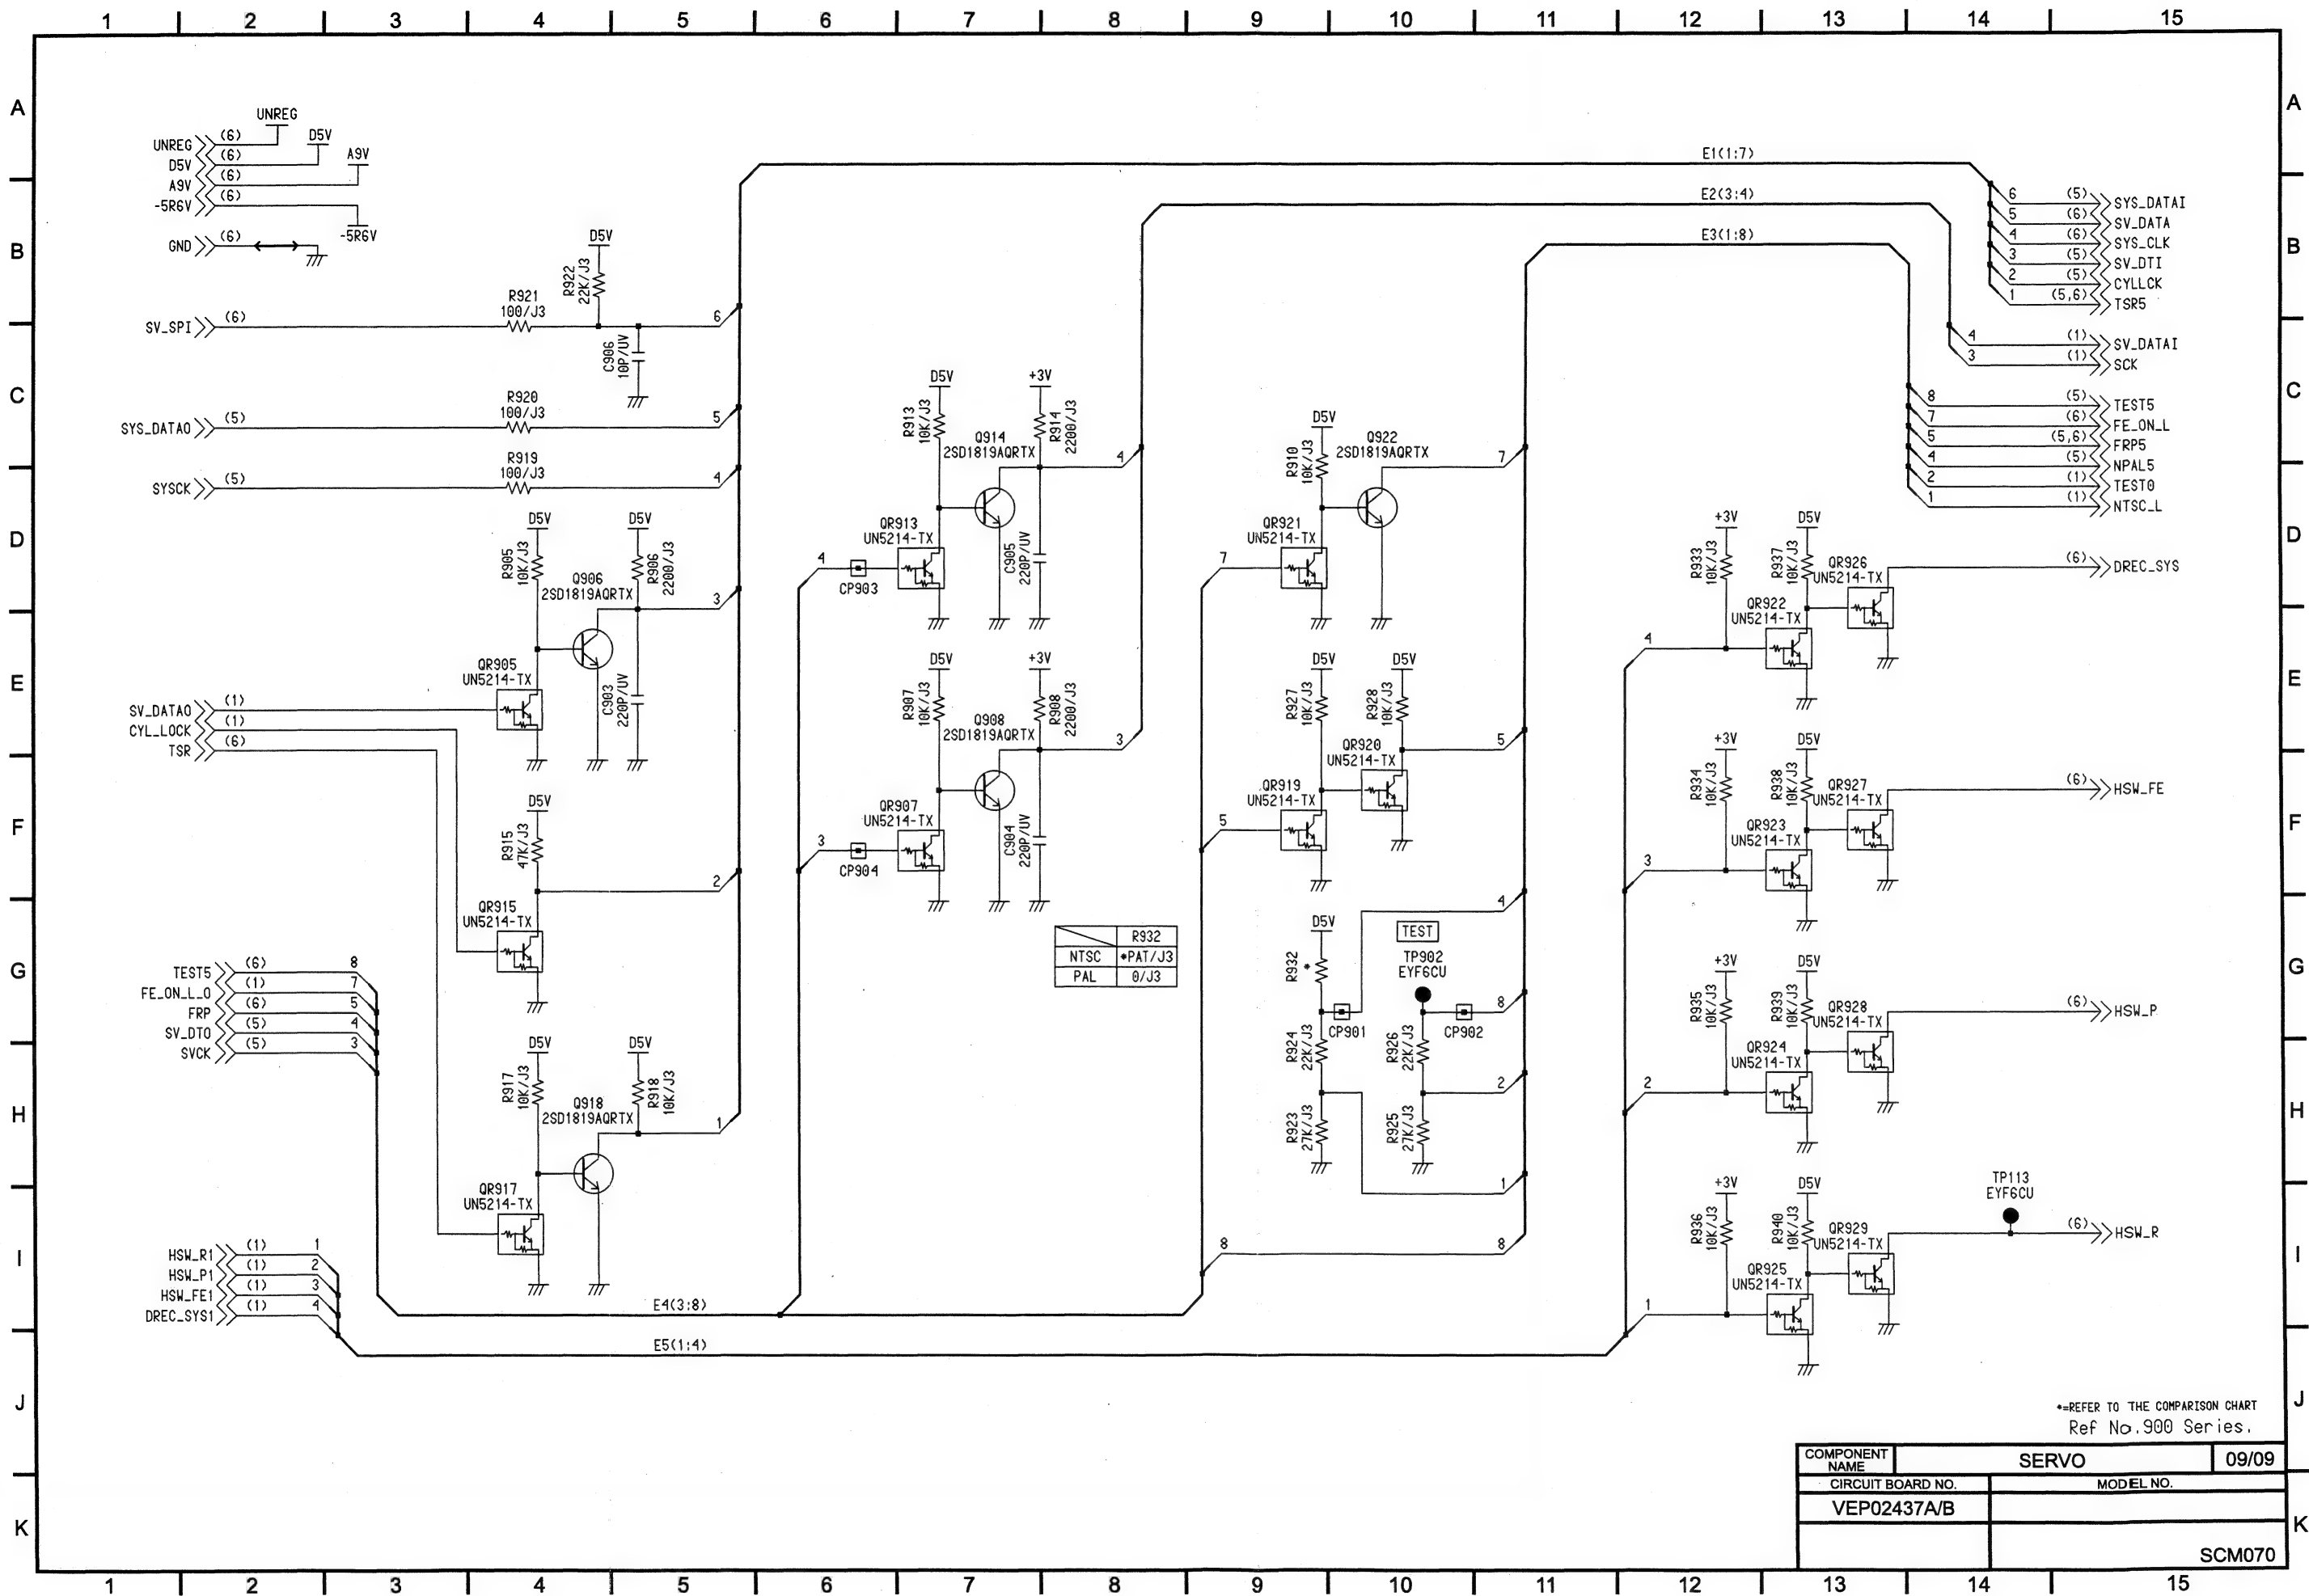


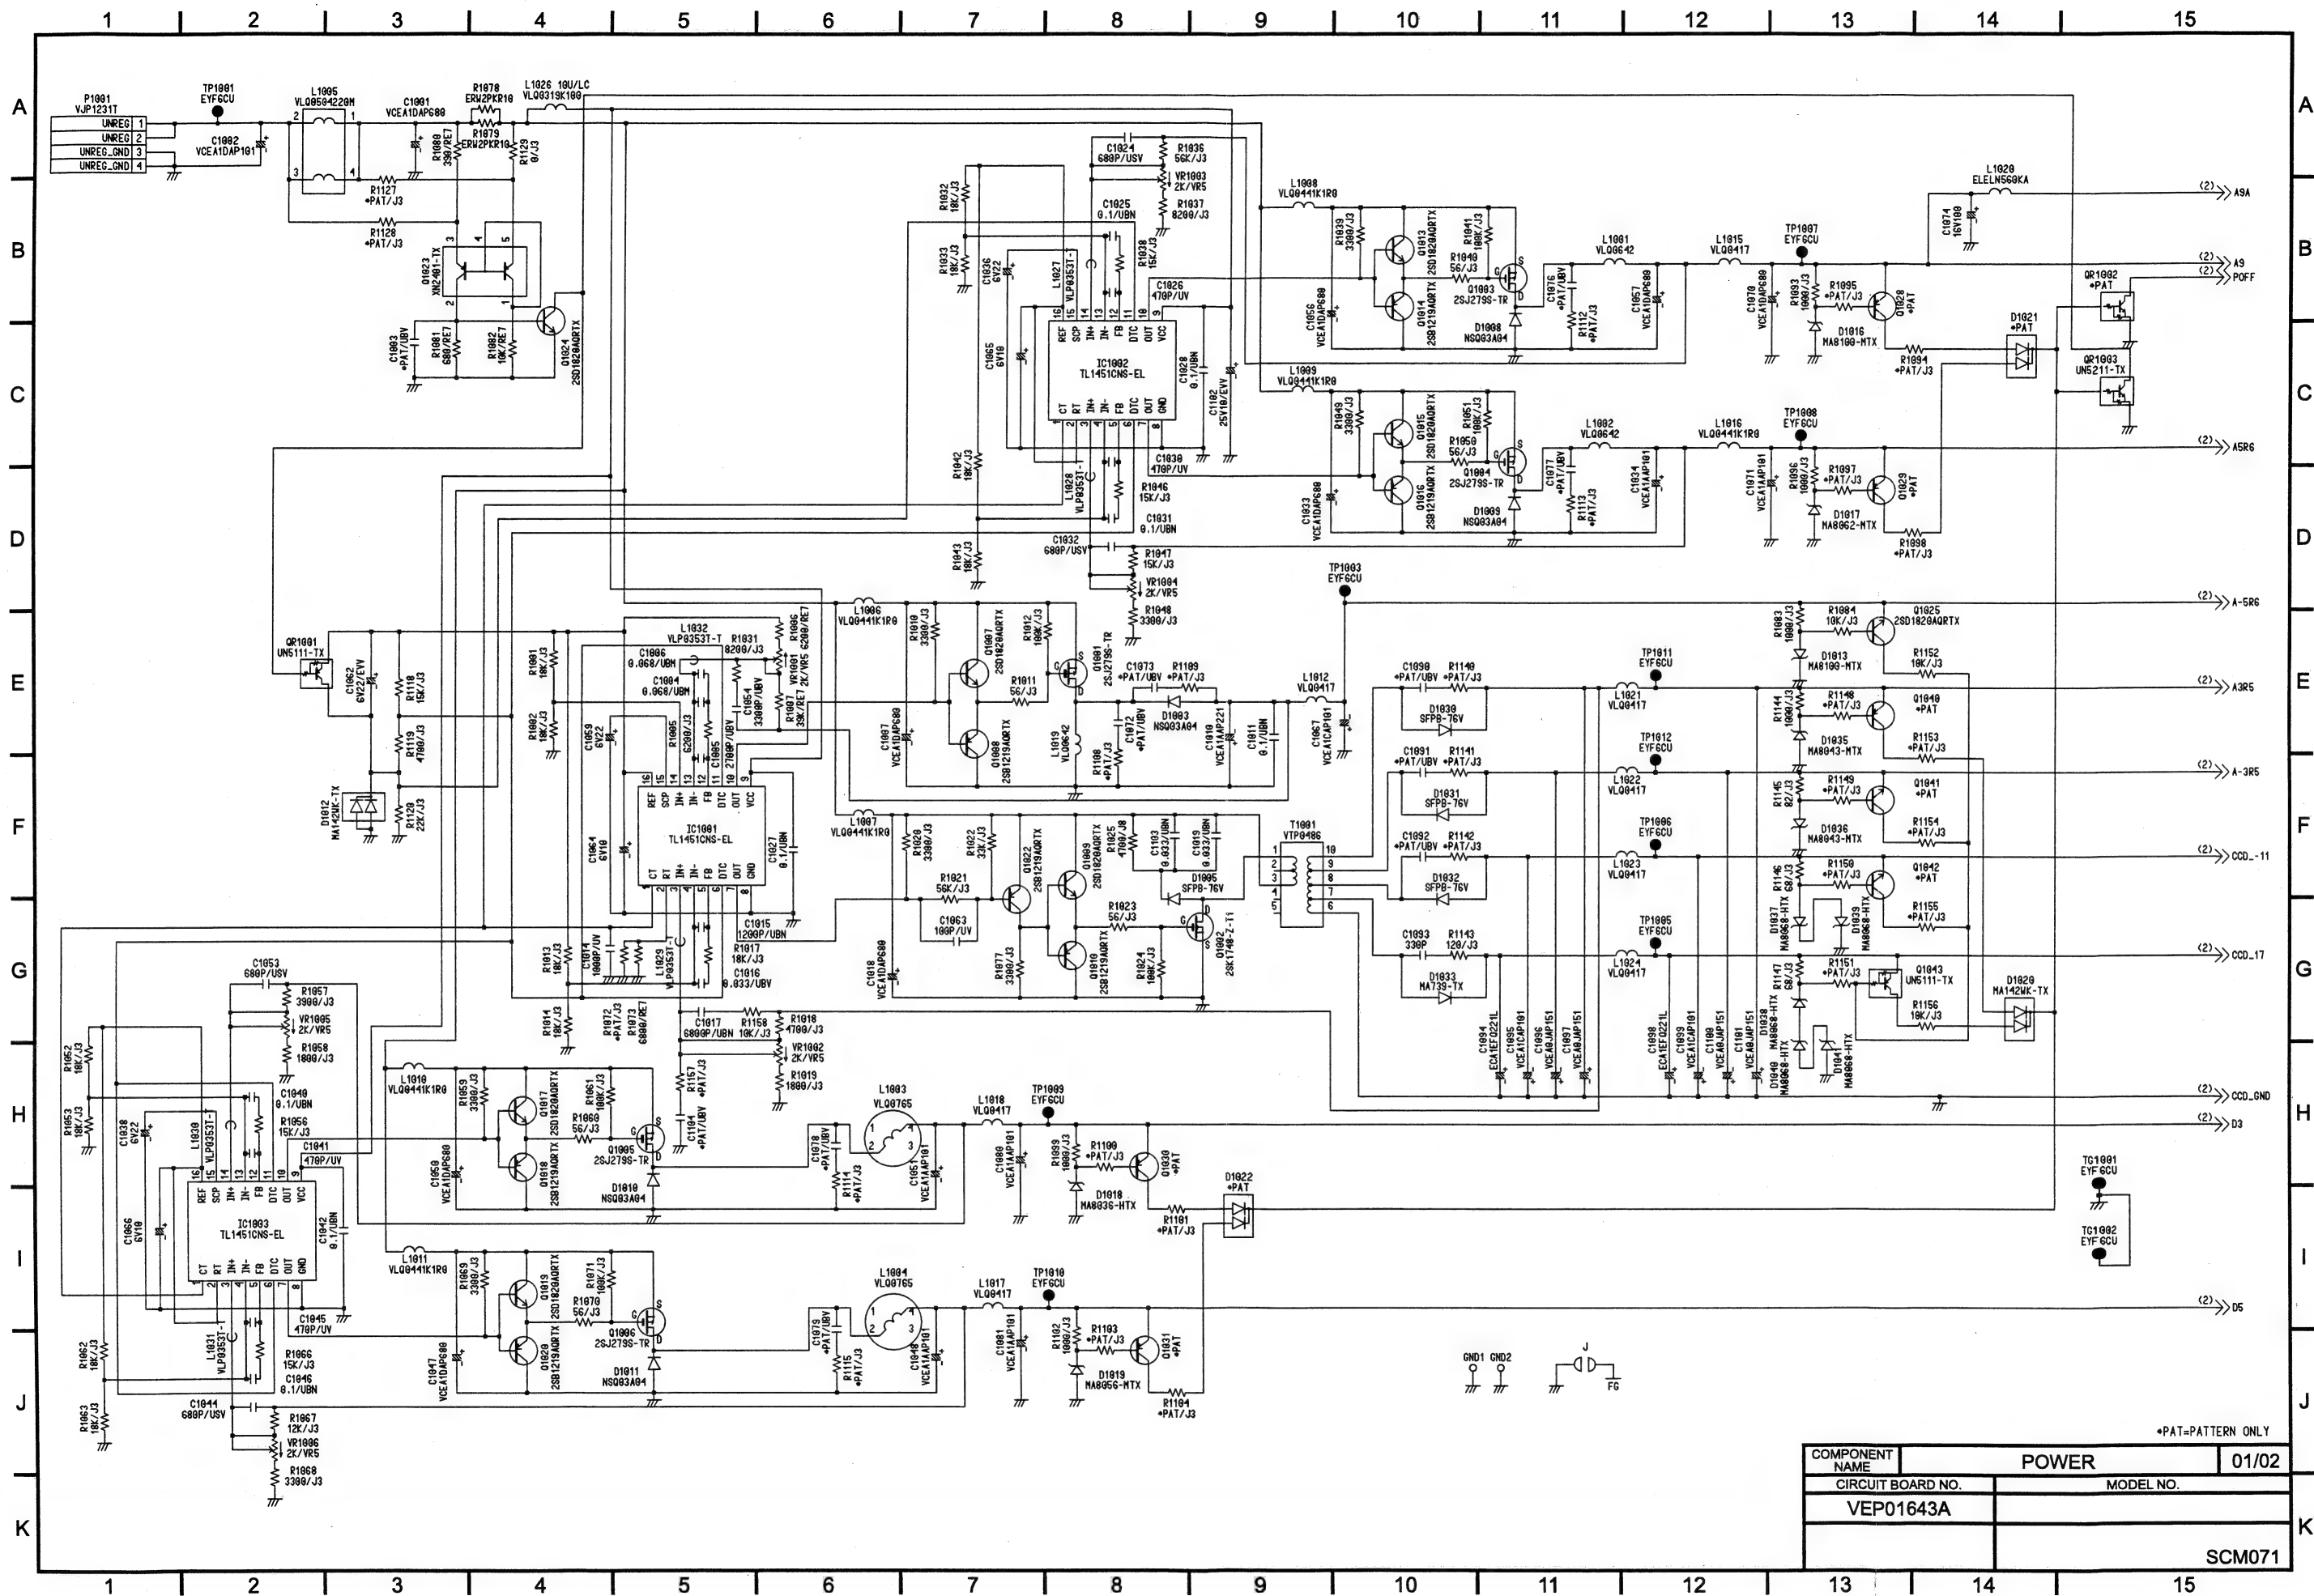


COMPONENT NAME		POWER	01/02
CIRCUIT BOARD NO.		MODEL NO.	
VEP01643A			
		SCM071	

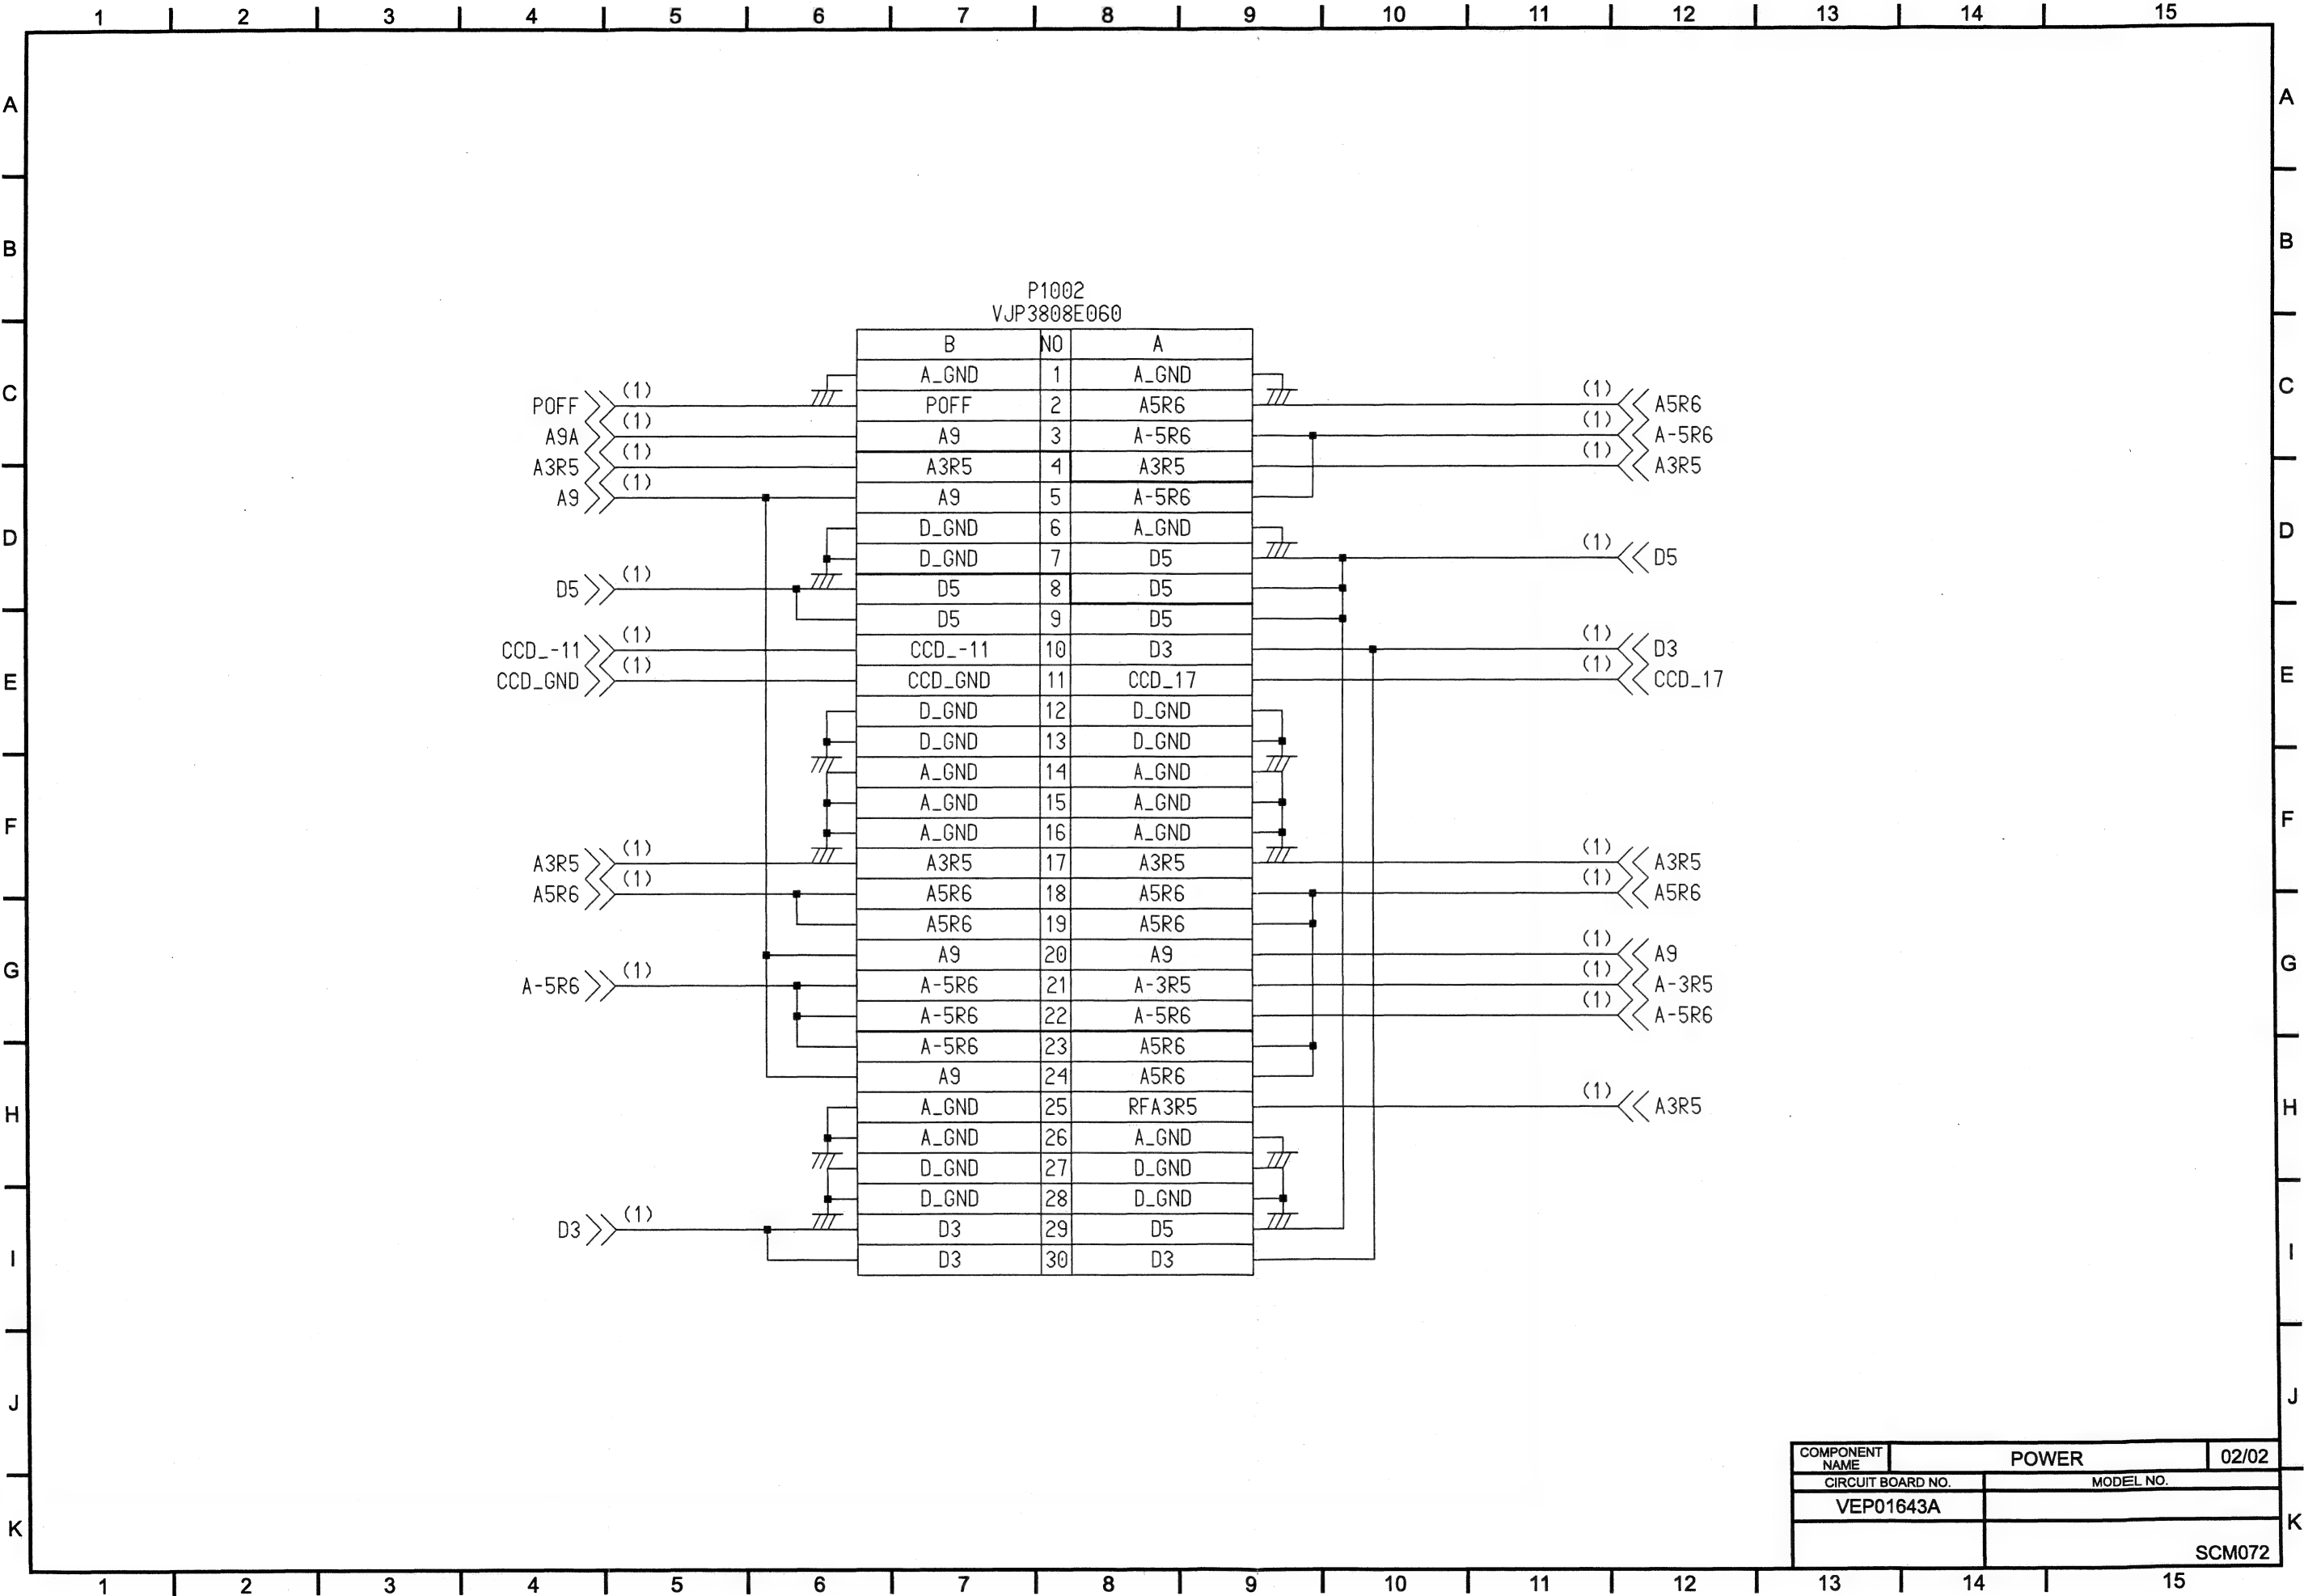


COMPONENT NAME	POWER		02/02
CIRCUIT BOARD NO.		MODEL NO.	
VEP01643A			
		SCM072	

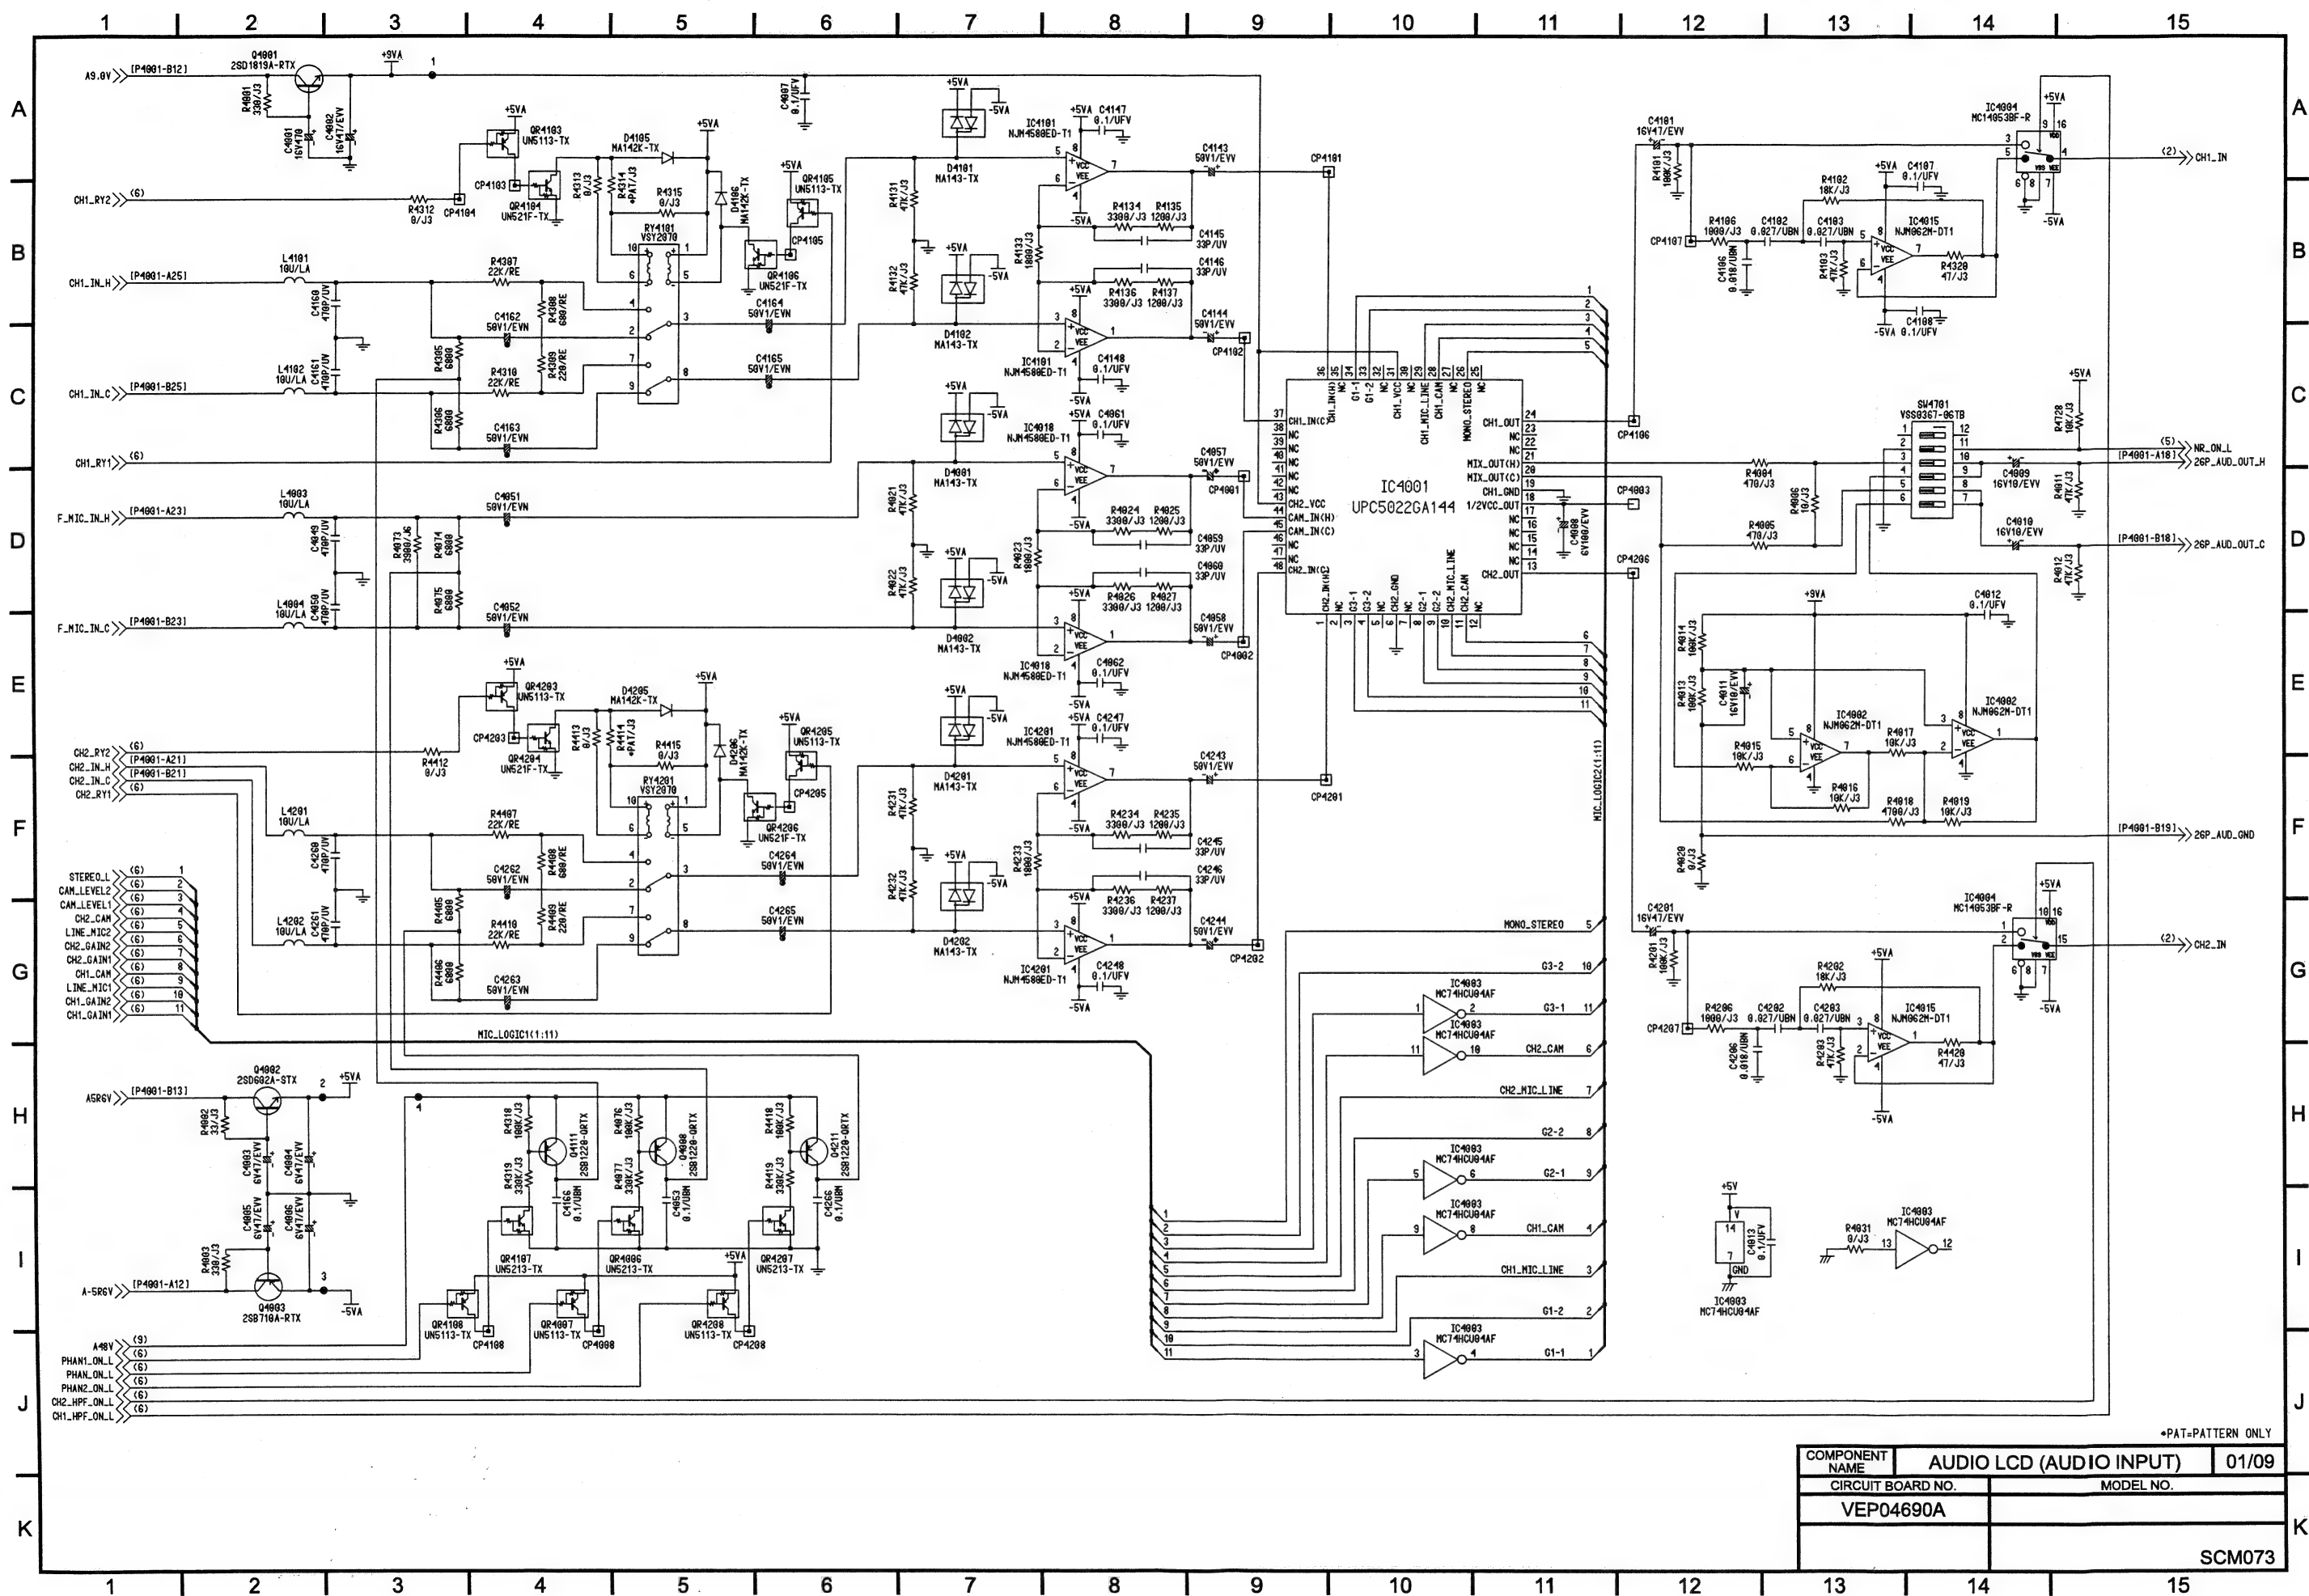



COMPONENT NAME		AUDIO LCD (AUDIO INPUT)	01/09
CIRCUIT BOARD NO.		MODEL NO.	
VEP04690A			
		SCM073	

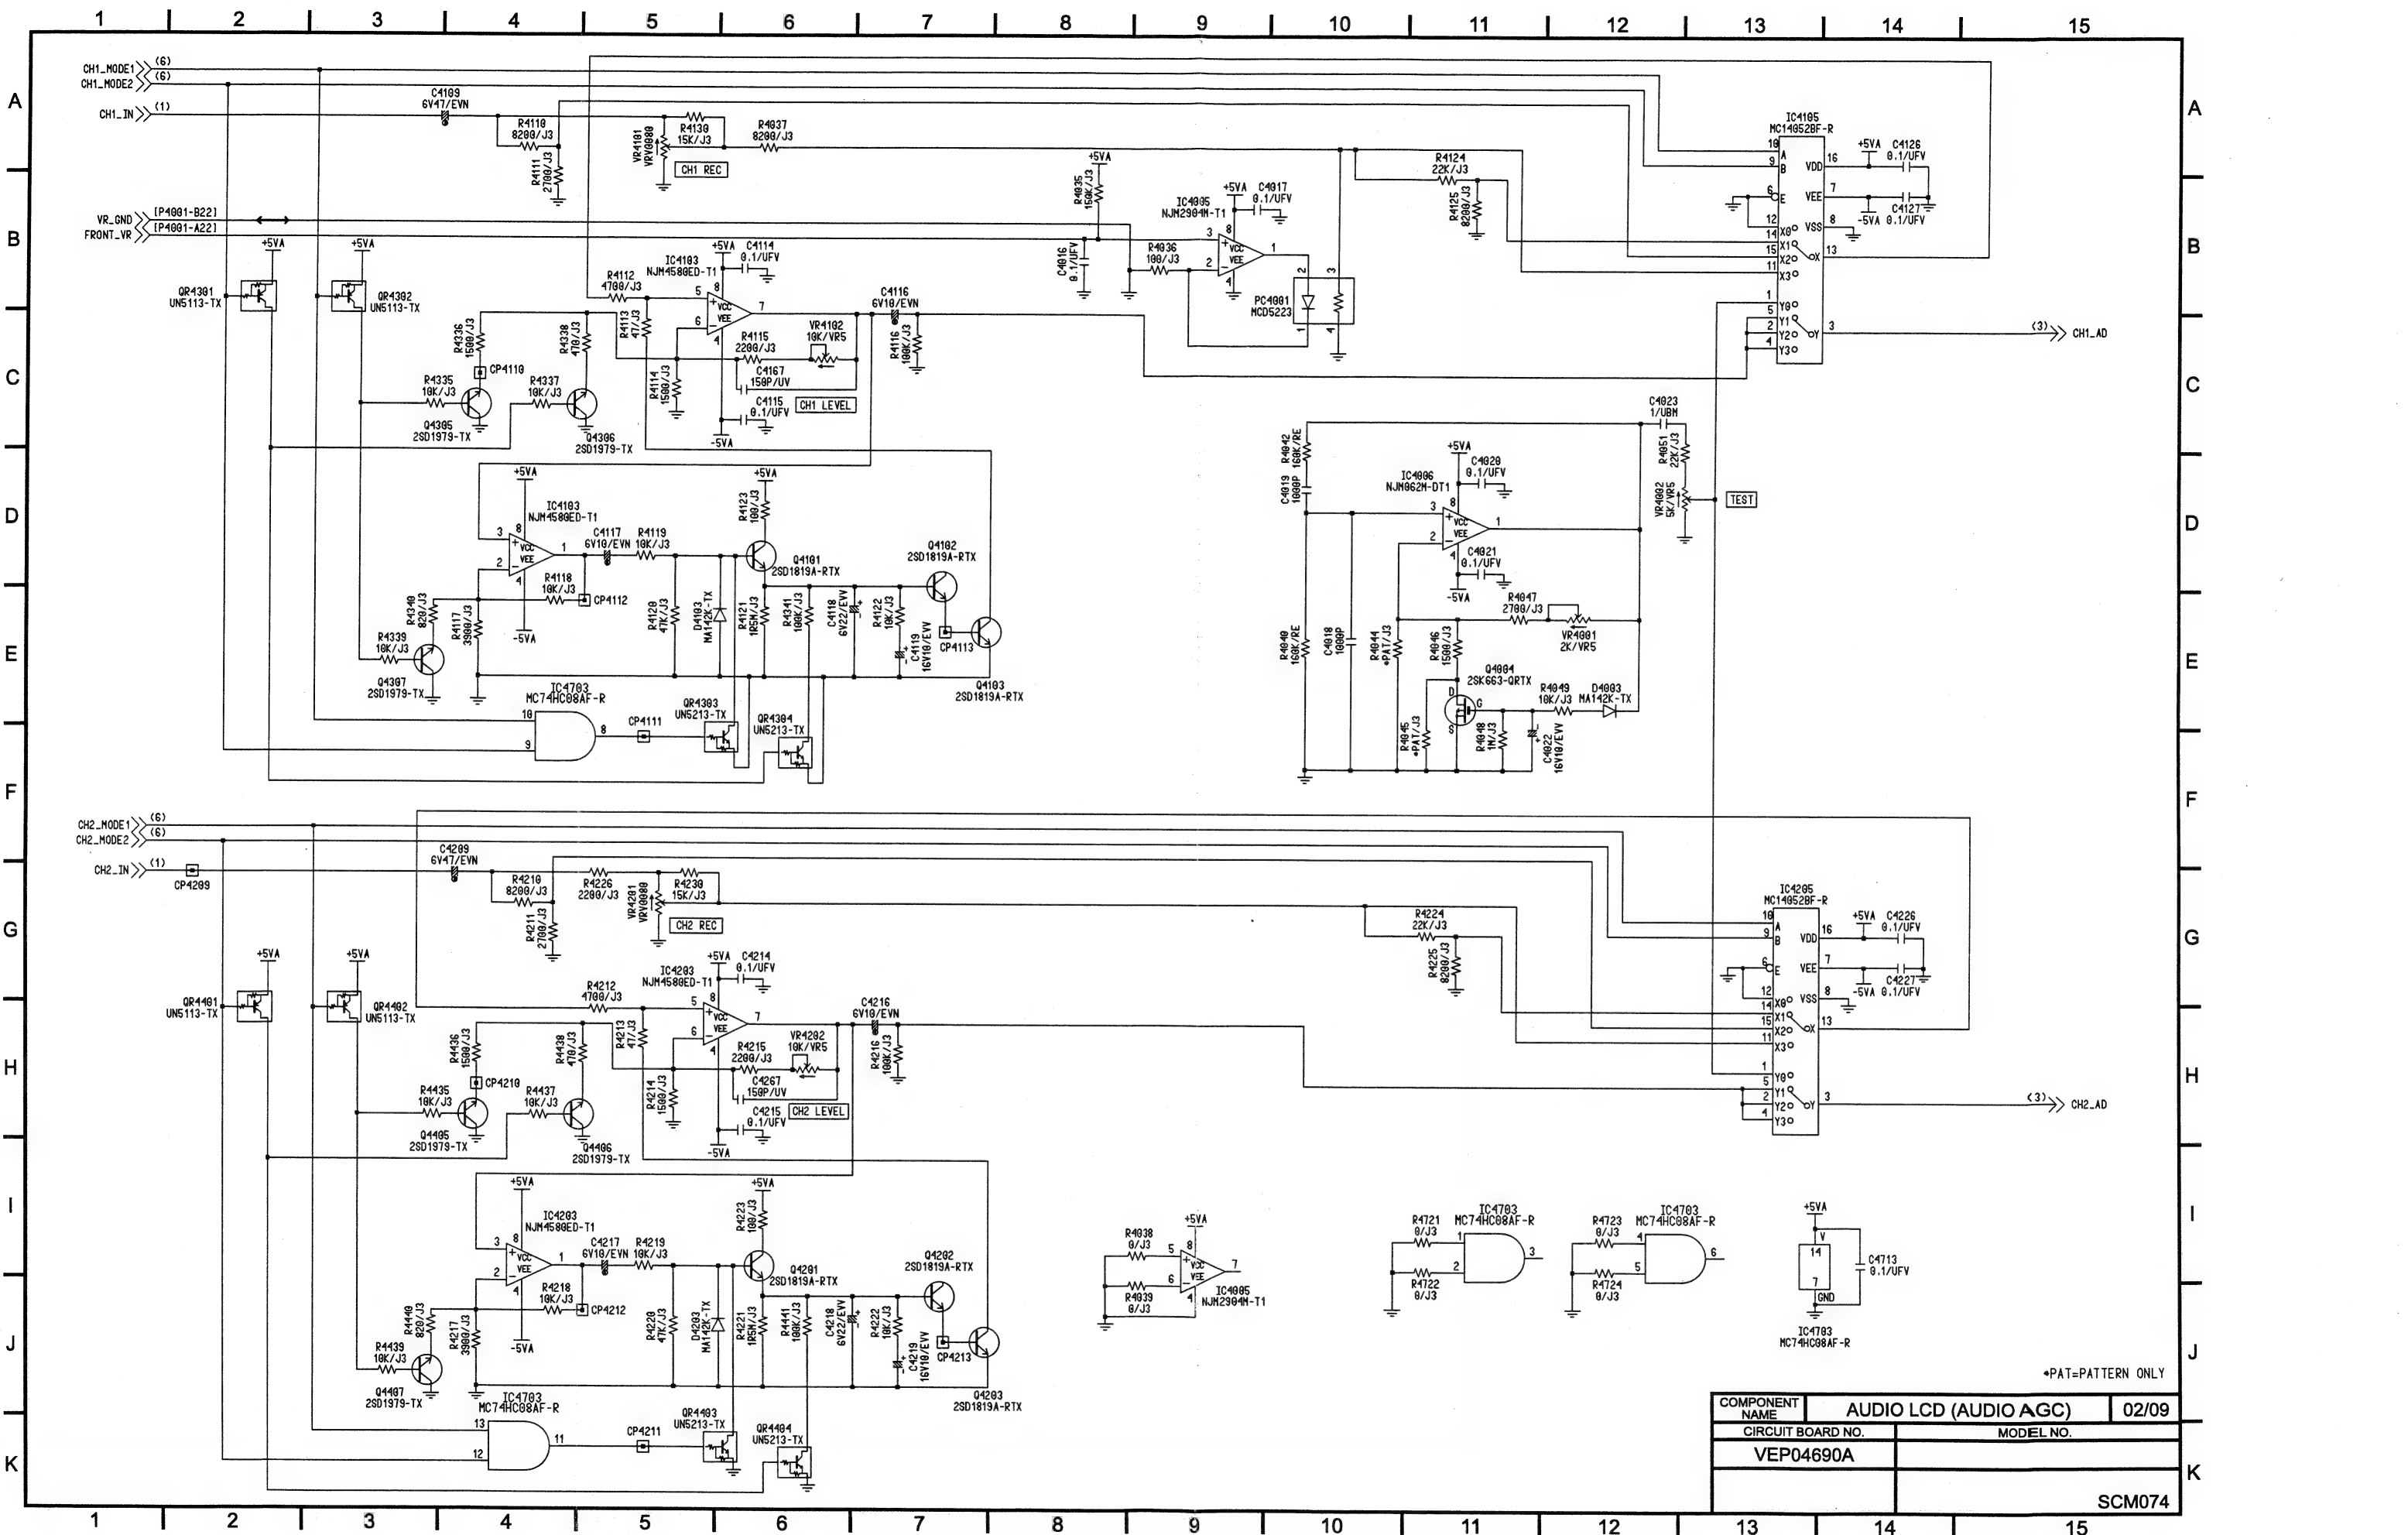

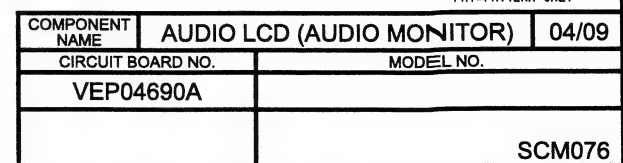


•PAT=PATTERN ONLY

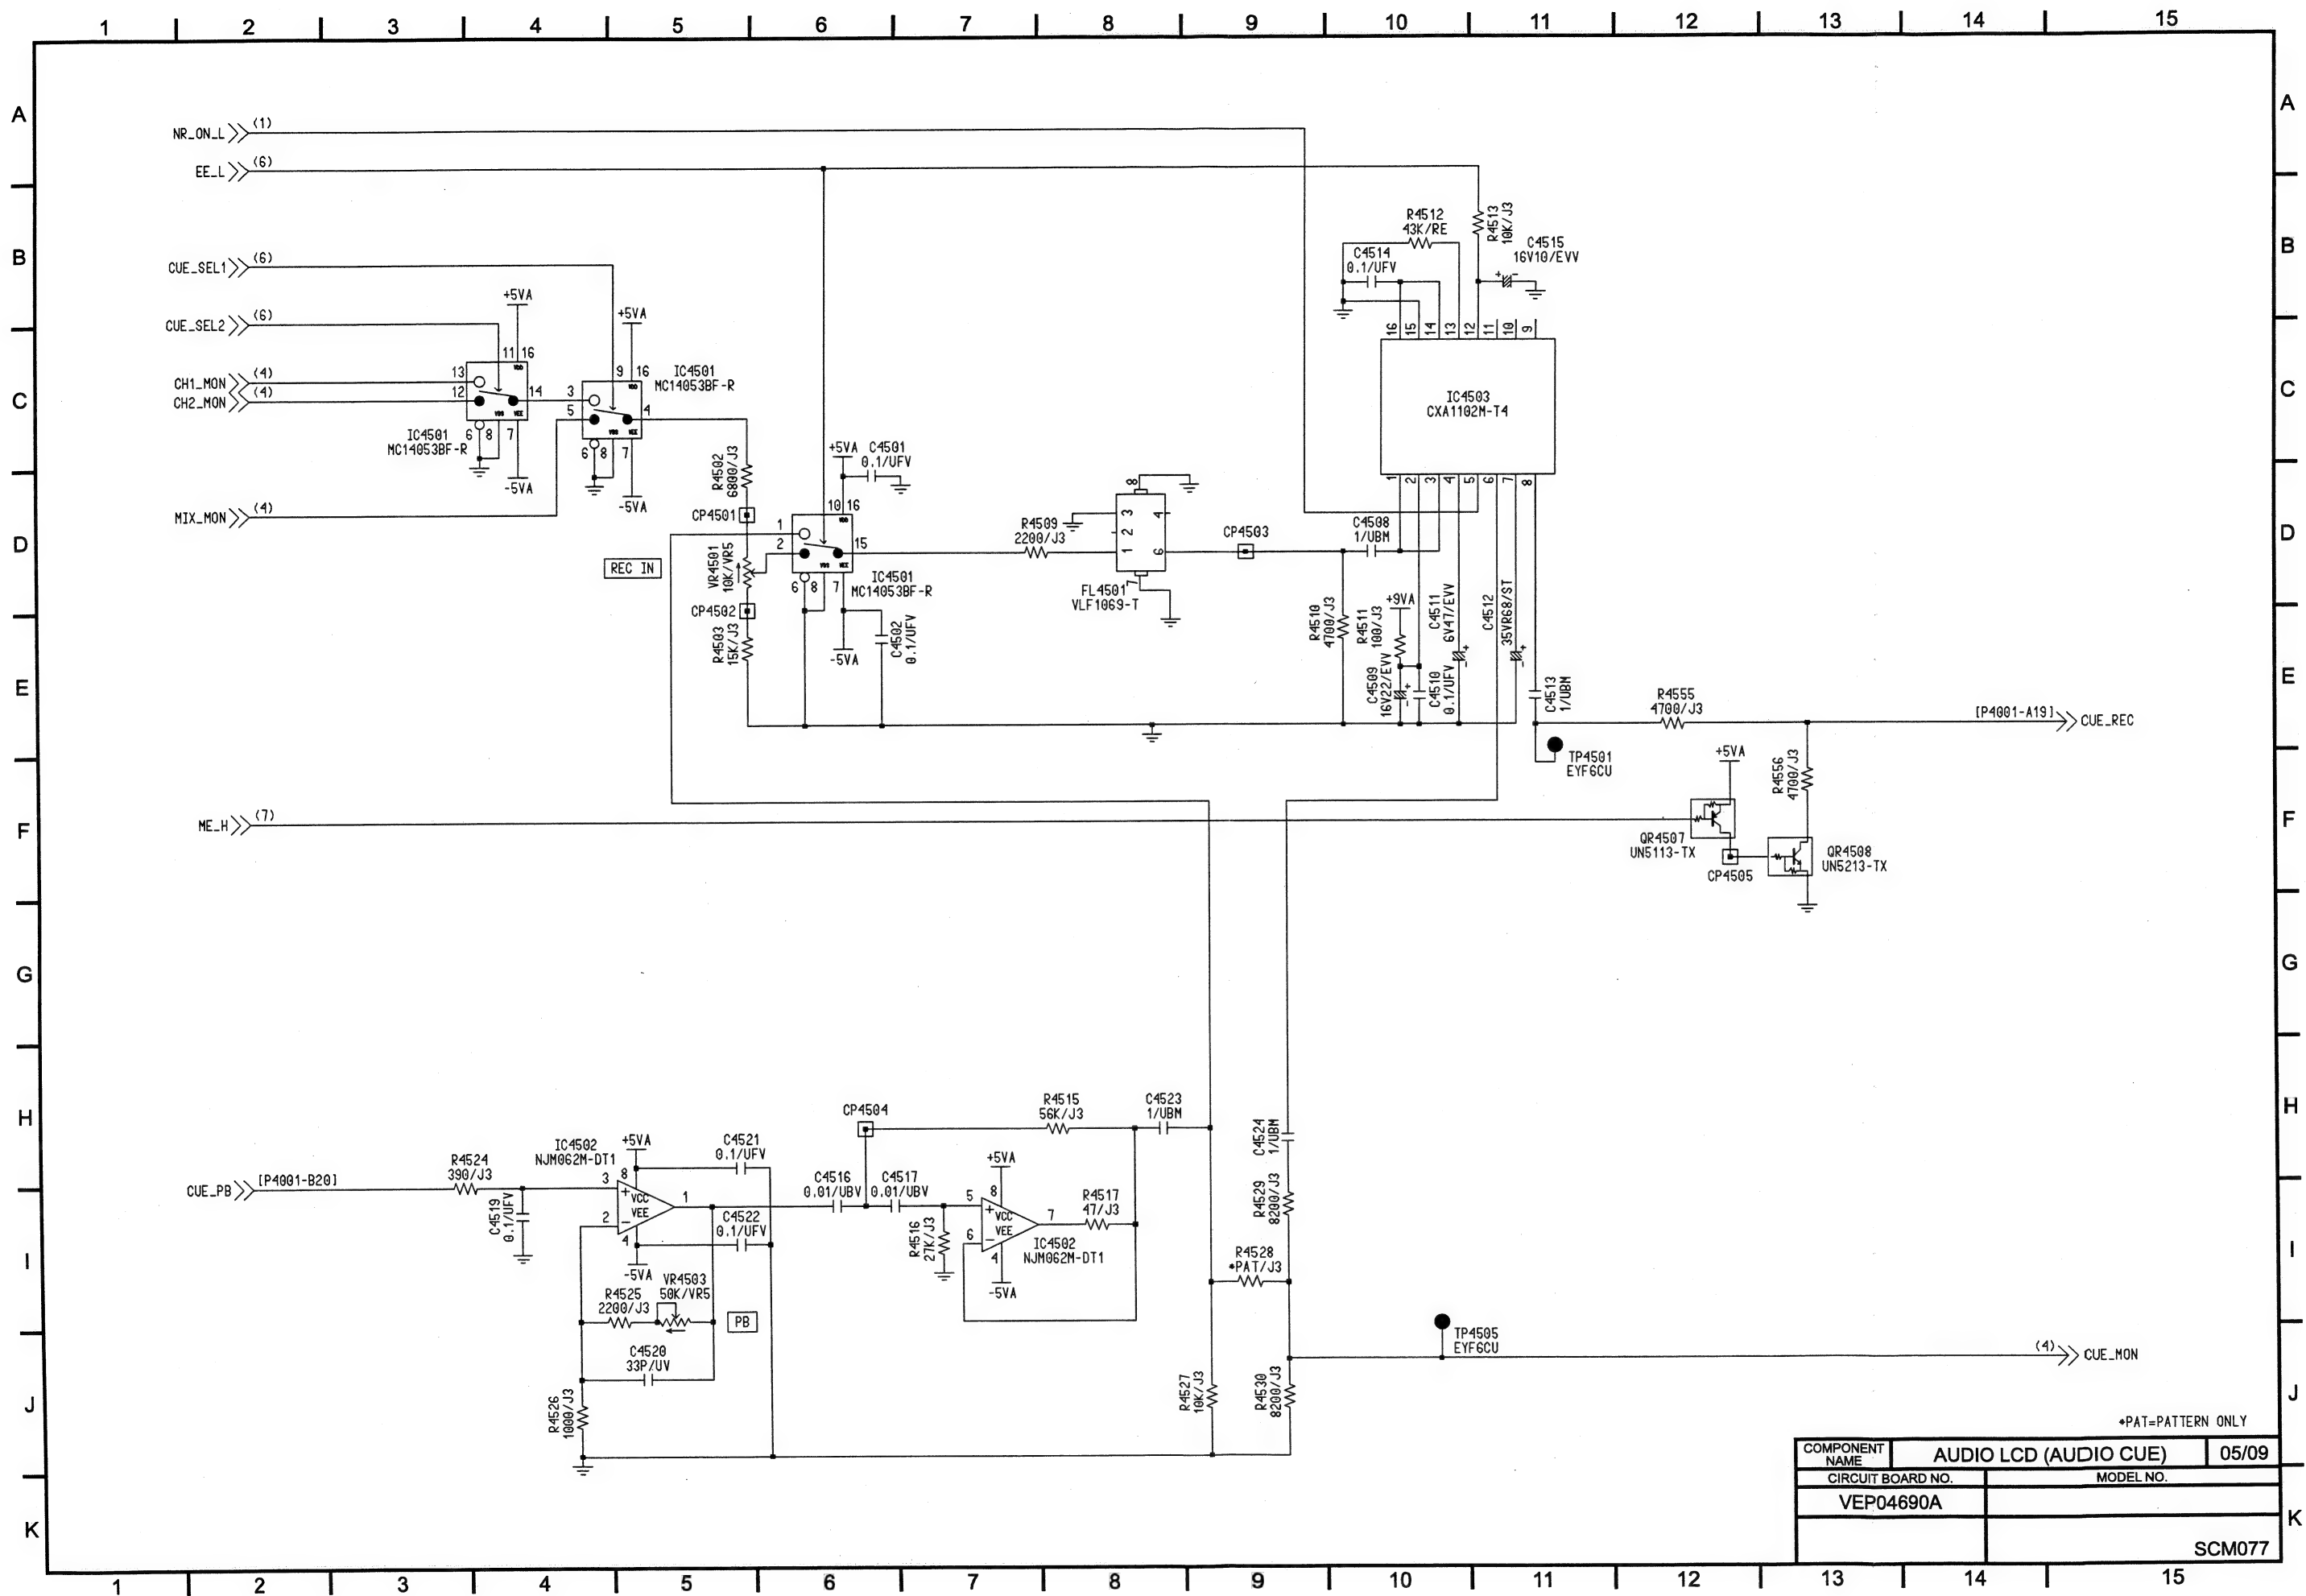


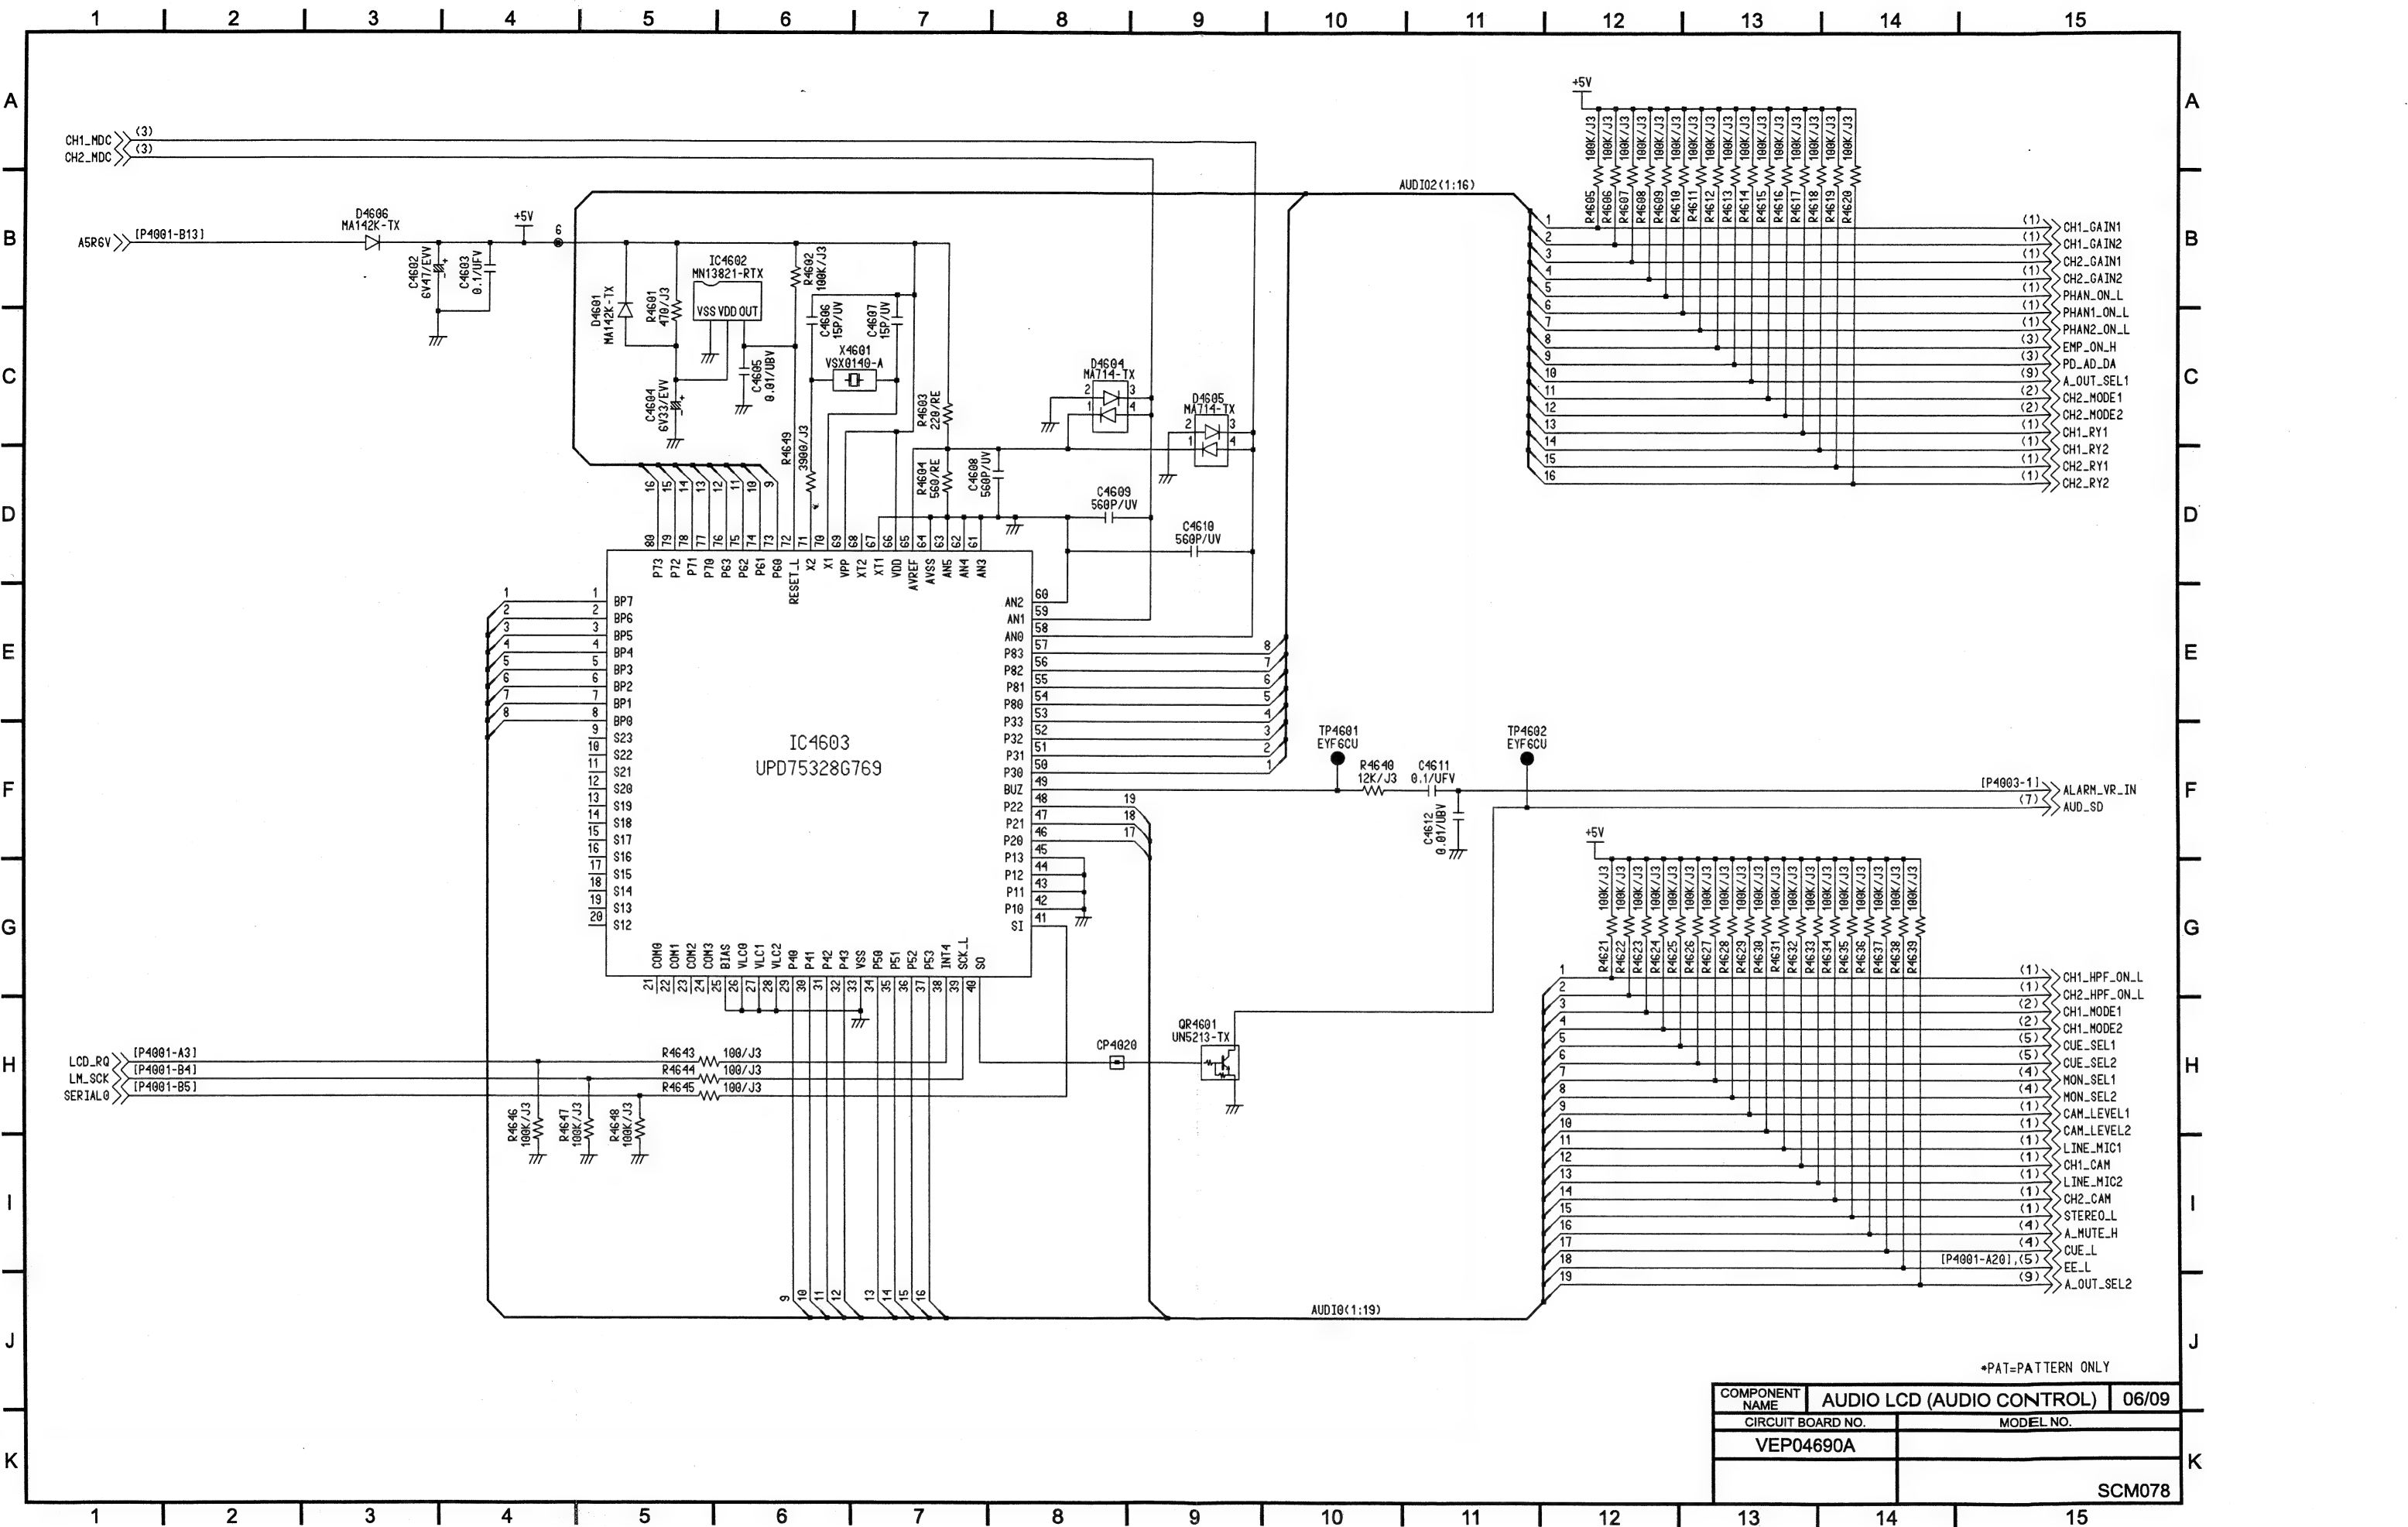


*PAT= PATTERN ONLY		
COMPONENT NAME	AUDIO LCD (AUDIO CONTROL)	06/09
CIRCUIT BOARD NO.	MODEL NO.	
VEP04690A		
		SCM078

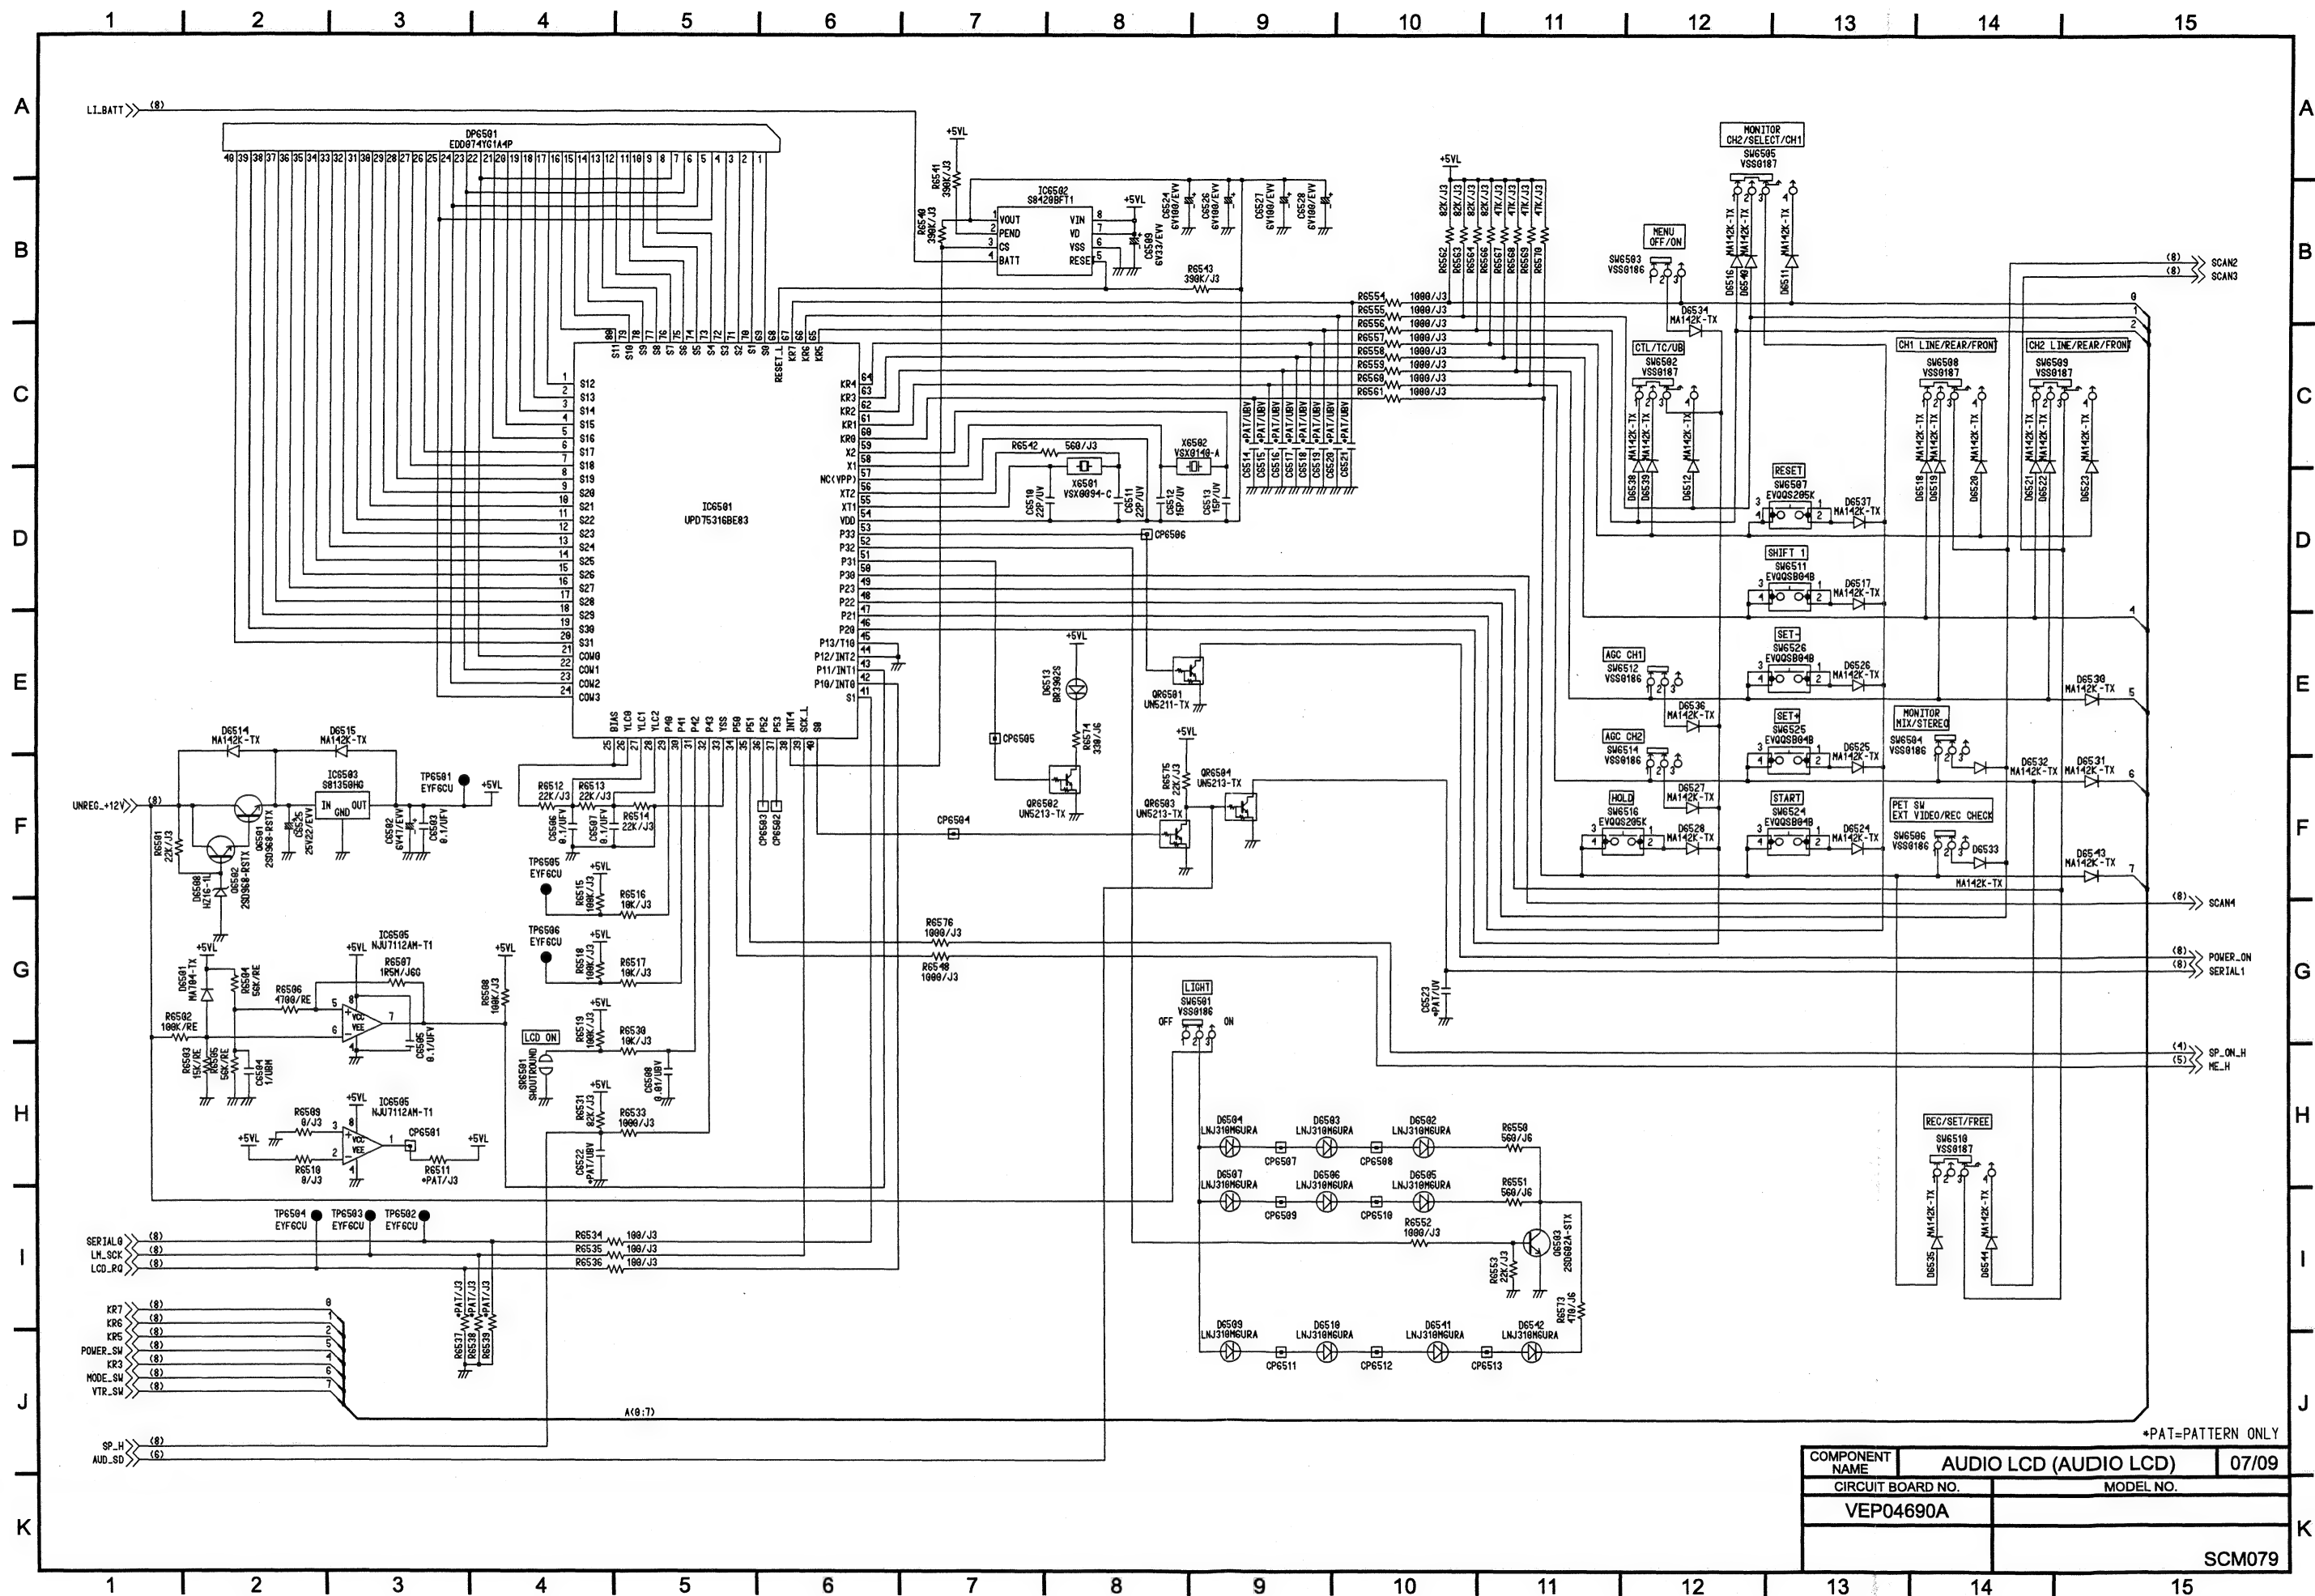


COMPONENT NAME	AUDIO LCD (AUDIO LCD)	07/09
CIRCUIT BOARD NO.	MODEL NO.	
VEP04690A		
	SCM079	

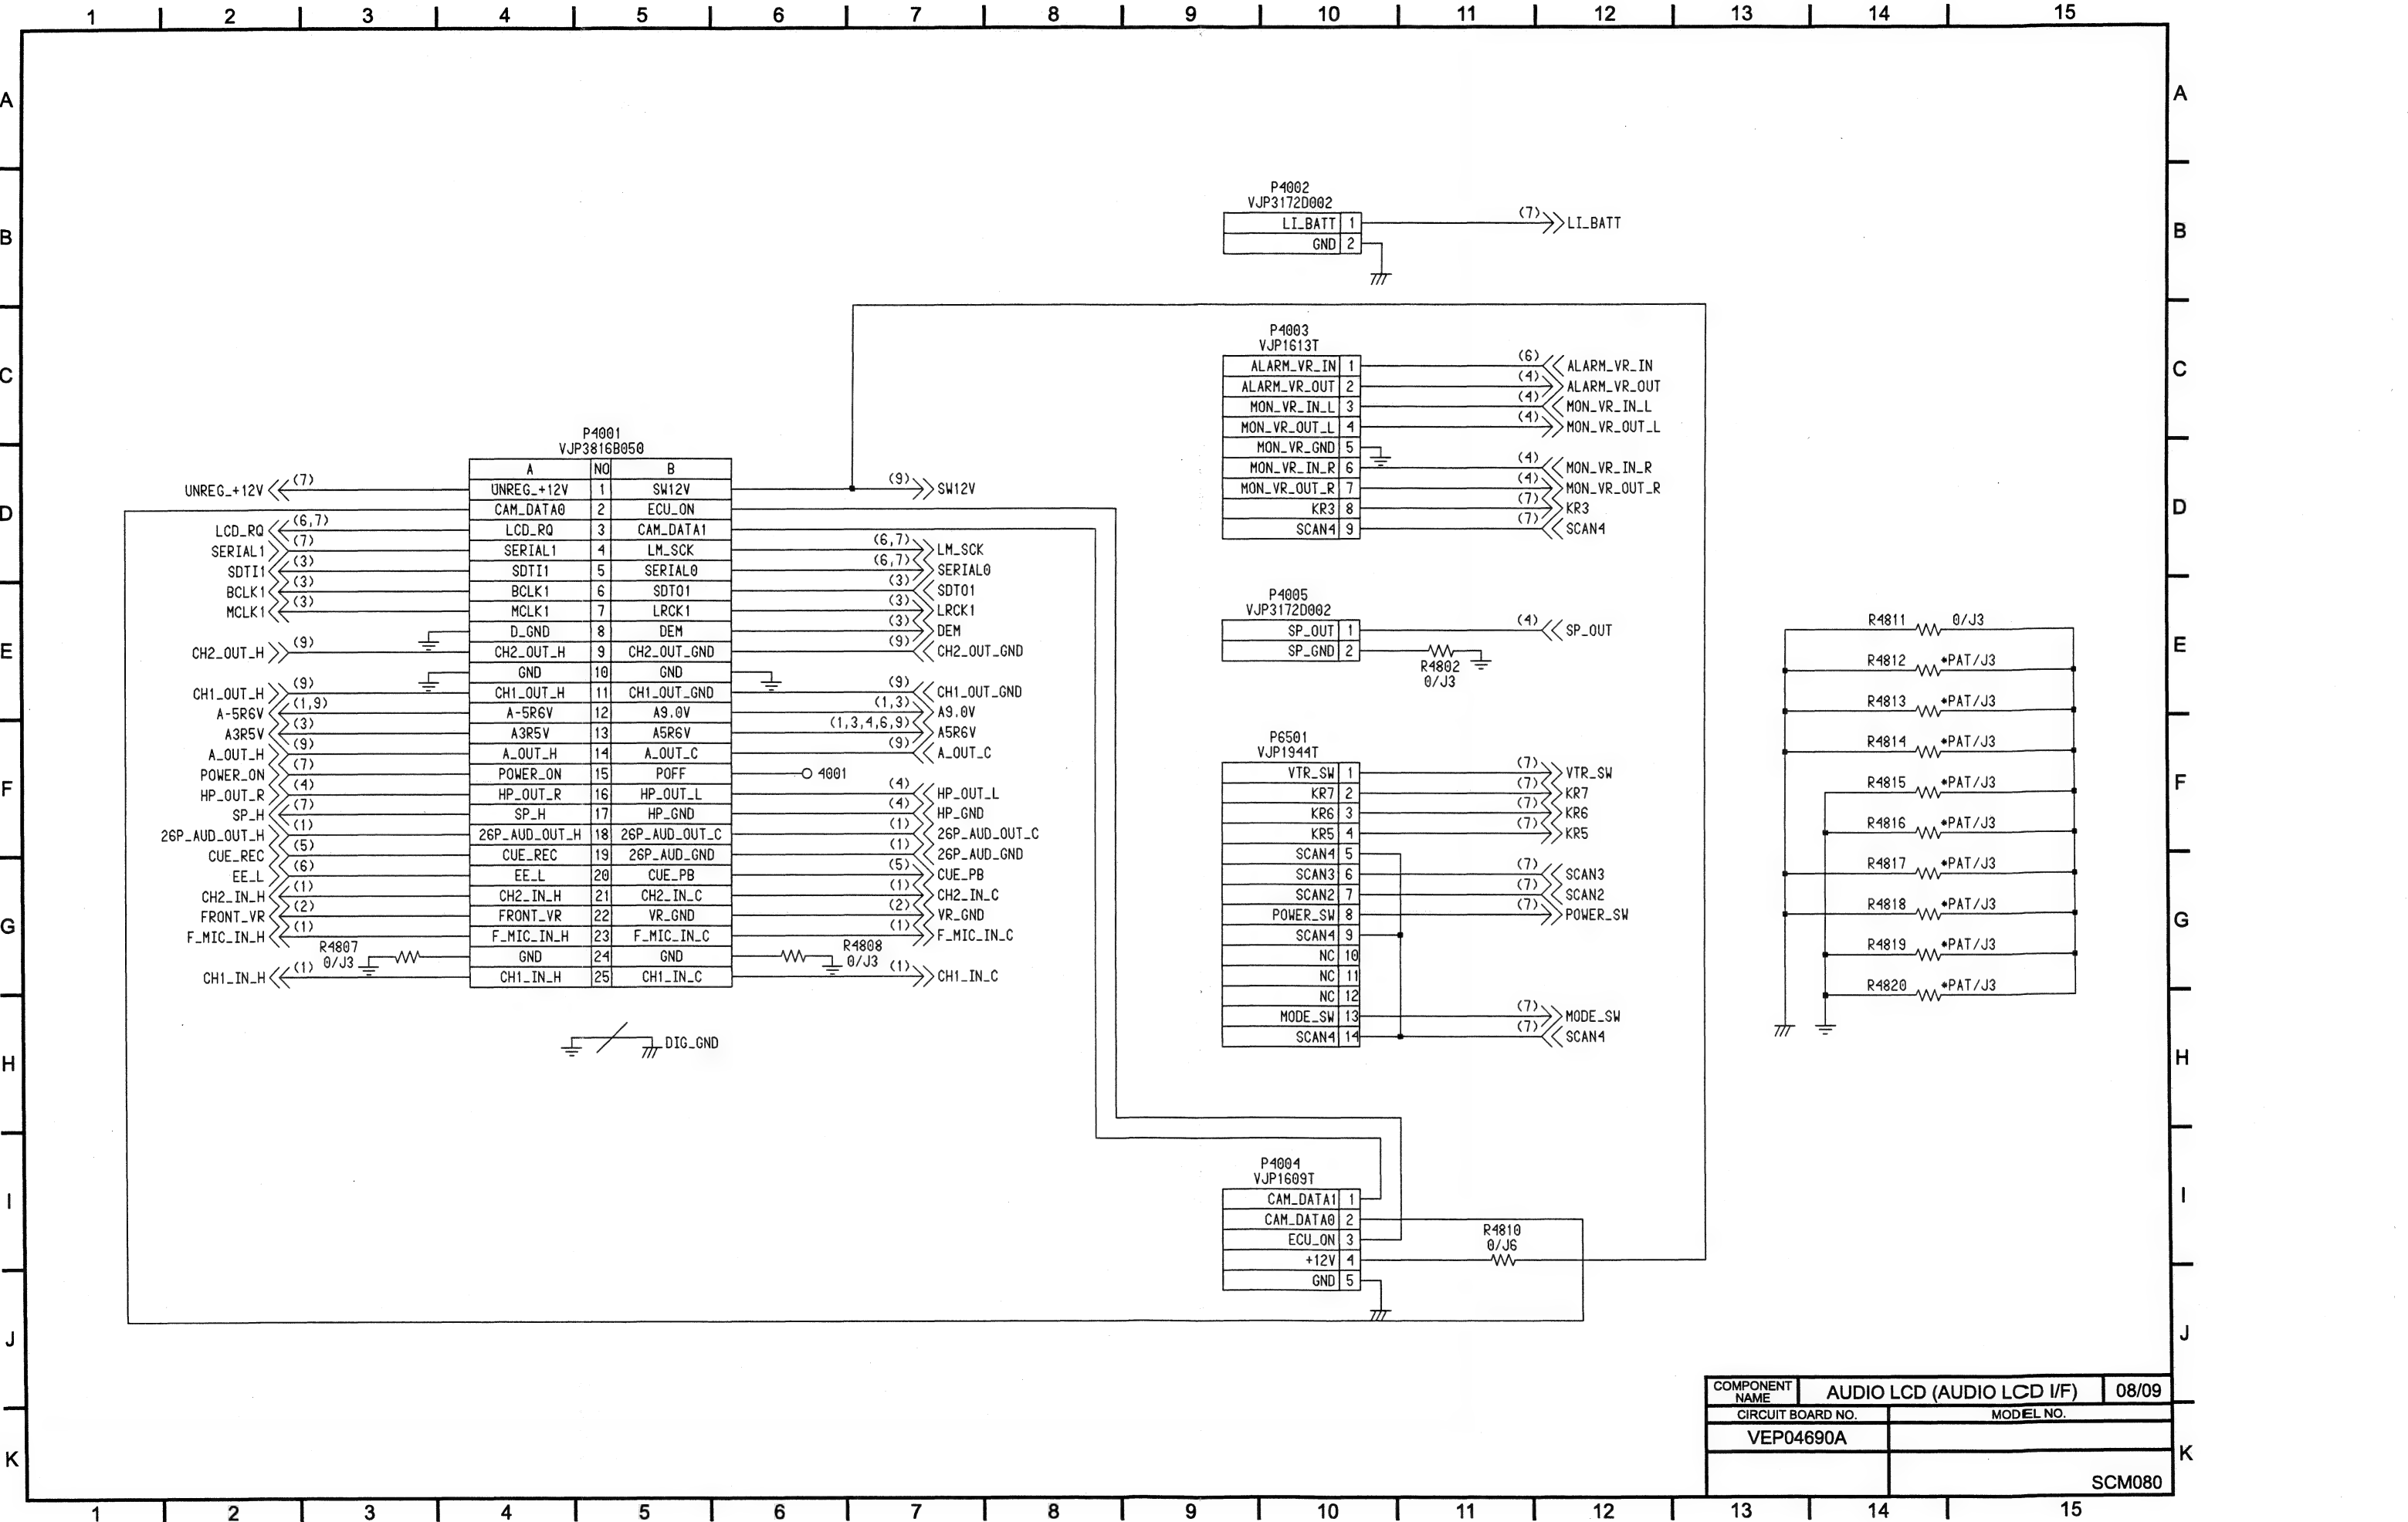


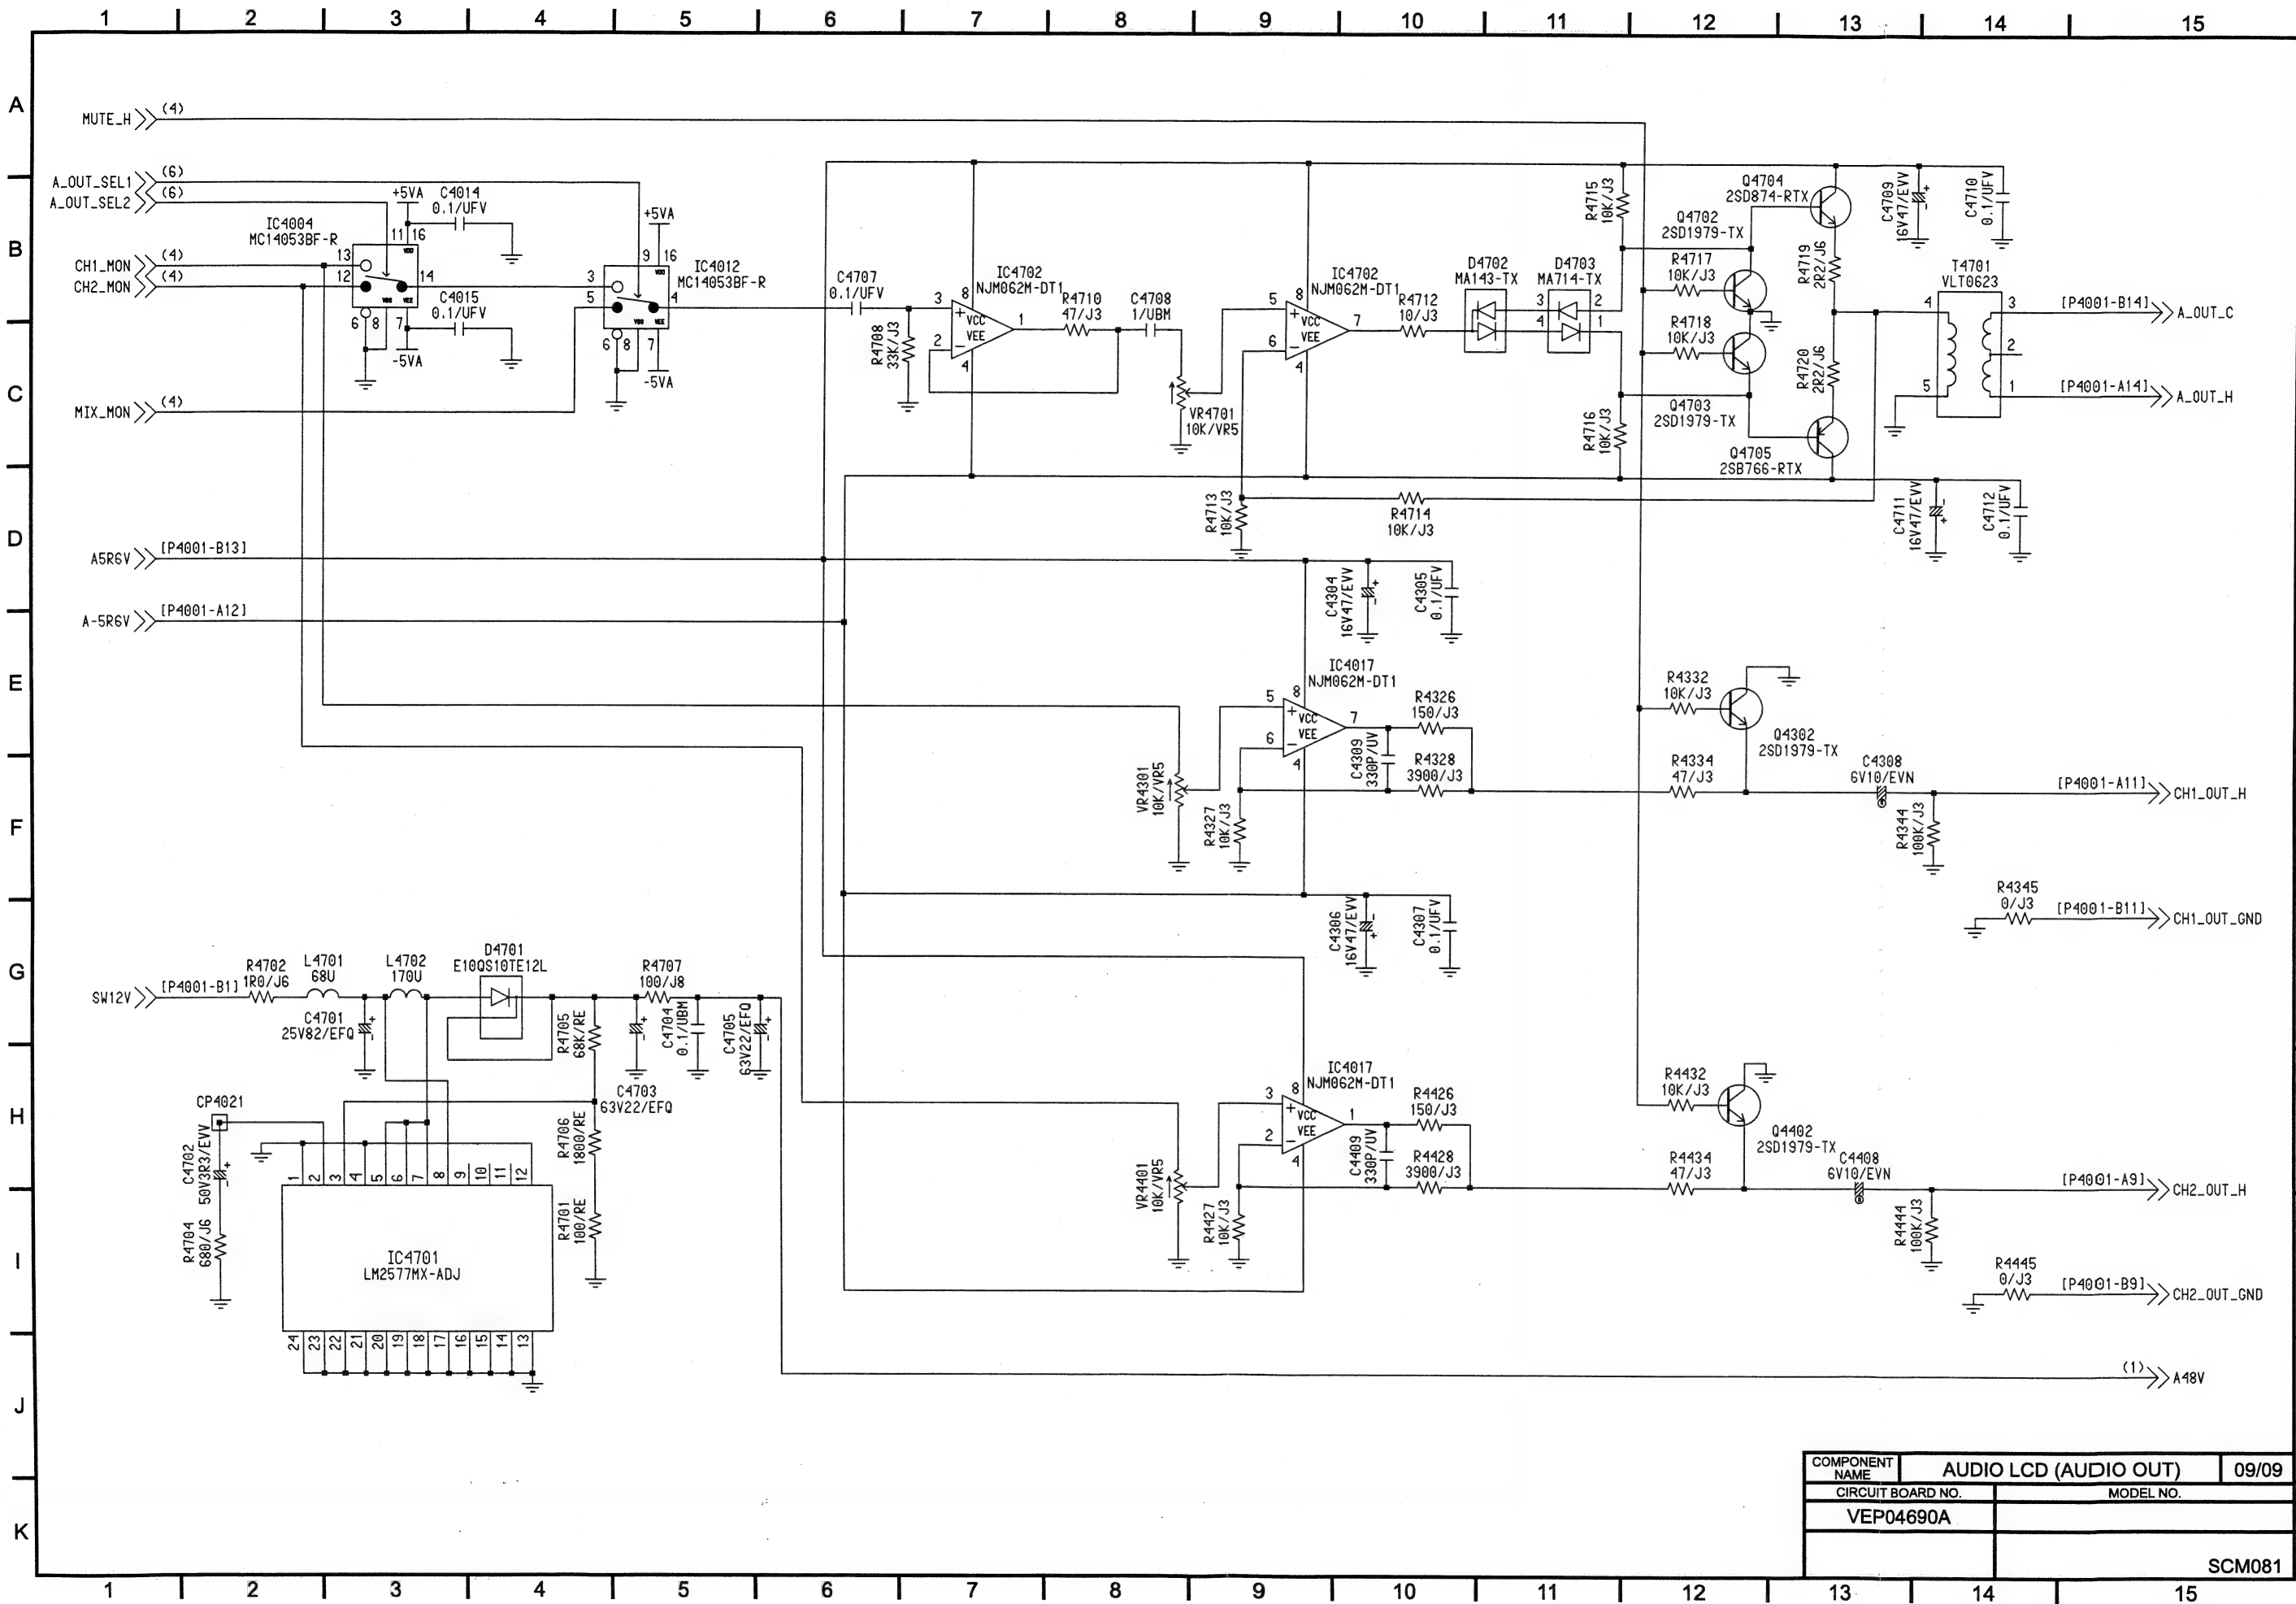


COMPONENT NAME	AUDIO LCD (AUDIO OUT)		09/09
CIRCUIT BOARD NO.		MODEL NO.	
VEP04690A			
		SCM081	

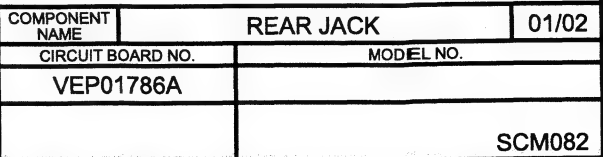


\$REF\$	PAL	NTSC
P1016	VJS3551	VJS3551
P1017	VJS3551	VJS3551
P1018	VJS3551	VJS3551
R1003	VLF1315A102T	*PAT
R1004	*PAT	VLF1315A102T
R1005	*PAT	VLF1315A102T
R1006	VLF1315A102T	*PAT
R1007	VLF1315A102T	*PAT
R1008	*PAT	VLF1315A102T
R1009	*PAT	VLF1315A102T
R1010	VLF1315A102T	*PAT
R1011	*PAT	VLF1315A102T
R1012	VLF1315A102T	*PAT
R1013	VLF1315A102T	*PAT
R1014	*PAT	VLF1315A102T
R1050	*PAT/J3	*PAT/J3
R1051	*PAT/J3	*PAT/J3

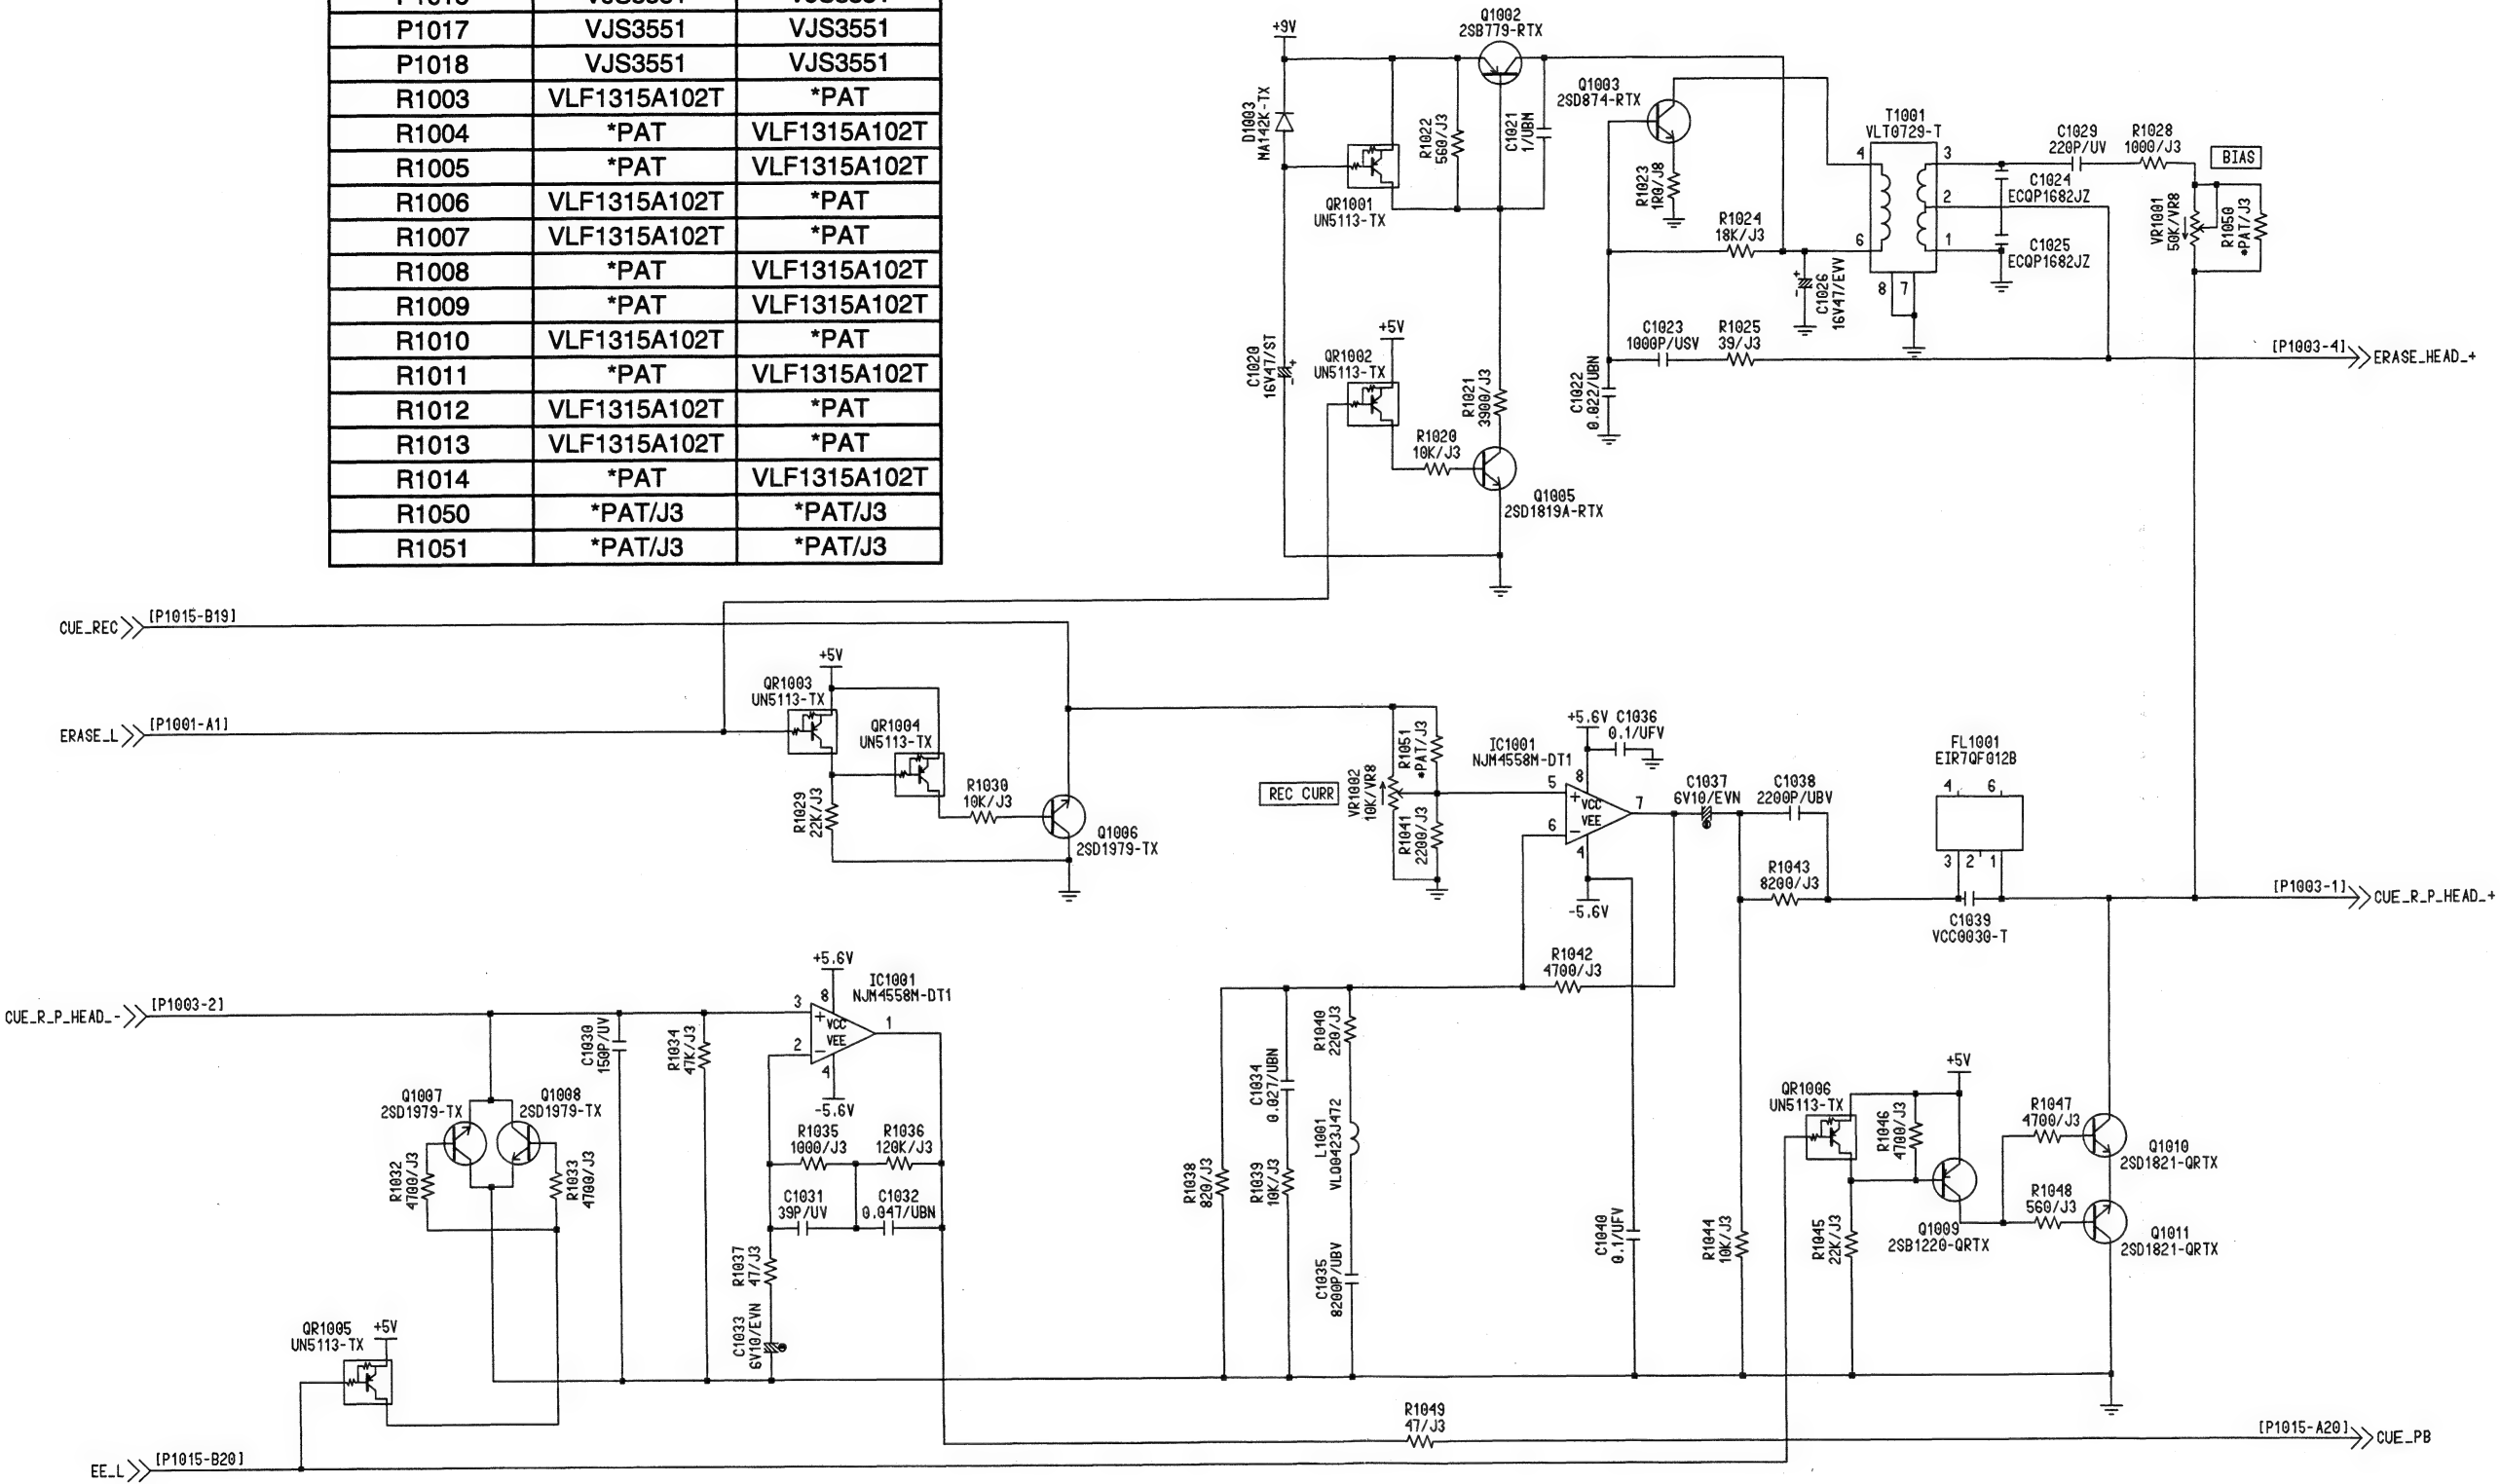


COMPONENT NAME	REAR JACK	02/02
CIRCUIT BOARD NO.	MODEL NO.	
VEP01786A		
		SCM083

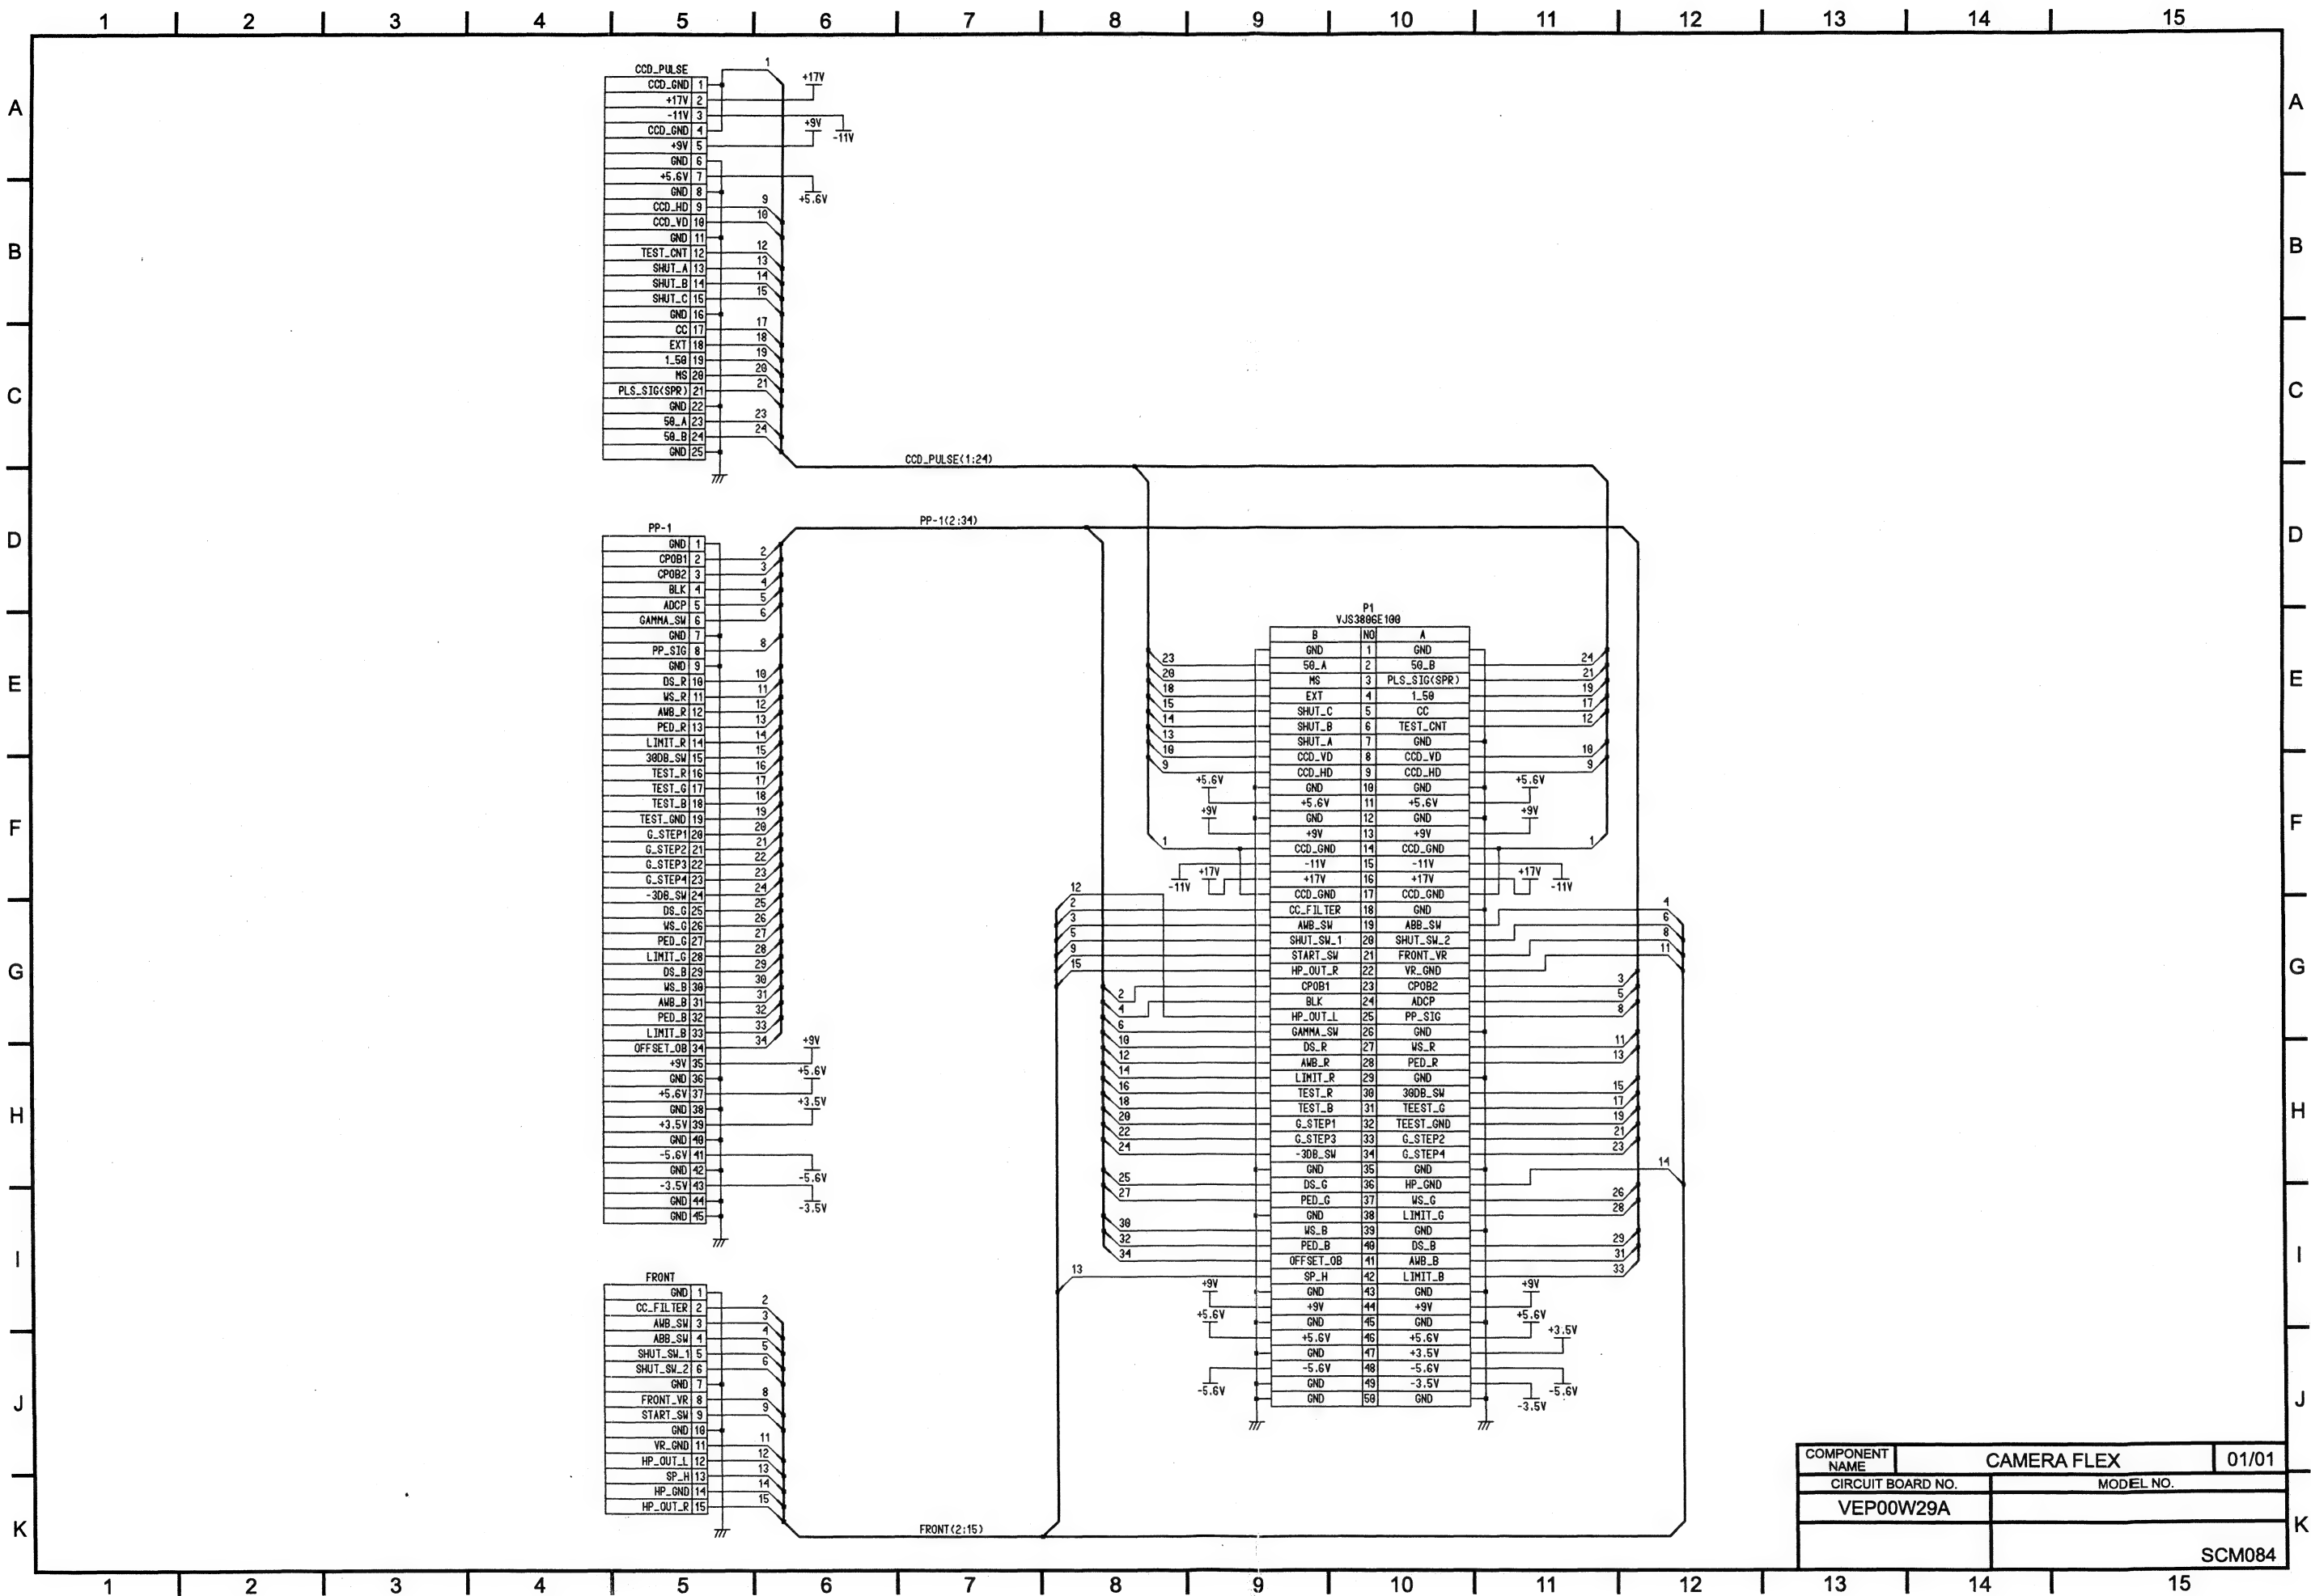


COMPONENT NAME	CAMERA FLEX	01/01
CIRCUIT BOARD NO.	MODEL NO.	
VEP00W29A		
		SCM084

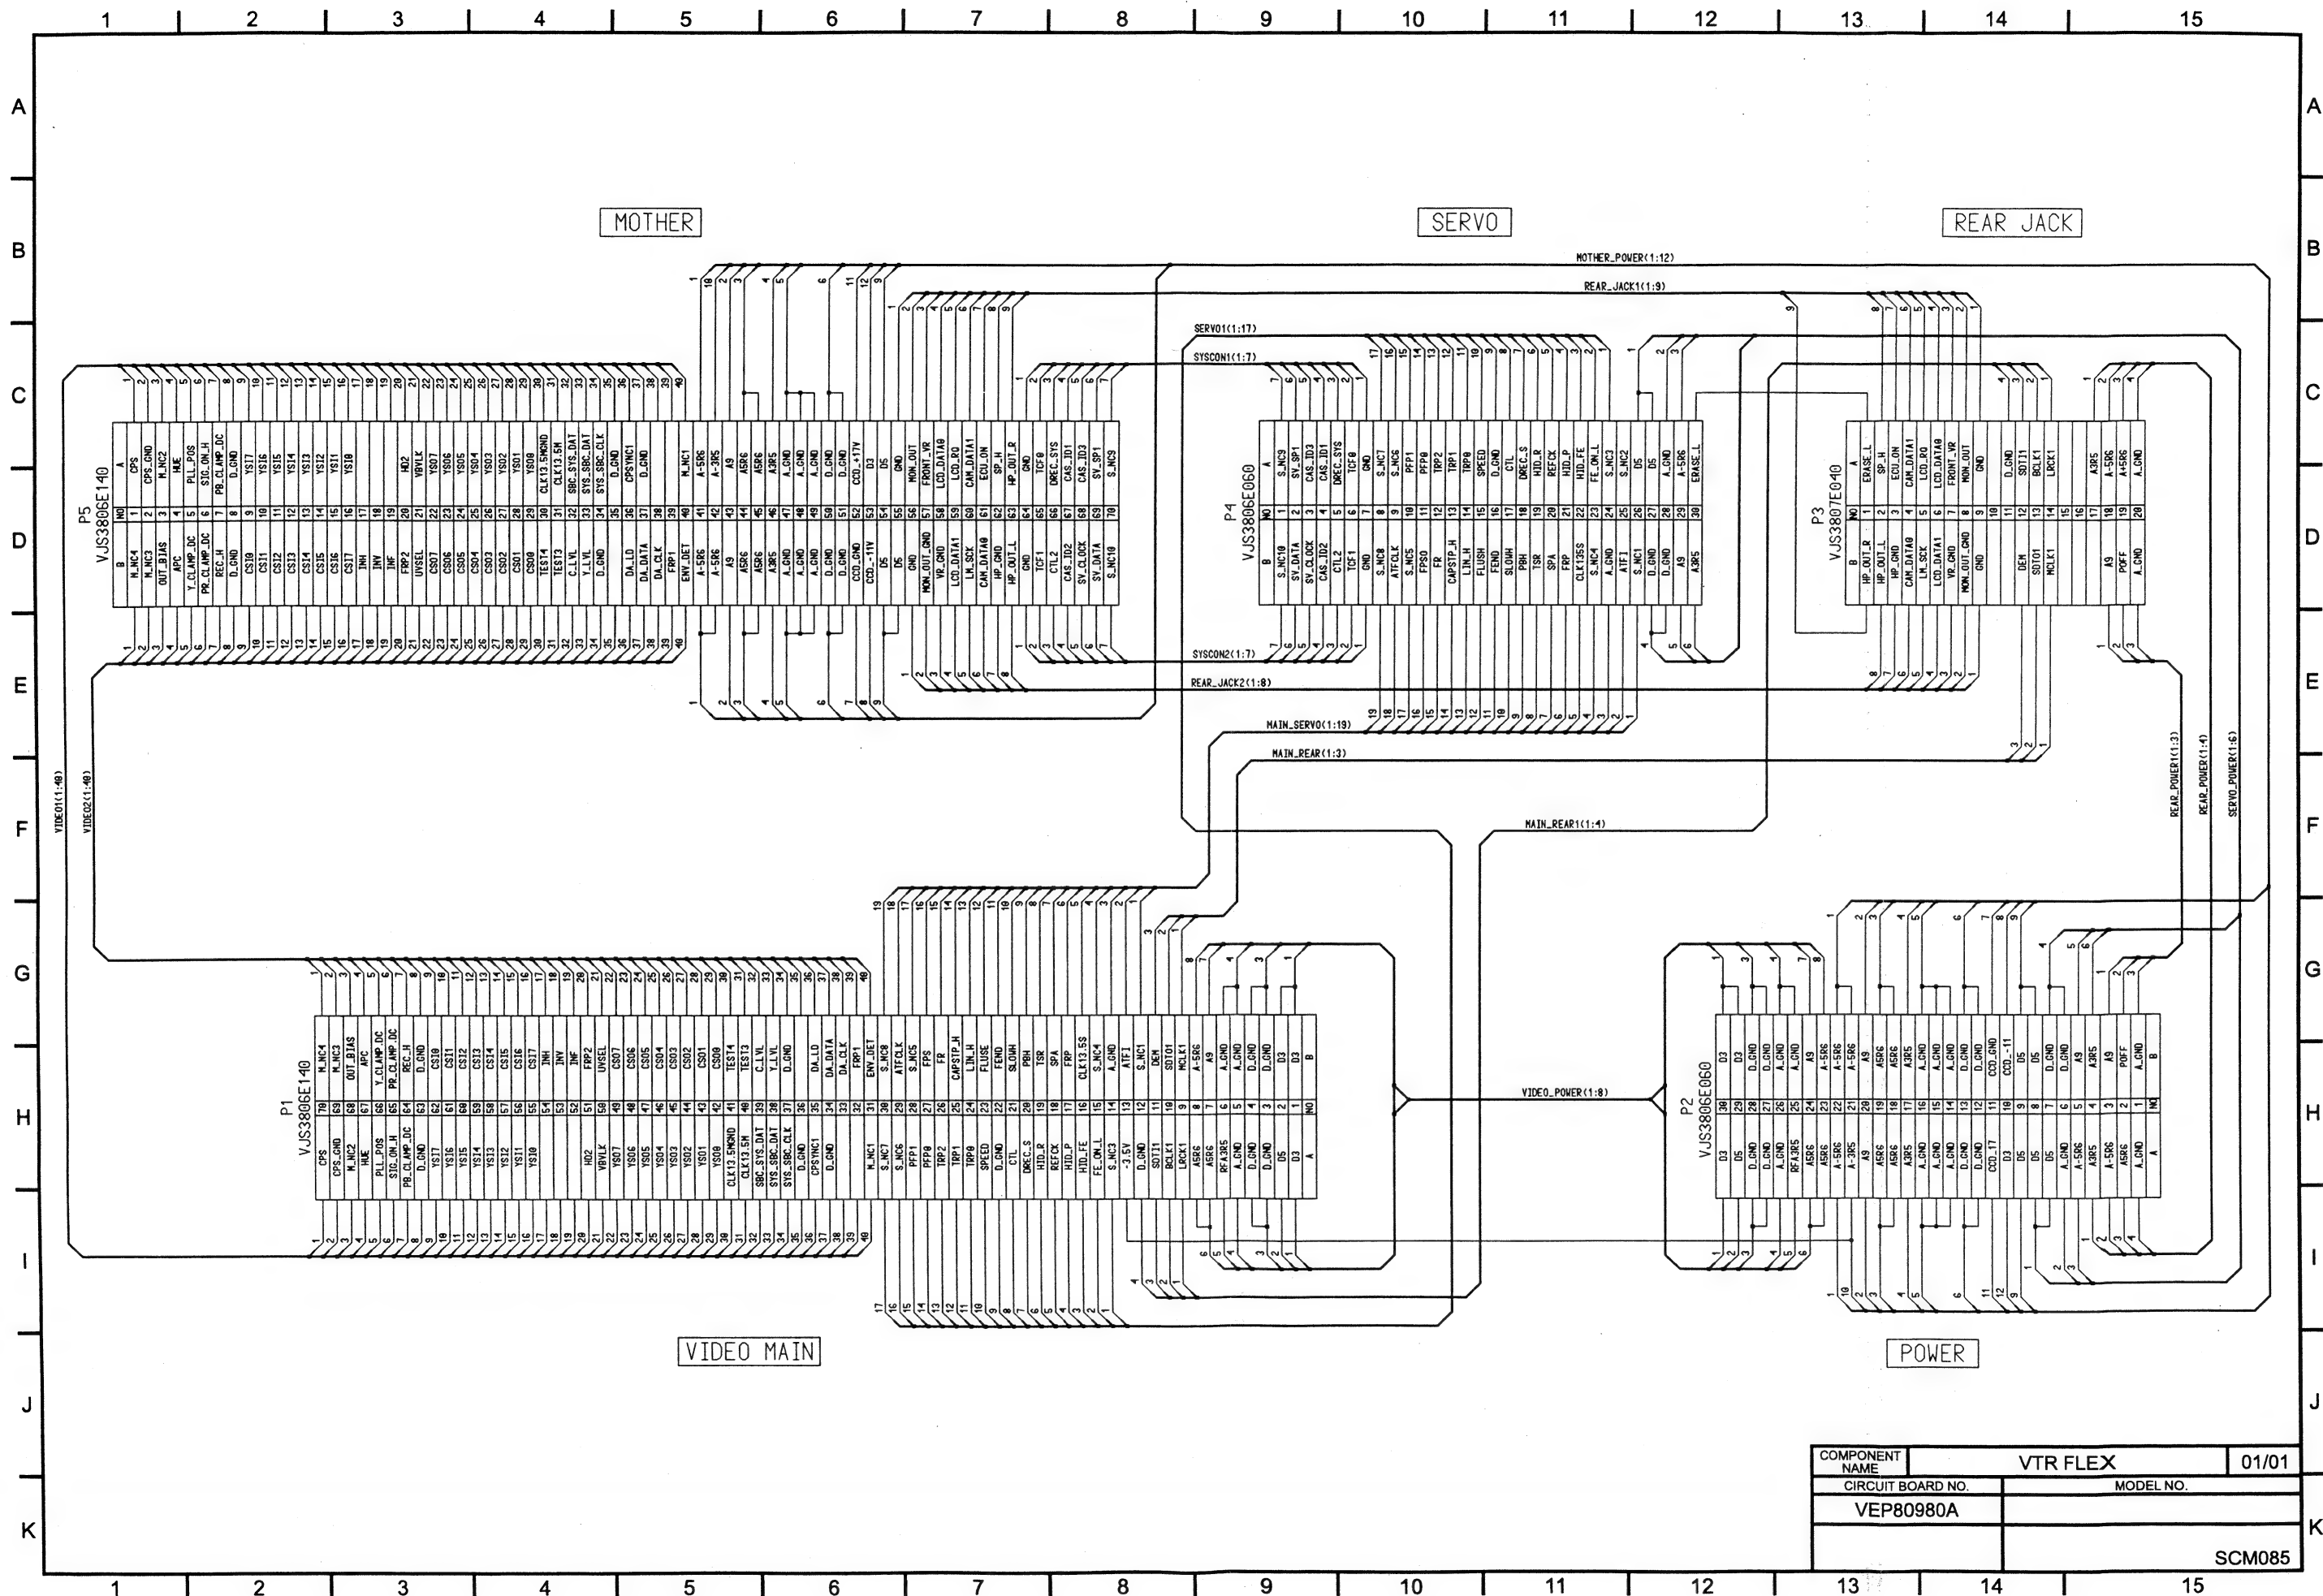



COMPONENT NAME	VTR FLEX	01/01
CIRCUIT BOARD NO.	MODEL NO.	
VEP80980A		
	SCM085	

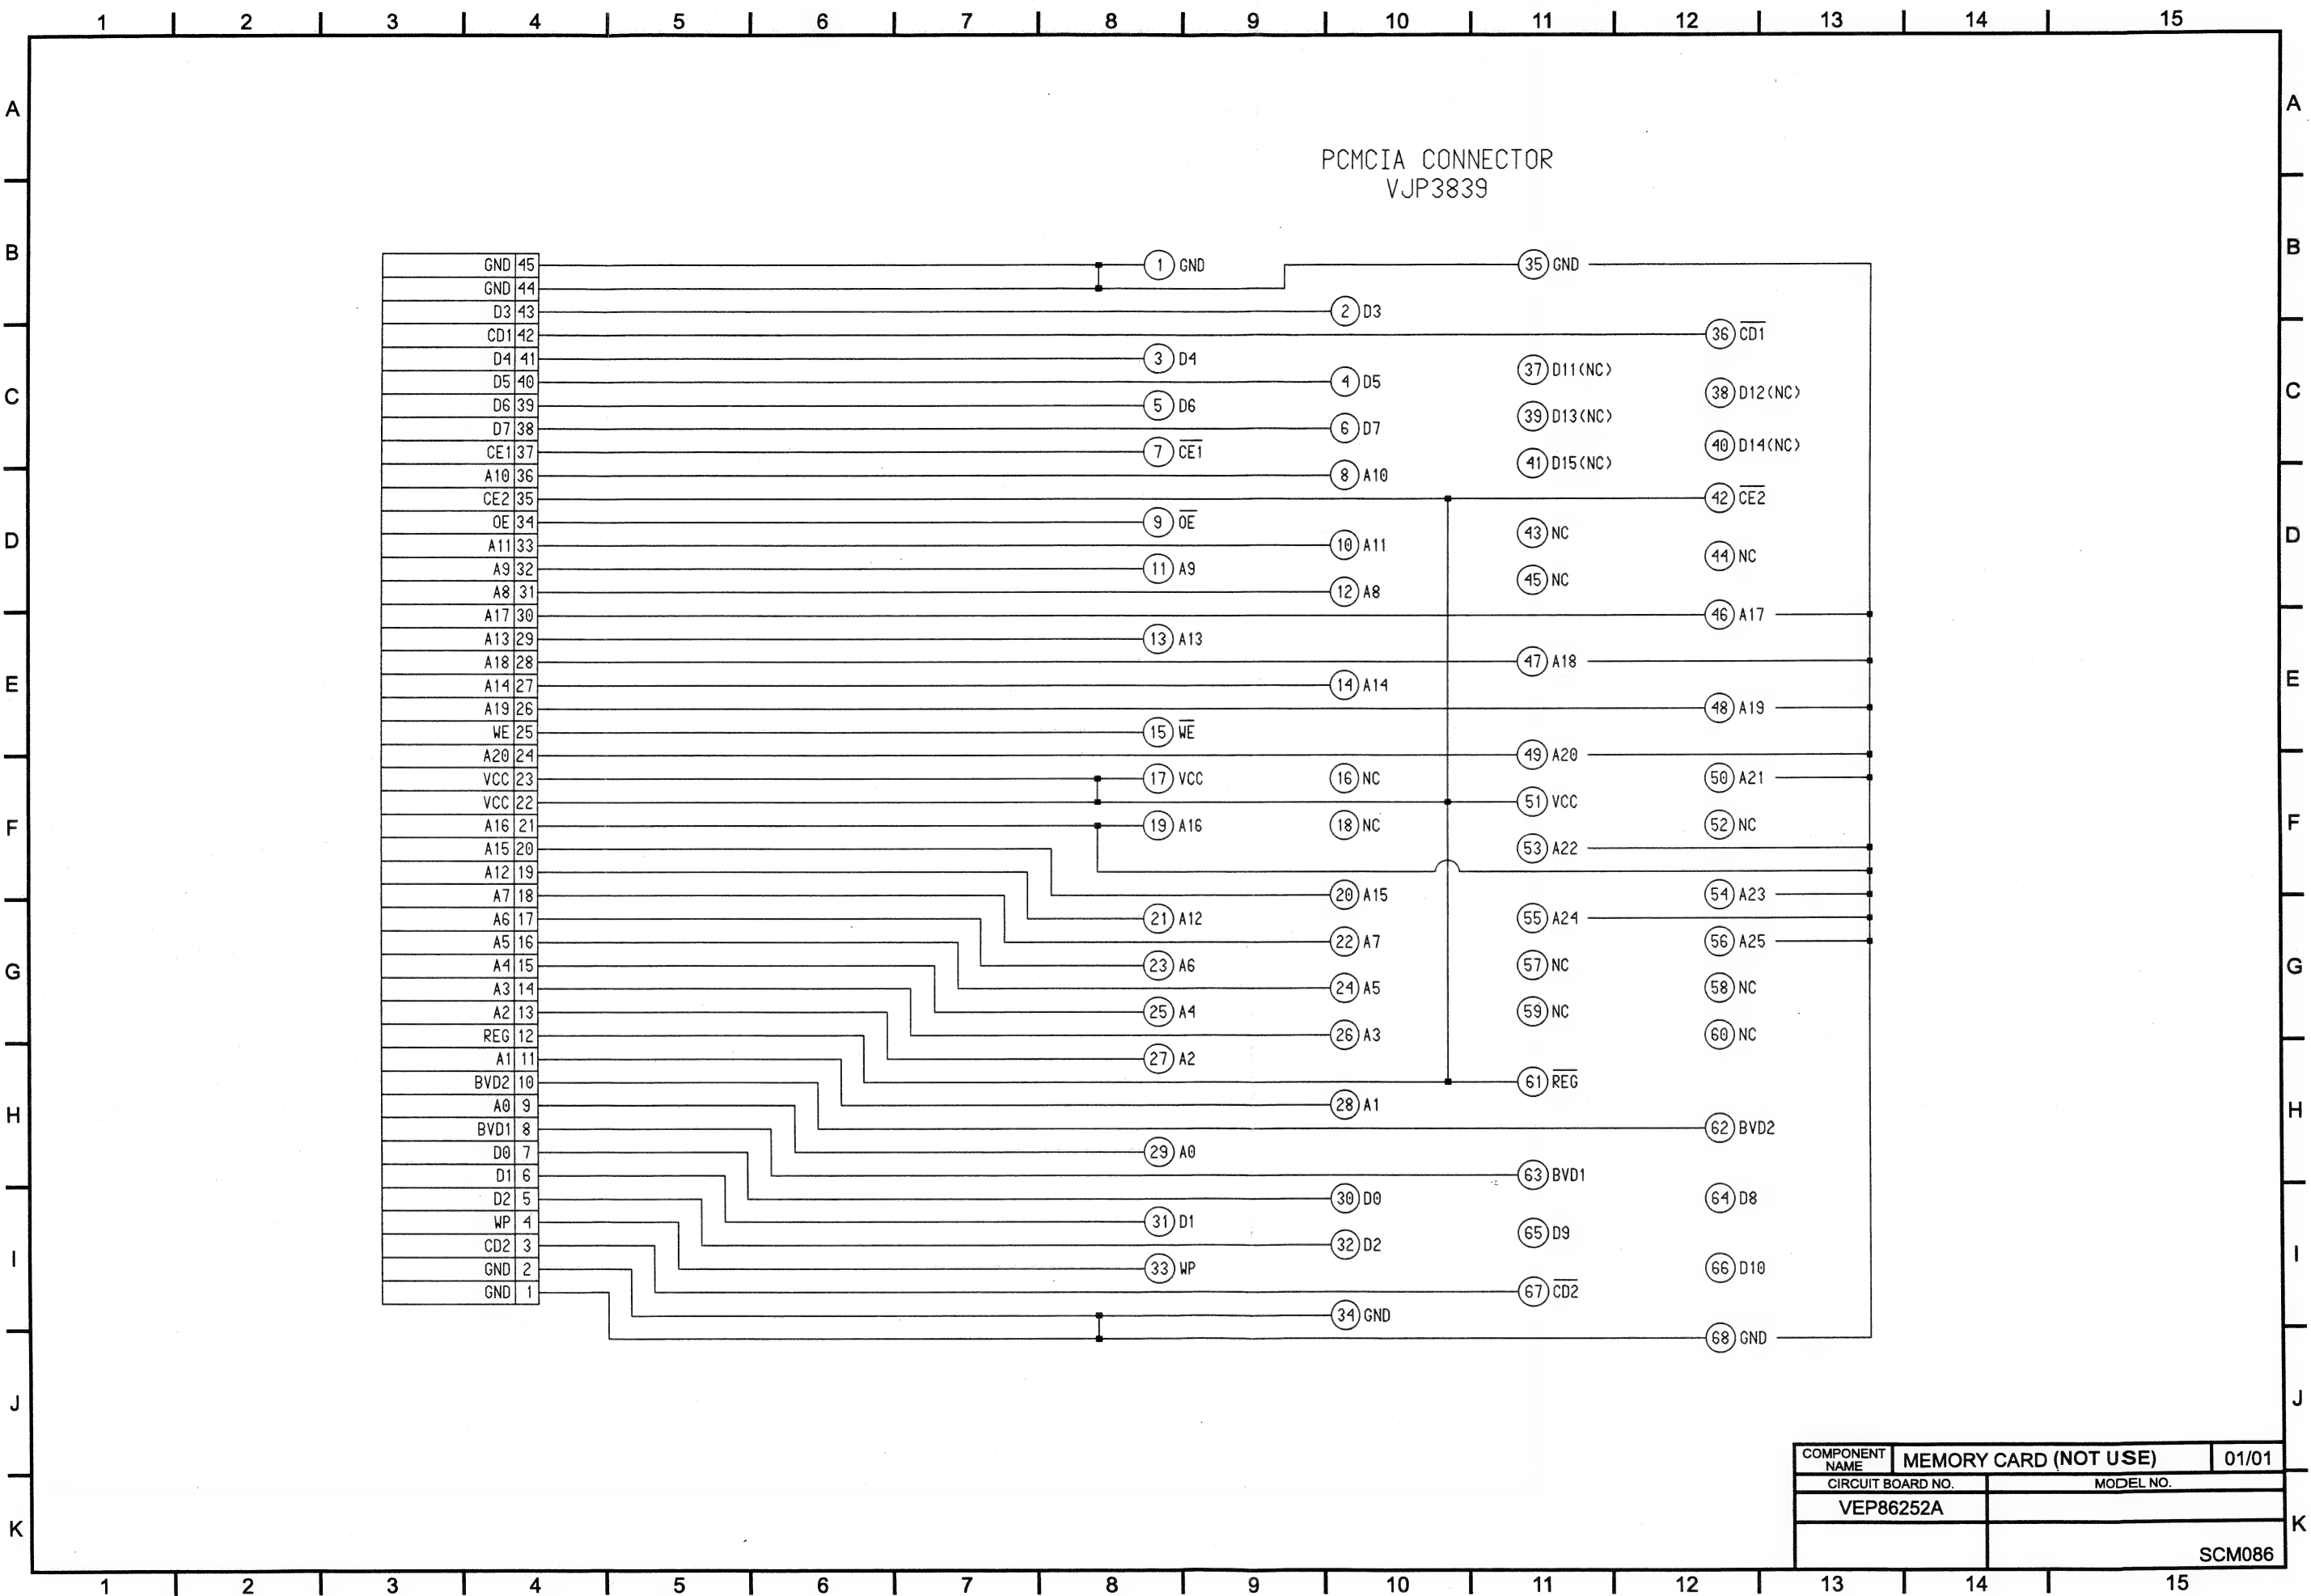


COMPONENT NAME	MEMORY CARD (NOT USE)	01/01
CIRCUIT BOARD NO.	MODEL NO.	
VEP86252A		
		SCM086

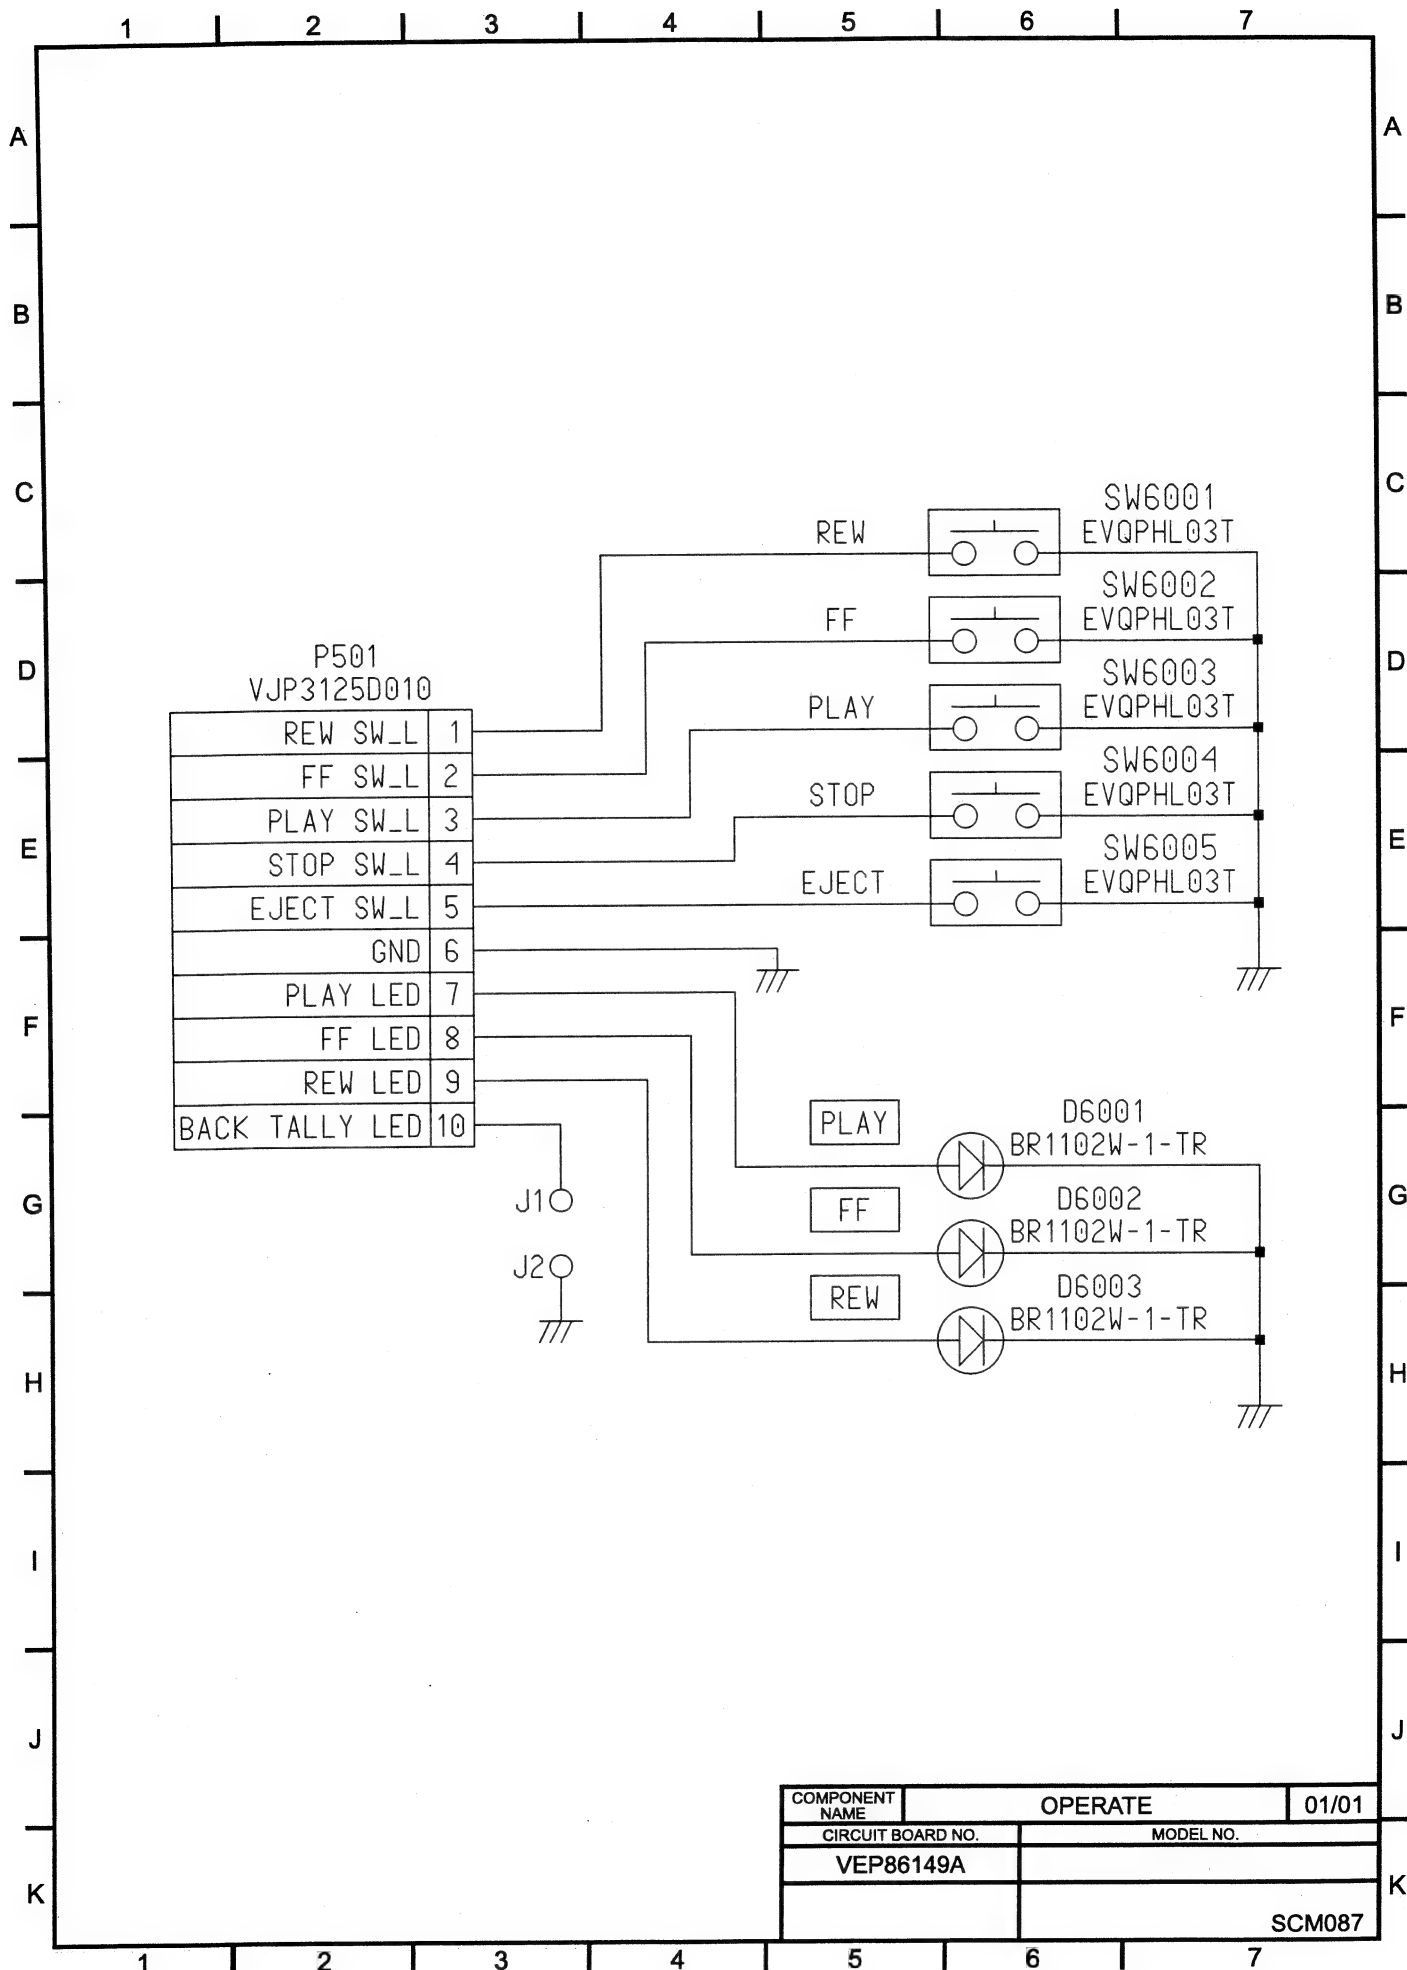


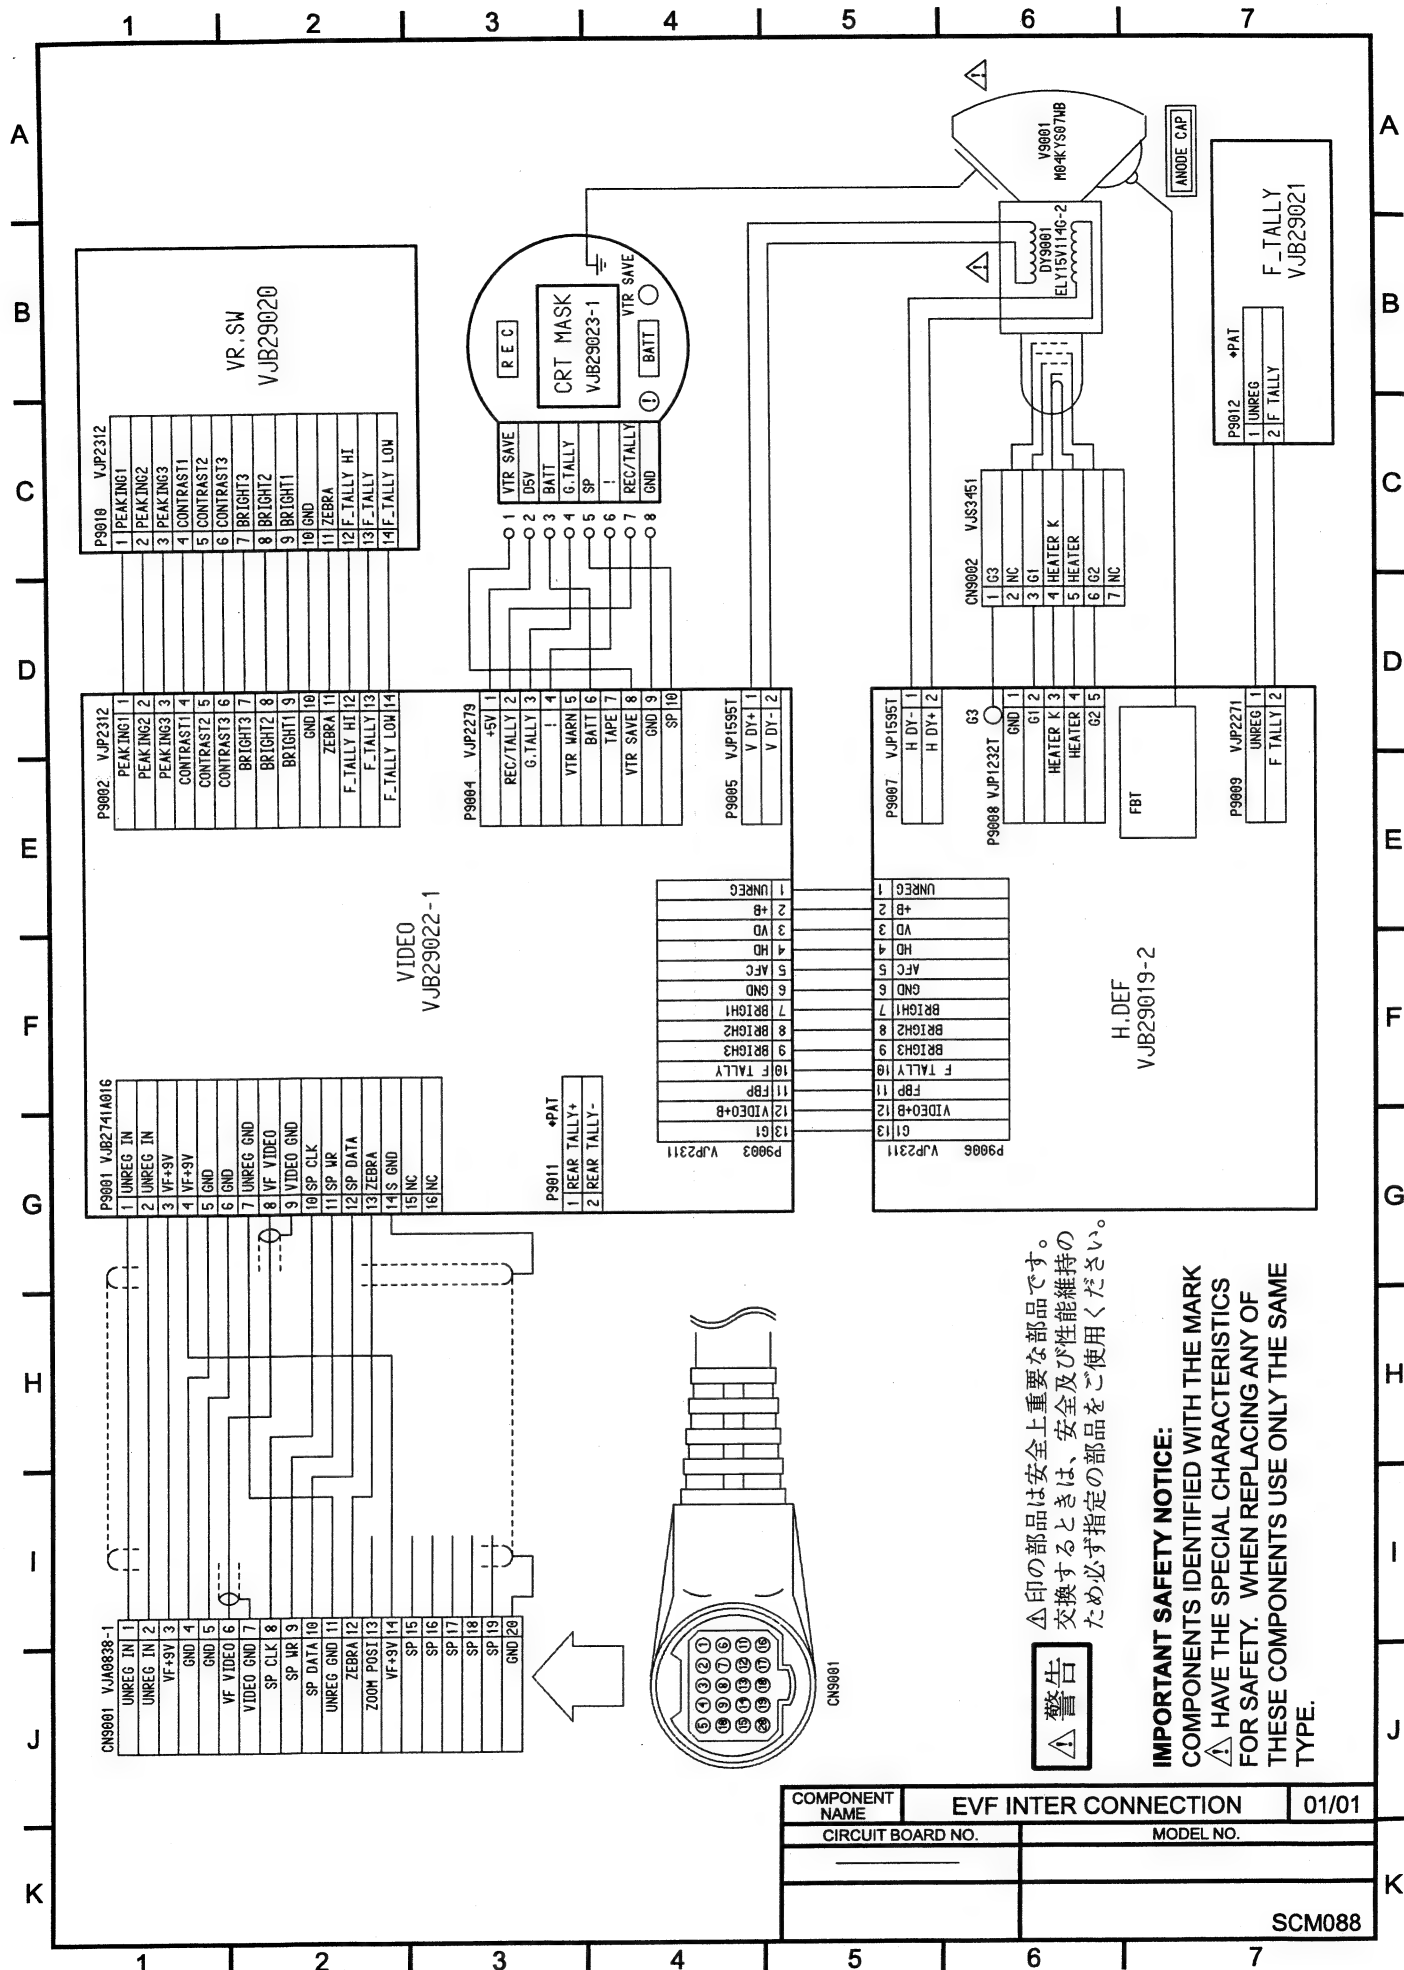

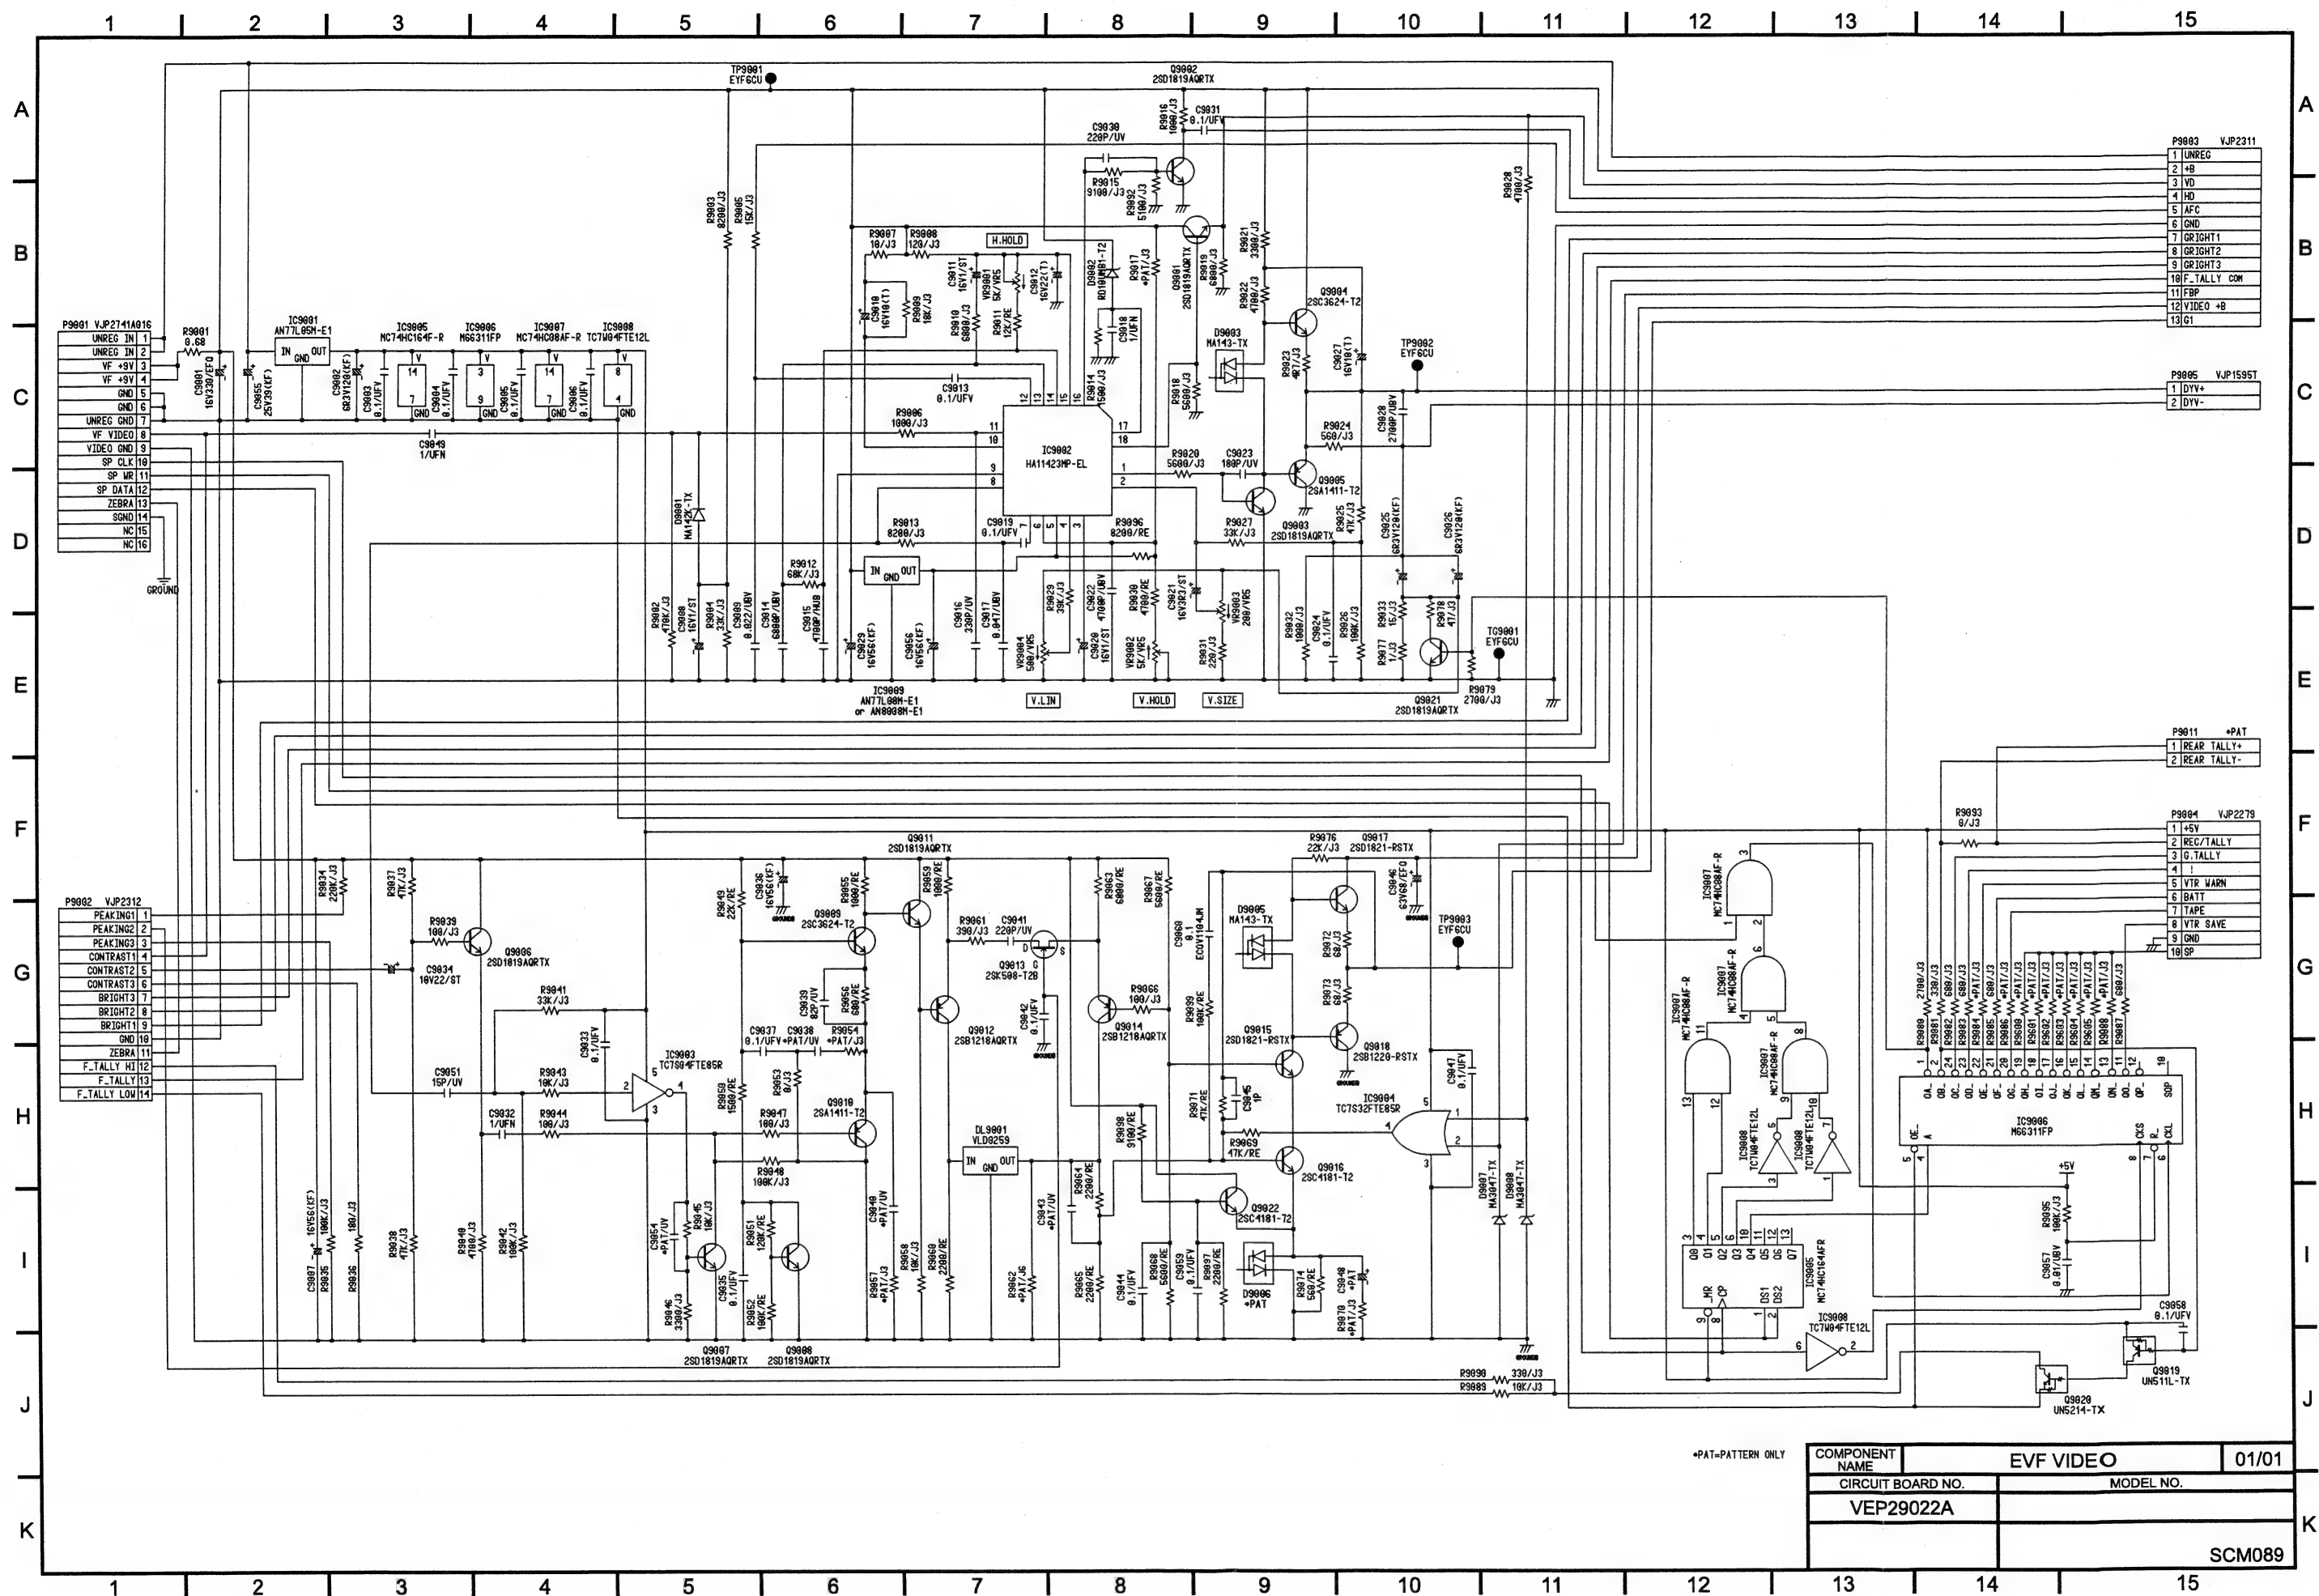


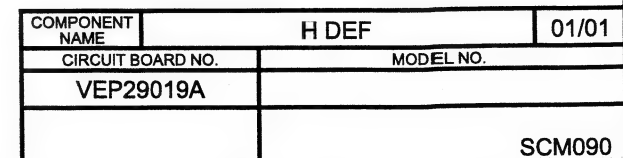


P9008 VJP1232T	
1	GND
2	G1
3	HEATER_K
4	HEATER
5	G2

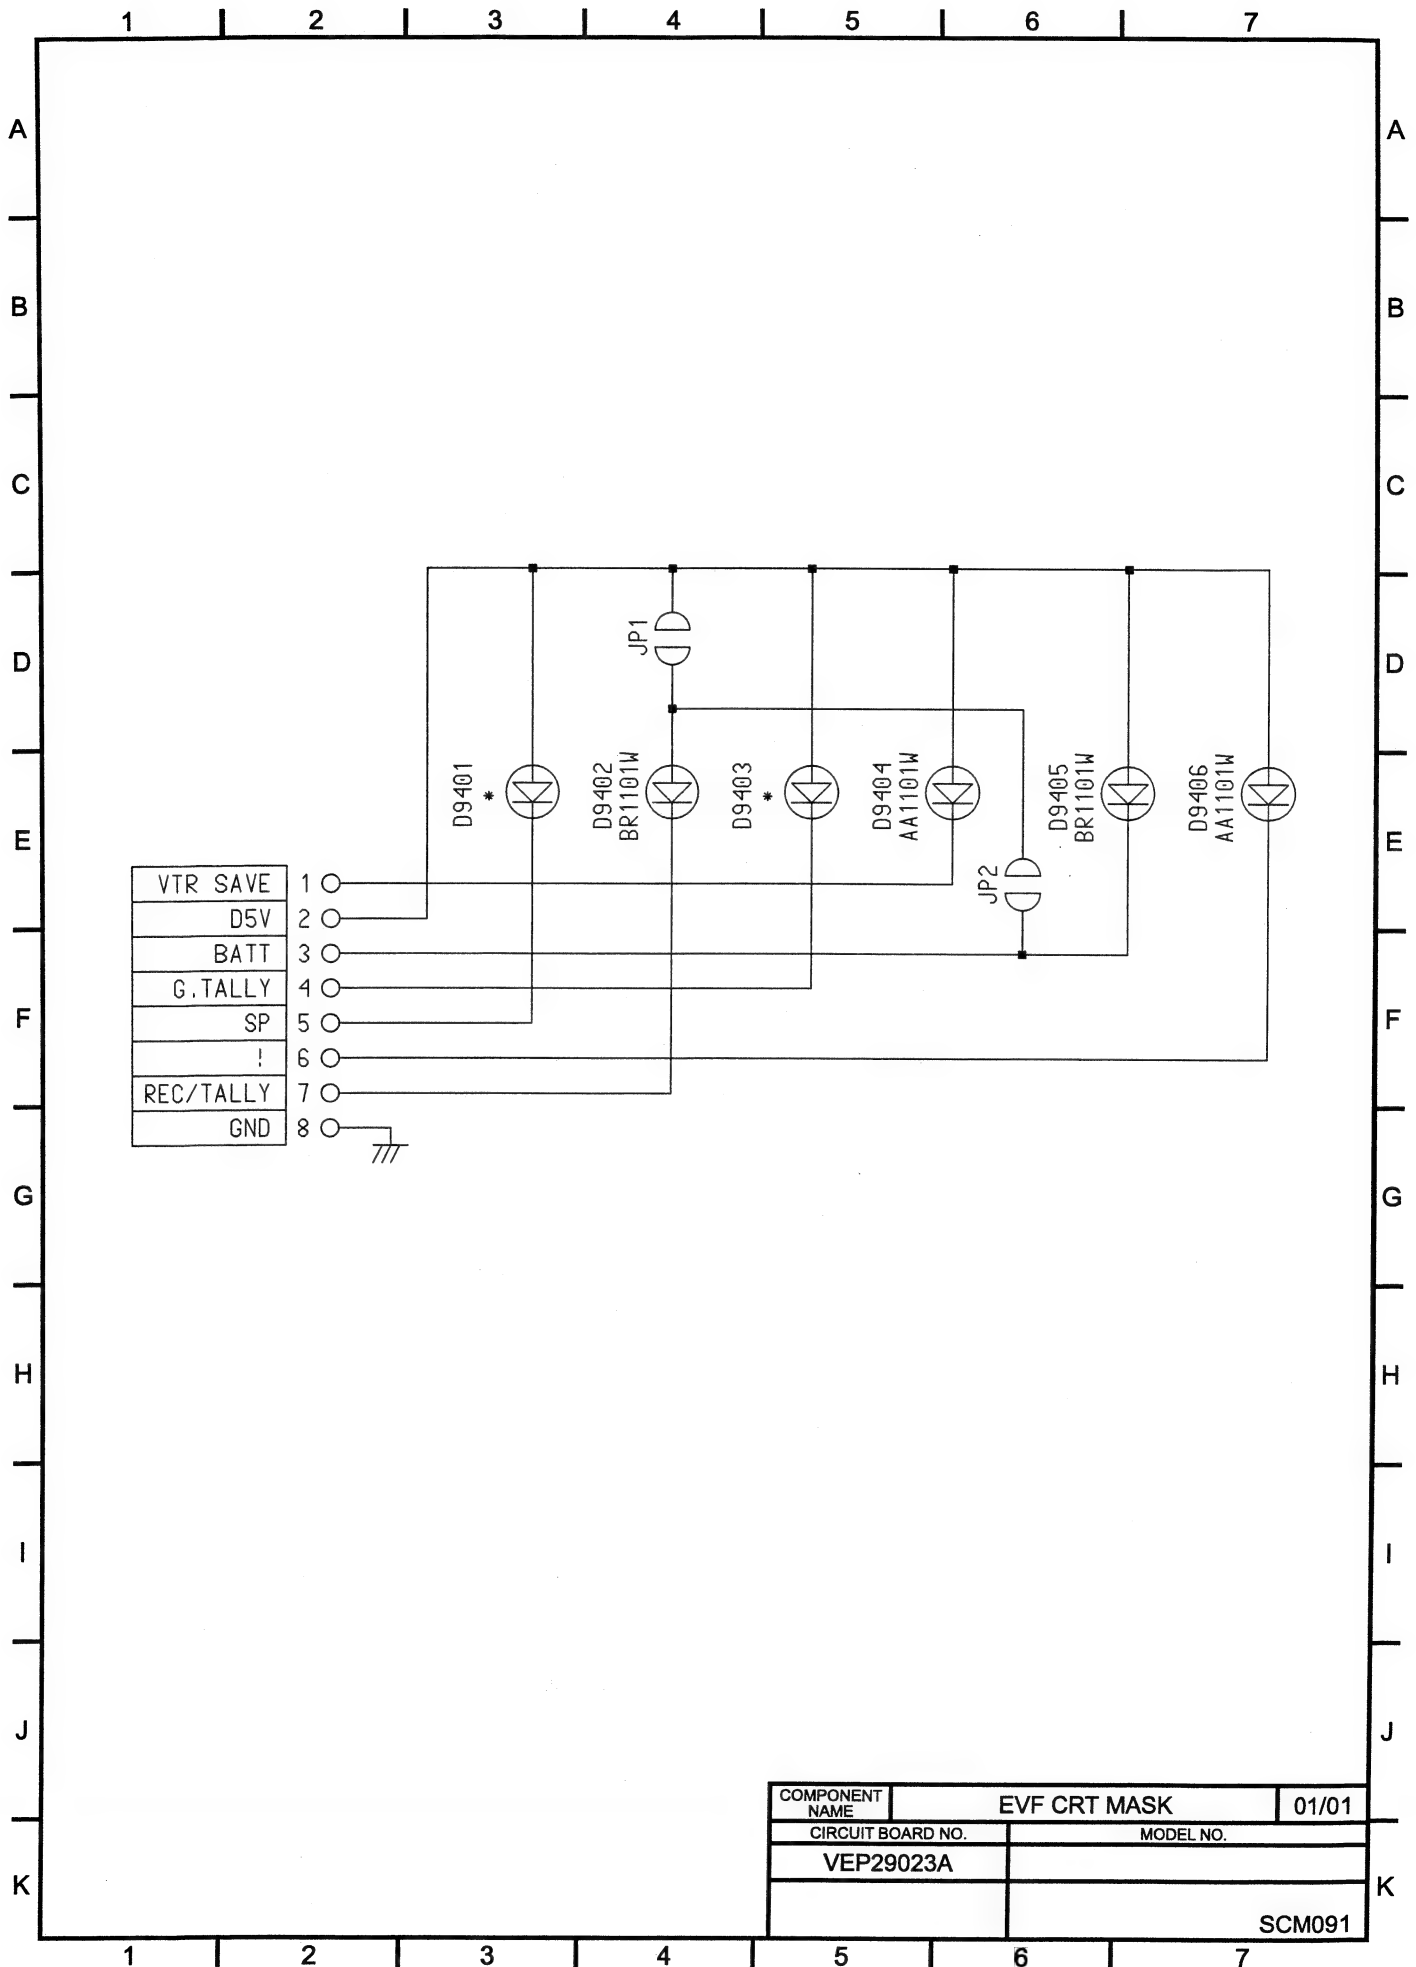

COMPONENT NAME	EVF CRT MASK		01/01
CIRCUIT BOARD NO.		MODEL NO.	
VEP29023A			
		SCM091	

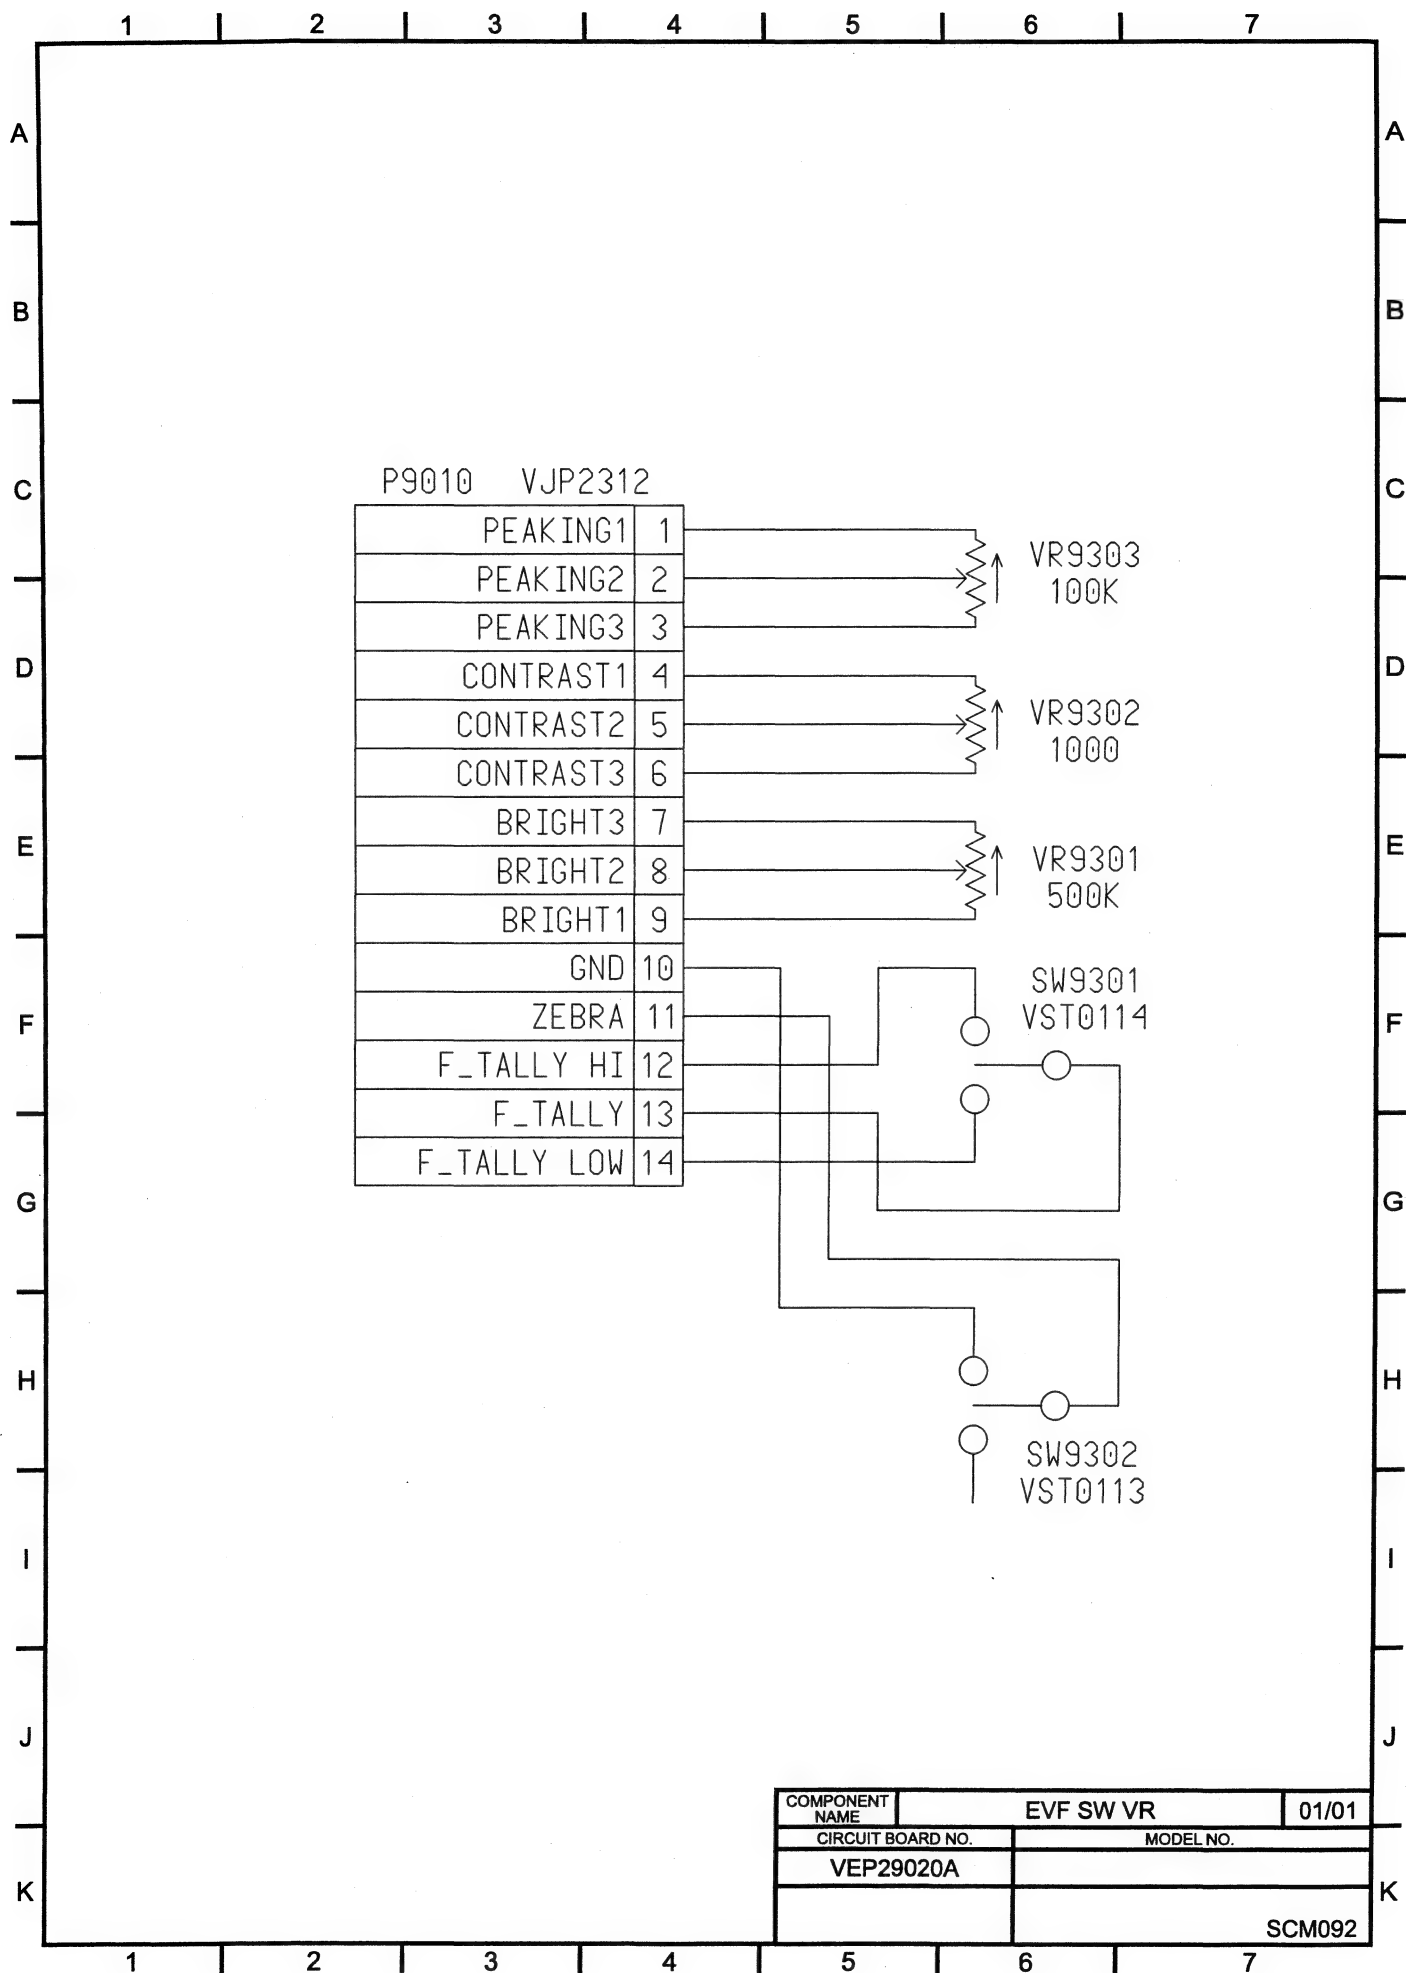

COMPONENT NAME	EVF SW VR	01/01
CIRCUIT BOARD NO.	MODEL NO.	
VEP29020A		
	SCM092	

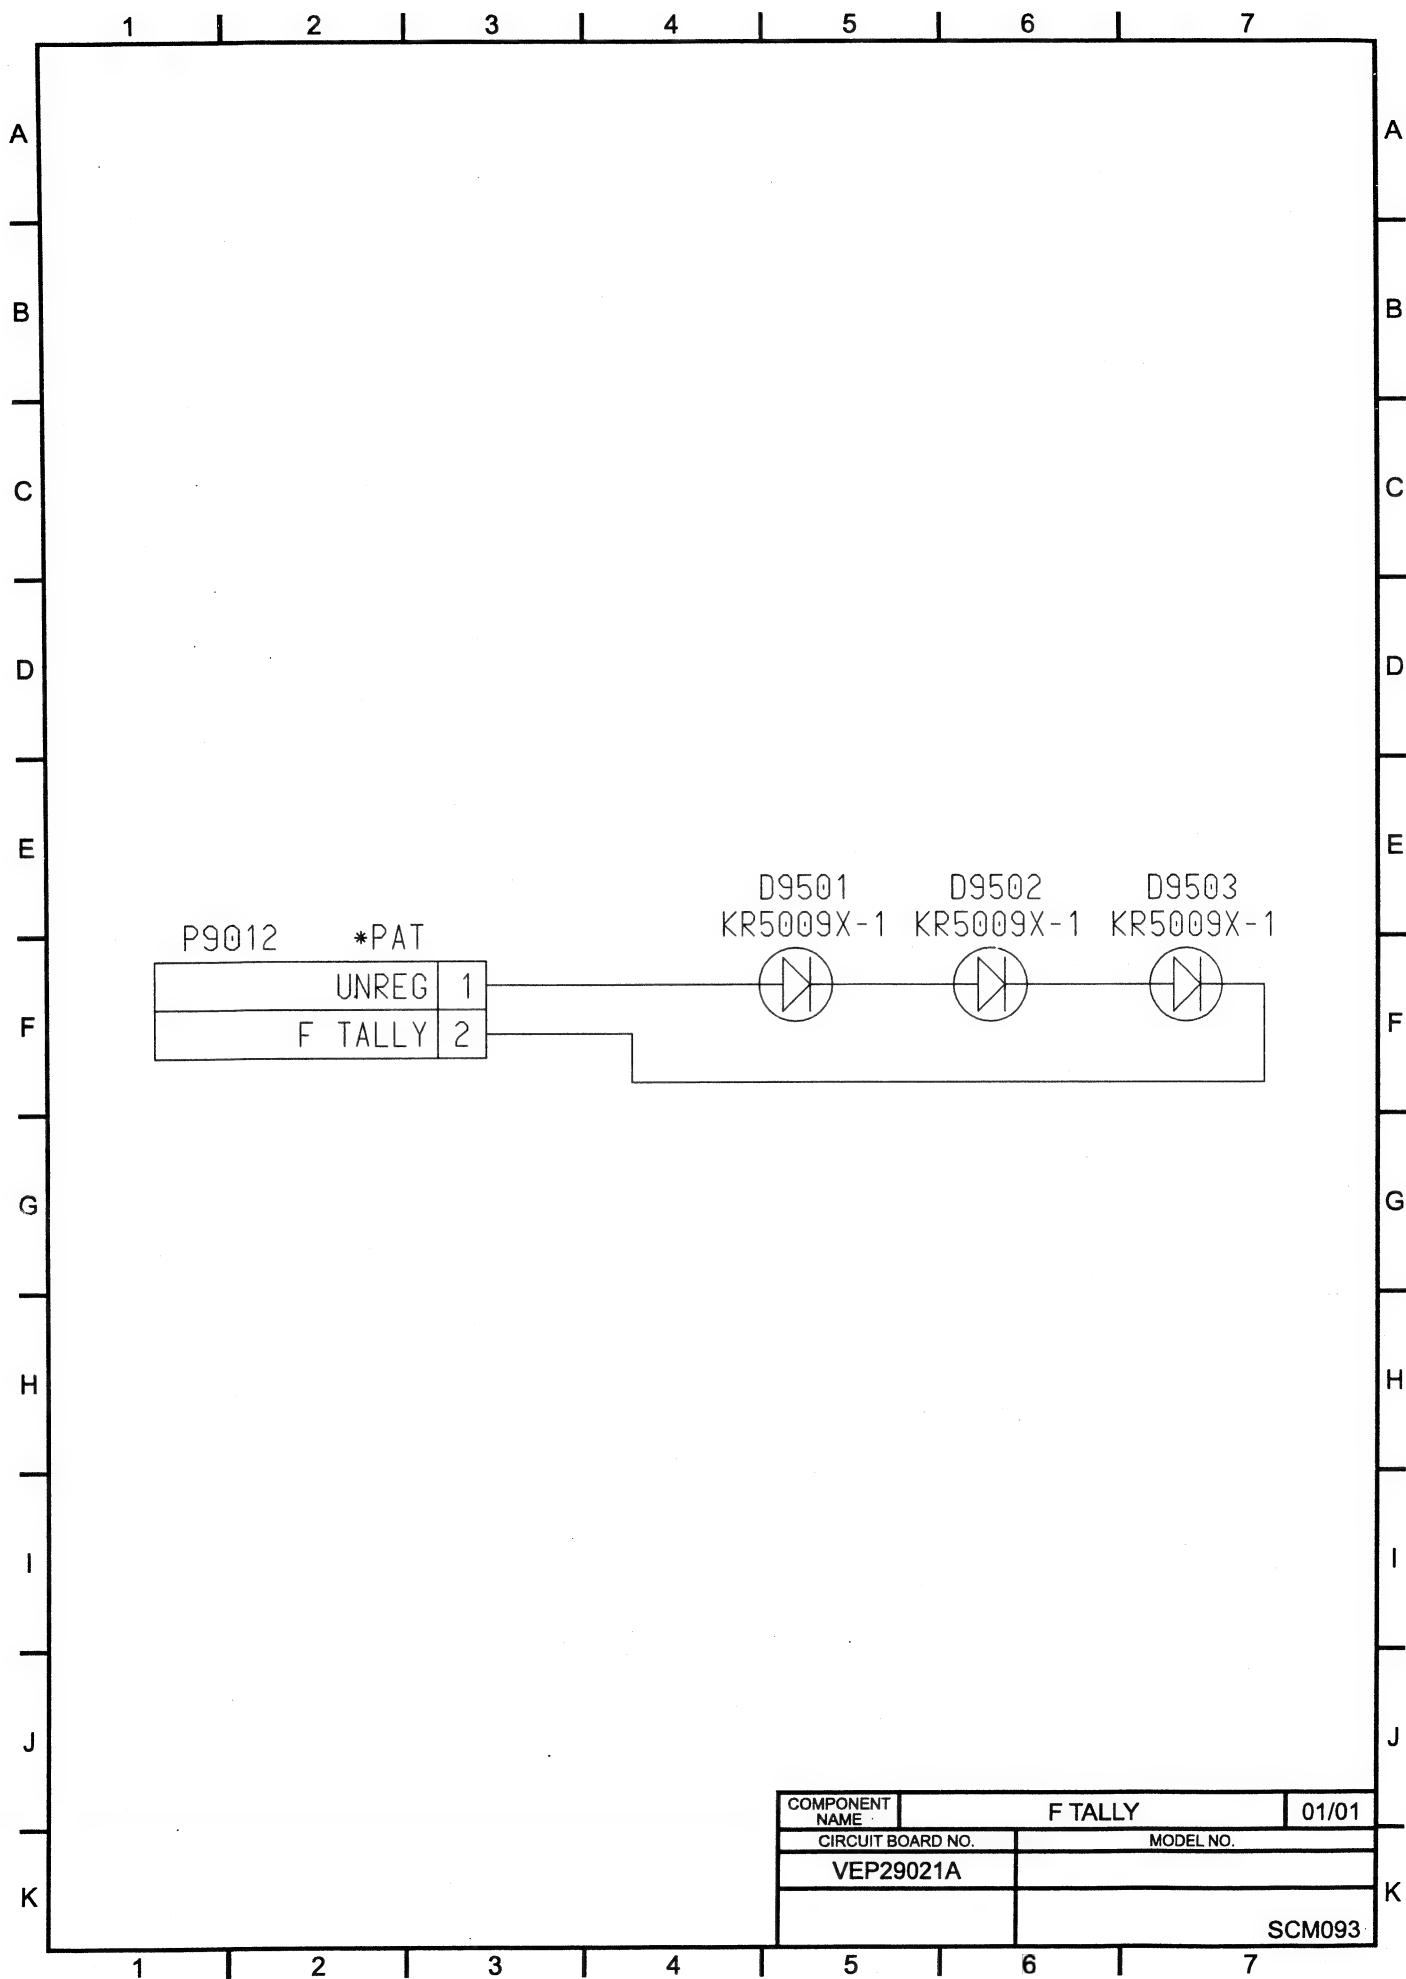

SECTION 7

CIRCUIT BOARD DIAGRAMS

CONTENTS

P.C.BOARD LOCATION	
CDS P.C.BOARD (NTSC: VEP25016A/PAL: VEP25016B).....	CBA-1
PULSE P.C.BOARD (NTSC: VEP20533A/PAL: VEP20533B)	CBA-2
PRE PROCESS P.C.BOARD (VEP23278A).....:	CBA-3
MOTHER P.C.BOARD for PAL (VEP00Y28A).....	CBA-4
MOTHER P.C.BOARD for NTSC (VEP00V89A).....	CBA-5
CAMERA SYSCON P.C.BOARD (NTSC: VEP26074B/PAL: VEP26074C)	CBA-6
CAMERA DSP P.C.BOARD (VEP23275A).....	CBA-7
CAMERA ENCODER P.C.BOARD (NTSC: VEP23276A/PAL: VEP23276B)	CBA-8
CAMERA SYNC P.C.BOARD (NTSC: VEP23446A/PAL: VEP23446B).....	CBA-9
EVF VIDEO P.C.BOARD (VEP29022A).....	CBA-10
H DEF P.C. BOARD (VEP29019A9).....	CBA-10
EVF CRT MASK P.C.BOARD (VEP29023A)	CBA-10
F TALLY P.C.BOARD (VEP29021A)	CBA-10
VEF SW VR P.C.BOARD (VEP29020A)	CBA-10
VIDEO MAIN P.C.BOARD (NTSC: VEP03B96A/ PAL: VEP03B96B).....	CBA-11
VIDEO I/F P.C.BOARD for NTSC (VEP03B94B)	CBA-12
VIDEO I/F P.C.BOARD for PAL (VEP03D53A).....	CBA-13
VIDEO I/F SUB P.C.BOARD (PAL only : VEP03D84A)	CBA-14
VTR SYSCON P.C.BOARD (NTSC: VEP06A22D/ PAL: VEP06A22E).....	CBA-15
SERVO P.C.BOARD (NTSC: VEP02437A/ PAL: VEP02437B).....	CBA-16
RF P.C.BOARD (VEP03B95A).....	CBA-17
POWER P.C.BOARD (VEP01643A).....	CBA-18
AUDIO LCD P.C.BOARD (VEP04690A).....	CBA-19
REAR JACK P.C.BOARD (VEP01786A).....	CBA-20
FRONT MIC P.C.BOARD (NTSC: VEP80A14C/ PAL: VEP80A14A).....	CBA-20
BNC P.C.BOARD (NTSC: VEP80A13B/ PAL: VEP80A13A).....	CBA-20
CCD P.C.BOARD (VEP20534A).....	CBA-21
OPERATE P.C.BOARD (VEP86149A).....	CBA-21


IMPORTANT SAFETY NOTICE

COMPONENTS IDENTIFIED WITH THE MARK  HAVE THE SPECIAL CHARACTERISTICS FOR SAFETY. WHEN REPLACING ANY OF THESE COMPONENTS USE ONLY THE SAME TYPE.

DO NOT USE THE PART NUMBER SHOWN ON THIS DRAWING FOR ORDERING. THE CORRECT PART NUMBER IS SHOWN IN THE PARTS LIST.

AND MAY BE SLIGHTLY DIFFERENT OR AMENDED SINCE THIS DRAWING WAS PREPARED.

P.C. BOARD LOCATION

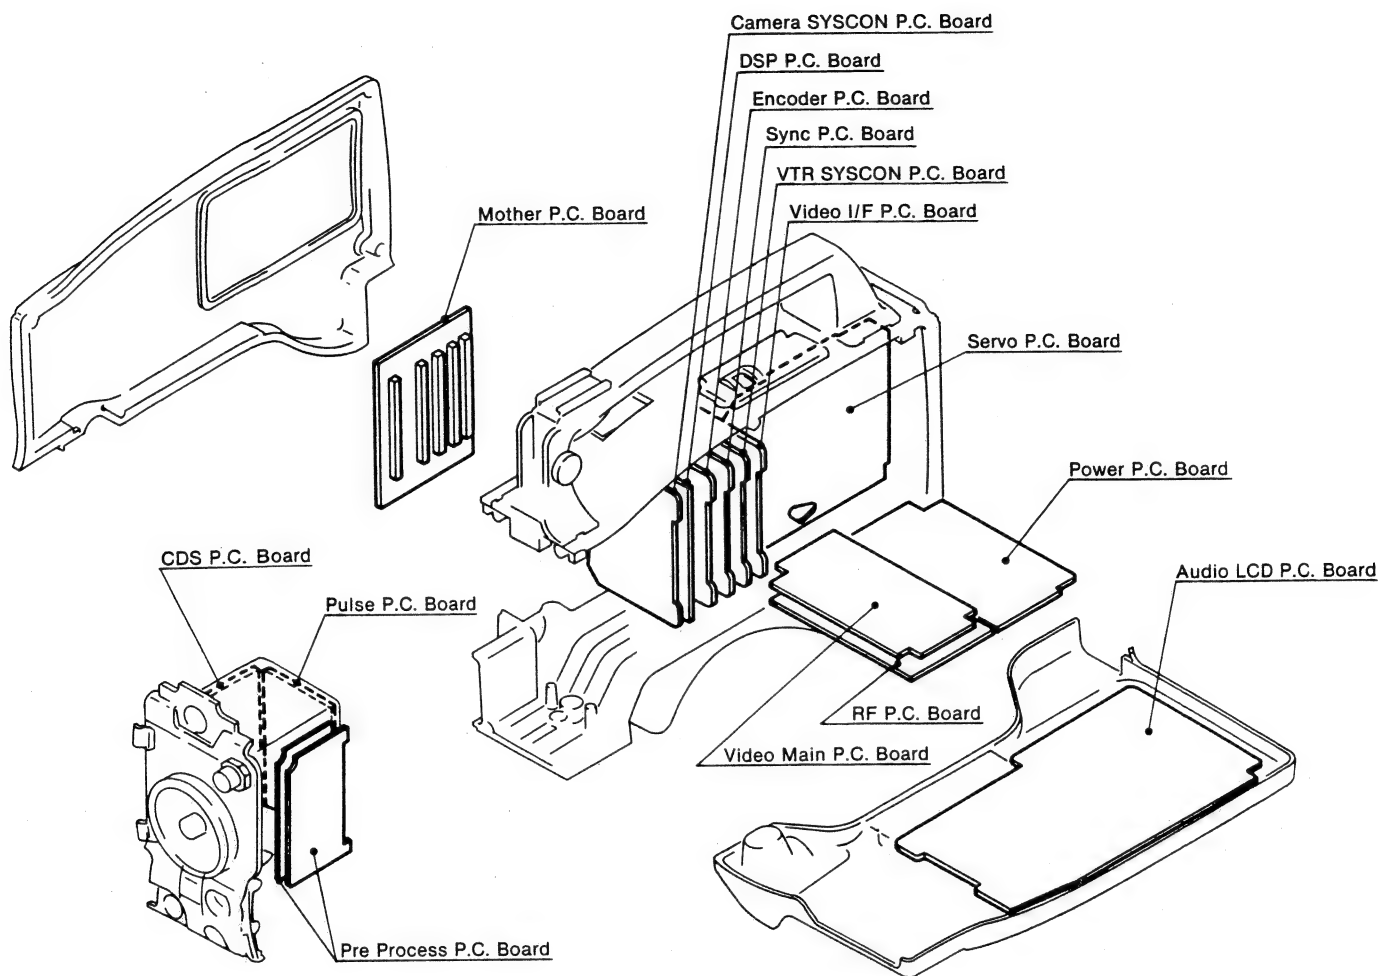

PRE PROCESS P.C. BOARD (VEP23278A)



REF	LOC	REF	LOC	REF	LOC	REF	LOC
IC3001	D2	Q3015	C2	Q3222	A2	Q3602	C1
IC3002	C2	Q3016	C2	Q3225	A2	Q3603	A1
IC3005	A2	Q3018	C2	Q3227	A2	Q3604	A1
IC3201	D2	Q3019	B2	Q3229	A2	Q3605	C1
IC3202	C2	Q3021	B2	Q3401	D3	TG3001	A1
IC3205	A2	Q3022	A2	Q3403	D3	TP3002	B2
IC3401	D3	Q3025	A2	Q3404	C3	TP3003	A1
IC3402	C3	Q3027	A2	Q3406	C3	TP3202	B2
IC3405	A3	Q3029	A1	Q3408	C3	TP3203	A2
IC3601	D1	Q3201	D2	Q3412	C3	TP3402	B3
IC3604	B1	Q3203	D2	Q3413	C3	TP3403	A3
IC3605	C1	Q3204	C2	Q3414	C3	VR3001	A2
IC3606	A1	Q3206	C2	Q3415	C3	VR3002	A1
IC3607	C1	Q3208	C2	Q3416	C3	VR3003	A1
Q3001	D2	Q3212	C2	Q3418	C3	VR3004	B2
Q3003	D1	Q3213	C2	Q3419	B3	VR3201	A2
Q3004	C1	Q3214	C2	Q3421	B3	VR3202	A2
Q3006	C1	Q3215	C2	Q3422	A3	VR3204	B2
Q3008	C2	Q3216	C2	Q3425	A3	VR3401	A3
Q3012	C2	Q3218	C2	Q3427	A3	VR3402	A3
Q3013	C2	Q3219	B2	Q3429	A3	VR3403	A3
Q3014	C2	Q3221	B2	Q3601	D1	VR3404	B3

FOIL SIDE

REF	LOC	REF	LOC
IC3003	C2	Q3207	C2
IC3004	B2	Q3209	C2
IC3006	A2	Q3210	C2
IC3203	C2	Q3211	C2
IC3204	B2	Q3223	A2
IC3206	A2	Q3224	A2
IC3403	C3	Q3228	A2
IC3404	B3	Q3407	C3
IC3406	A3	Q3409	C3
IC3603	C1	Q3410	C3
IC3608	A1	Q3411	C3
IC3609	C1	Q3423	A3
P1	C3	Q3424	A3
P2	A1	Q3428	A3
P3	C1		
Q3007	C2		
Q3009	C2		
Q3010	C2		
Q3011	C2		
Q3023	A2		
Q3024	A1		
Q3028	A1		

COMPONENT SIDE

PRE PROCESS P.C. BOARD

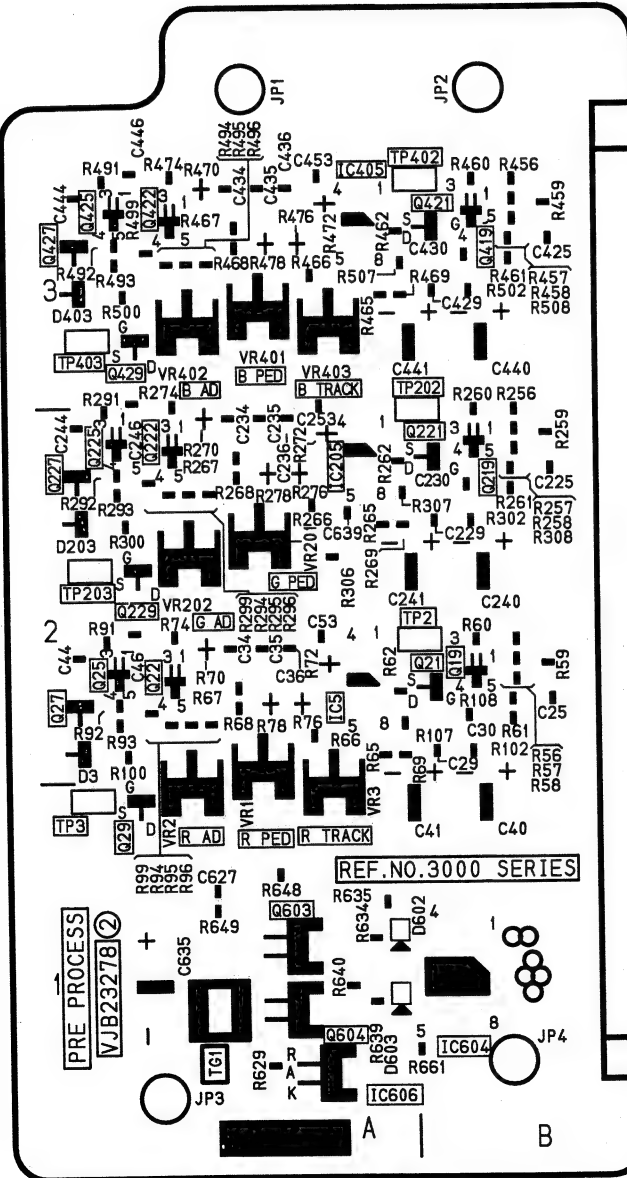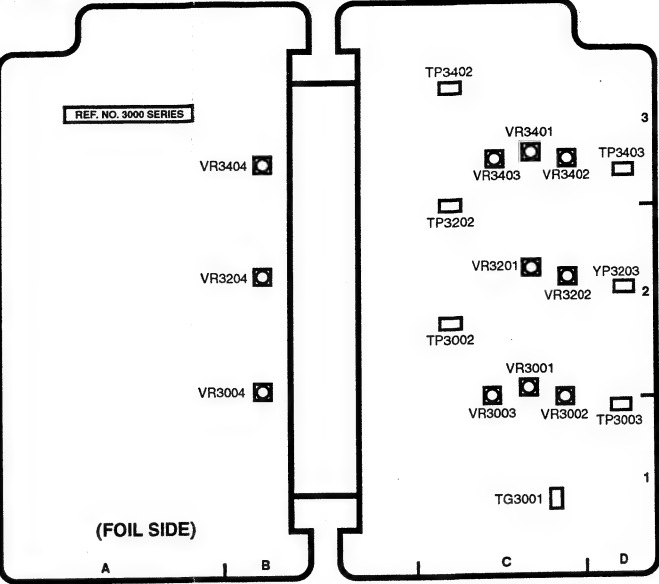


MOTHER P.C. BOARD for PAL (VEP00Y28A)

REF	LOC
P9601	B3
P9607	A3
P9608	C3
P9610	A2
P9611	A1
P9612	A1
P9613	B2
P9614	C1
P9617	B2
P9619	D2
P9620	C2
P9621	C2
P9622	A1
P9630	B2


FOIL SIDE

REF	LOC
P9602	B3
P9603	B2
P9604	B2
P9605	B1
P9606	B1

COMPONENT SIDE

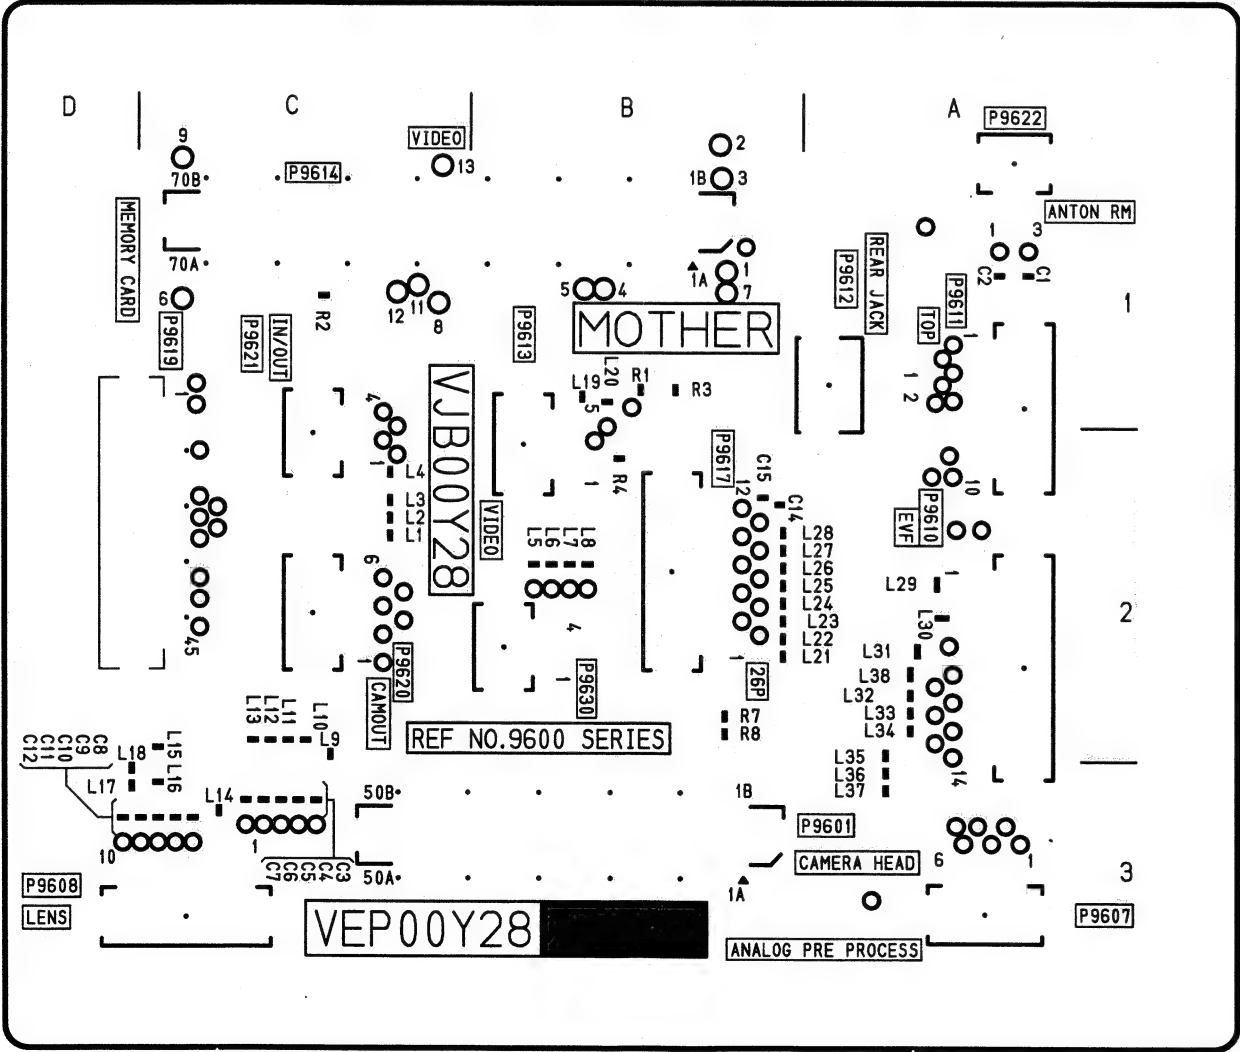

(FOIL SIDE)

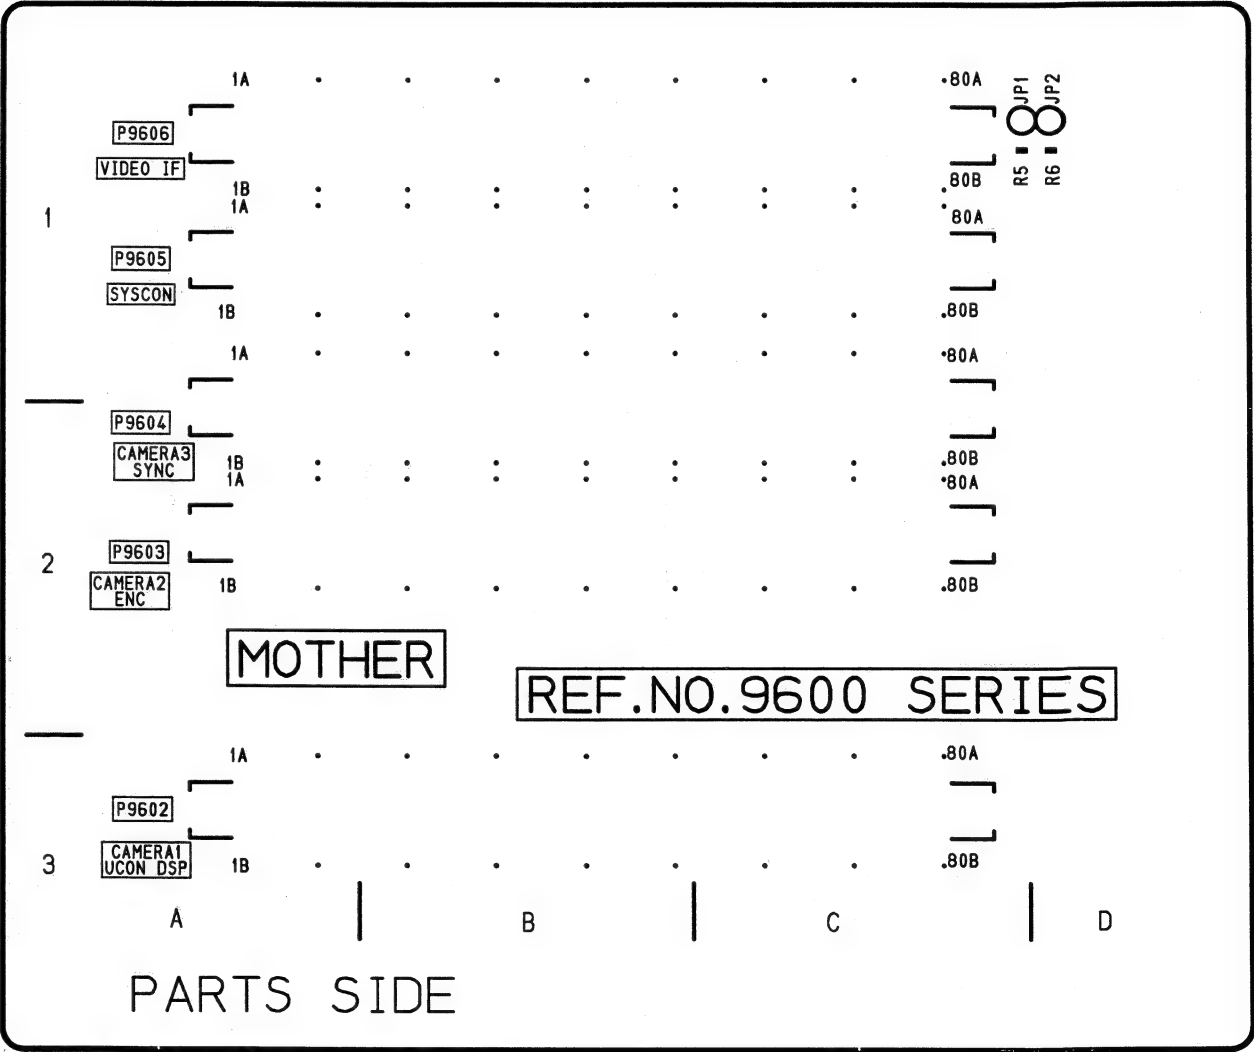

(COMPONENT SIDE)


CDS P.C. BOARD (NTSC:VEP25016A / PAL:VEP25016B)

REF	LOC	REF	LOC	REF	LOC	REF	LOC	REF	LOC	REF	LOC
IC3001	B3	Q3113	A1	Q3207	A3	Q3302	A2	Q3319	A1	TP3102	B1
IC3002	A3	Q3114	A2	Q3208	B2	Q3303	A2	Q3321	A1	TP3103	B1
P3001	B3	Q3115	A1	Q3209	A2	Q3304	A2	Q3322	A1	TP3201	A2
P3003	B1	Q3116	B1	Q3210	A2	Q3305	A2	Q3323	A1	TP3202	A2
Q3001	A3	Q3117	B1	Q3211	B2	Q3306	A2	QR3102	A2	TP3203	A1
Q3101	B2	Q3118	B1	Q3212	A2	Q3307	B3	QR3201	A2	TP3301	A2
Q3102	B2	Q3119	B1	Q3213	A2	Q3308	B2	QR3202	B3	TP3302	A2
Q3103	B2	Q3120	B1	Q3214	B2	Q3309	B2	QR3301	A2	TP3303	A1
Q3104	B2	Q3121	B1	Q3215	A1	Q3310	B2	QR3302	B3	VC3101	B1
Q3105	B2	Q3122	B1	Q3216	A1	Q3311	B2	TG3001	B2	VC3201	A1
Q3106	B2	Q3123	B2	Q3217	A2	Q3312	B2	TG3002	B2	VC3301	A1
Q3107	A3	Q3201	A2	Q3218	A1	Q3313	B2	TP3001	B3	VR3101	B1
Q3108	A2	Q3202	A2	Q3219	A1	Q3314	B2	TP3002	B2	VR3102	B2
Q3109	A2	Q3203	A2	Q3220	A1	Q3315	B1	TP3003	B3	VR3201	A1
Q3110	A2	Q3204	A2	Q3221	A1	Q3316	A1	TP3004	A3	VR3202	A2
Q3111	A2	Q3205	A2	Q3222	A1	Q3317	A2	TP3005	A3	VR3301	A1
Q3112	A2	Q3206	A2	Q3301	A2	Q3318	A1	TP3101	B1	VR3302	A2


FOIL SIDE

REF	LOC	REF	LOC
IC3002	B3	Q3211	A2
P3001	A3	Q3212	A2
P3003	A1	Q3213	A2
Q3001	B3	Q3214	A2
Q3107	B3	Q3215	A1
Q3108	B2	Q3307	A3
Q3109	B2	Q3308	A2
Q3110	B2	Q3309	A2
Q3111	B2	Q3310	A2
Q3112	B2	Q3311	A2
Q3113	B1	Q3312	A2
Q3114	B2	Q3313	A2
Q3115	B1	Q3314	A2
Q3207	A3	Q3315	A1
Q3208	A2	QR3102	B2
Q3209	A2	QR3202	A3
Q3210	A2	QR3302	A3


COMPONENT SIDE

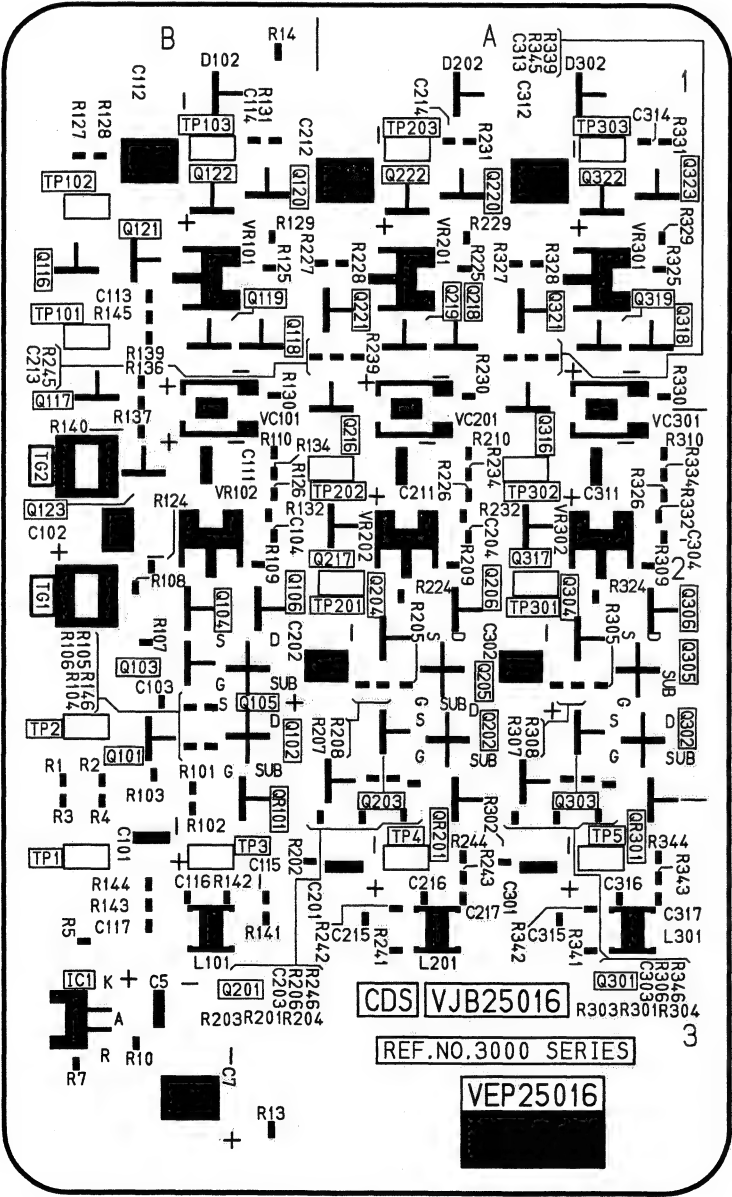

(FOIL SIDE)

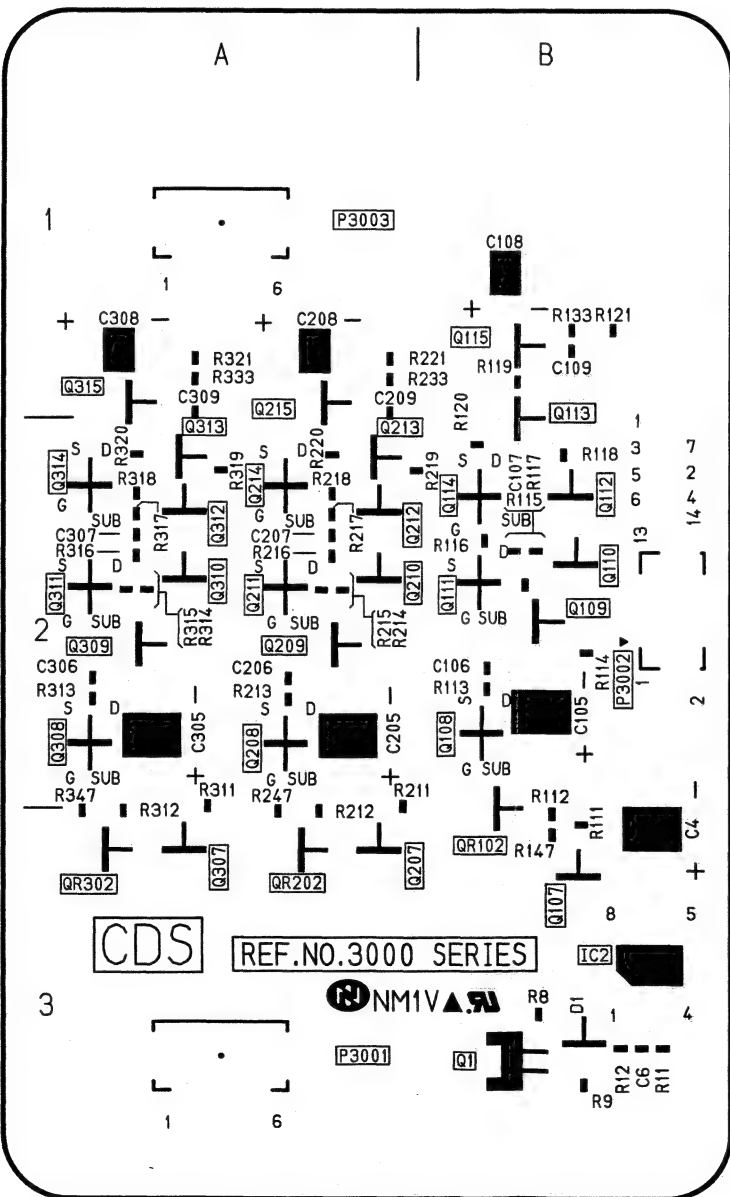

(COMPONENT SIDE)

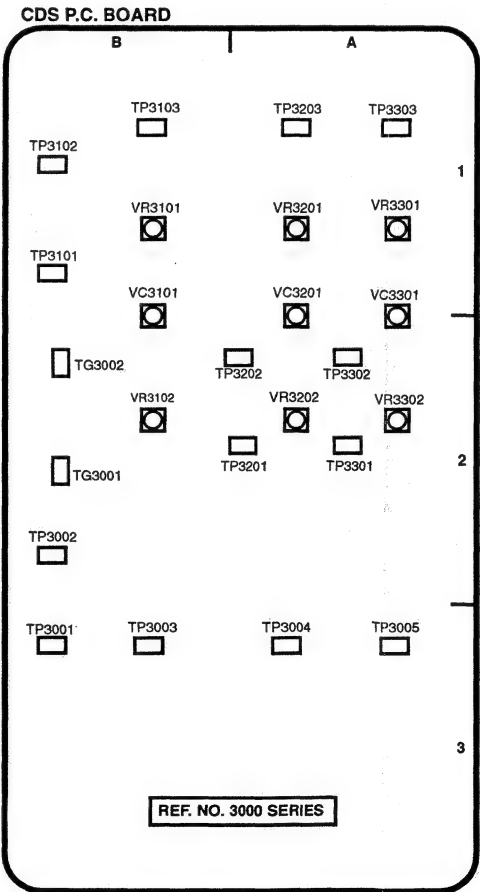

(FOIL SIDE)



PULSE P.C. BOARD (NTSC:VEP20533A / PAL:VEP20533B)

REF	LOC	REF	LOC
IC6	C1	Q14	B2
IC7	A1	TG1	A1
IC8	A1	TG2	A2
IC9	B1	TP1	A1
IC10	B1	TP2	A1
IC13	B2	TP3	A1
IC14	C2	TP4	C2
IC15	C1	VR1	B2
IC16	C1	VR2	B2
IC17	B2	VR3	A2
IC18	B1	VR4	A2
IC19	B2	VR5	A2
IC20	B2	VR6	A2
P1	B1	VR7	C2
Q3	C2	VR8	C2
Q4	C2	VR9	C2
Q5	C2	VR10	B2
Q9	C2	VR11	B2
Q10	C2	VR12	B2
Q11	B2	VR13	C2
Q12	B2	VR14	C2
Q13	B2		

FOIL SIDE


REF	LOC
IC1	A1
IC2	A2
IC3	C1
IC5	C1
P2	A1
P3	B1
P4	B1
Q6	C1
Q7	B1
Q15	A1
Q16	B1
Q17	C2
Q18	C2
Q19	B2

COMPONENT SIDE

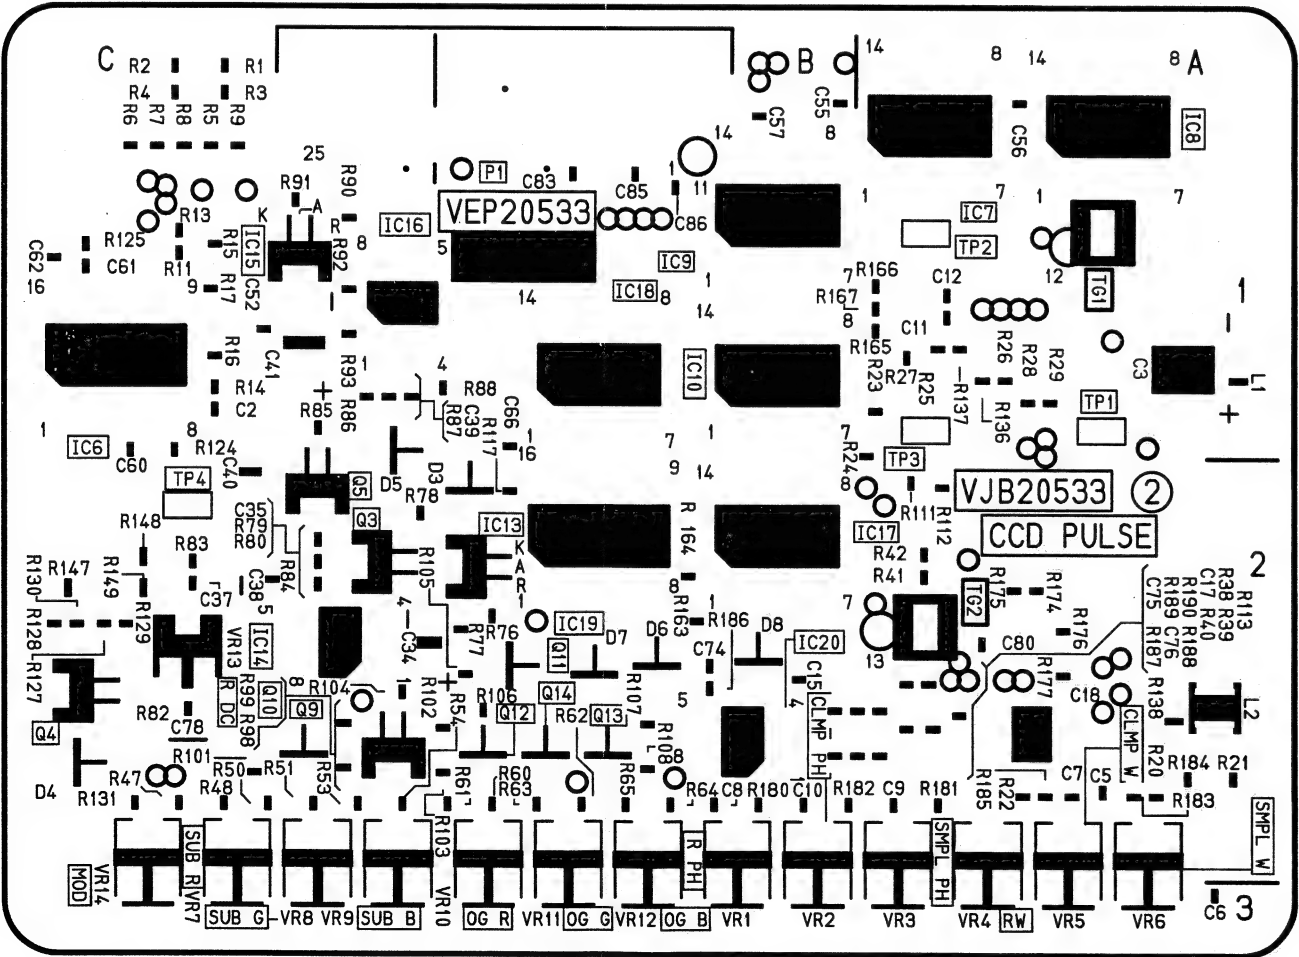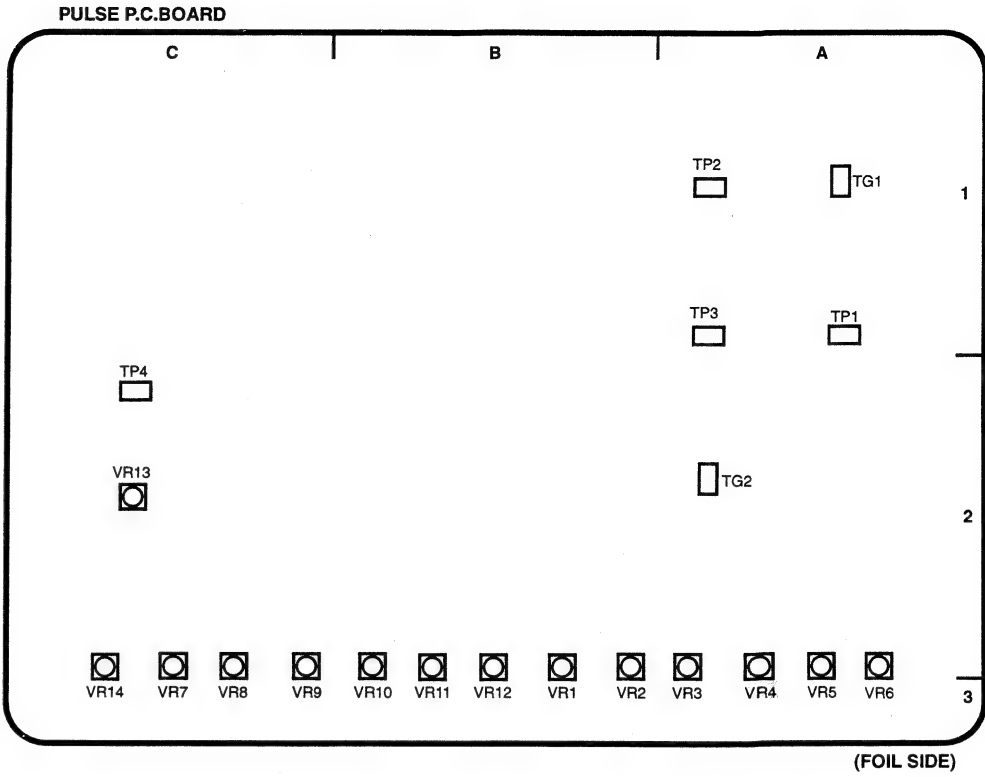

CBA-2

CBA-2

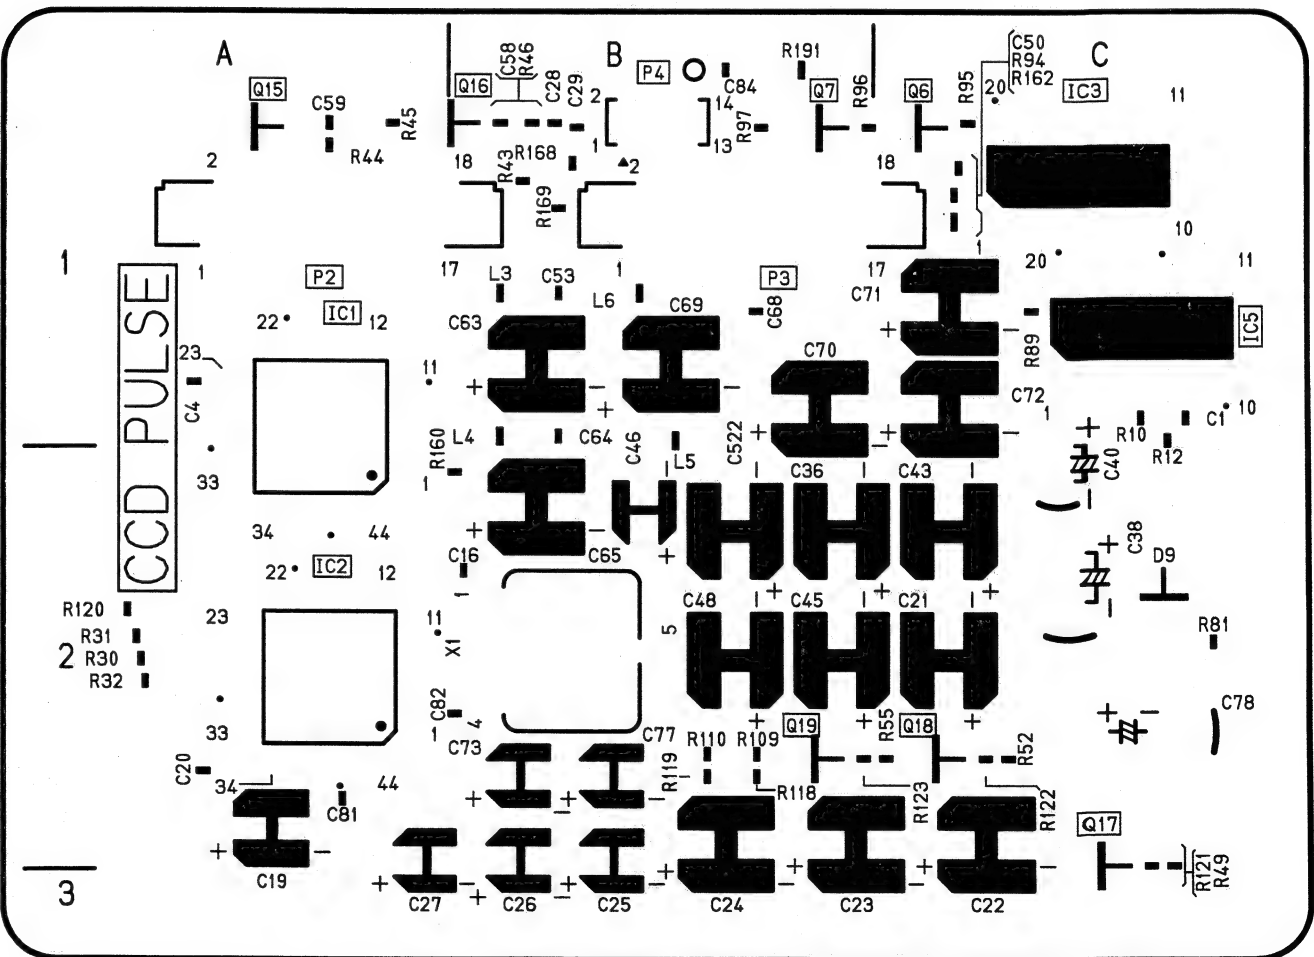

CBA-2

CBA-2


MOTHER P.C. BOARD for NTSC (VEP00V89A)

REF	LOC
P9601	B3
P9607	A3
P9608	C3
P9610	A2
P9611	A1
P9612	A1
P9613	B2
P9614	C1
P9617	B2
P9619	D2
P9620	C2
P9621	C2
P9622	A1


FOIL SIDE

REF	LOC
P9602	B3
P9603	B2
P9604	B2
P9605	B1
P9606	B1

COMPONENT SIDE

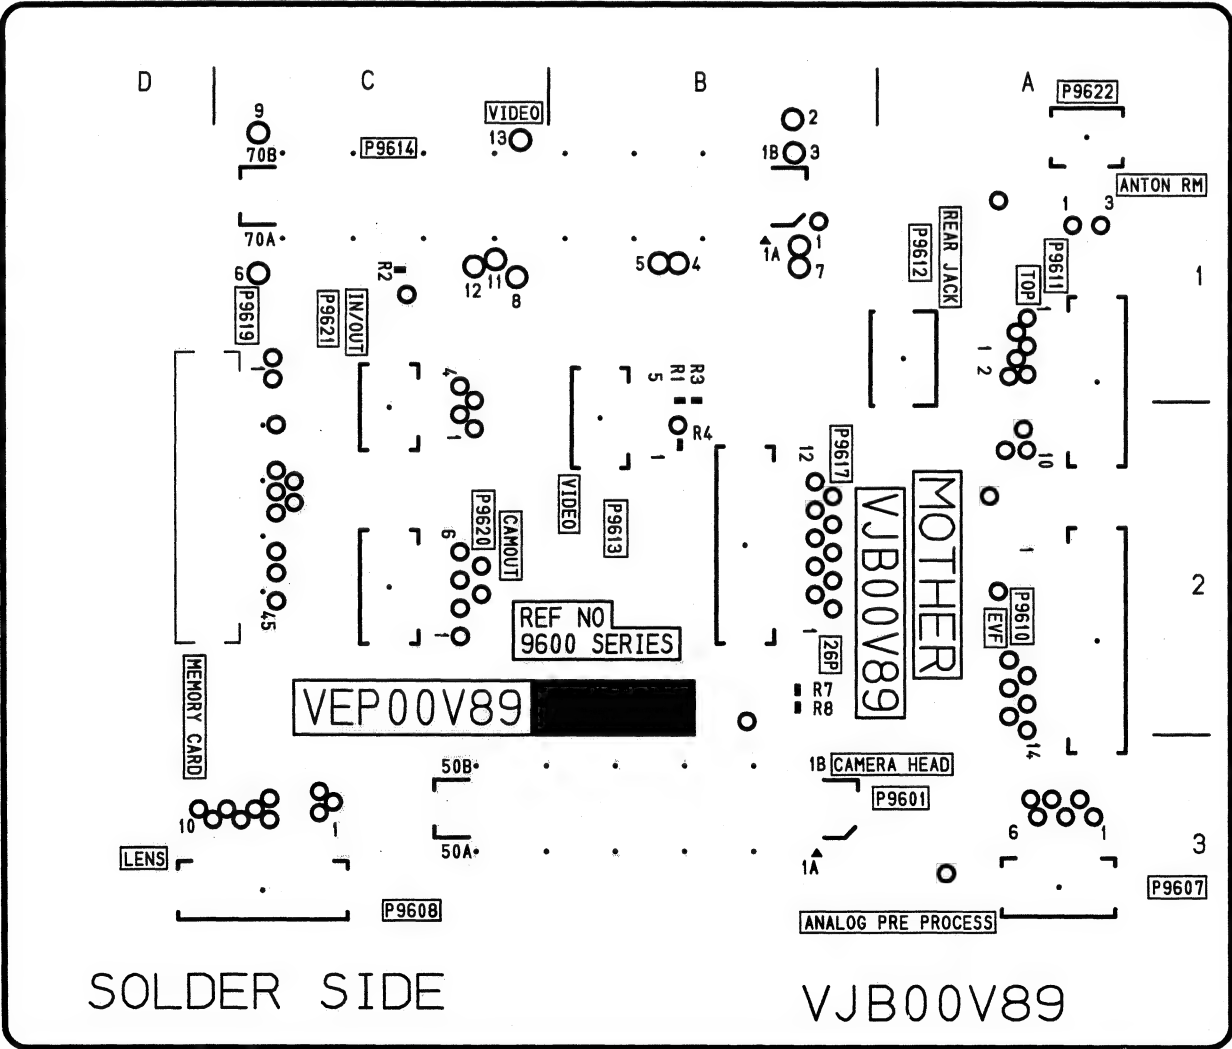

(FOIL SIDE)

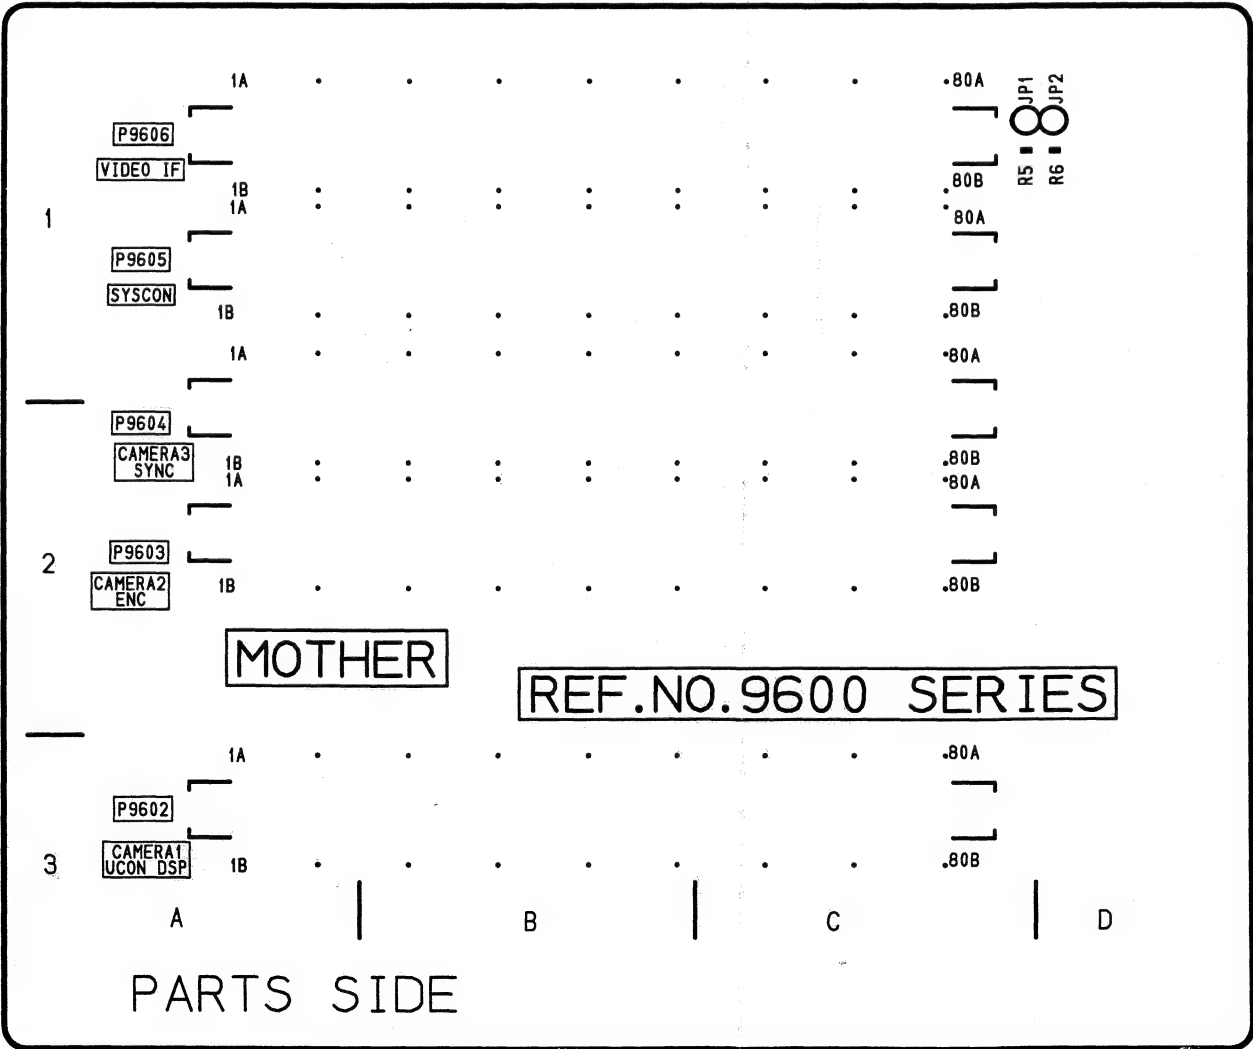

(COMPONENT SIDE)




CAMERA SYSCON P.C. BOARD (NTSC:VEP26074B / PAL:VEP26074C)

REF	LOC	REF	LOC
IC3502	B2	IC3532	B2
IC3503	C2	IC3701	A2
IC3504	C2	P3501	B1
IC3507	A2	P3502	C2
IC3508	A1	QR3500	B2
IC3511	C1	QR3501	B1
IC3513	B1	QR3502	A1
IC3514	A2		
IC3515	B2		
IC3516	B2		
IC3517	A2		
IC3518	B1		
IC3520	B1		
IC3521	B1		
IC3522	B1		
IC3523	C1		
IC3528	B2		
IC3531	A1		

FOIL SIDE

REF	LOC	REF	LOC
IC3501	A2	TG3500	B3
IC3505	C2	TP3500	C3
IC3506	B1	TP3501	B3
IC3510	C1	TP3502	C3
IC3519	B1	TP3503	B3
IC3525	B1	TP3504	B3
IC3526	C1	TP3505	C1
IC3529	C1	TP3506	C1
IC3530	A1	TP3507	C1
IC3533	C1	TP3508	A3
P3503	C2	TP3509	C3
Q3500	C1	TP3510	C3
Q3501	C1	TP3511	B1
Q3502	C1	TP3512	B1
Q3503	B1	TP3513	B1
Q3504	B1	TP3514	C2
Q3505	C1	TP3515	C2
QR3503	B2	TP3516	A3

COMPONENT SIDE

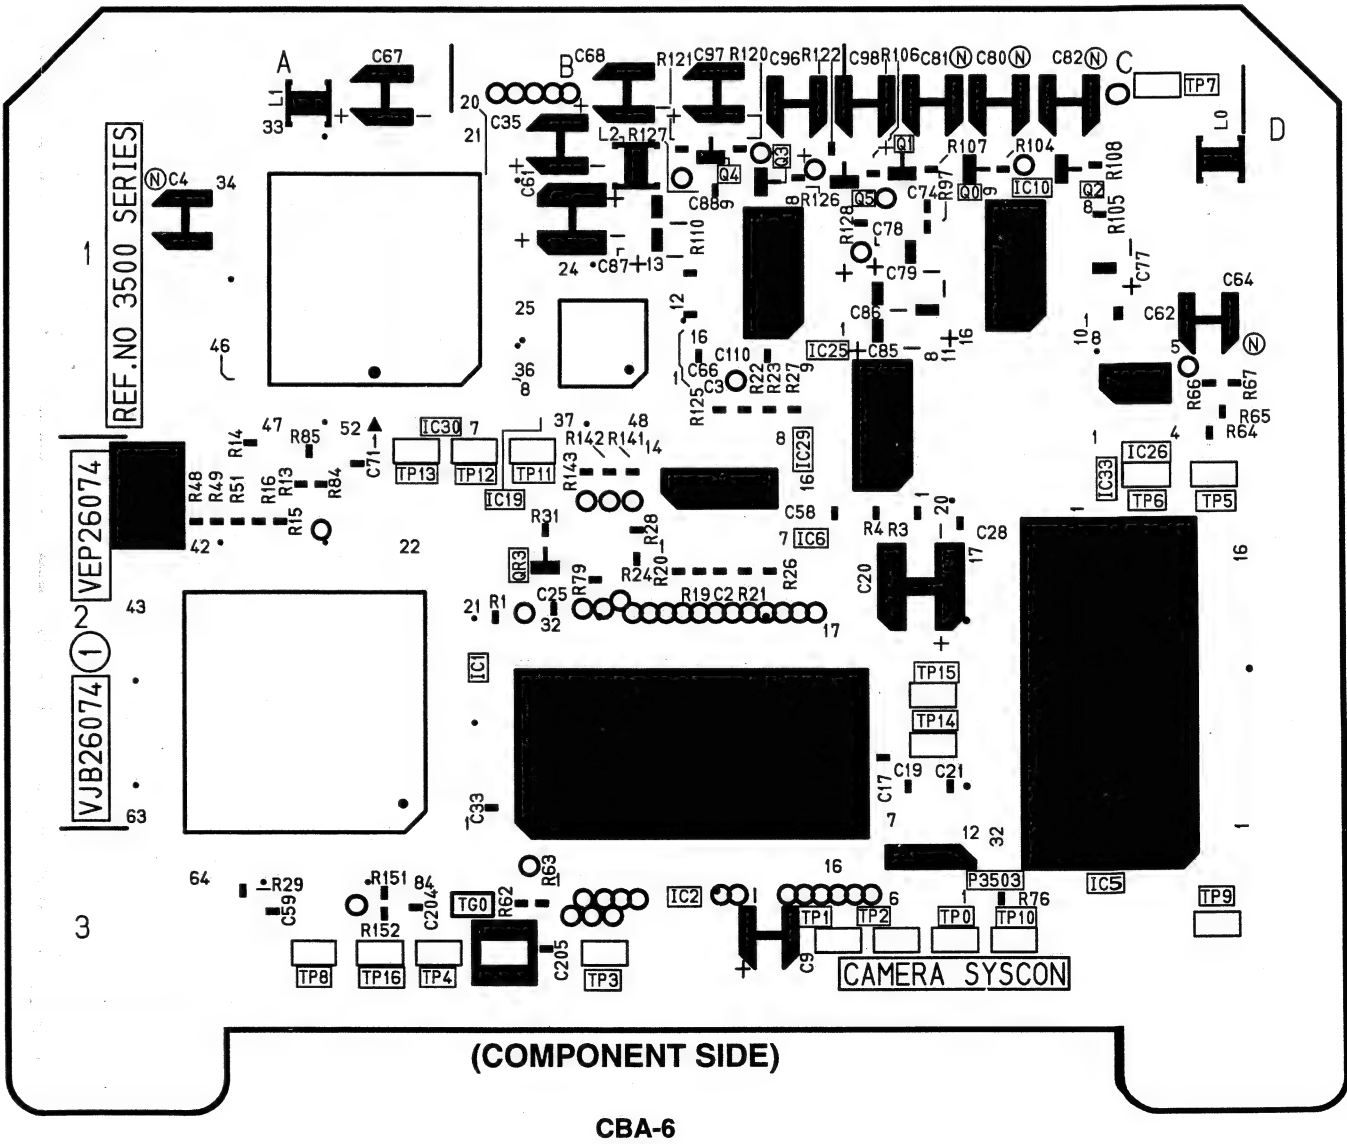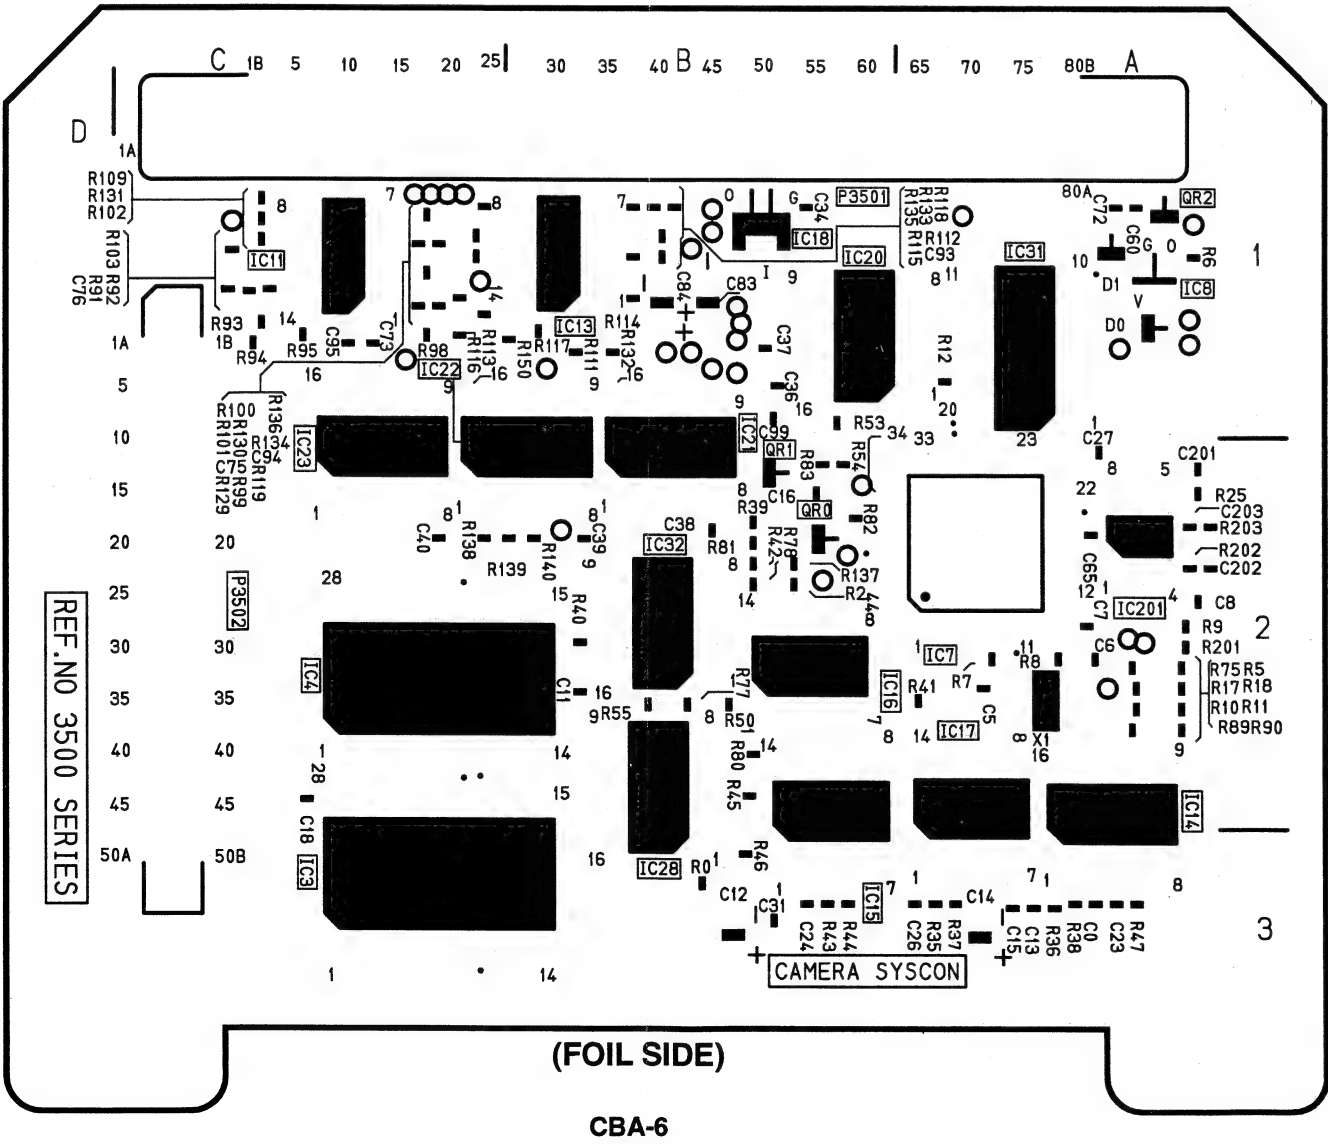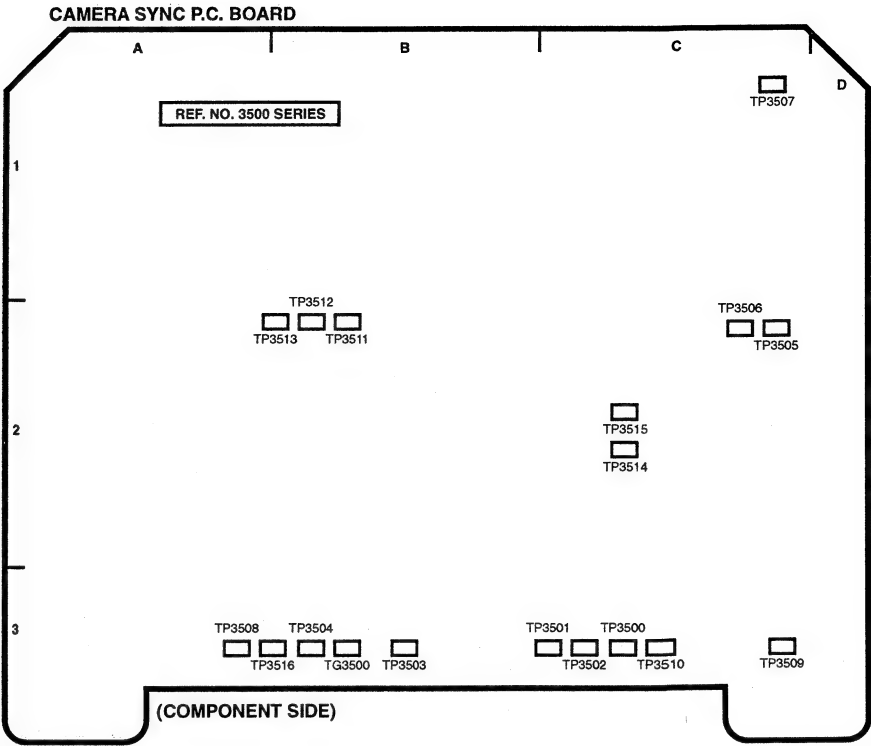


CAMERA DSP P.C. BOARD (VEP23275A)

REF	LOC	REF	LOC	REF	LOC
IC3001	A3	IC3306	A2	TP3103	C2
IC3002	A3	TG3001	A1	TP3104	C1
IC3014	C3	TG3101	C1	TP3105	C2
IC3016	B3	TG3201	C1	TP3106	C2
IC3101	B3	TP3001	A1	TP3107	B3
IC3102	B2	TP3002	A1	TP3108	B3
IC3205	A2	TP3003	A1	TP3201	B1
IC3206	A1	TP3004	C3	TP3202	B1
IC3301	A3	TP3005	C3	TP3203	B1
IC3302	A2	TP3006	C3	TP3204	B1
IC3303	A1	TP3007	C2	TP3205	B1
IC3304	A3	TP3101	C2	TP3206	B1
IC3305	A2	TP3102	A3		


FOIL SIDE

REF	LOC	REF	LOC	REF	LOC
IC3003	B3	IC3104	B2	Q3301	A2
IC3004	A3	IC3201	B1	Q3302	A2
IC3005	B3	IC3202	B2	Q3303	A2
IC3006	B3	IC3203	B1	VR3001	B3
IC3007	A2	IC3204	B2		
IC3008	B2	IC3307	A1		
IC3009	B2	IC3308	A1		
IC3010	A2	P3001	B1		
IC3011	B2	Q3201	B1		
IC3012	B2	Q3202	B1		
IC3013	A2	Q3203	B1		
IC3015	B3	Q3204	A2		
IC3103	B2	Q3205	A1		

COMPONENT SIDE

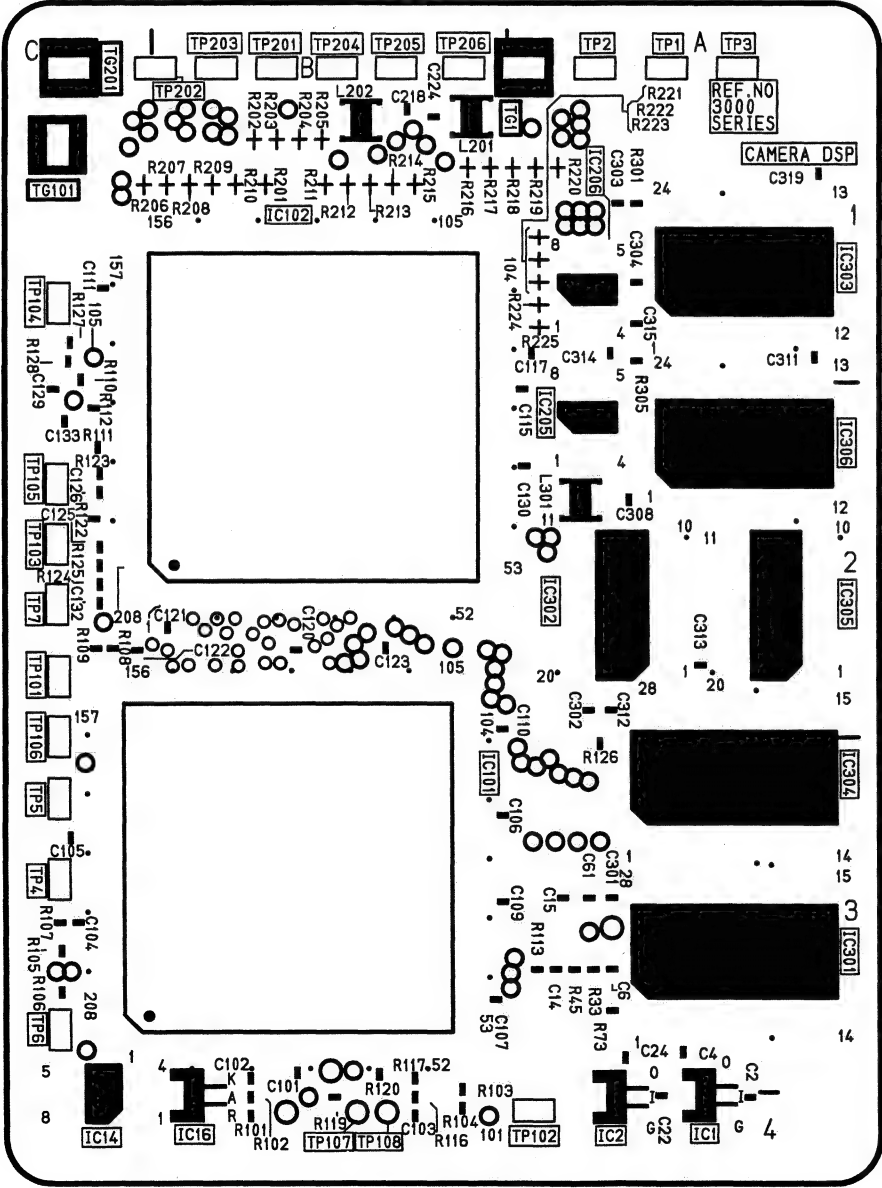


(FOIL SIDE)

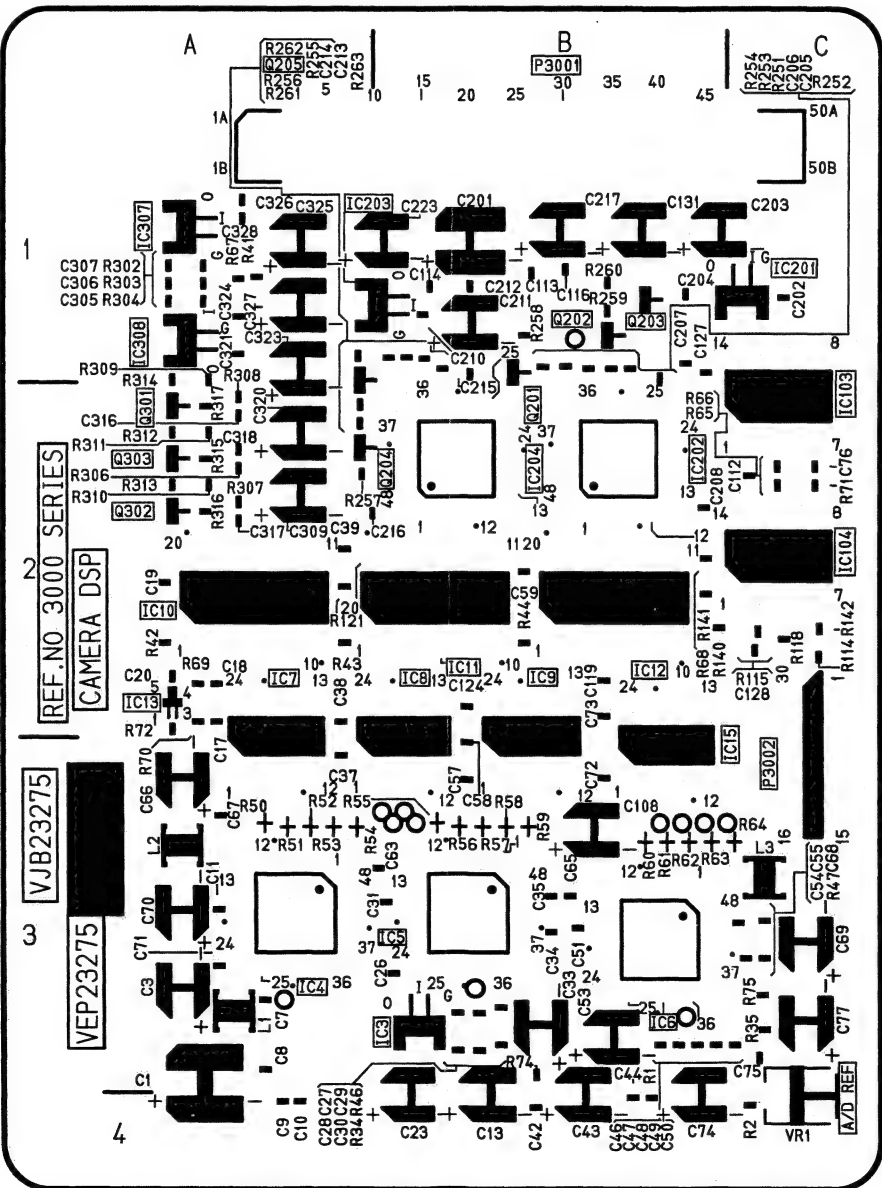


(COMPONENT SIDE)

CBA-7

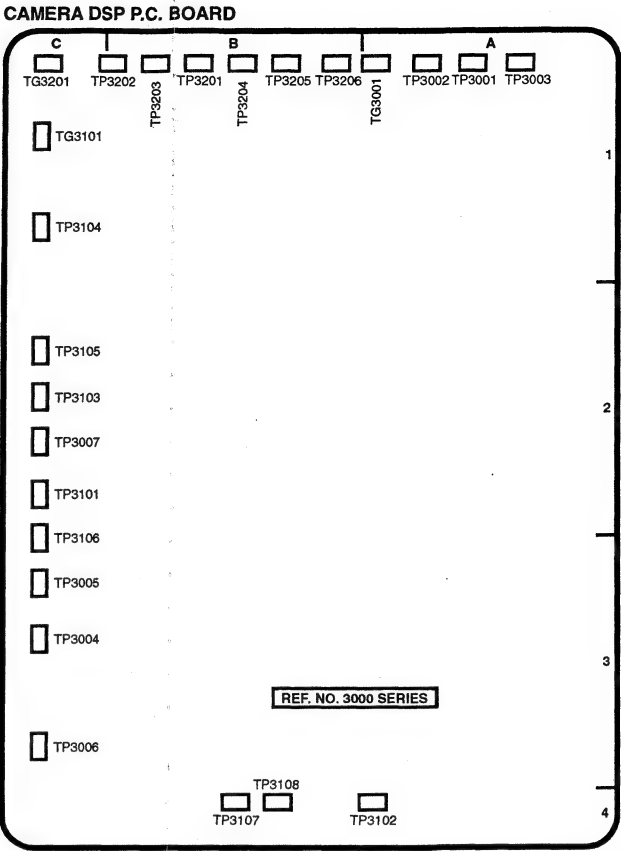

(FOIL SIDE)

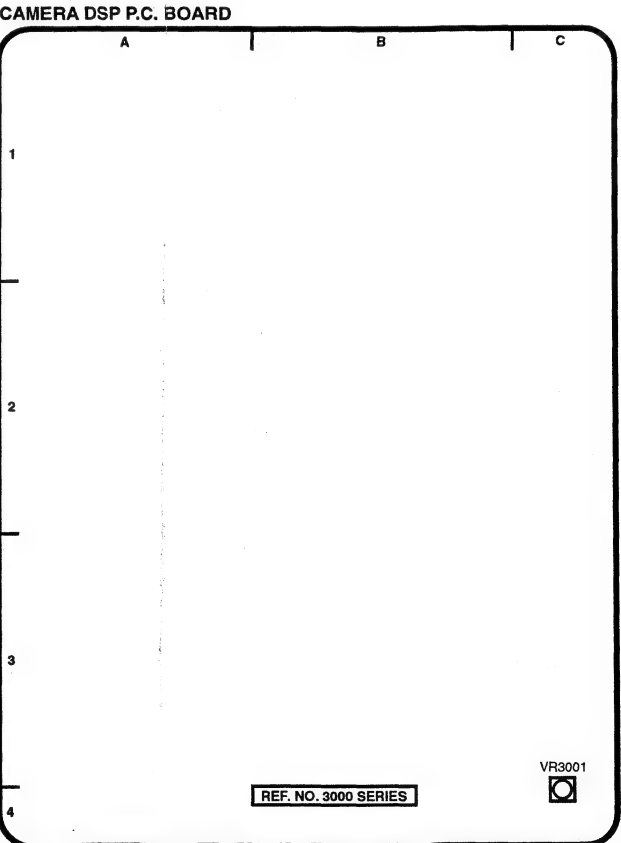

(COMPONENT SIDE)

CBA-7




CAMERA ENCODER P.C. BOARD (VEP23276)

REF	LOC	REF	LOC	REF	LOC
IC3003	A3	Q3006	A2	Q3203	C2
IC3005	B2	Q3007	A2	Q3204	C2
IC3006	A1	Q3008	A2	Q3206	B2
IC3102	B2	Q3009	B3	Q3207	B2
IC3103	C1	Q3012	A1	Q3209	C3
IC3104	C1	Q3013	A1	Q3210	C2
IC3106	B1	Q3014	B2	Q3212	C2
IC3107	B2	Q3015	B2	Q3214	B2
IC3203	C2	Q3016	B3	Q3215	B2
IC3204	B2	Q3101	B2	Q3401	A2
IC3205	B3	Q3102	B2	Q3402	B1
IC3401	B2	Q3103	B1	Q3403	B1
IC3402	B1	Q3104	C1		
IC3403	A2	Q3105	C3		
IC3405	A1	Q3106	C1		
IC3407	A1	Q3107	C1		
Q3002	B2	Q3108	C1		
Q3003	A2	Q3109	C3		
Q3004	B2	Q3201	C2		
Q3005	A2	Q3202	C2		

FOIL SIDE

REF	LOC	REF	LOC	REF	LOC
IC3001	B3	TP3004	B3	VR3005	B2
IC3004	A2	TP3005	B3	VR3006	A2
IC3101	C1	TP3006	A1	VR3007	A2
IC3105	B2	TP3007	A2	VR3008	A3
IC3201	C2	TP3101	D1	VR3009	A3
IC3202	C2	TP3102	D1	VR3010	B3
IC3404	A1	TP3103	D3	VR3011	B2
IC3406	B1	TP3104	B2	VR3012	B3
P3001	B1	TP3201	D2	VR3101	C1
Q3010	A1	TP3202	D2	VR3102	C1
Q3011	A1	TP3203	C2	VR3103	C1
SW3101	A1	TP3204	C2	VR3104	C1
SW3102	A1	TP3401	B1	VR3105	C3
SW3201	C2	TP3402	B1	VR3106	C3
SW3202	C2	TP3403	A1	VR3201	C2
TG3001	B3	TP3404	B1	VR3202	C2
TG3201	D1	VC3001	A2	VR3401	A2
TP3001	C3	VR3002	B2	VR3403	B1
TP3002	A2	VR3003	A2		
TP3003	A3	VR3004	B2		

COMPONENT SIDE

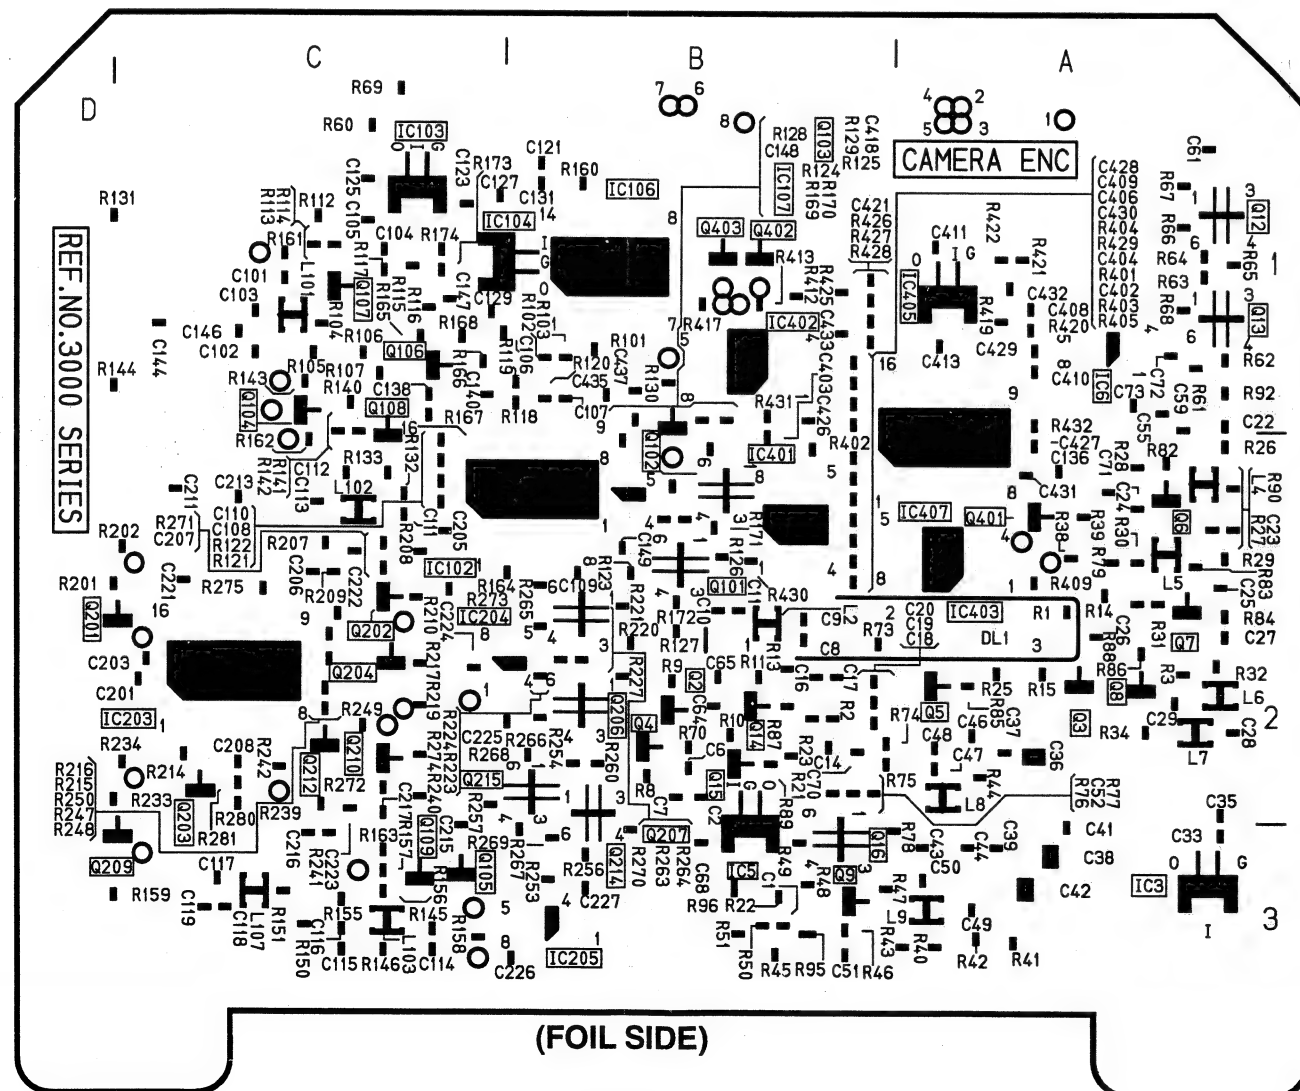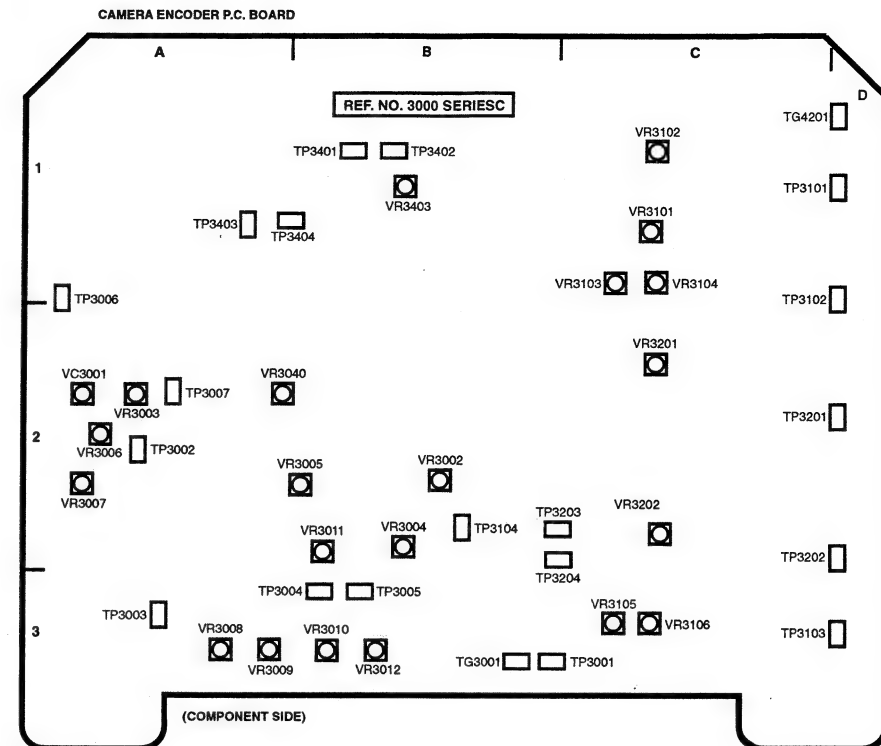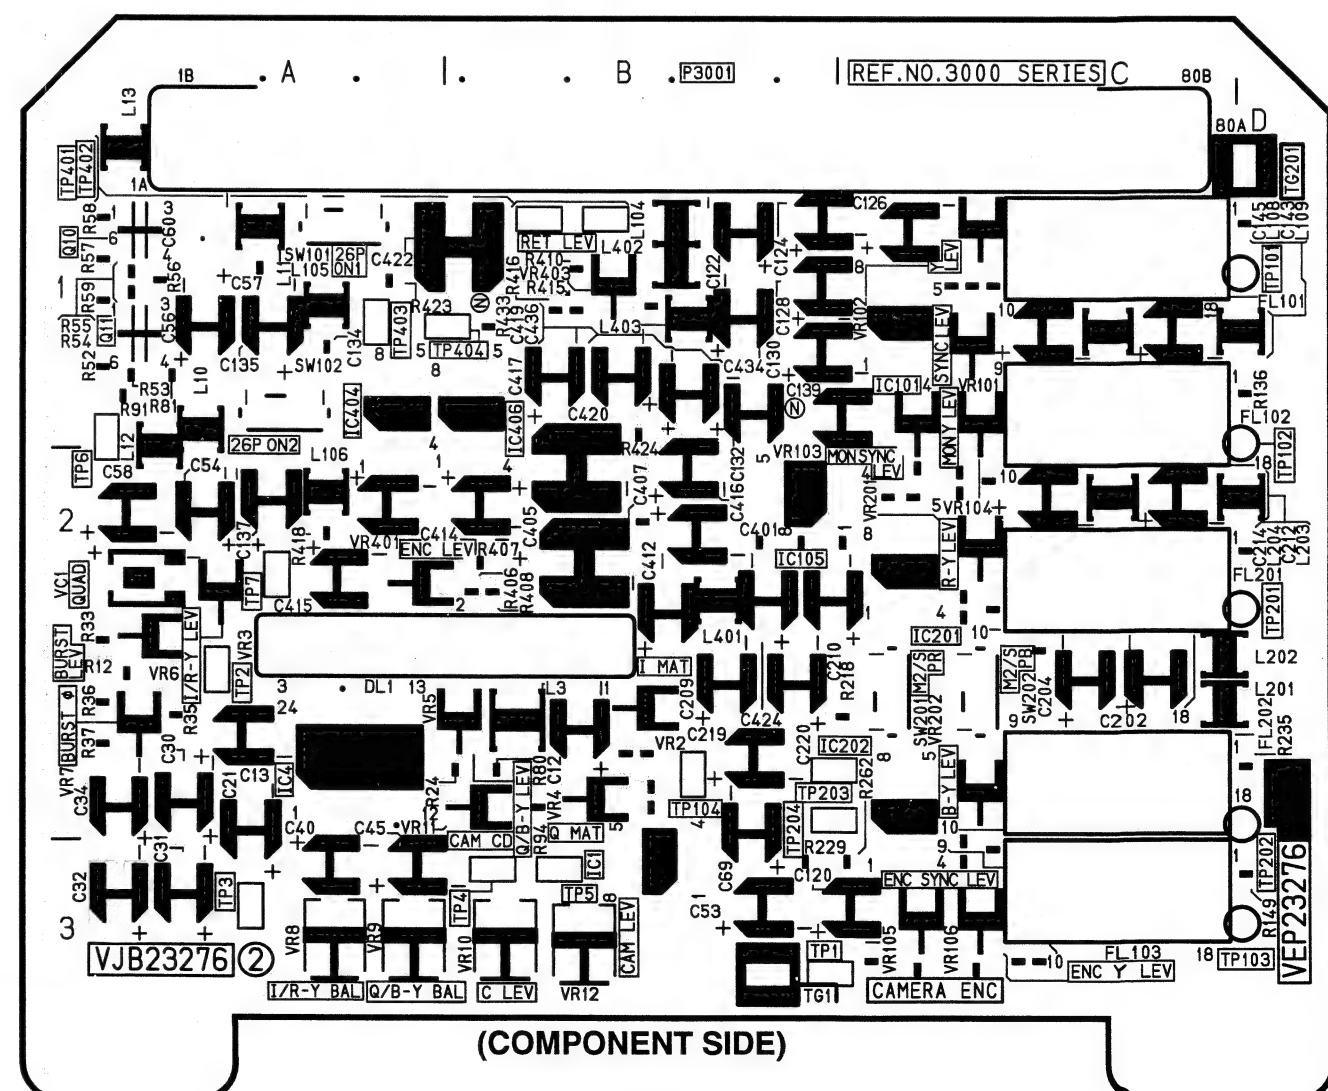**CBA-8****CBA-8**


CAMERA SYNC P.C. BOARD (VEP23446)

REF	LOC	REF	LOC
IC2	C2	IC23	A2
IC3	A2	IC24	A3
IC4	B1	IC25	A3
IC5	C2	IC26	A2
IC6	C1	IC28	A1
IC7	B2	IC31	C3
IC8	B1	IC32	C2
IC9	B2	IC35	A2
IC10	C2	IC36	B2
IC12	B1	IC201	B2
IC13	B1	Q2	A1
IC14	C1	Q3	A2
IC15	B1	Q11	C2
IC16	B1	Q12	C2
IC17	B2	Q13	C2
IC18	A2	Q14	C3
IC19	B2	Q15	C3
IC20	A1	Q17	C3
IC21	A1	Q23	C1
IC22	A1		



FOIL SIDE

REF	LOC	REF	LOC
IC25	A2	TP2	B1
IC16	C1	TP14	B1
IC11	B2	TP8	B1
Q1	B1	TP6	B1
VR7	A1	TP16	C1
VR12	A2	TP11	A2
VR6	A2	TP3	A3
VR2	B2	TG1	A3
VR5	A3	TP9	B3
VR201	A3	TP7	B3
VR202	A3	TG2	C3
VR203	B3	P3001	B1
VR11	B3		
VR14	C3		
VR13	C3		
VR15	C3		
VR4	C2		
VR3	C2		
TP13	B1		
TP1	B1		

COMPONENT SIDE

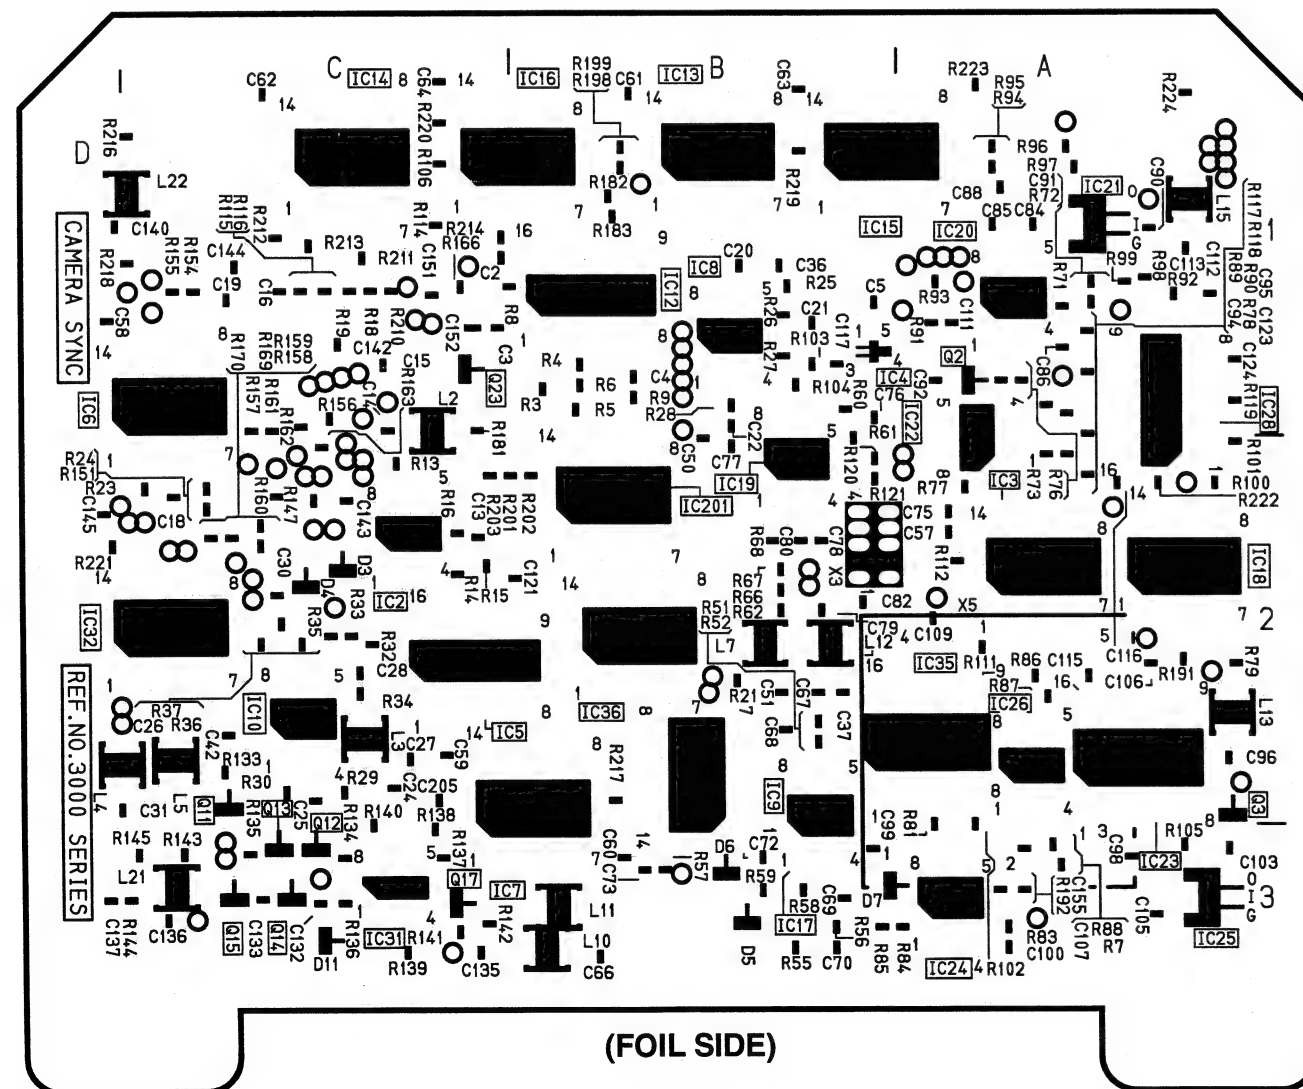


(FOIL SIDE)

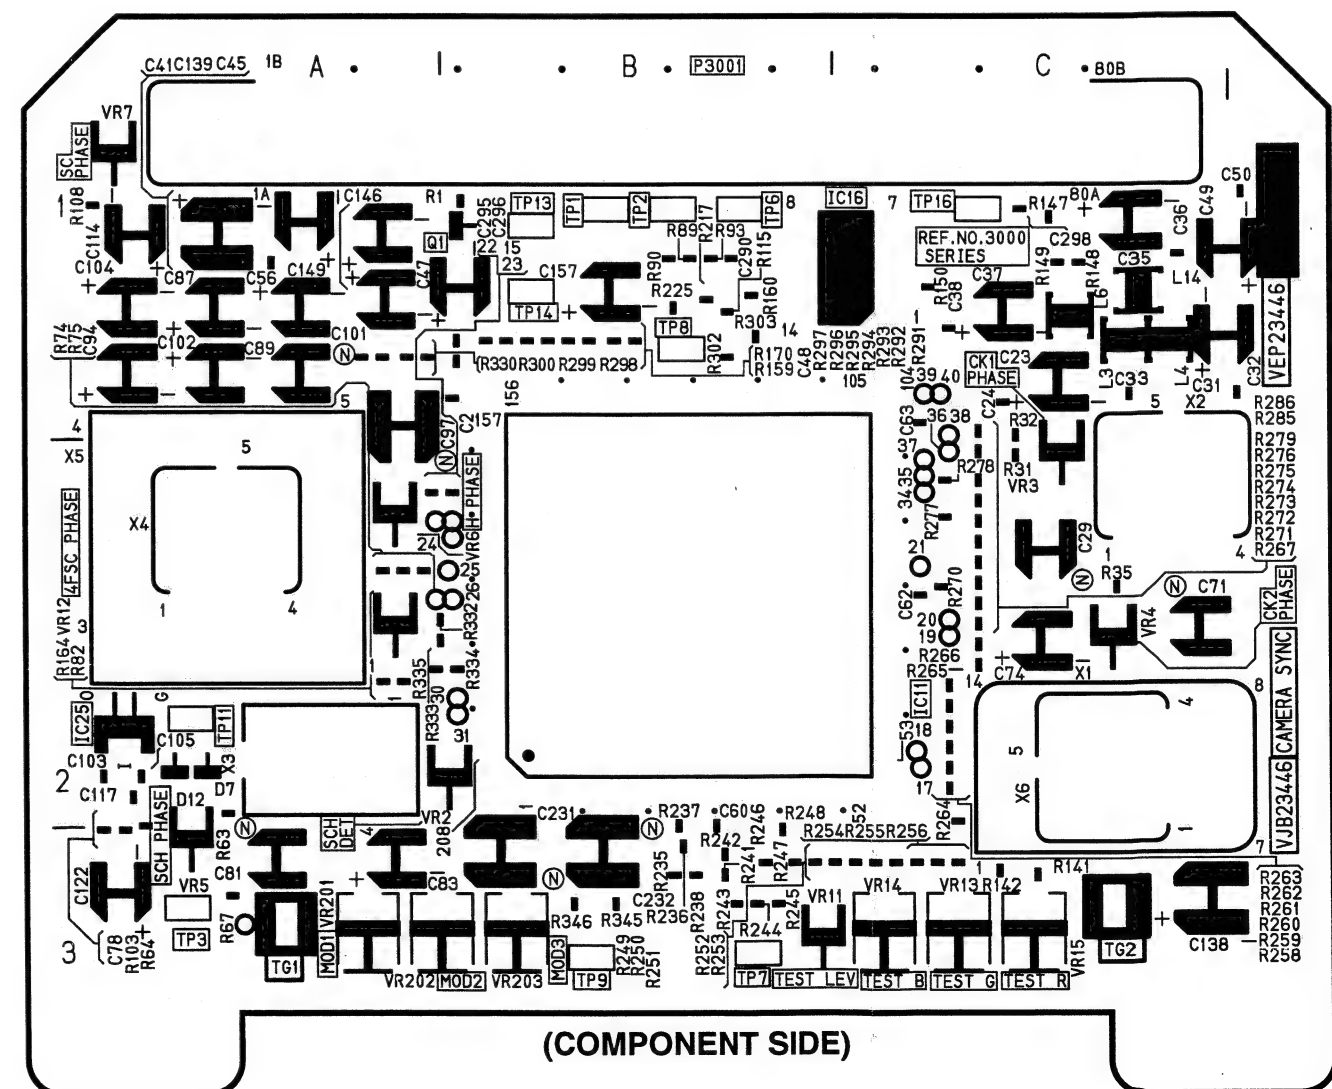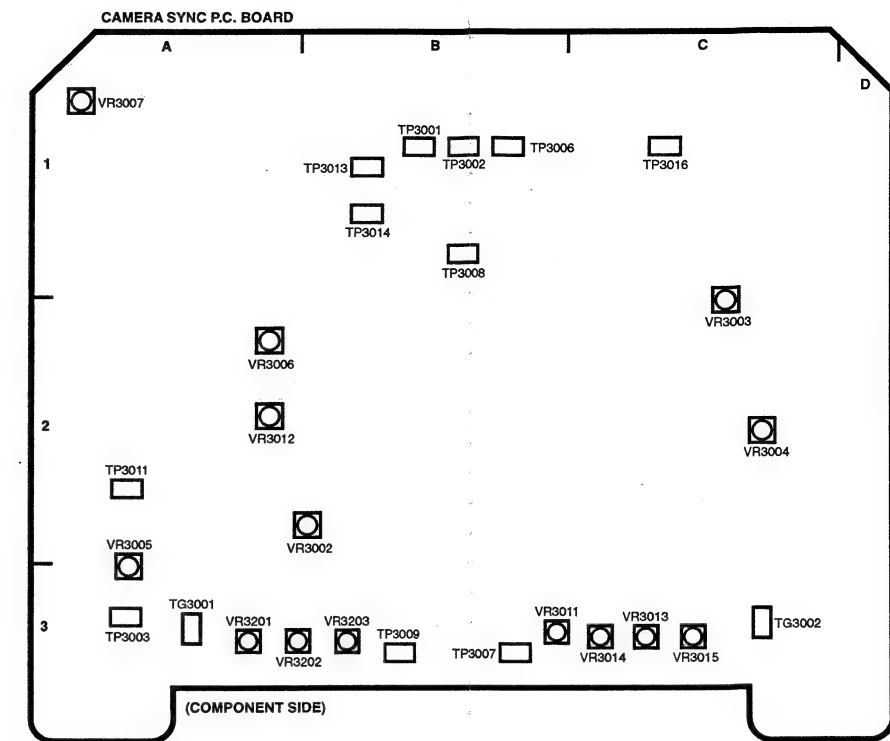CBA-9


(COMPONENT SIDE)

CBA-9

EVF VIDEO P.C. BOARD (VEP29022A)

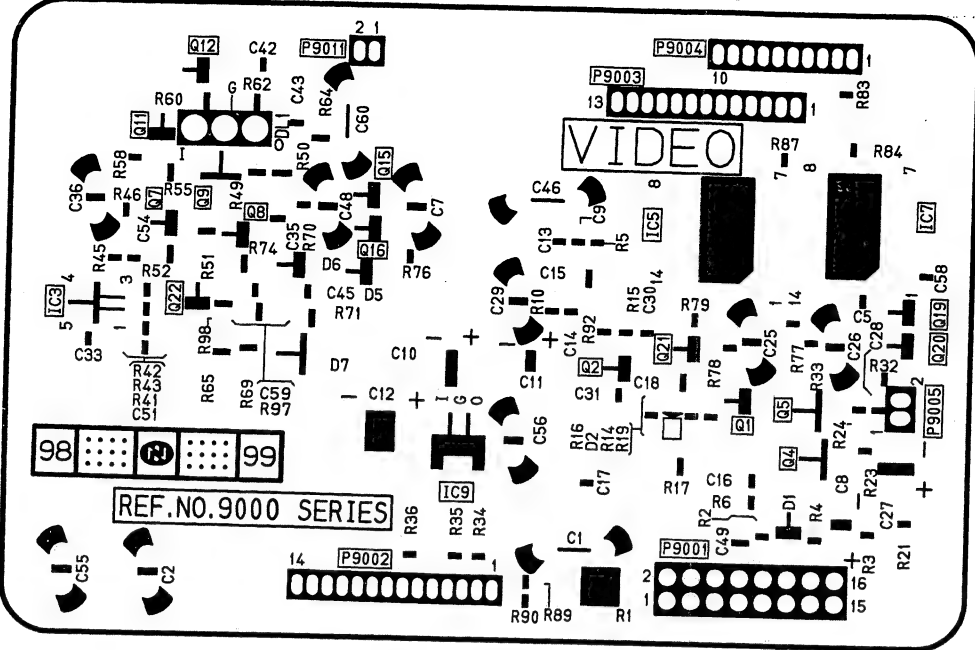


(FOIL SIDE)

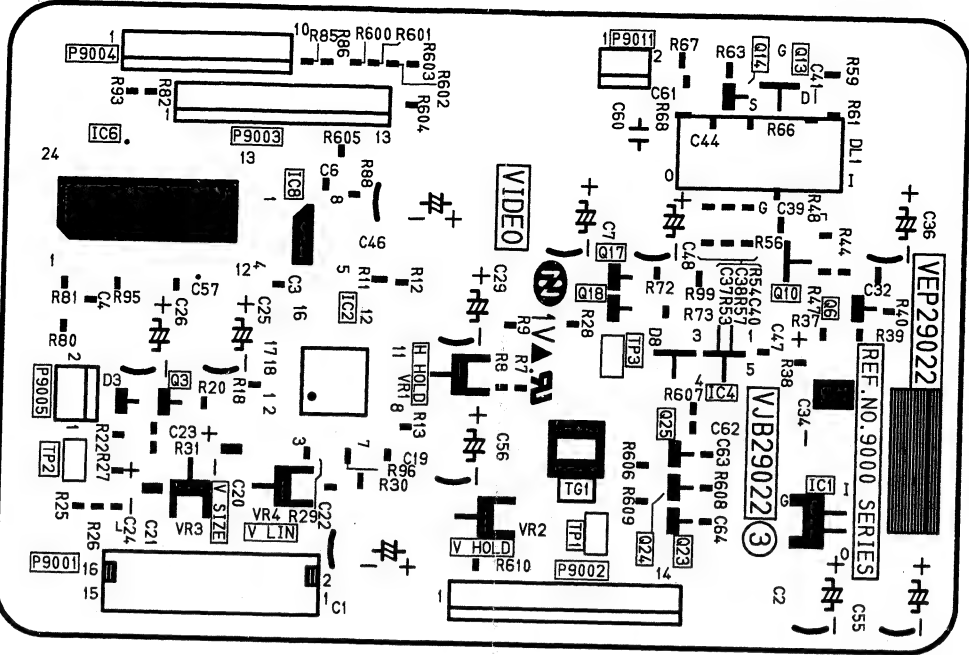


(COMPONENT SIDE)

EVF VIDEO P.C. BOARD

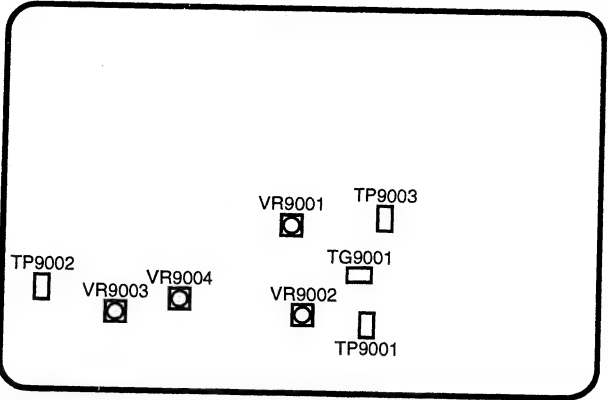

(COMPONENT SIDE)


EVF CRT MASK P.C. BOARD (VEP29023A)

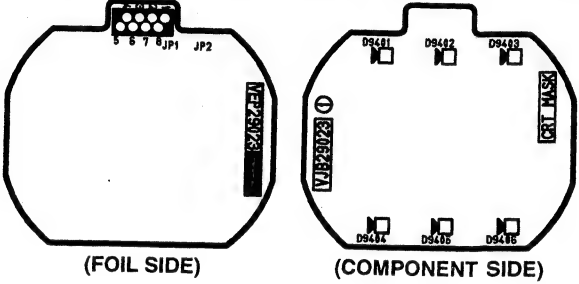


(FOIL SIDE)

(COMPONENT SIDE)

H DEF P.C. BOARD (VEP29019A)

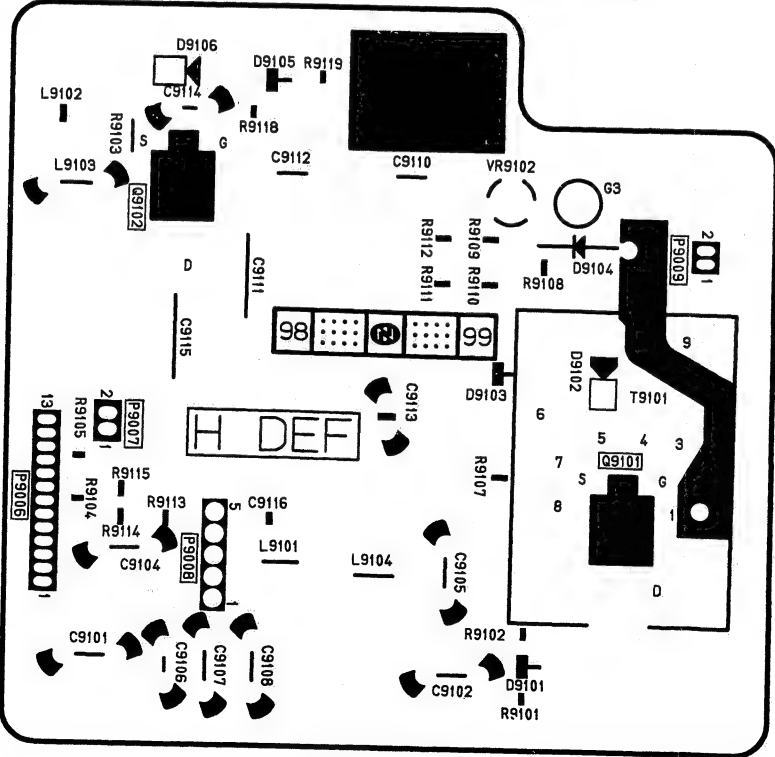


(FOIL SIDE)

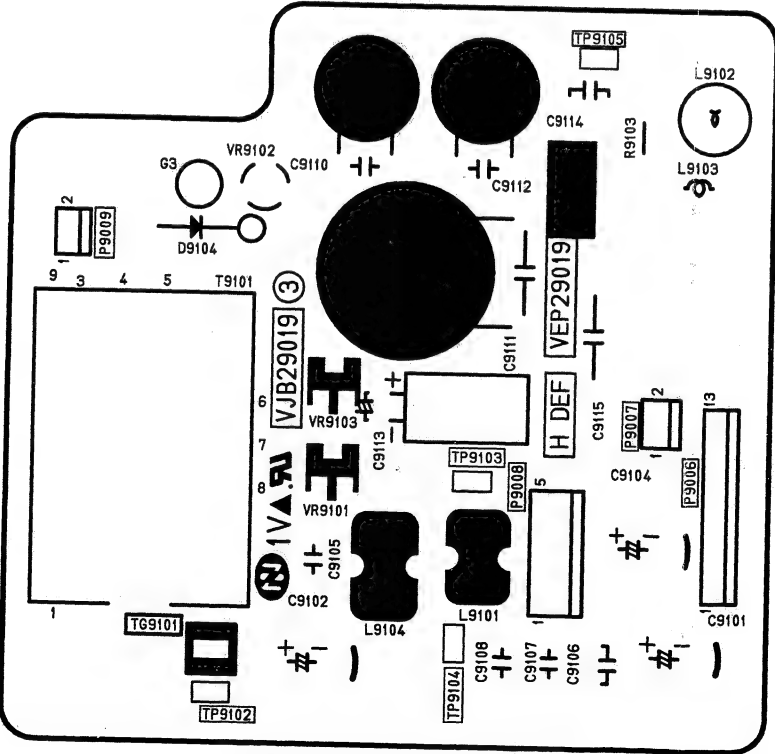

(COMPONENT SIDE)


F TALLY P.C. BOARD (VEP29021A)

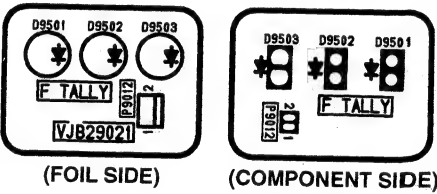


(FOIL SIDE)

(COMPONENT SIDE)

EVF SW VR P.C. BOARD (VEP29020A)

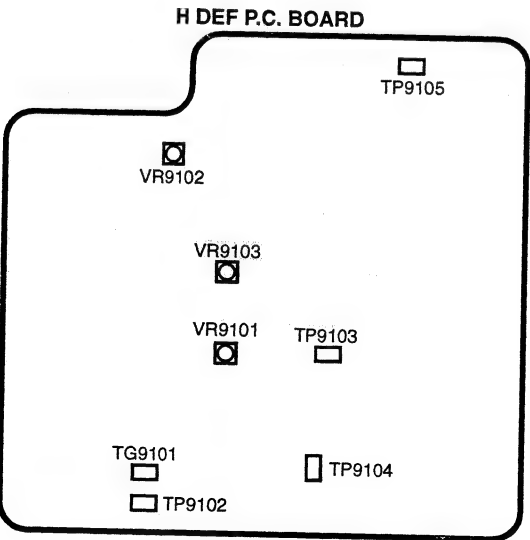


(COMPONENT SIDE)

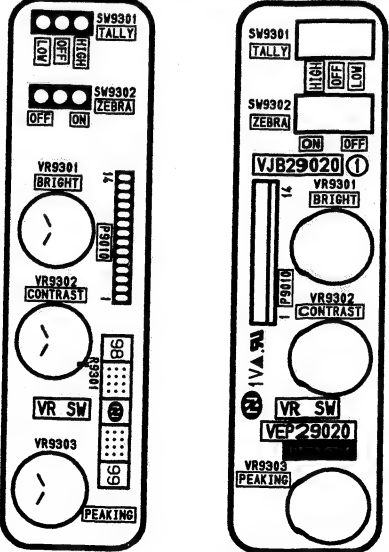


(FOIL SIDE)

(COMPONENT SIDE)


VIDEO MAIN P.C. BOARD (NTSC:VEP03B96A / PAL:VEP03B96B)

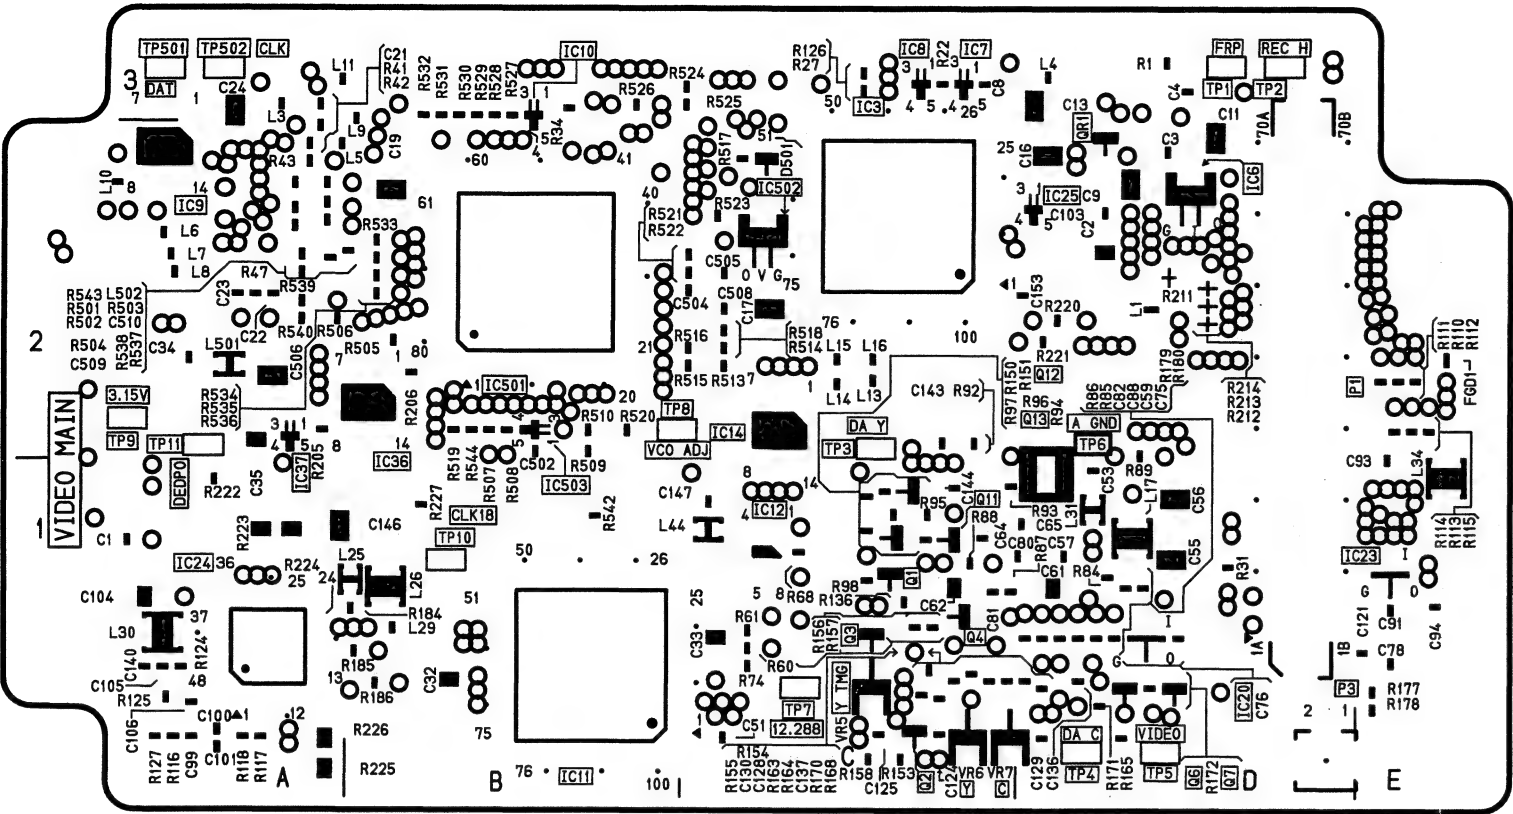

(FOIL SIDE)

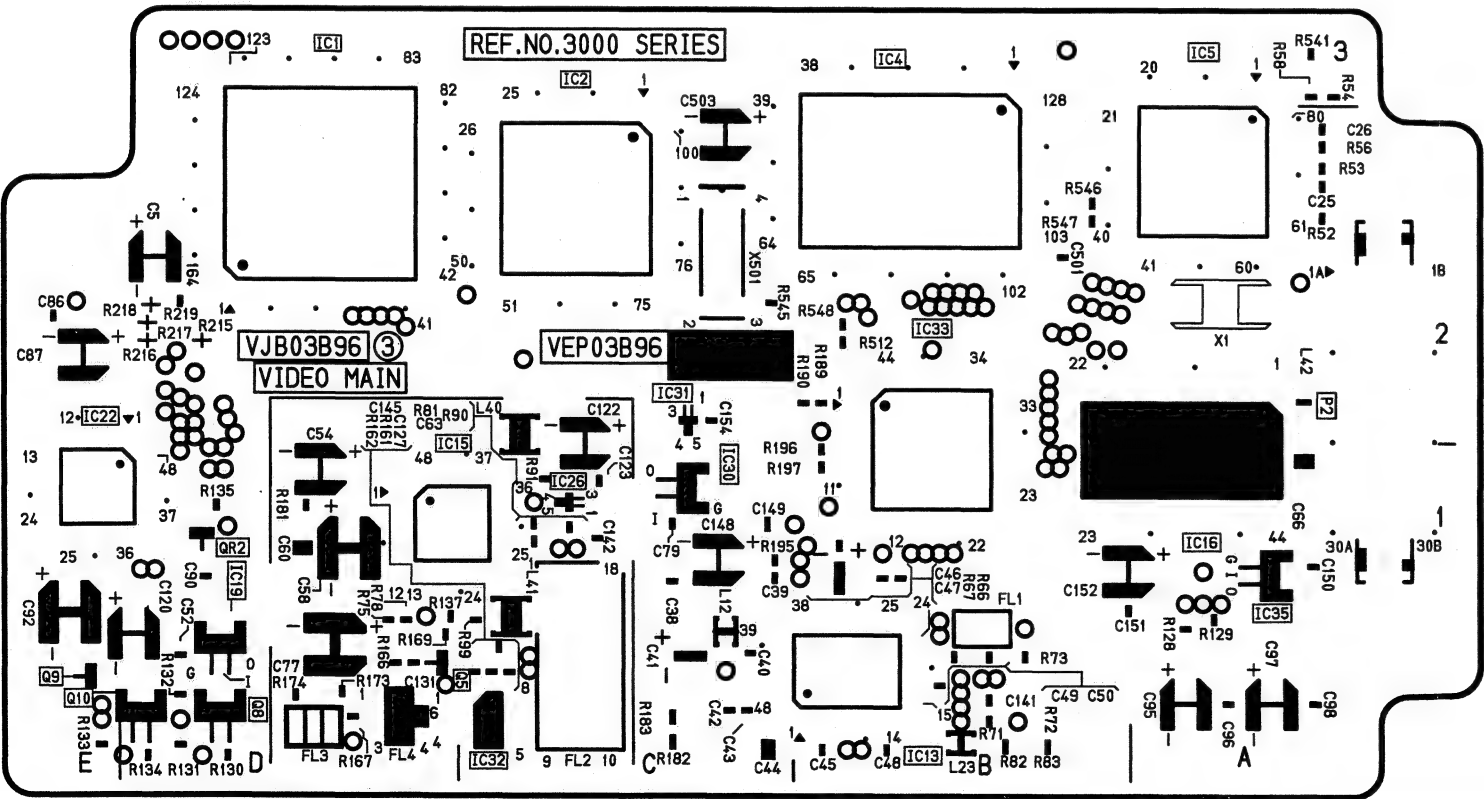

(COMPONENT SIDE)

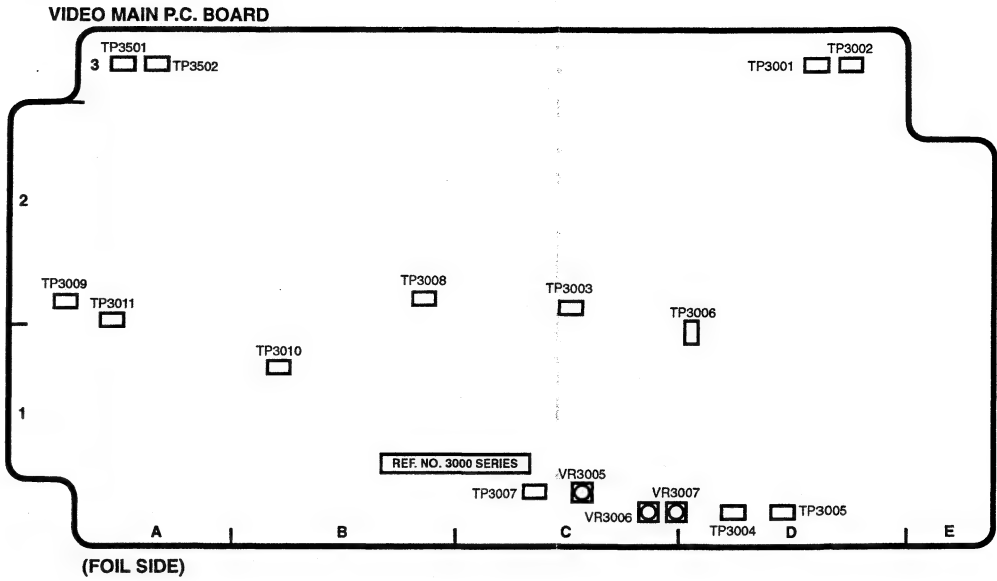

(FOIL SIDE)

REF	LOC	REF	LOC
IC3	C2	Q4	C1
IC6	D2	Q6	D1
IC7	C3	Q7	D1
IC8	C3	Q11	C1
IC9	A2	Q12	C1
IC10	B3	Q13	C1
IC11	B1	QR1	D2
IC12	C1	TP1	D3
IC14	C2	TP2	D3
IC20	D1	TP3	C2
IC23	E1	TP4	D1
IC24	A1	TP5	D1
IC25	D2	TP6	D1
IC36	B2	TP7	C1
IC37	A2	TP8	B2
IC501	B2	TP9	A2
IC502	C2	TP10	B1
IC503	B2	TP11	A2
P1	D2	TP501	A3
P3	D1	TP502	A3
Q1	C1	VR5	C1
Q2	C1	VR6	C1
Q3	C1	VR7	C1

FOIL SIDE

REF	LOC
IC1	D2
IC2	C2
IC4	B2
IC5	A2
IC13	B1
IC15	D1
IC16	A1
IC19	D1
IC22	E1
IC26	C1
IC30	C1
IC31	C2
IC32	C1
IC33	B1
IC35	A1
P2	A2
Q5	D1
Q8	D1
Q9	E1
Q10	D1
QR2	D1

COMPONENT SIDE



VIDEO I/F P.C. BOARD for NTSC (VEP03B94B)

REF	LOC	REF	LOC	REF	LOC
IC4	C2	IC302	A2	Q114	B2
IC6	C2	IC303	A2	Q115	B2
IC7	C1	Q1	C1	Q116	B2
IC8	C1	Q3	C1	Q117	B2
IC9	B1	Q4	C1	Q201	B1
IC10	C2	Q5	C2	QR88	A1
IC101	C2	Q6	C2	QR89	A1
IC102	C2	Q92	A1		
IC201	B1	Q102	B2		
IC202	B1	Q104	C3		
IC203	B1	Q105	B2		
IC204	A1	Q106	B2		
IC205	B1	Q107	B2		
IC207	A2	Q108	B2		
IC208	A2	Q110	C3		
IC209	A2	Q111	B3		
IC211	B1	Q112	B3		
IC212	A3	Q113	B3		

FOIL SIDE

REF	LOC	REF	LOC	REF	LOC
IC1	C2	Q93	A1	TP305	A3
IC2	A1	Q101	C2	TP306	A3
IC3	A1	Q103	C2	TP307	A3
IC5	B1	Q109	C3	VR1	C1
IC103	B2	QR90	A1	VR2	C1
IC104	B2	TG1	A1	VR104	B2
IC105	B2	TP1	D1	VR105	C2
IC106	B3	TP2	C1	VR107	B2
IC142	B2	TP201	B1	VR108	B2
IC206	B1	TP202	A2	VR109	C3
IC210	A2	TP203	B1	VR111	B2
IC301	A2	TP207	B2	VR112	B3
P1	B1	TP208	B2	VR201	B1
Q87	A1	TP212	B3	VR203	A2
Q88	A1	TP301	A3	VR204	A2
Q89	A1	TP302	A3	VR205	A3
Q90	A1	TP303	A3		
Q91	A1	TP304	A3		

COMPONENT SIDE

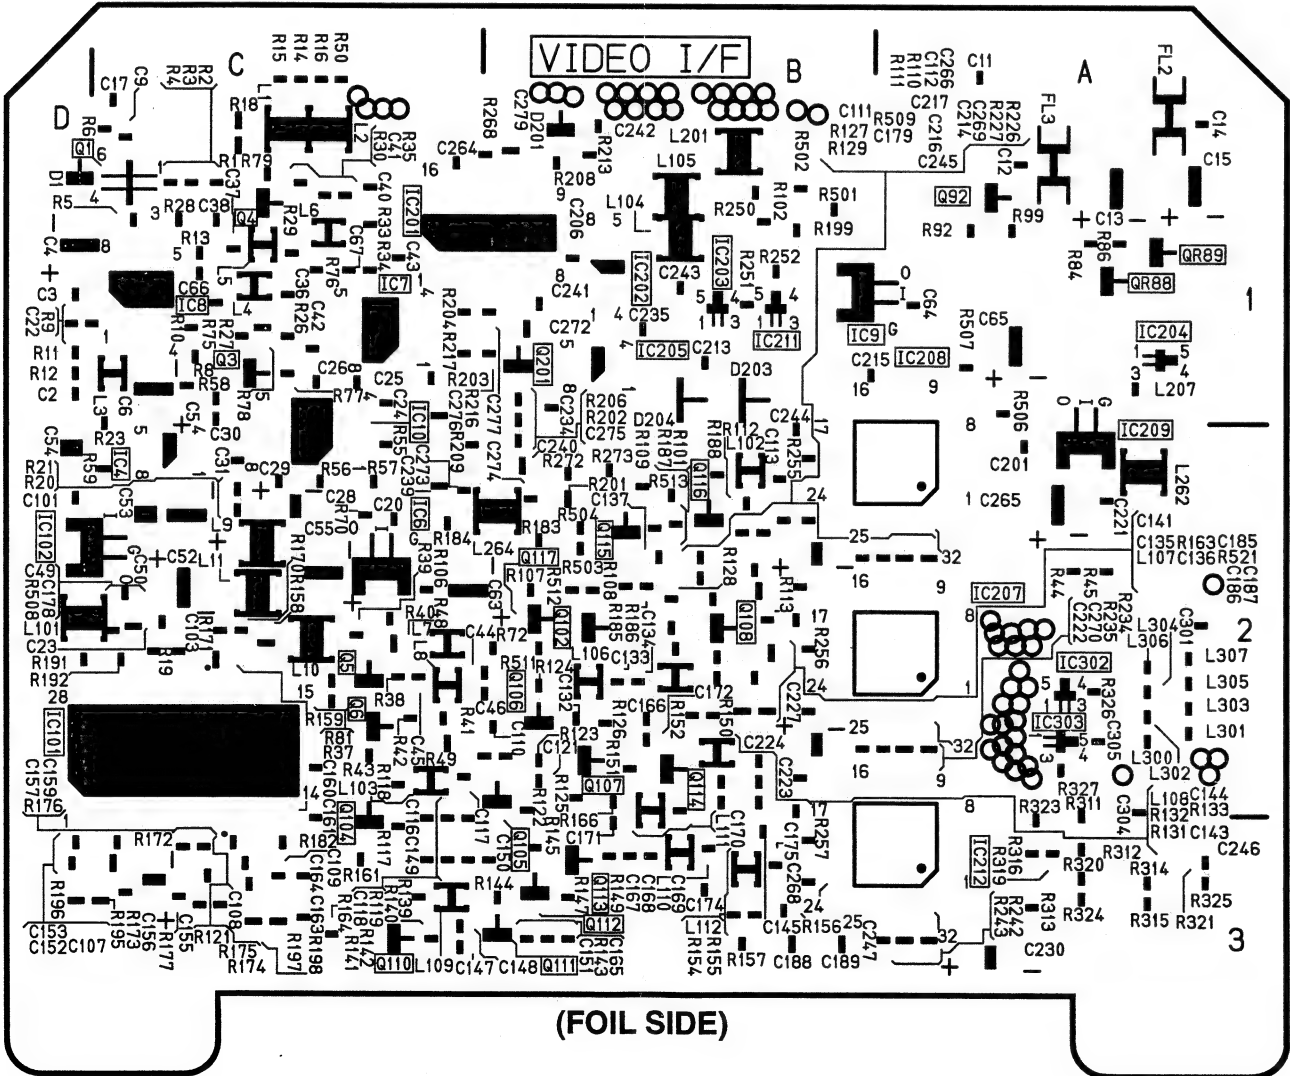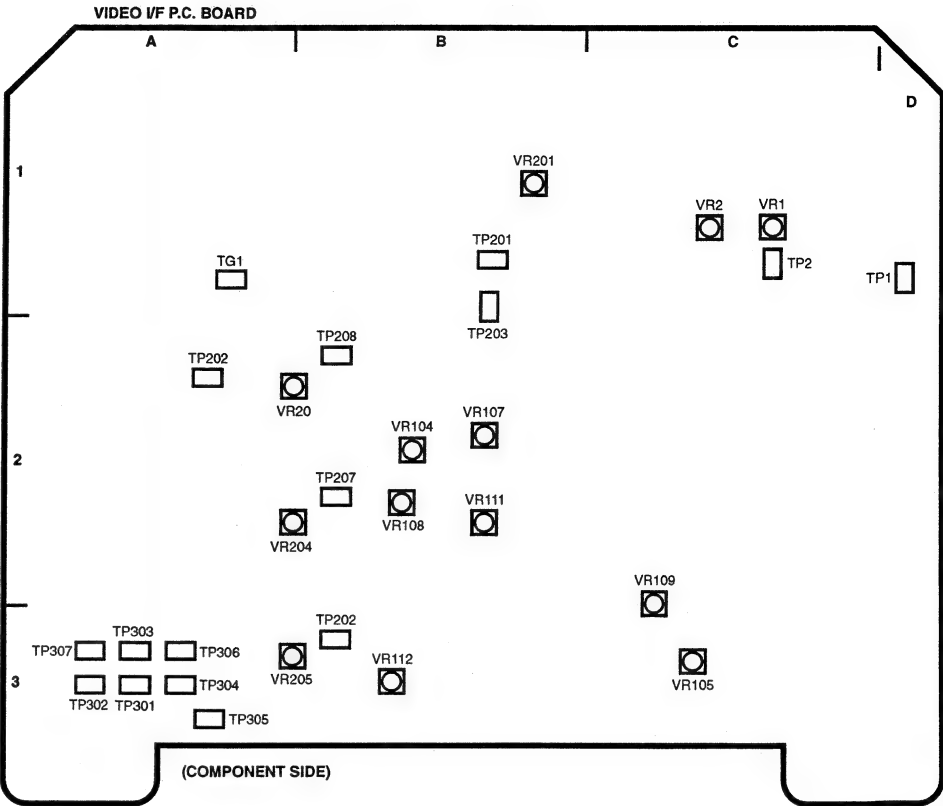



VIDEO I/F P.C. BOARD for PAL (VEP03D53A)

REF	LOC	REF	LOC	REF	LOC
IC2	B1	Q114	C1	TP305	B3
IC5	B1	Q115	B1	TP306	C3
IC8	A1	Q116	C1	TP307	B3
IC11	A1	Q117	C1	TP601	B1
IC101	C1	Q601	A2	VR601	B2
IC207	C2	Q602	A2	VR104	C2
IC208	B2	Q603	A2	VR107	C1
IC209	B1	Q604	A2	VR108	C2
IC212	C2	Q605	A2	VR111	C1
IC214	C2	Q606	A2	VR112	D2
IC302	C2	Q610	B2	VR201	B2
IC303	C2	Q611	B1	VR601	A2
IC304	C3	Q613	A1	VR602	A2
IC305	B2	Q614	B1	VR603	A2
IC306	C3	Q615	B1	VR604	A2
IC601	A3	Q616	B2	VR605	A2
IC608	B3	QR88	A1	VR606	A2
IC610	B2	QR301	C3	VR607	B1
P101	C1	TG1	B2	VR608	B1
Q91	A1	TP207	C2	VR609	A1
Q92	A1	TP208	B2	VR610	A1
Q101	B1	TP212	C2		
Q102	B1	TP301	B3		
Q103	C1	TP302	B3		
Q108	C1	TP303	B3		
Q113	C1	TP304	C3		

FOIL SIDE


REF	LOC
IC6	A1
IC9	B1
IC102	C1
IC103	C1
IC104	C1
IC105	C2
IC201	B2
IC202	B2
IC210	B1
IC301	C2
IC402	A2
IC403	A3
IC602	A2
IC603	A2
IC604	A1
IC609	B2
IC611	B1
P1	B1
P2	B3
Q87	A1
Q107	C1
Q109	D1
Q201	B2
Q607	A2
Q609	A2
Q612	B2

COMPONENT SIDE

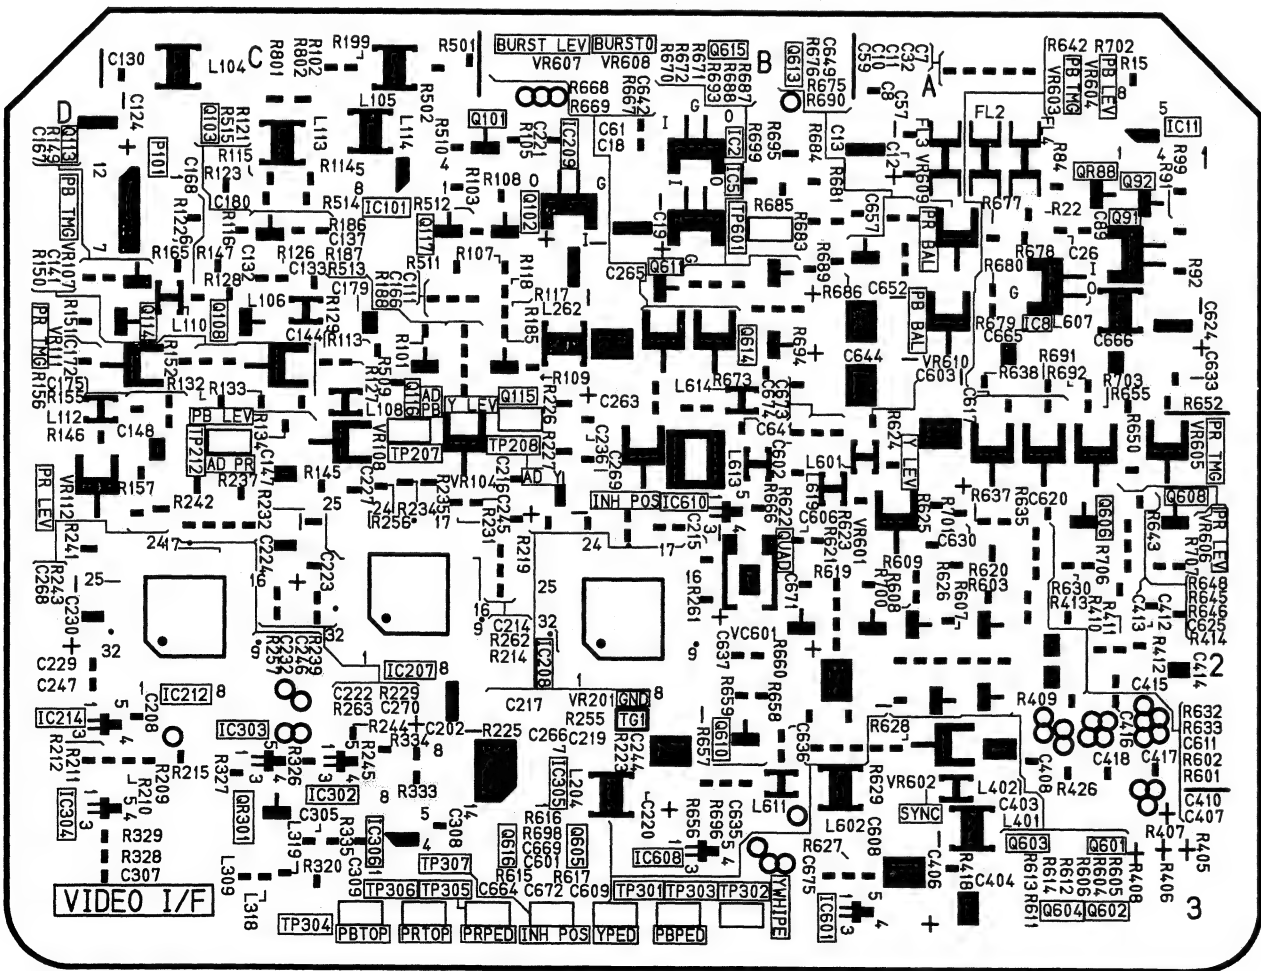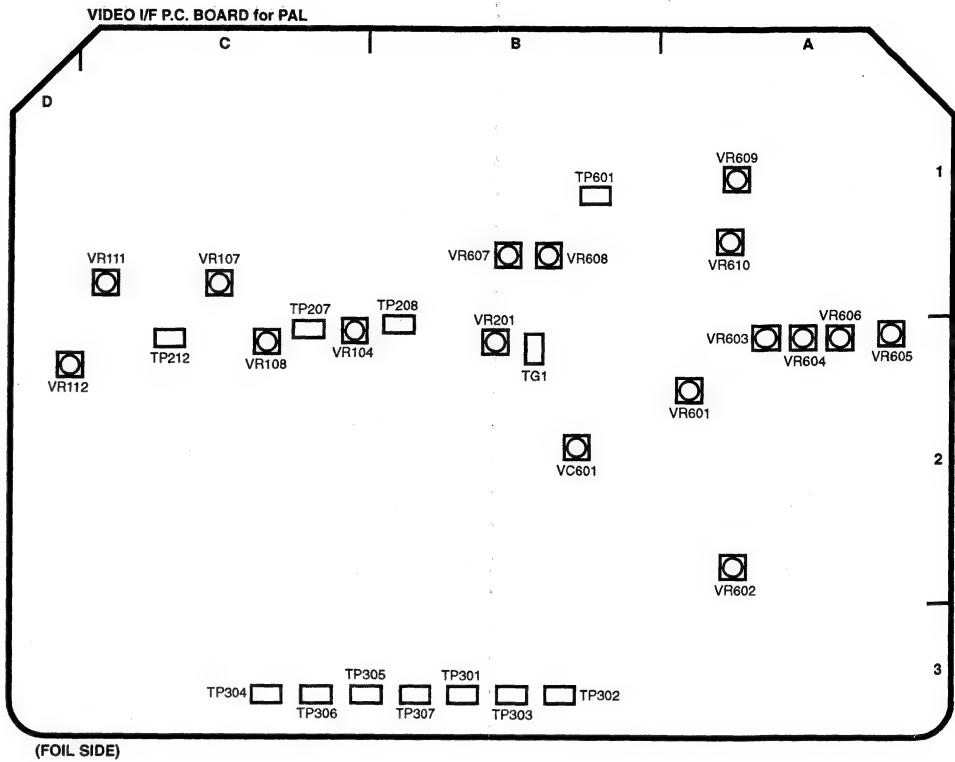

(FOIL SIDE)

CBA-13

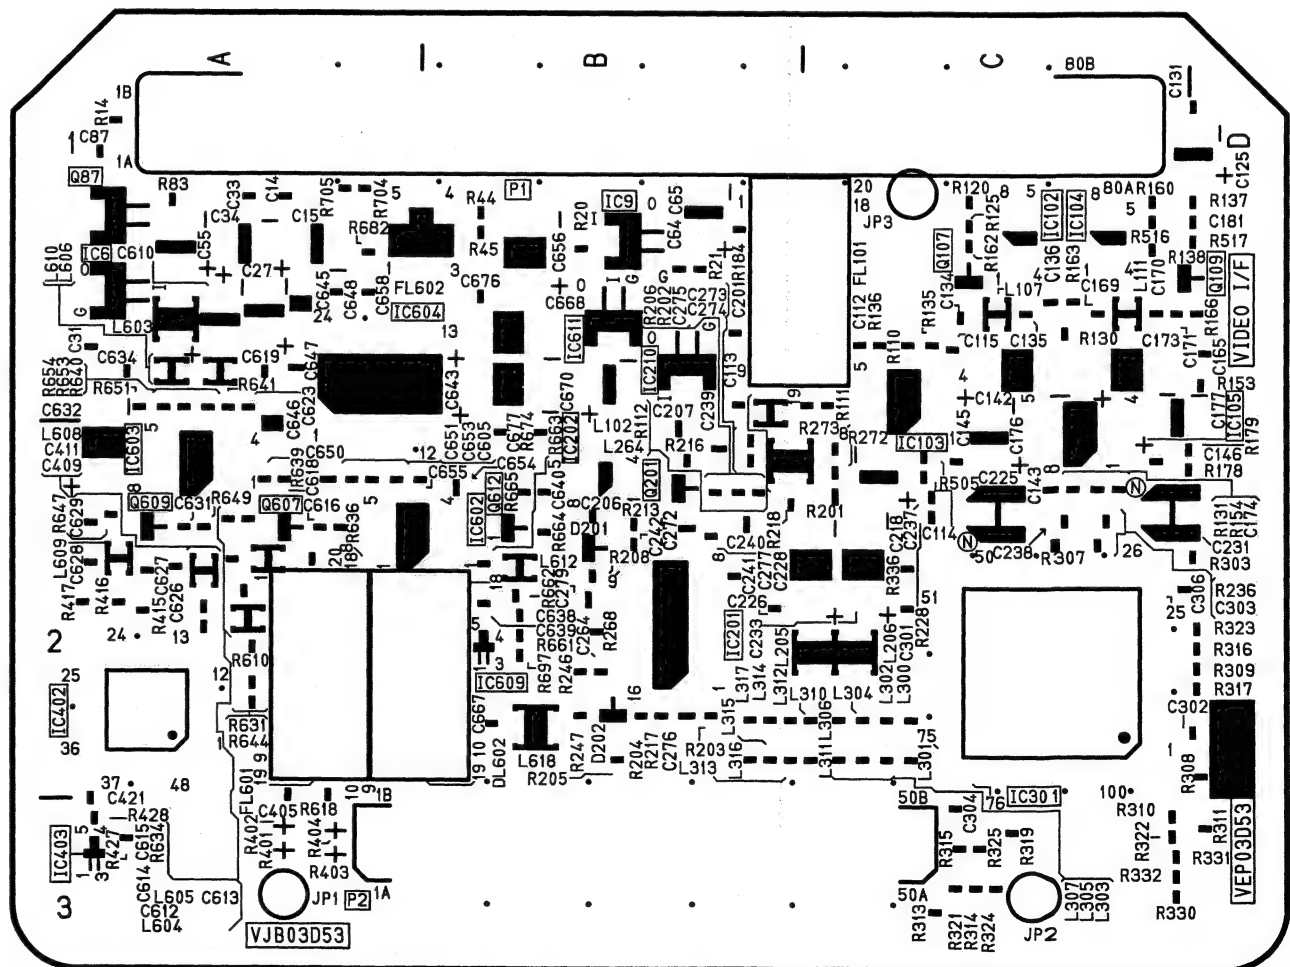

(COMPONENT SIDE)

CBA-13

VIDEO I/F SUB P.C. BOARD (PAL only:VEP03D84A)


REF	LOC
IC4	A2
IC7	B3
IC10	A2
IC203	B1
IC205	A1
IC206	A1
IC211	A1
IC213	B1
IC215	B1

FOIL SIDE


REF	LOC
IC1	B3
IC3	A2
P3	B2
TP201	A1
TP202	A1
TP203	A1

COMPONENT SIDE


VIDEO I/F SUB P.C. BOARD

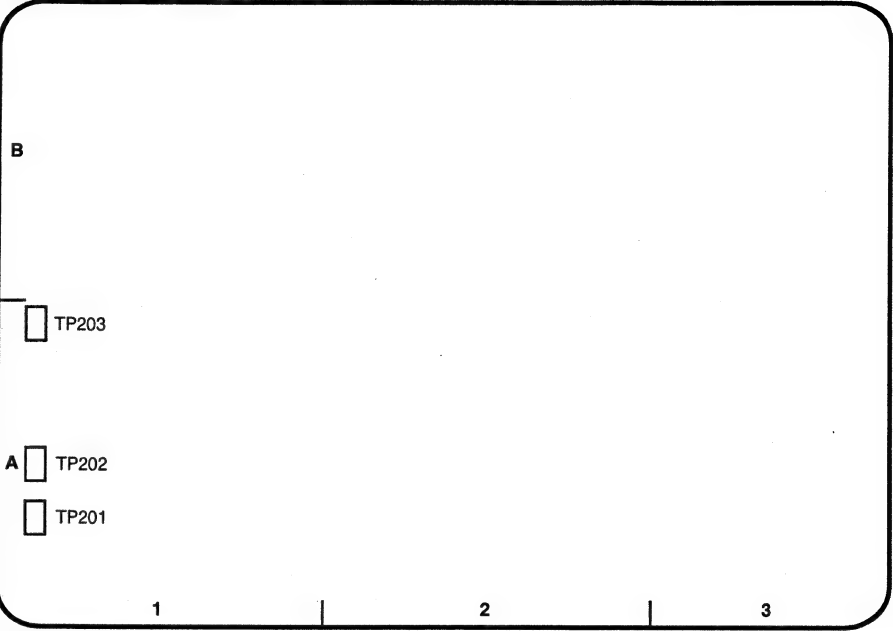

(COMPONENT SIDE)

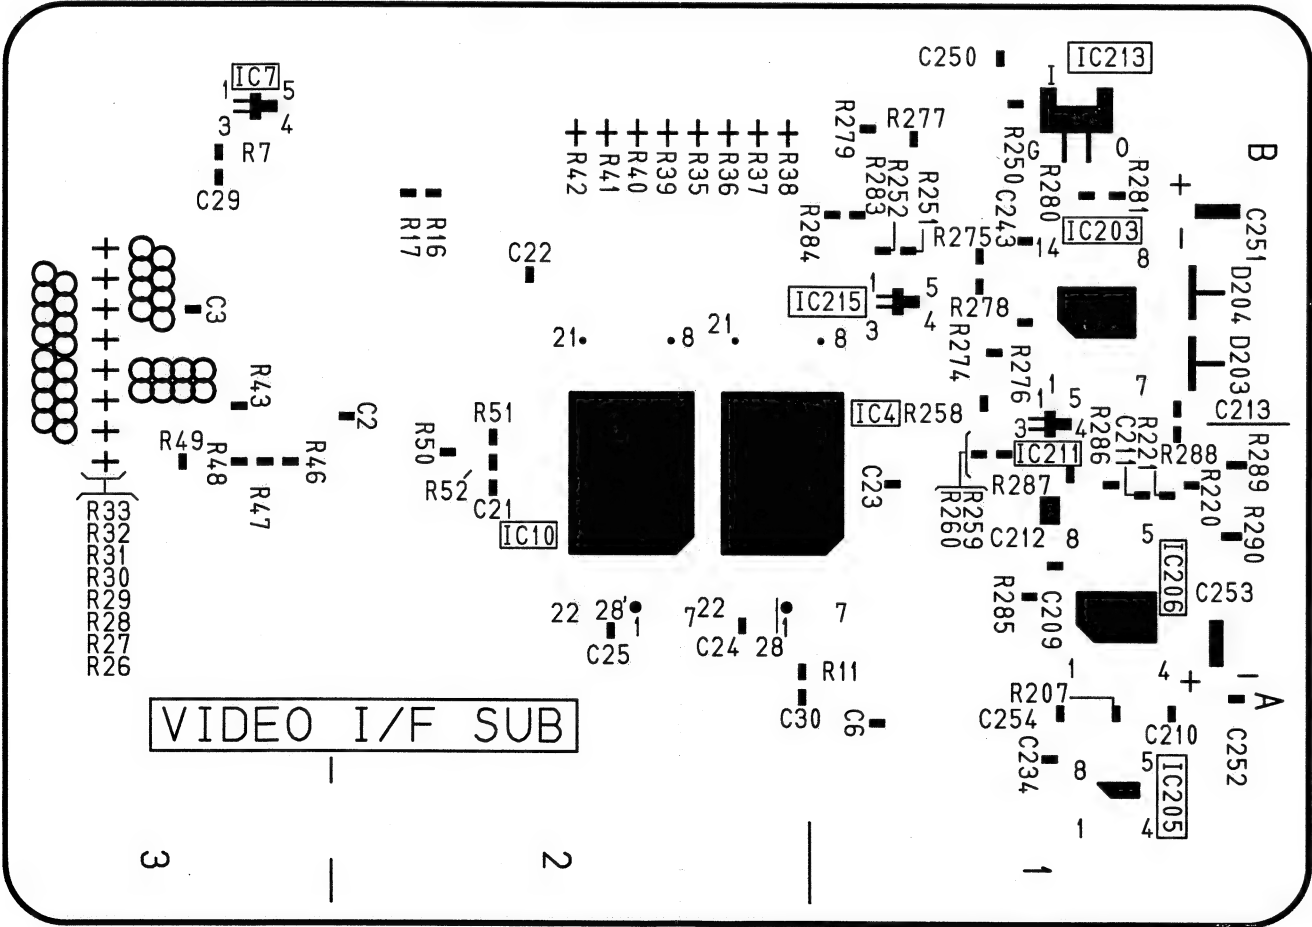

(FOIL SIDE)

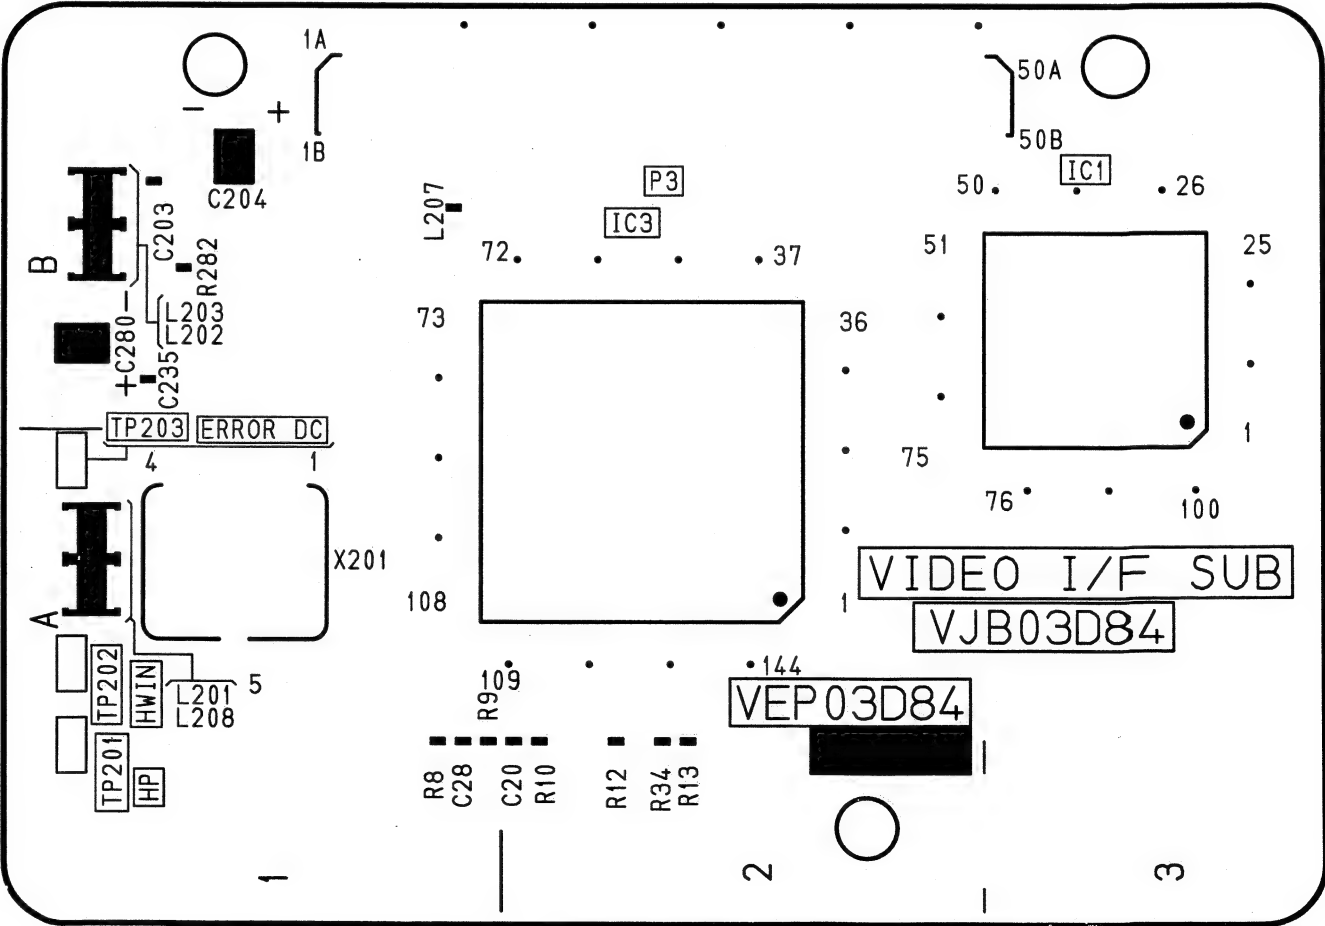

(COMPONENT SIDE)



VTR SYSCON P.C. BOARD (NTSC:VEP06A22D / PAL:VEP06A22E)

REF	LOC	REF	LOC
IC6003	B2	IC6201	C2
IC6004	B2	IC6801	A2
IC6005	C1	QR6201	B2
IC6007	B2	QR6202	B2
IC6008	C2	QR6203	B2
IC6010	B2	QR6204	C2
IC6011	C1	QR6206	C2
IC6012	C2	QR6207	C2
IC6013	B2	QR6208	C2
IC6101	B1	QR6209	C2
IC6102	B1		


FOIL SIDE

REF	LOC	REF	LOC
IC6001	C1	QR6004	B1
IC6002	C2	QR6005	B1
IC6006	C2	SW6001	C3
IC6009	B1	TG6001	C3
IC6202	B2	TP6001	C2
IC6802	A2	TP6002	A3
IC6803	B2	VC6001	B2
P6001	B1		
Q6801	A2		
QR6001	B1		
QR6003	B1		

COMPONENT SIDE

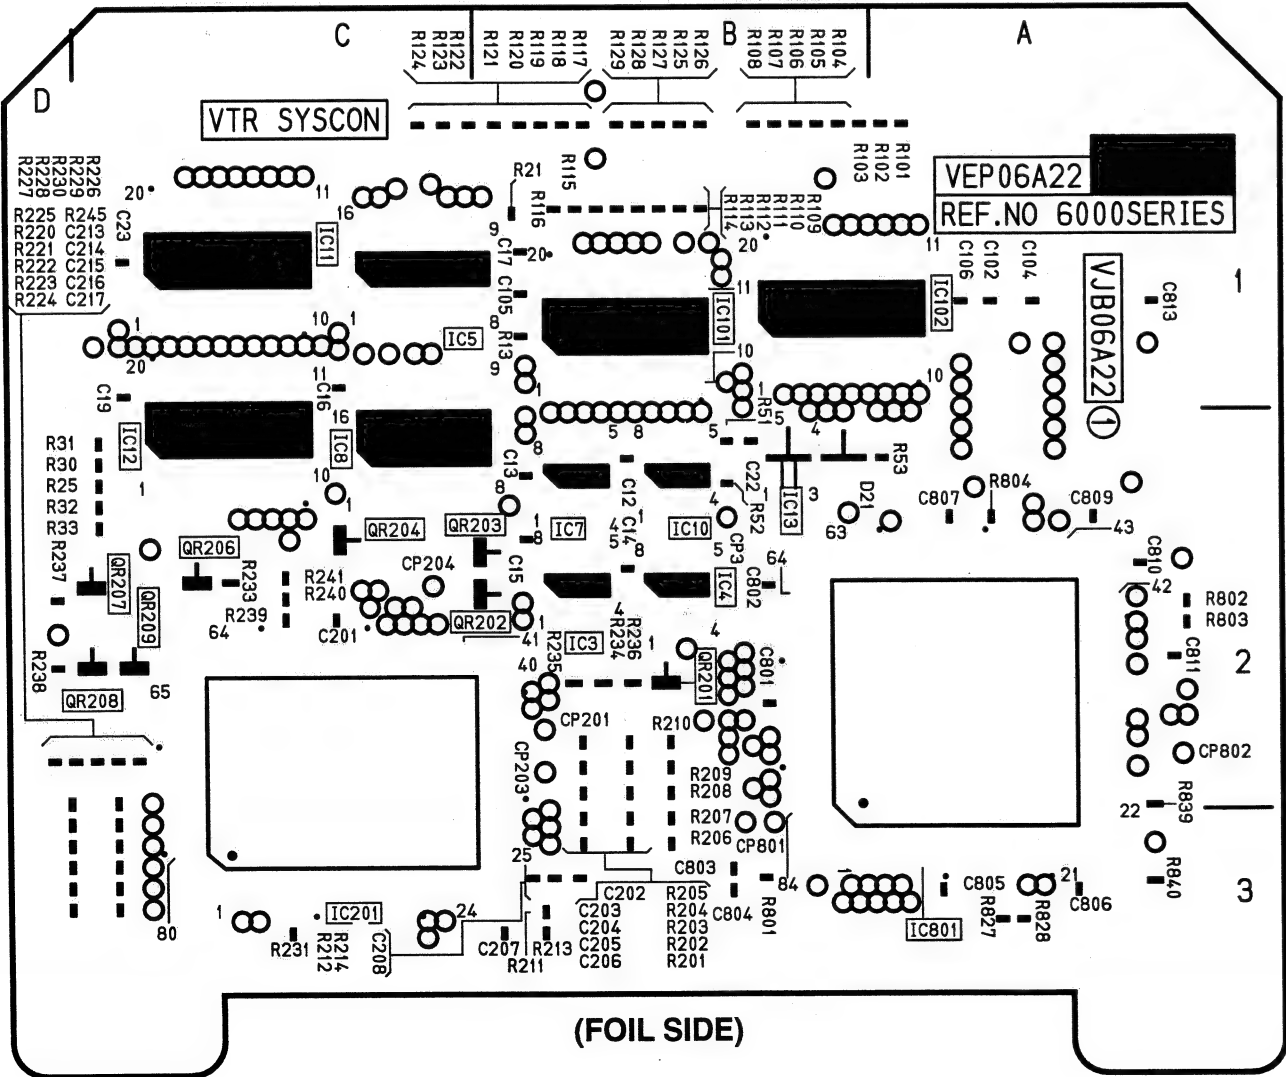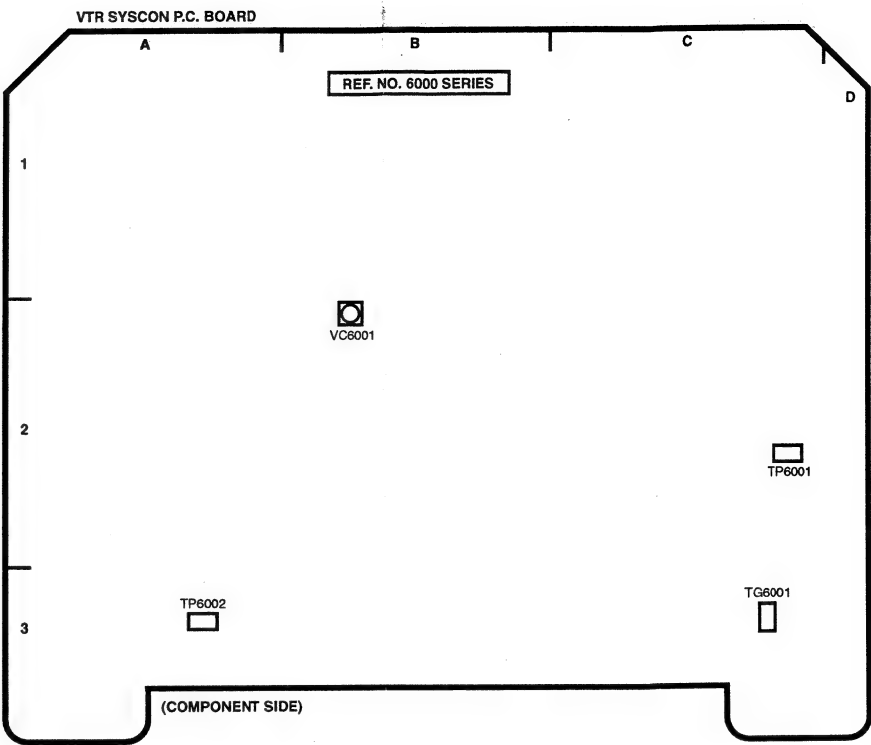


CBA-15

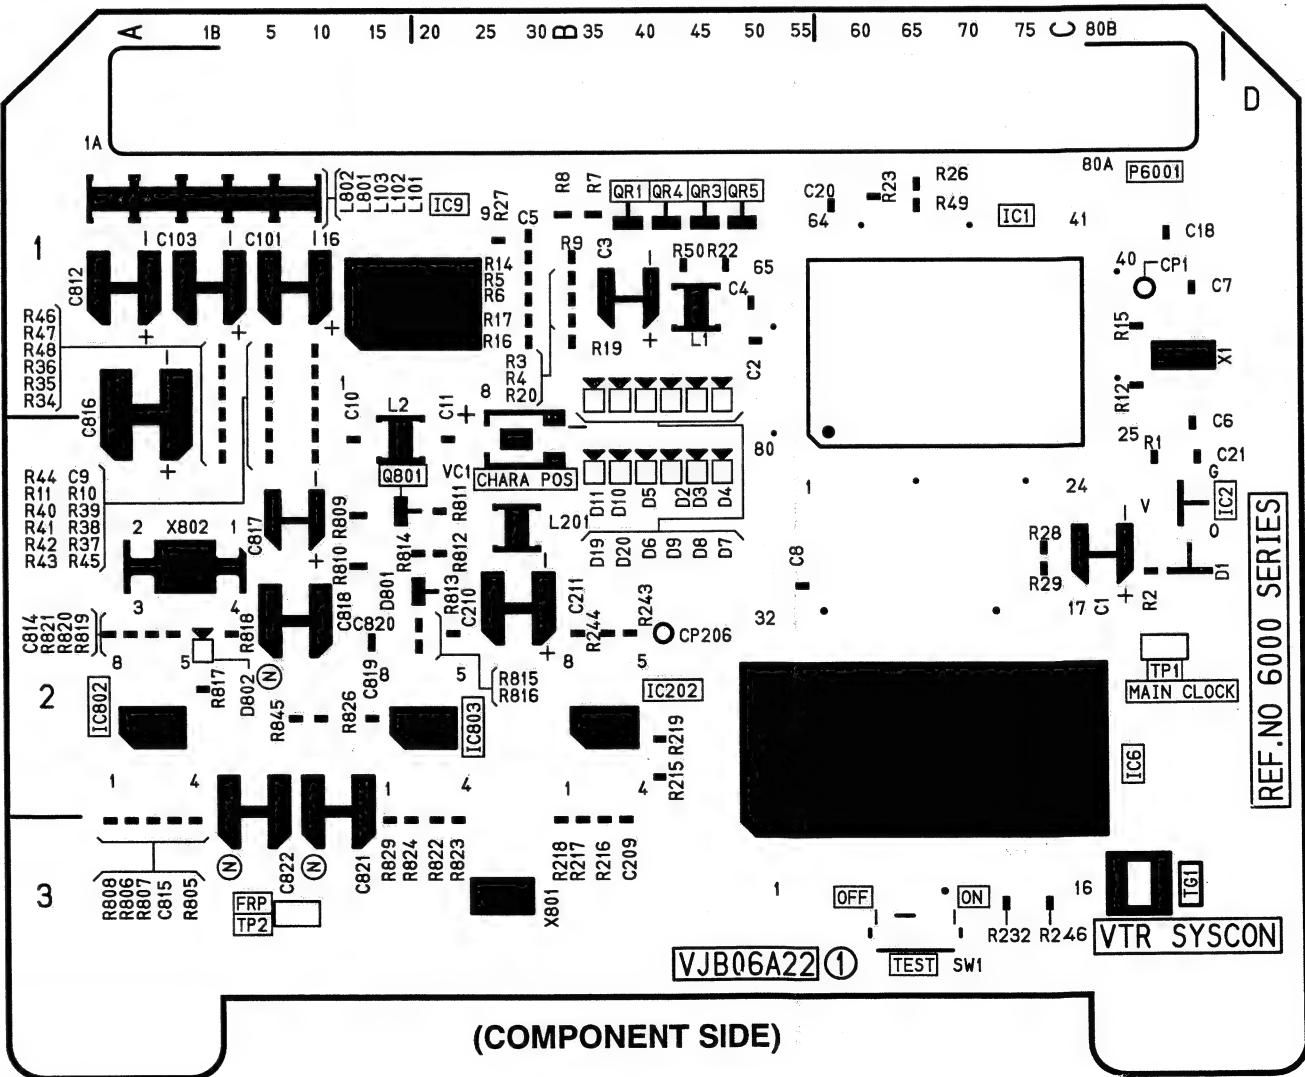



CBA-15

SERVO P.C.BOARD (NTSC:VEP02437A / PAL:VEP02437B)

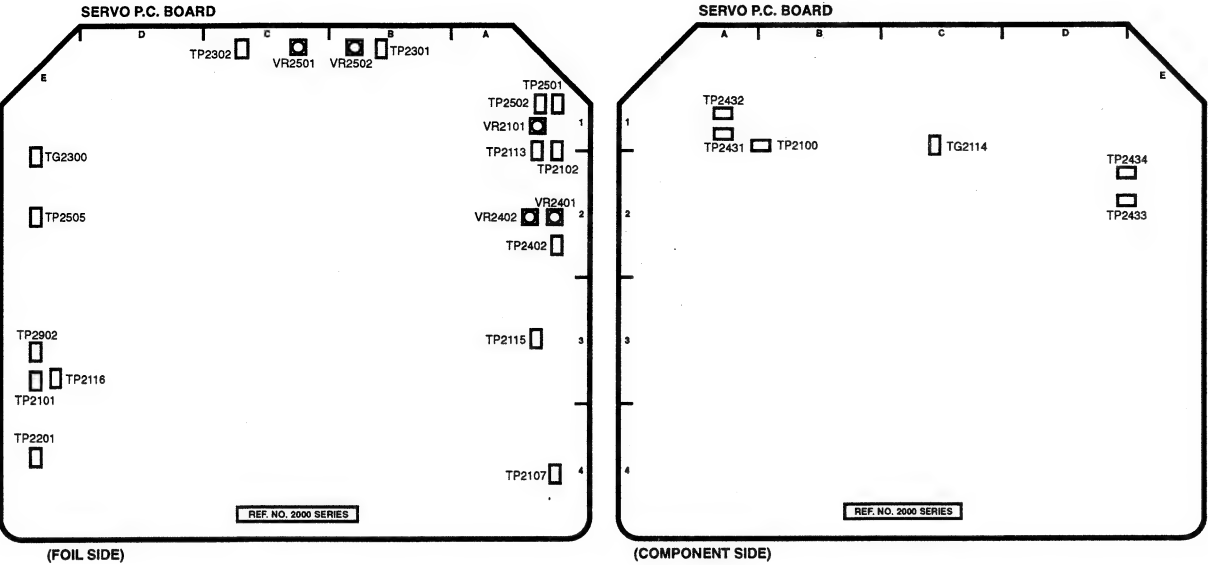

REF	LOC	REF	LOC	REF	LOC	REF	LOC	REF	LOC	REF	LOC
IC6	C4	IC803	D1	Q816	A2	Q908	B2	QR809	D1	TP113	A1
IC7	B4	IC806	D2	Q817	A2	Q914	B1	QR810	E1	TP115	A3
IC9	C2	Q2	C3	Q819	A2	Q918	B2	QR813	E1	TP116	E3
IC103	B4	Q3	C3	Q820	A2	Q922	B3	QR814	A3	TP201	E4
IC104	B2	Q4	D3	Q821	A1	QR2	C2	QR818	A2	TP301	B1
IC201	C3	Q5	C2	Q822	A3	QR5	C2	QR824	D2	TP302	C1
IC202	D4	Q6	C2	Q823	A3	QR101	B3	QR828	D2	TP402	A2
IC203	C4	Q7	C2	Q825	D2	QR102	B3	QR838	D3	TP501	A1
IC204	C4	Q100	B3	Q826	E2	QR106	B4	QR844	D2	TP502	A1
IC401	A1	Q101	B3	Q827	D3	QR149	B4	QR845	E2	TP505	E2
IC402	E1	Q103	B3	Q829	D2	QR150	B3	QR846	D2	TP902	E3
IC403	A2	Q104	B3	Q831	D3	QR305	B1	QR905	B2	VR101	A1
IC404	A1	Q105	B3	Q832	E2	QR306	B1	QR907	B2	VR401	A2
IC406	A3	Q106	A3	Q833	E2	QR501	C2	QR913	B1	VR402	A2
IC409	A1	Q301	C2	Q836	D3	QR504	C3	QR915	A2	VR501	C1
IC410	E1	Q302	D2	Q837	E3	QR701	A4	QR917	B2	VR502	B1
IC502	C2	Q502	B3	Q839	E3	QR702	A4	QR921	B3		
IC503	C2	Q503	B3	Q841	E3	QR703	B4	TG300	E1		
IC702	D4	Q702	B4	Q842	D3	QR704	E4	TP101	E3		
IC801	D1	Q812	D4	Q843	D3	QR801	D1	TP102	A1		
IC802	D4	Q815	A3	Q906	B2	QR804	D1	TP107	A4		

REF	LOC	REF	LOC	REF	LOC
IC100	B2	P607	C1	QR920	B4
IC101	A3	P608	E2	TG114	C1
IC110	B2	P609	E3	TP100	B1
IC200	C4	P610	E3	TP431	A1
IC205	C3	P611	E4	TP432	A1
IC301	C1	P612	D4	TP433	E2
IC302	B1	P613	C4	TP434	E2
IC303	D1	P616	D4		
IC405	E1	P617	D4		
IC407	A3	P618	B4		
IC501	C2	P619	B4		
IC701	A4	P620	B1		
IC804	D2	P621	C1		
IC805	D1	Q401	A3		
P600	B4	Q703	A4		
P601	A4	Q811	D4		
P602	A3	Q830	D2		
P603	A3	Q835	D3		
P604	A3	Q840	E3		
P605	A2	QR834	E3		
P606	B1	QR919	B4		

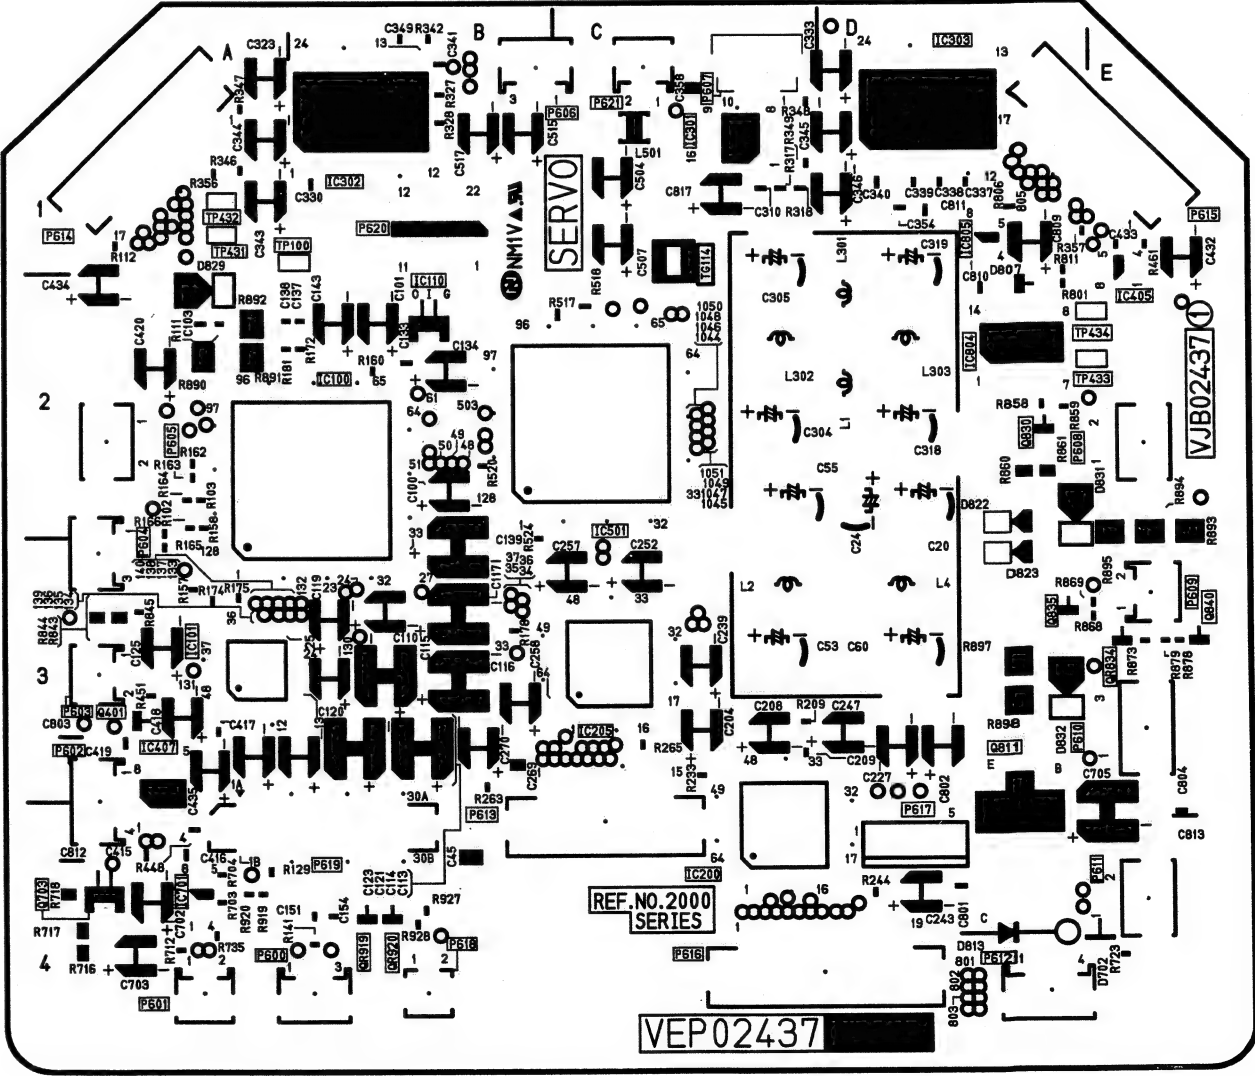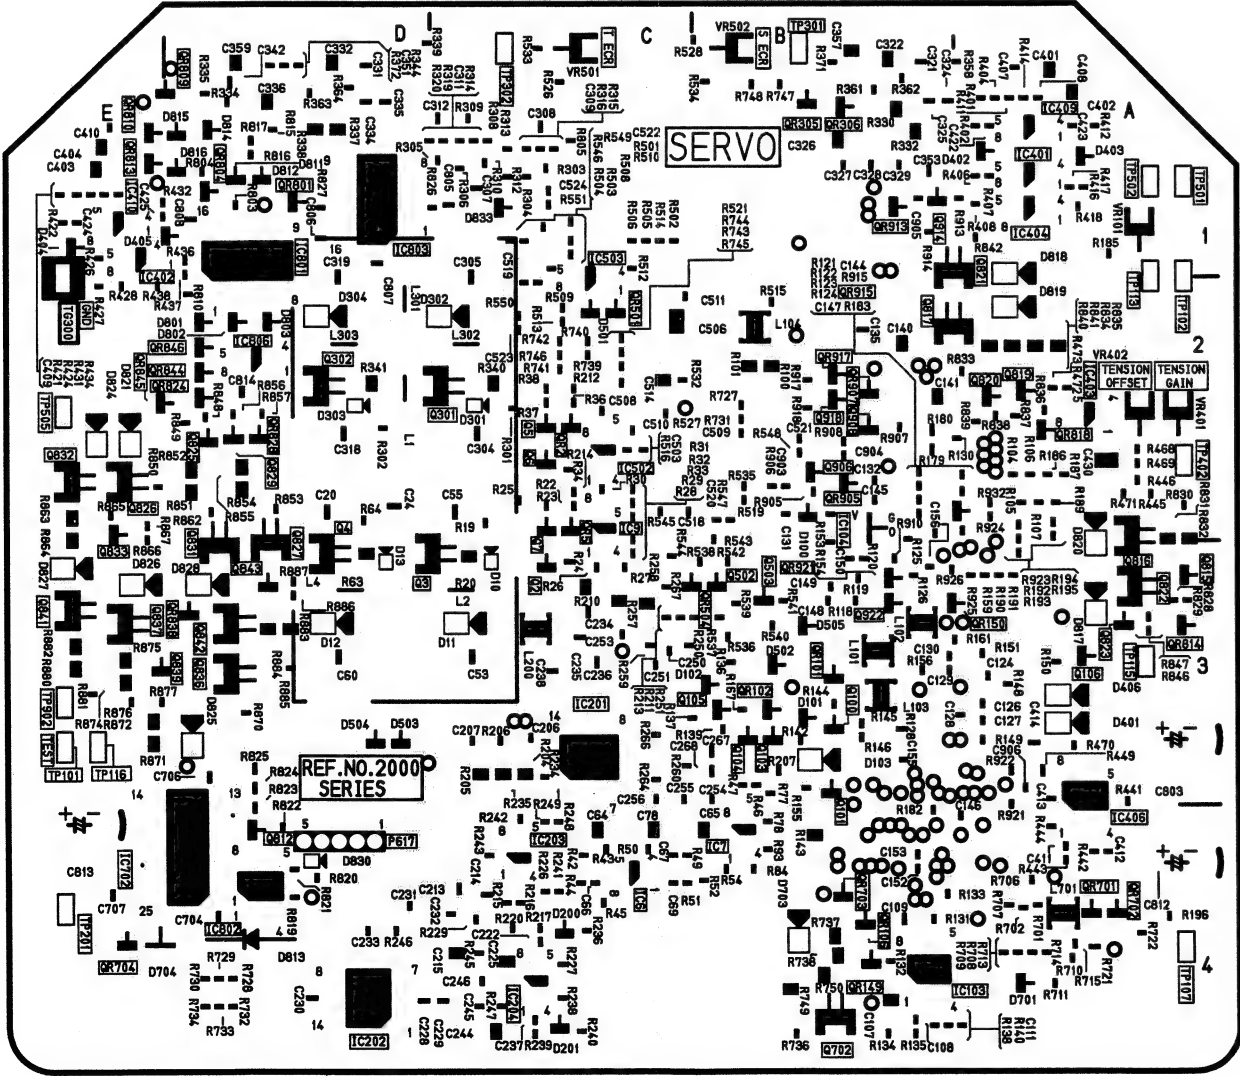

(FOIL SIDE)

(COMPONENT SIDE)

RF P.C.BOARD (VEP03B95A)


REF	LOC	REF	LOC	REF	LOC	REF	LOC
IC2	A2	IC304	D1	Q204	D2	Q304	D1
IC3	A3	IC404	C1	Q205	D2	Q306	C1
IC4	B2	IC502	B1	Q207	C2	Q400	D1
IC5	A2	P1	A2	Q210	C2	Q401	D1
IC7	B2	Q1	A2	Q213	C3	Q403	C1
IC9	A2	Q2	B2	Q214	C2	Q404	C1
IC10	A2	Q3	A2	Q215	C2	Q405	C1
IC11	A2	Q100	D2	Q216	D2	Q409	C1
IC200	D2	Q101	D2	Q217	D2	Q410	C1
IC201	D2	Q102	D2	Q218	D1	Q411	C1
IC203	C2	Q103	D2	Q219	D1	Q500	B1
IC204	B2	Q104	D2	Q226	C2	Q501	A1
IC205	D2	Q105	D3	Q227	C1	QR1	A2
IC206	D1	Q106	D2	Q228	B2	QR200	B2
IC210	B2	Q107	D3	Q229	B2	QR201	B2
IC211	B2	Q201	C2	Q230	B2		
IC301	D1	Q202	D2	Q235	B2		
IC303	D1	Q203	D2	Q300	D1		

FOIL SIDE


REF	LOC	REF	LOC	REF	LOC	REF	LOC
IC1	A2	P4	D1	QR400	C1	TP503	A1
IC6	A2	Q208	D2	QR401	B1	TP504	A1
IC8	A2	Q209	D2	TG1	B2	TP505	A1
IC100	D3	Q212	C3	TG300	C1	TP506	A1
IC101	D2	Q221	D2	TG500	B1	TP507	A1
IC207	C2	Q222	D1	TP100	D2	TP508	B2
IC208	B2	Q225	C2	TP101	D2	VR200	B2
IC209	B2	Q231	C2	TP200	C2	VR300	D1
IC300	D1	Q232	C2	TP201	C2	VR400	D1
IC302	C1	Q233	C2	TP202	C2	VR401	D1
IC400	D1	Q234	C1	TP203	C2		
IC401	C1	Q305	C1	TP300	A1		
IC402	C1	Q307	C1	TP400	A1		
IC403	D1	Q406	B1	TP401	C1		
IC500	B1	Q407	B1	TP402	B1		
IC501	B1	Q408	B1	TP500	B1		
P2	A2	QR100	D2	TP501	B2		
P3	D2	QR101	D2	TP502	B1		

COMPONENT SIDE


RF P.C. BOARD

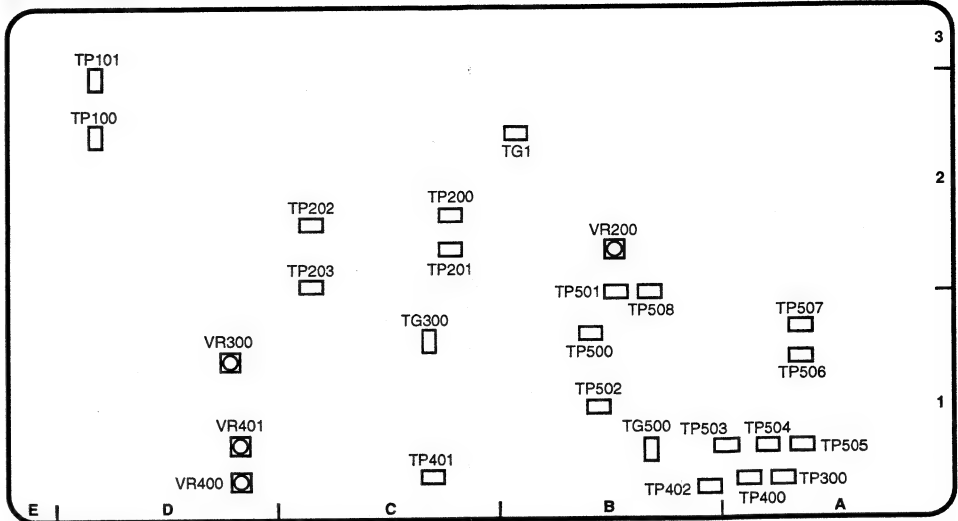

(COMPONENT SIDE)

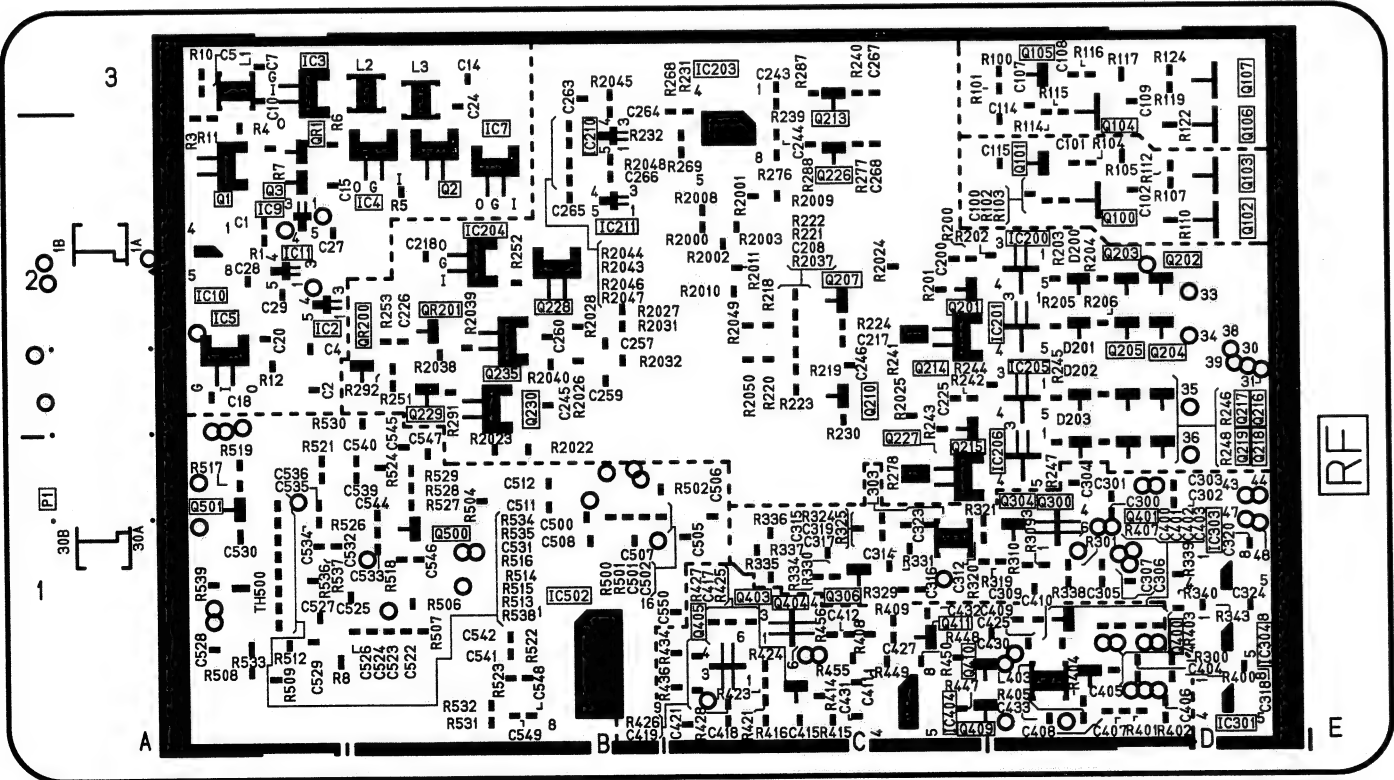


(FOIL SIDE)

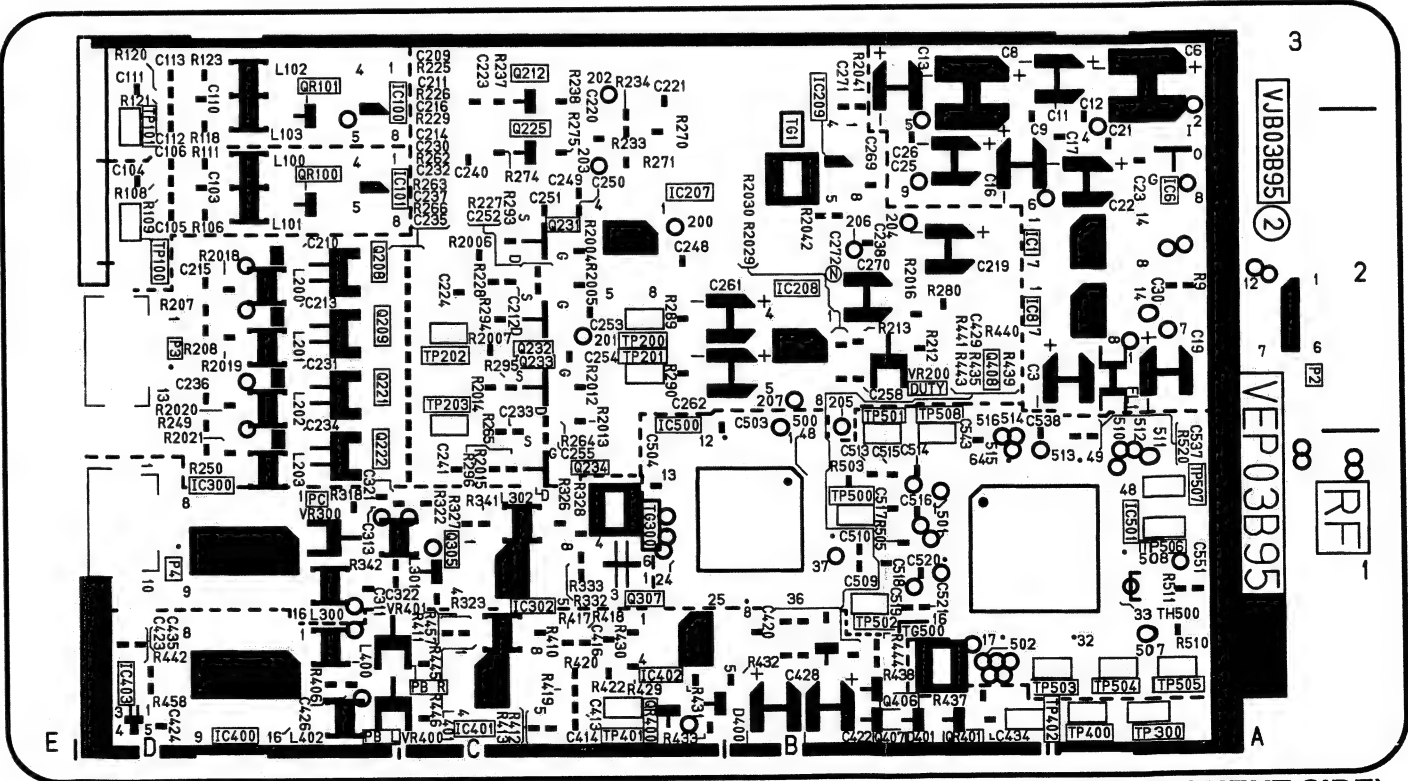

(COMPONENT SIDE)

POWER P.C. BOARD (VEP01643A)

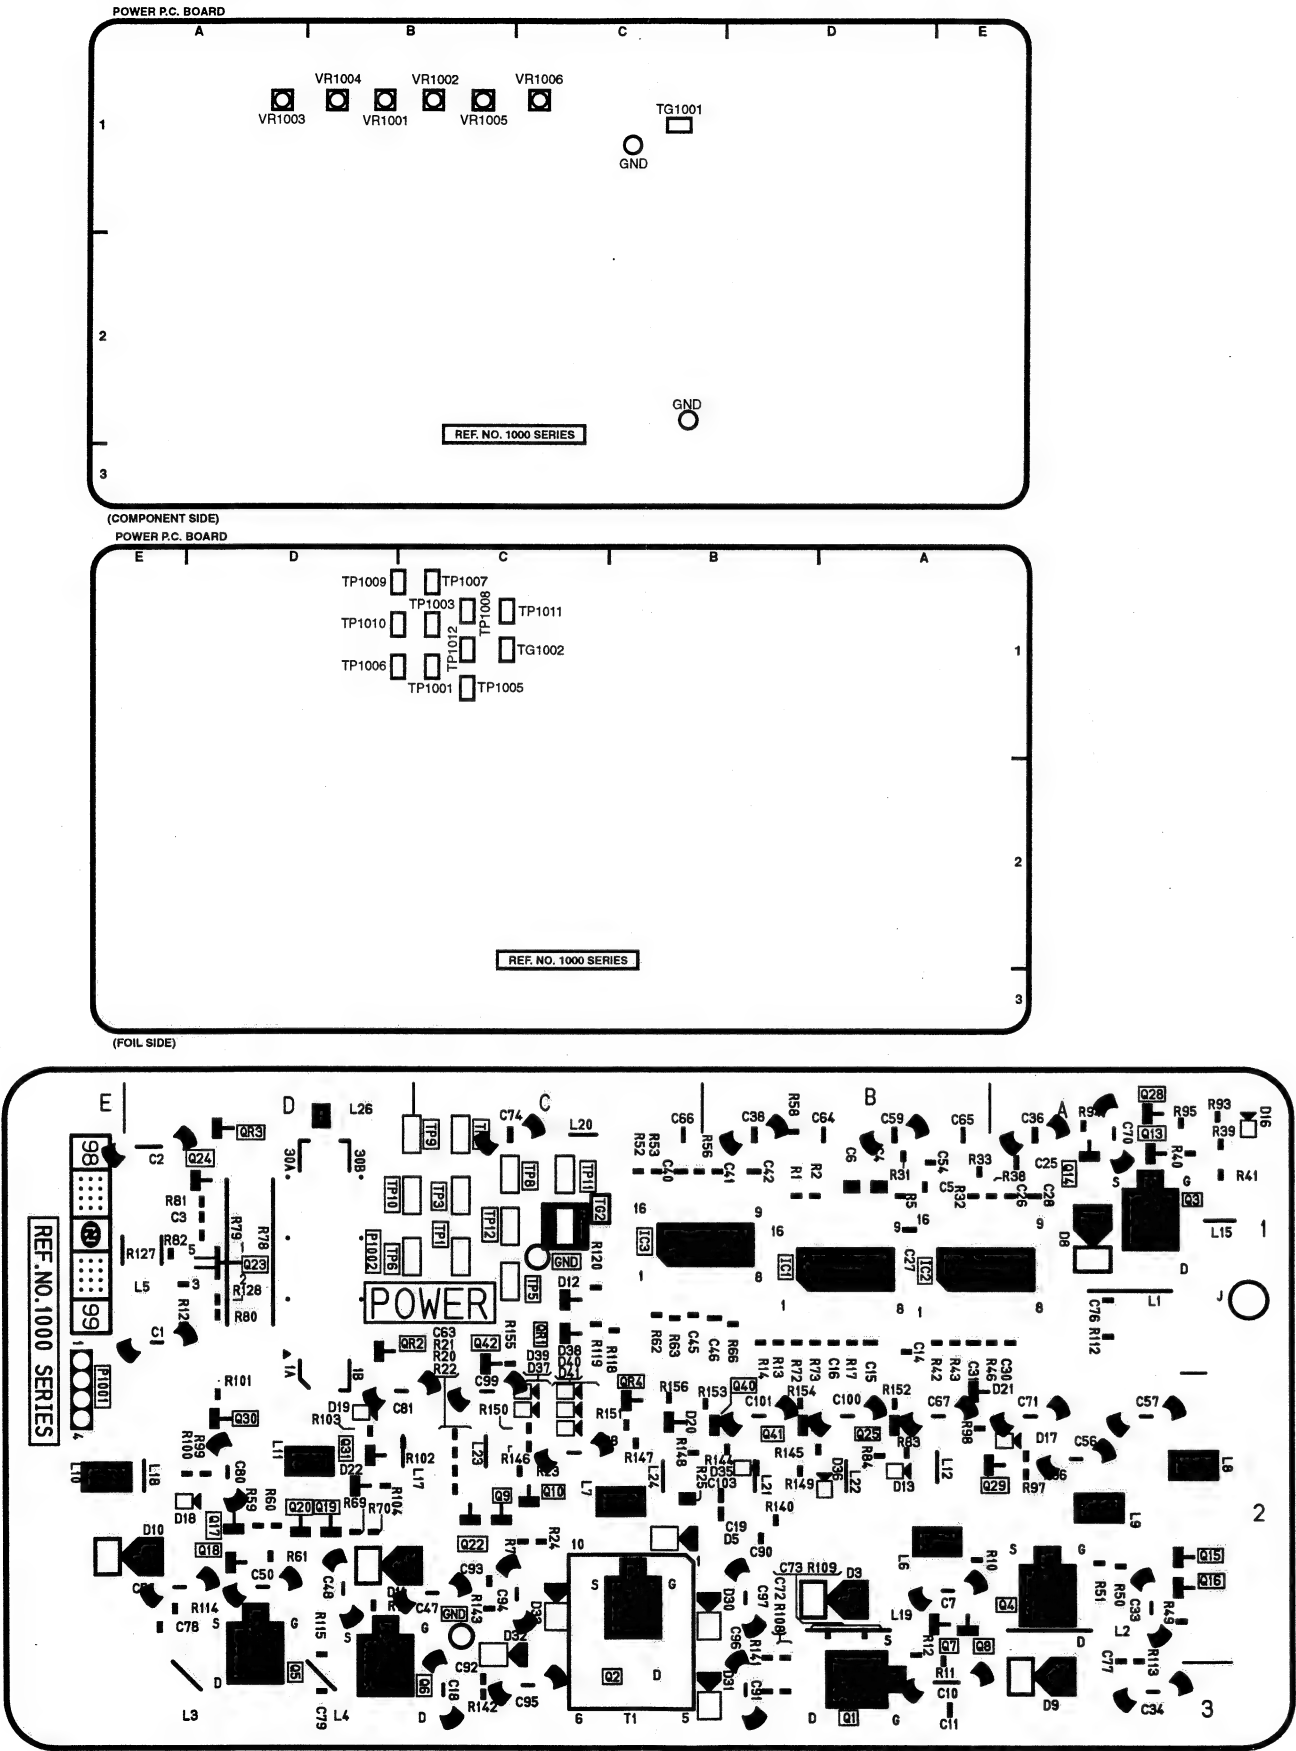


(FOIL SIDE)

REF	LOC	REF	LOC	REF	LOC	REF	LOC
IC1001	B1	Q1016	A2	QR1002	D1	P1001	E1
IC1002	B1	Q1017	D2	QR1003	D1	TG1001	C1
IC1003	B1	Q1018	D2	QR1004	C2	VR1001	B1
P1002	D1	Q1019	D2	TG1002	C1	VR1002	B1
Q1001	B3	Q1020	D2	TP1001	C1	VR1003	A1
Q1002	C2	Q1022	C2	TP1003	C1	VR1004	B1
Q1003	A1	Q1023	D1	TP1005	C1	VR1005	B1
Q1004	A2	Q1024	D1	TP1006	D1	VR1006	C1
Q1005	D2	Q1025	B2	TP1007	C1		
Q1006	D3	Q1028	A1	TP1008	C1		
Q1007	B2	Q1029	B2	TP1009	D1		
Q1008	B2	Q1030	D2	TP1010	D1		
Q1009	C2	Q1031	D2	TP1011	C1		
Q1010	C2	Q1040	B2	TP1012	C1		
Q1013	A1	Q1041	B2				
Q1014	A1	Q1042	C1				
Q1015	A2	QR1001	C1				


FOIL SIDE

COMPONENT SIDE

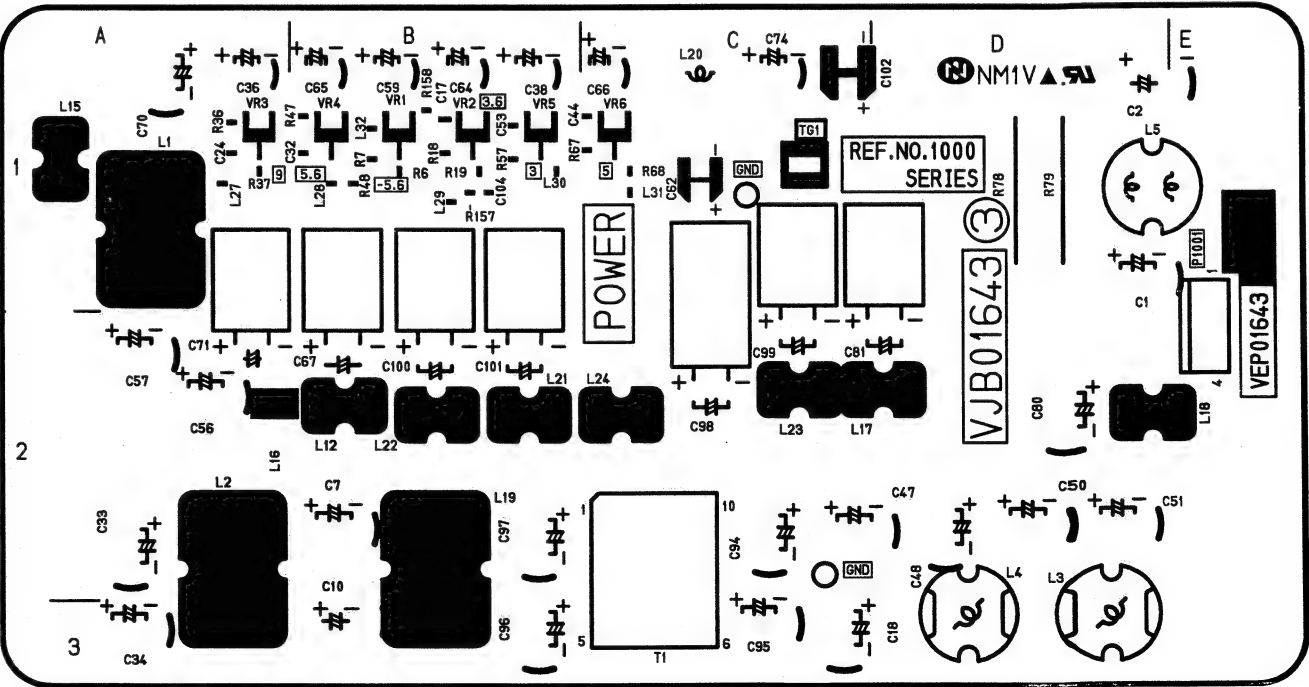

(COMPONENT SIDE)

AUDIO LCD P.C. BOARD (VEP04690A) (COMPONENT SIDE)


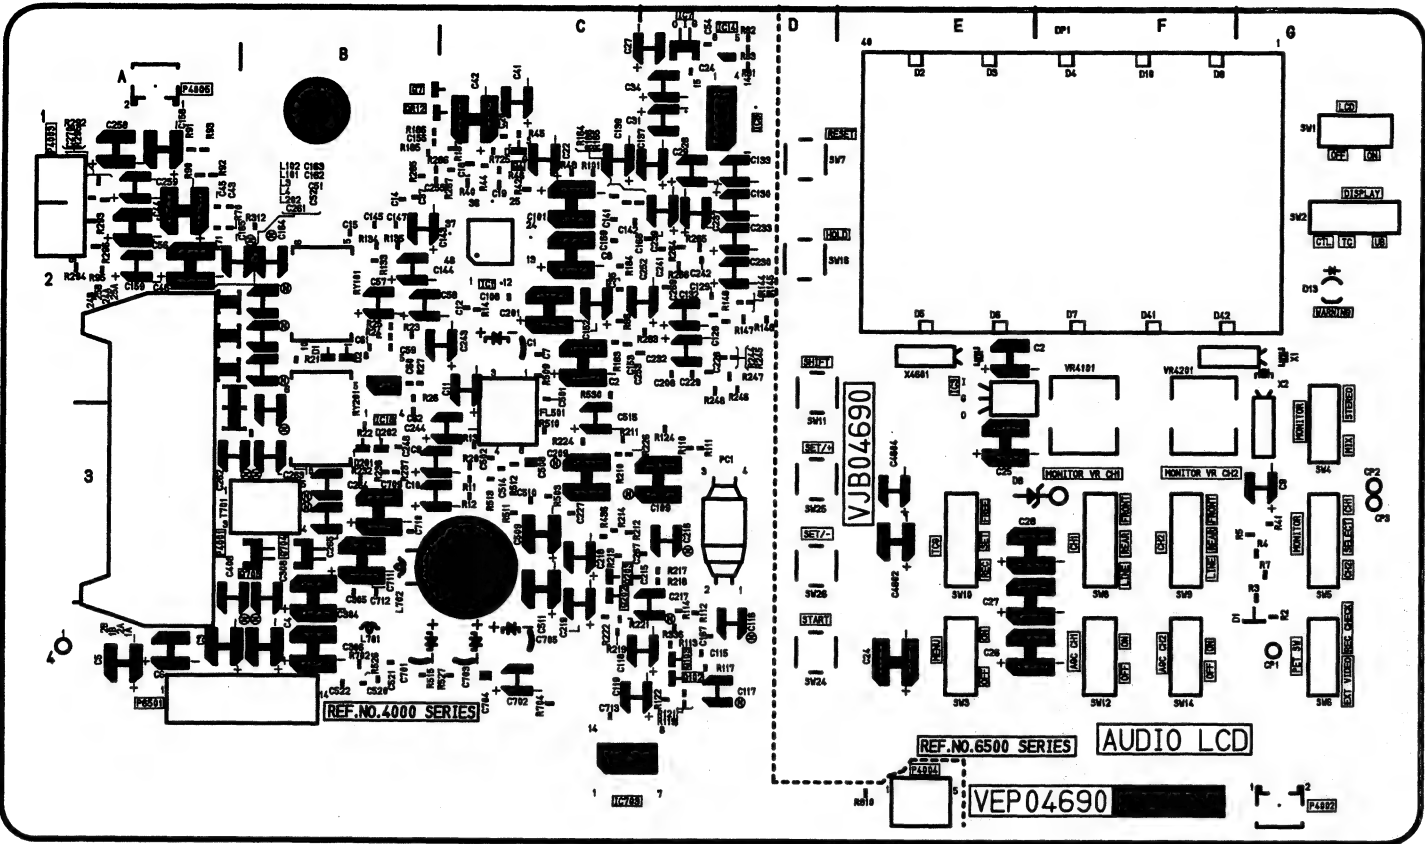


REF	LOC	REF	LOC
IC4001	C2	SW6506	G4
IC4007	D1	SW6507	D1
IC4008	D1	SW6508	F3
IC4014	D1	SW6509	F3
IC4018	B2	SW6510	E3
IC4703	C4	SW6511	D2
IC6503	E2	SW6512	F4
P4001	A3	SW6514	F4
P4002	G4	SW6516	D2
P4003	A1	SW6524	D4
P4004	E4	SW6525	D3
P4005	A1	SW6526	D3
P6501	A4	VR4101	F3
PC4001	D3	VR4201	F3
Q4004	C1		
Q4007	B1		
Q4102	D4		
Q4103	D4		
Q4202	C3		
Q4203	C3		
Q4704	B3		
Q4705	B3		
QR4012	B1		
SW6501	G1		
SW6502	G2		
SW6503	E4		
SW6504	G3		
SW6505	G3		

REF	LOC	REF	LOC	REF	LOC	REF	LOC	REF	LOC
IC4002	C2	IC4704	A2	Q6501	E3	QR4402	D4	VR4102	D3
IC4003	E1	IC6501	F2	Q6502	E3	QR4403	C4	VR4103	C2
IC4004	B1	IC6502	G3	Q6503	F1	QR4404	C4	VR4202	C3
IC4005	D3	IC6505	G3	QR4001	A2	QR4507	C3	VR4203	D2
IC4006	C1	Q4001	C2	QR4006	A1	QR4508	C3	VR4301	B3
IC4009	C2	Q4002	A4	QR4007	A1	QR4601	F1	VR4401	B3
IC4010	B1	Q4003	A4	QR4010	D1	QR6501	G1	VR4501	C3
IC4011	B1	Q4008	A2	QR4013	B1	QR6502	G2	VR4503	B4
IC4012	B1	Q4009	A2	QR4102	D2	QR6503	F1	VR4701	B3
IC4013	A1	Q4010	A1	QR4103	B1	QR6504	F1		
IC4015	C2	Q4101	D4	QR4104	B2	SW4701	C2		
IC4016	D2	Q4107	D2	QR4105	B1	TG4001	D2		
IC4017	B4	Q4110	A2	QR4106	B2	TP4101	D1		
IC4101	B2	Q4111	B2	QR4107	B1	TP4102	E2		
IC4102	C2	Q4201	C4	QR4108	A1	TP4201	D1		
IC4103	D4	Q4207	D2	QR4201	D2	TP4202	E2		
IC4105	D3	Q4210	A2	QR4202	D2	TP4501	B3		
IC4201	B3	Q4211	A2	QR4203	B2	TP4505	C2		
IC4202	D2	Q4302	B4	QR4204	B2	TP4601	F2		
IC4203	D3	Q4305	D4	QR4205	B2	TP4602	F1		
IC4205	C3	Q4306	D4	QR4206	B2	TP6501	E2		
IC4501	C3	Q4307	D4	QR4207	A2	TP6502	G1		
IC4502	B4	Q4402	A4	QR4208	A1	TP6503	G1		
IC4503	C3	Q4405	C3	QR4301	D4	TP6504	G1		
IC4602	E2	Q4406	C3	QR4302	D4	TP6505	F1		
IC4603	E2	Q4407	C3	QR4303	D4	TP6506	F1		
IC4701	C3	Q4702	B3	QR4304	D4	VR4001	C1		
IC4702	B3	Q4703	B3	QR4401	D4	VR4002	C2		


COMPONENT SIDE

FOIL SIDE

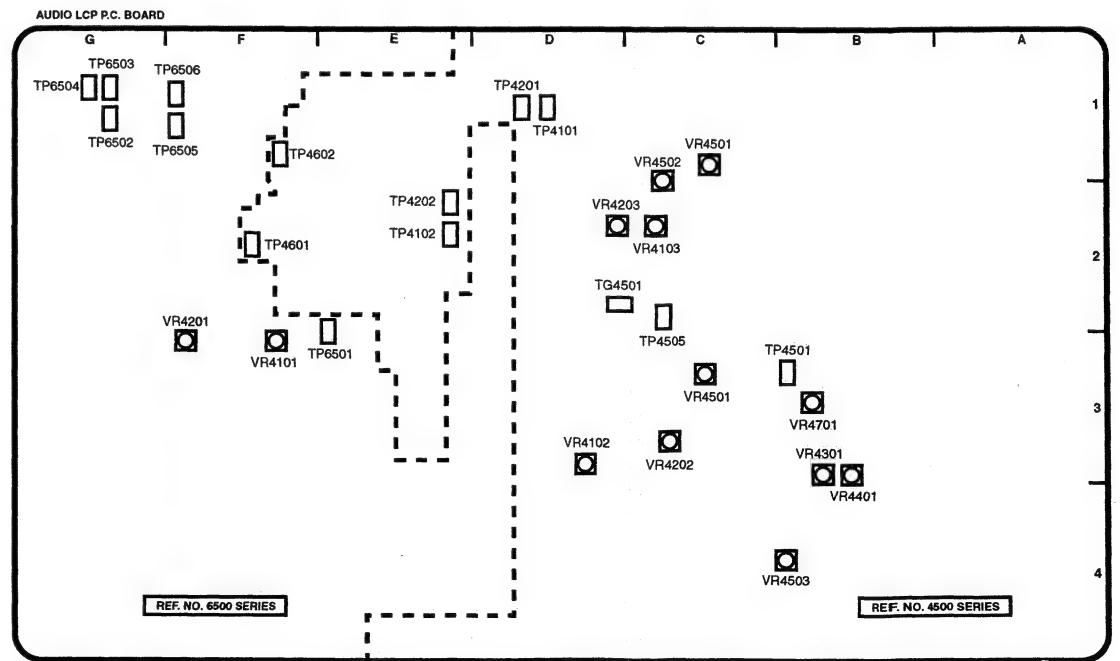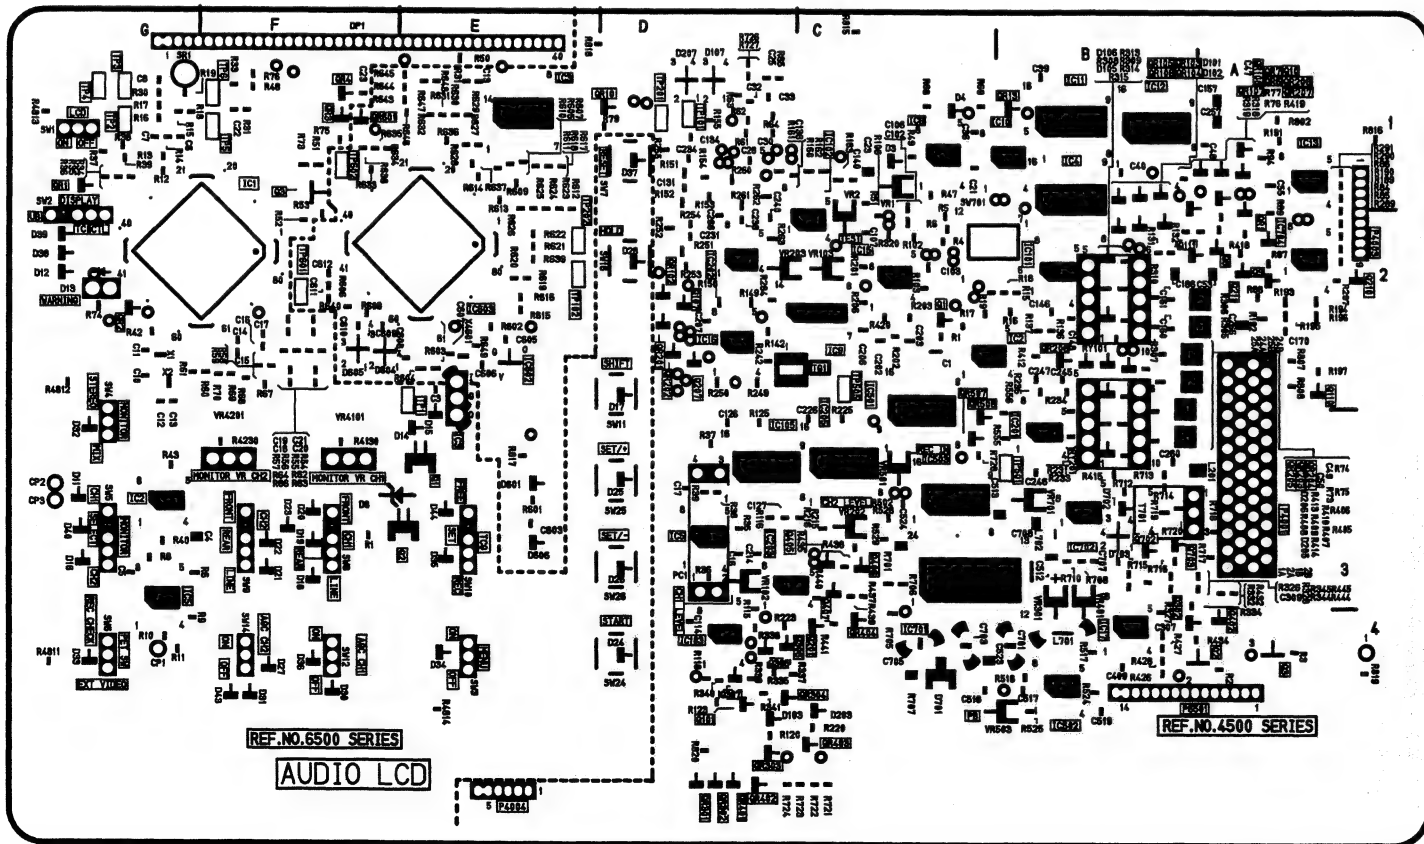


(FOIL SIDE)

REAR JACK P.C. BOARD (VEP01786A)

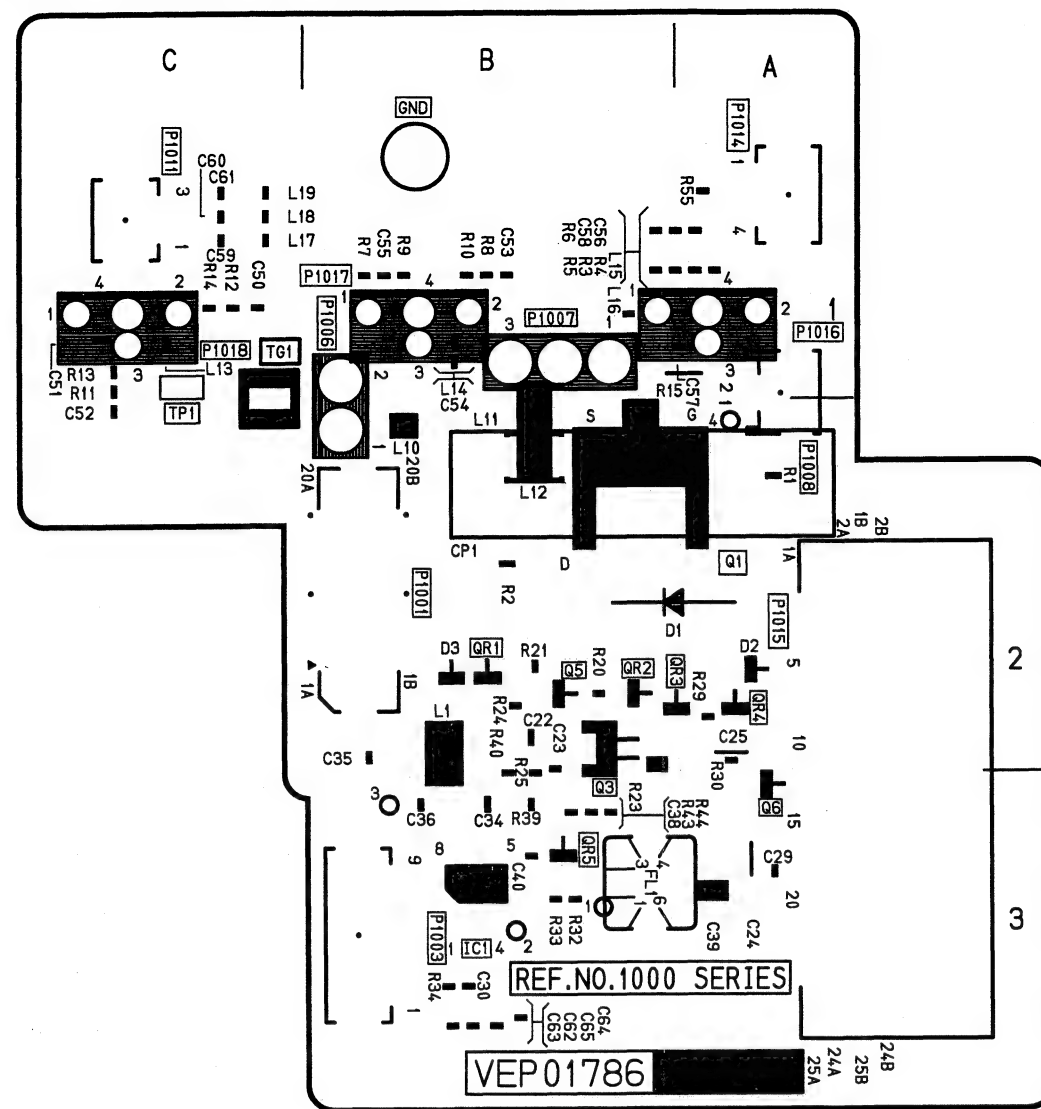


(FOIL SIDE)

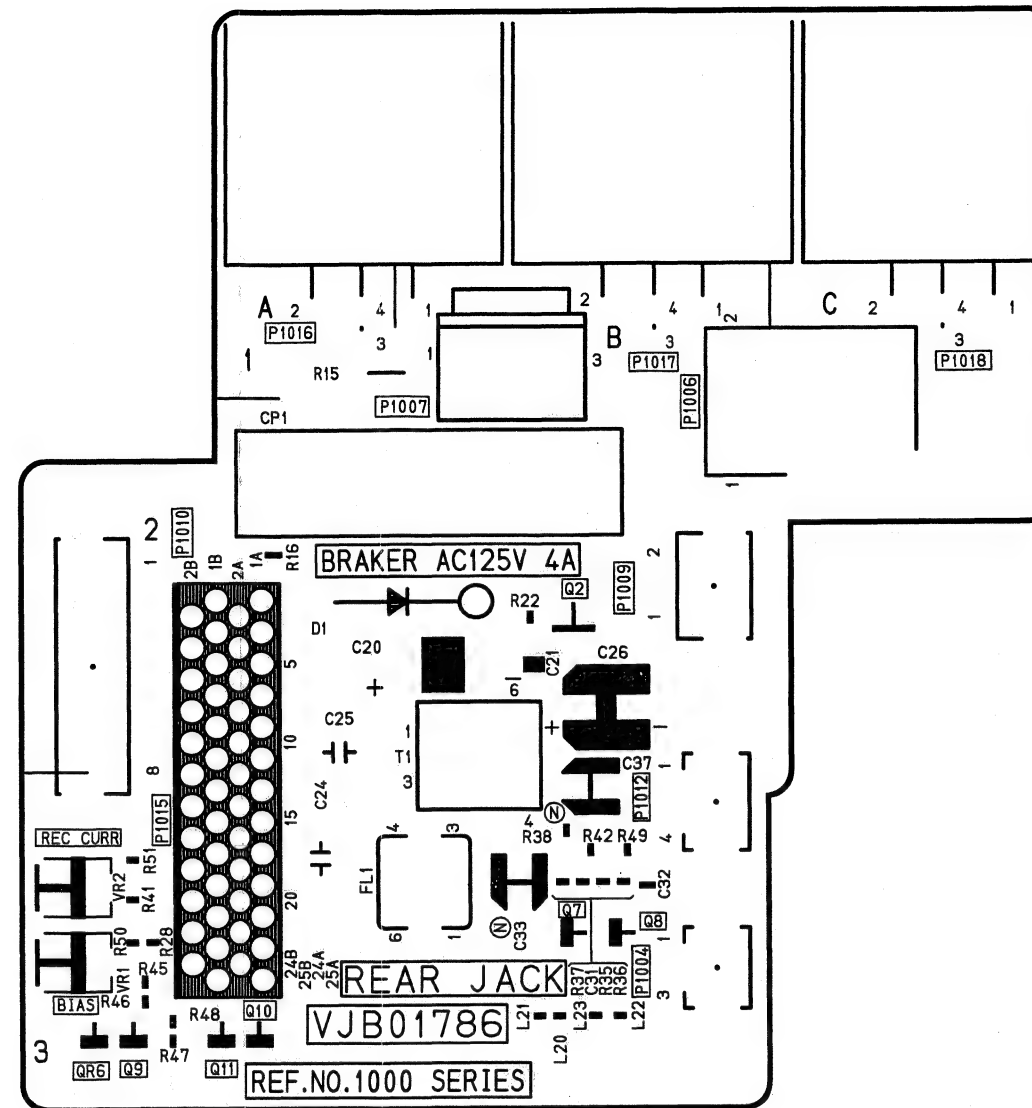


(COMPONENT SIDE)


BNC P.C. BOARD (NTSC:VEP80A13B / PAL:VEP80A13A)

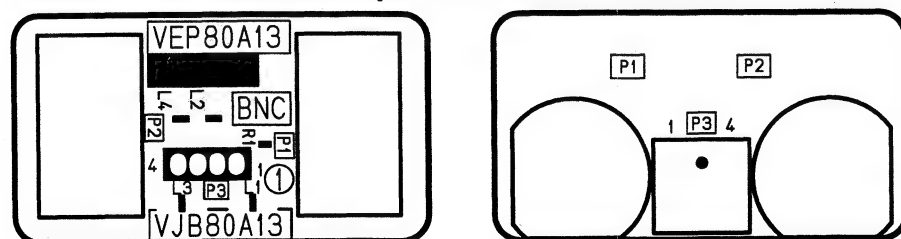


FRONT MIC P.C. BOARD (NTSC:VEP80A14C / PAL:VEP80A14A)

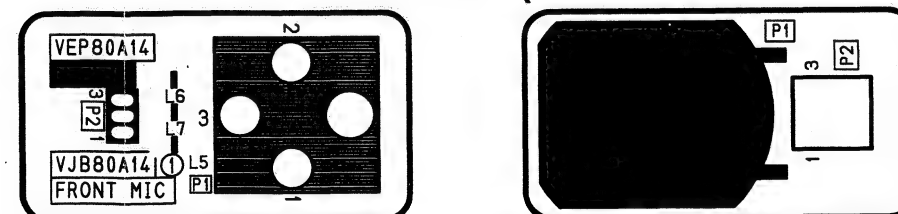

CCD P.C. BOARD (VEP20534A)

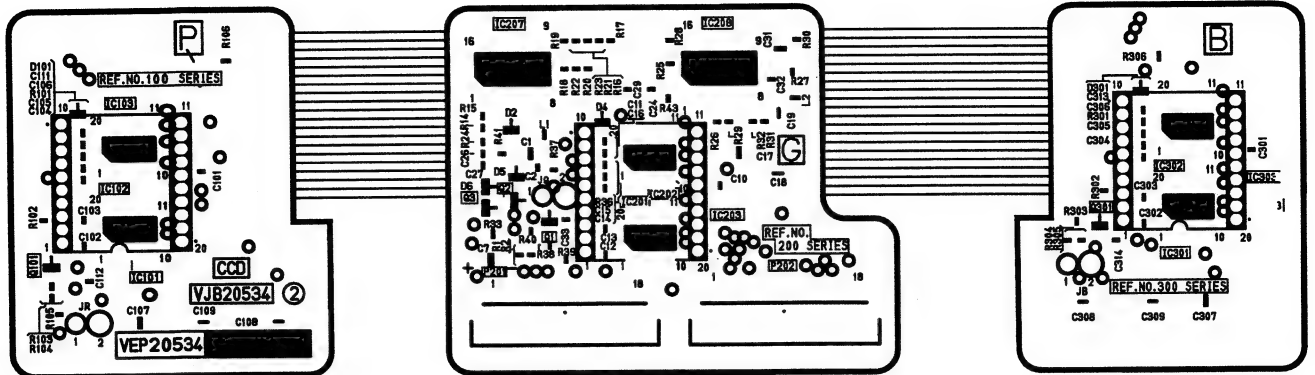


(COMPONENT SIDE)

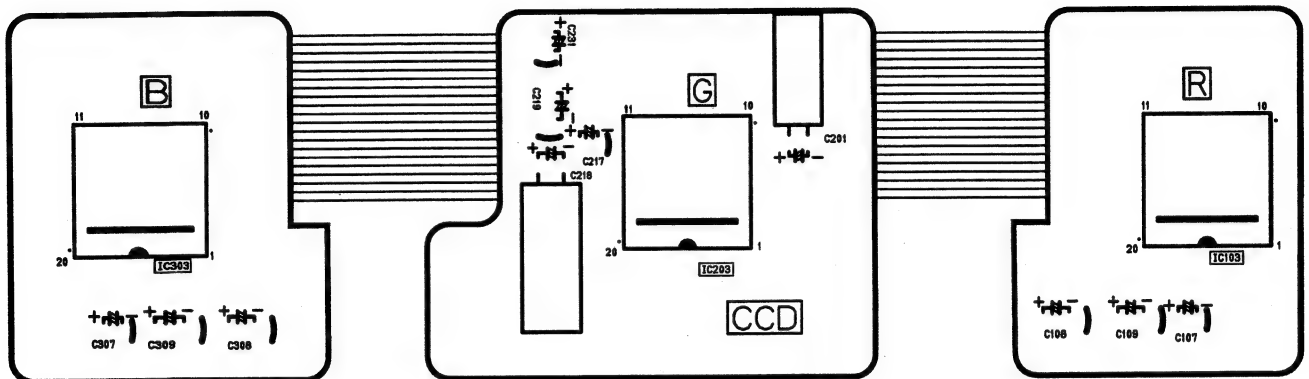

(FOIL SIDE)

OPERATE P. C. BOARD (VEP86149A)

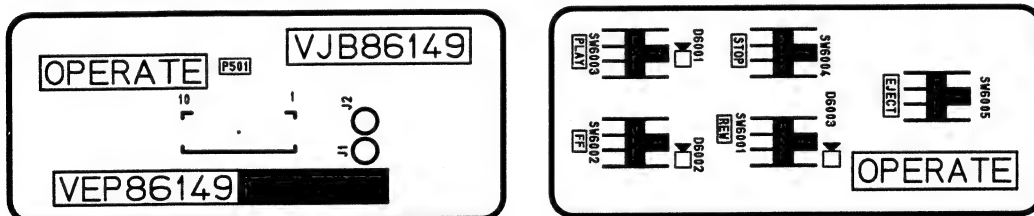

(FOIL SIDE)

(COMPONENT SIDE)

SECTION 8

EXPLODED VIEWS & PARTS LIST

Note:

1. *Be sure to make your orders of replacement parts according to this list.
2. Unless otherwise specified, all resistors are in OHMS, K=1,000
OHMS, all capacitors are in MICROFARADS (μ F), P= $\mu\mu$ F.
3. The P.C. Board units marked with "■" shown below the main assembled parts.
4. The parts marked with (E) on the exploded view show the electric parts.
5. IMPORTANT SAFETY NOTICE
Components identified with the mark <!> have the special characteristics for safety. When replacing any of these components, use only the same type.
6. The marking (RTL) indicates the retention time is limited for this item.
After the discontinuation of this assembly in production, it will no longer be available

<<Abbreviations for part>>

<NAME>

<DESCRIPTIONS>

C. CAPACITOR	:	CERAMIC CAPACITOR
C. CAPACITOR CH	:	CERAMIC CHIP CAPACITOR
E. CAPACITOR	:	ELECTROLYTIC CAPACITOR
G. CAPACITOR	:	GLASS CAPACITOR
M. CAPACITOR	:	MICA CAPACITOR
P. CAPACITOR	:	PLASTIC FILM CAPACITOR
S. CAPACITOR	:	SEMI-CONDUCTOR CAPACITOR
T. CAPACITOR	:	TANTALUM CAPACITOR
TRIMMER	:TRIMMER	
C. RESISTOR	:	CARBON RESISTOR
F. RESISTOR	:	FUSE RESISTOR
M. RESISTOR	:	METAL OXIDE RESISTOR
M. RESISTOR CH	:	METAL OXIDE CHIP RESISTOR
S. RESISTOR	:	SOLID RESISTOR
V. RESISTOR	:	VARIABLE RESISTOR
W. RESISTOR	:	WIRE WOUND RESISTOR
COMBI. TR-R	:	TRANSISTOR-RESISTOR COMBINATION PARTS
COMBI. R-R	:	RESISTOR-RESISTOR COMBINATION PARTS
COMBI. C-R	:	CAPACITOR-RESISTOR COMBINATION PARTS
COMBI. C-R-R	:	CAPACITOR-RESISTOR-COIL COMBINATION PARTS
P.C. BOARD	:	PRINTED CIRCUIT BOARD
W/COMPONENT	:	WITHCOMPONENT

CONTENTS

Mechanical Replacement Parts List & Exploded Views	PRT-1
Frame Assembly(1)	PRT-1
Frame Assembly(2)	PRT-3
Frame Assembly(3)	PRT-5
Mechanical Chassis Assembly(1)	PRT-7
Mechanical Chassis Assembly(2)	PRT-9
Cassette Compartment Assembly	PRT-11
EVF Assembly	PRT-13
SHAN-TM700	PRT-15
Packing Parts Assembly	PRT-17
Electrical Replacement Parts List	PRT-18

SERVICING FIXTURES & TOOLS

AJD400P/E


Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
1	VFK1145	BACK TENSION METER	1	(T2-M30-P)					
2	VFK1149	POST DRIVER	1						
3	VFK71	DIAL TORQUE GAUGE (150G)	1						
4	VFK1191	DIAL TORQUE GAUGE (45G)	1						
5	VFK1152	DIAL TORQUE GAUGE ADAPTOR	1						
6	VFK0357	ECCENTRIC SCREWDRIIVER 1.5	1						
7	VFK1154	POST HEIGHT FIXTURE	1						
8	VFK1153	MECH. NEUTRAL PLATE(POST)	1						
9	VFK1423	TAPE BEG/END DET CASSETTE	1						
10	VFK1155	NEUTRAL POSITION TOOL	1	(GOLD)					
11	VFK1156	NEUTRAL POSITION TOOL	1	(BLACK)					
12	VFK1208	NEUTRAL POSITION TOOL	1	(BLACK WITH HOLE)					
13	VFK1150	NUT DRIVER (5.5MM)	1						
14	VFK1151	NUT DRIVER (2.5MM)	1						
15	VFK1188	DIAL TENSION GAUGE (30G)	1						
16	VFK0948	CHECK LIGHT	1						
17	VFK0749	FROIRAL GREASE	1	(FOR PLASTIC)					
18	MOR265	MORLYTONE GREASE	1	(FOR METAL)					
19	VFK1146	PHILIPS DRIVER (FINE)	1	(00-75)					
20	VFK1147	PHILIPS DRIVER (FKNE)	1	(0-100)					
21	VFK1148	HEX. DRIVER (1.5)	1						
22	VFK1178	HEX. DRIVER (0.89)	1						
23	VFK1179	HEX. DRIVER (0.71)	1						
24	VFK1190	HEX. WRENCH	1						
25	VFK1209	TORQUE DRIVER (0.4-3KG)	1						
26	VFK1375	POST AXIS DRIVER (1.5MM)	1						
27	VFK1300	A/D BOARD(DAO-12 QUATECH)	1						
28	VFM3680KM	ALIGNMENT TAPE (NO.1)	1						
29	VFM3681KM	ALIGNMENT TAPE (NO.2)	1						
30	VFM3682KM	ALIGNMENT TAPE (NO.3)	1						
31	AJ-CL12MP	CLEANING TAPE	1	SALES					
32	VFK1420	L1STA SOFTWARE	1	NEW					
33	VFK1186	L1STA CALBE	1						
34	VFK1194	EXTENSION BOARD	1						
35	VFK1162A	EVR TOOL SOFTWARE	1						
36	VFK1158A	B.E.R. COUNTER TOOL	1						
37	VFK1185	B.E.R. COUNTER CABLE	1						
38	VFKW1000AA	EVR 1/F BOX UNIT	1						
39	VFKW1000C	EVR RS232C CABLE	1						
40	VFK1180	EVR SUB 1/F UNIT	1						
41	VFK1187	EVR CABLE	1						
42	VFK1210	MULTI-CANON CABLE	1						
43	VFK0369	TWEEZERS	1						
44	VFK0371	RADIO PRIER	1						
45	VFK0372	CUTTER PRIER	1						
46	VFK0338	TRIMMER ADJUSTMENT DRIVER	1						
47	VFK0337	PHILIPS DRIVER	1						
48	VFK1160A	RF AUTO ADJUSTMENT SOFT	1						
49	VFK1163	RF AUTO ADJUSTMENT TOOL	1						
50	VFK0906	OIL	1						

[illegible]

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
1	4G28145	SPRING	1	
2	V5MA0046A4	CAMERA SHOE	1	
3	VMS4284	BELT HOOK PIN	2	
4	VYH0270	HANDLE ASS'Y	1	
5	VGU7080	SIDE U LOCK KNOB	1	
6	VMB1615	SPRING	1	
7	VKF2700	HANDLE COVER	1	
8	VKF2516	CARD COVER	1	
9	VGL0720	TALLY COVER	1	
10	VMG0950	P8 O-RING	1	
11	VMG0955	P4 O-RING	1	
12	VEE0E17	EVF CONNECTOR	1	
13	VGM1588	UPPER CASE	1	
14	VJF0909	CABLE CLAMPER	2	
15	VG0515	BATTERY CABLE HOLDER	1	
16	VYK8551	BACK CASE	1	FOR AJ-D400P
16	VYK8552	BACK CASE	1	FOR AJ-D400E
17	VJF1125	BATTERY HOLDER	1	
18	VMS5860	DOOR SHAFT	1	
19	VKF2486	VTR OPERATION DOOR	1	
20	VGK2476	VTR OPERATION BASE	1	
21	VGU7082	VTR OPERATION BUTTON	1	
22	VMB2917	DOOR SPRING	1	
23	VKF3087	CONENECTOR COVER	1	
24	VJS1440	CONNECTOR (FEMALE)	1	
25	VEK8482	SIDE (L) CONNECTOR ASS'Y	1	FOR AJ-D400P
25	VEK8483	SIDE (L) CONNECTOR ASS'Y	1	FOR AJ-D400E
29	VGM1259	BOTTOM CASE	1	
25-1	VMG0943	CONNECTOR INSULATION CUSHION	3	
25-2	VKF2961	SHIELD SHEET	1	
26	VSC4400	SHIELD CASE	1	
27	VMP4853	LENS CONNECTOR PLATE	1	
28	VEE9429	LENS CONNECTOR	1	
29	VGM1259	BOTTOM CASE	1	FOR AJ-D400P
29	VGM1631	BOTTOM CASE	1	FOR AJ-D400E
30	VMG0643	BRAKER CAP	1	
31	VMP4896	BACK LOCK ANGLE	1	
32	VMT0768	SHOLDER PAD	1	
33	VGM1278	FRONT V EDGE	1	
34	VGM1277	FRONT FOOT BASE	1	
35	VKA0299	FRONT FOOT	2	
36	VMP4846	JACK P.C.B. ANGLE	1	
37	VGM1263	JACK PANEL	1	
38	VMX0531	CLATCH SPACER	1	
39	VHN0194	SPACER	1	
40	VEE9413	CONNECTOR	1	
41	VMP5193	BNC JACK	1	
43	VG04060	NET	1	
44	VMG0954	REAR FOOT	2	
45	VMX2606	SPACER	2	
46	VG0362	BNC CAP	3	
47	VMS6234	BELT HOOK PIN	1	
48	VEE0F15	AUDIO OUT CABLE	1	
49	VMZ2806	REAR JACK BARRIER	1	
50	VMT1023	GASKET	1	FOR AJ-D400E
51	VMP5255	GND ANGLE	1	FOR AJ-D400E
52	VMT0800	GASKET	1	FOR AJ-D400E
71	XSB26+6	SCREW	3	
72	XSB3+8FZ	SCREW	14	
73	XSB3+10FZ	SCREW	4	
74	XSB4+6FC	SCREW	3	
75	XSB4+6FZ	SCREW	2	
76	XSN26+6FC	SCREW	2	
77	XSN26+6FZ	SCREW	7	
78	XSN26+8FZ	SCREW	4	
79	XSS2+4FZ	SCREW	2	
80	XSS3+8FZ	SCREW	4	
81	XTN2+4G	SCREW	1	
82	XTN2+6G	SCREW	2	
83	XTS26+6J	SCREW	6	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
84	XSN3+8FZ	SCREW	2	
85	XYN2+F6	SCREW	2	
86	XYN26+C8FZ	SCREW	2	
87	XYN3+C6	SCREW	2	
88	XYN3+F8	SCREW	2	
89	XSN2+6FZ	SCREW	6	
90	XSN26+4FC	SCREW	1	
91	XWE4FZ	WASHER	1	
92	XUC3FP	E-RING	1	
93	XUC12VM	E-RING	1	
94	XWA4BFZ	WASHER	1	
E17	VEP01786A	REAR JACK P.C. BOARD	1	
E23	VEP00W08B	HEADPHONE P.C. BOARD	1	
E24	VEP00X87A	DC INPUT P.C. BOARD	1	
E27	VEP86149A	OPERATE P.C. BOARD	1	
E28	VEP80858A	BACK TALLY P.C. BOARD	1	
E29	VEP80A14C	FRONT MIC P.C. BOARD	1	FOR AJ-D400P
E29	VEP80A14A	FRONT MIC P.C. BOARD	1	FOR AJ-D400E


FRAME ASSEMBLY (1)

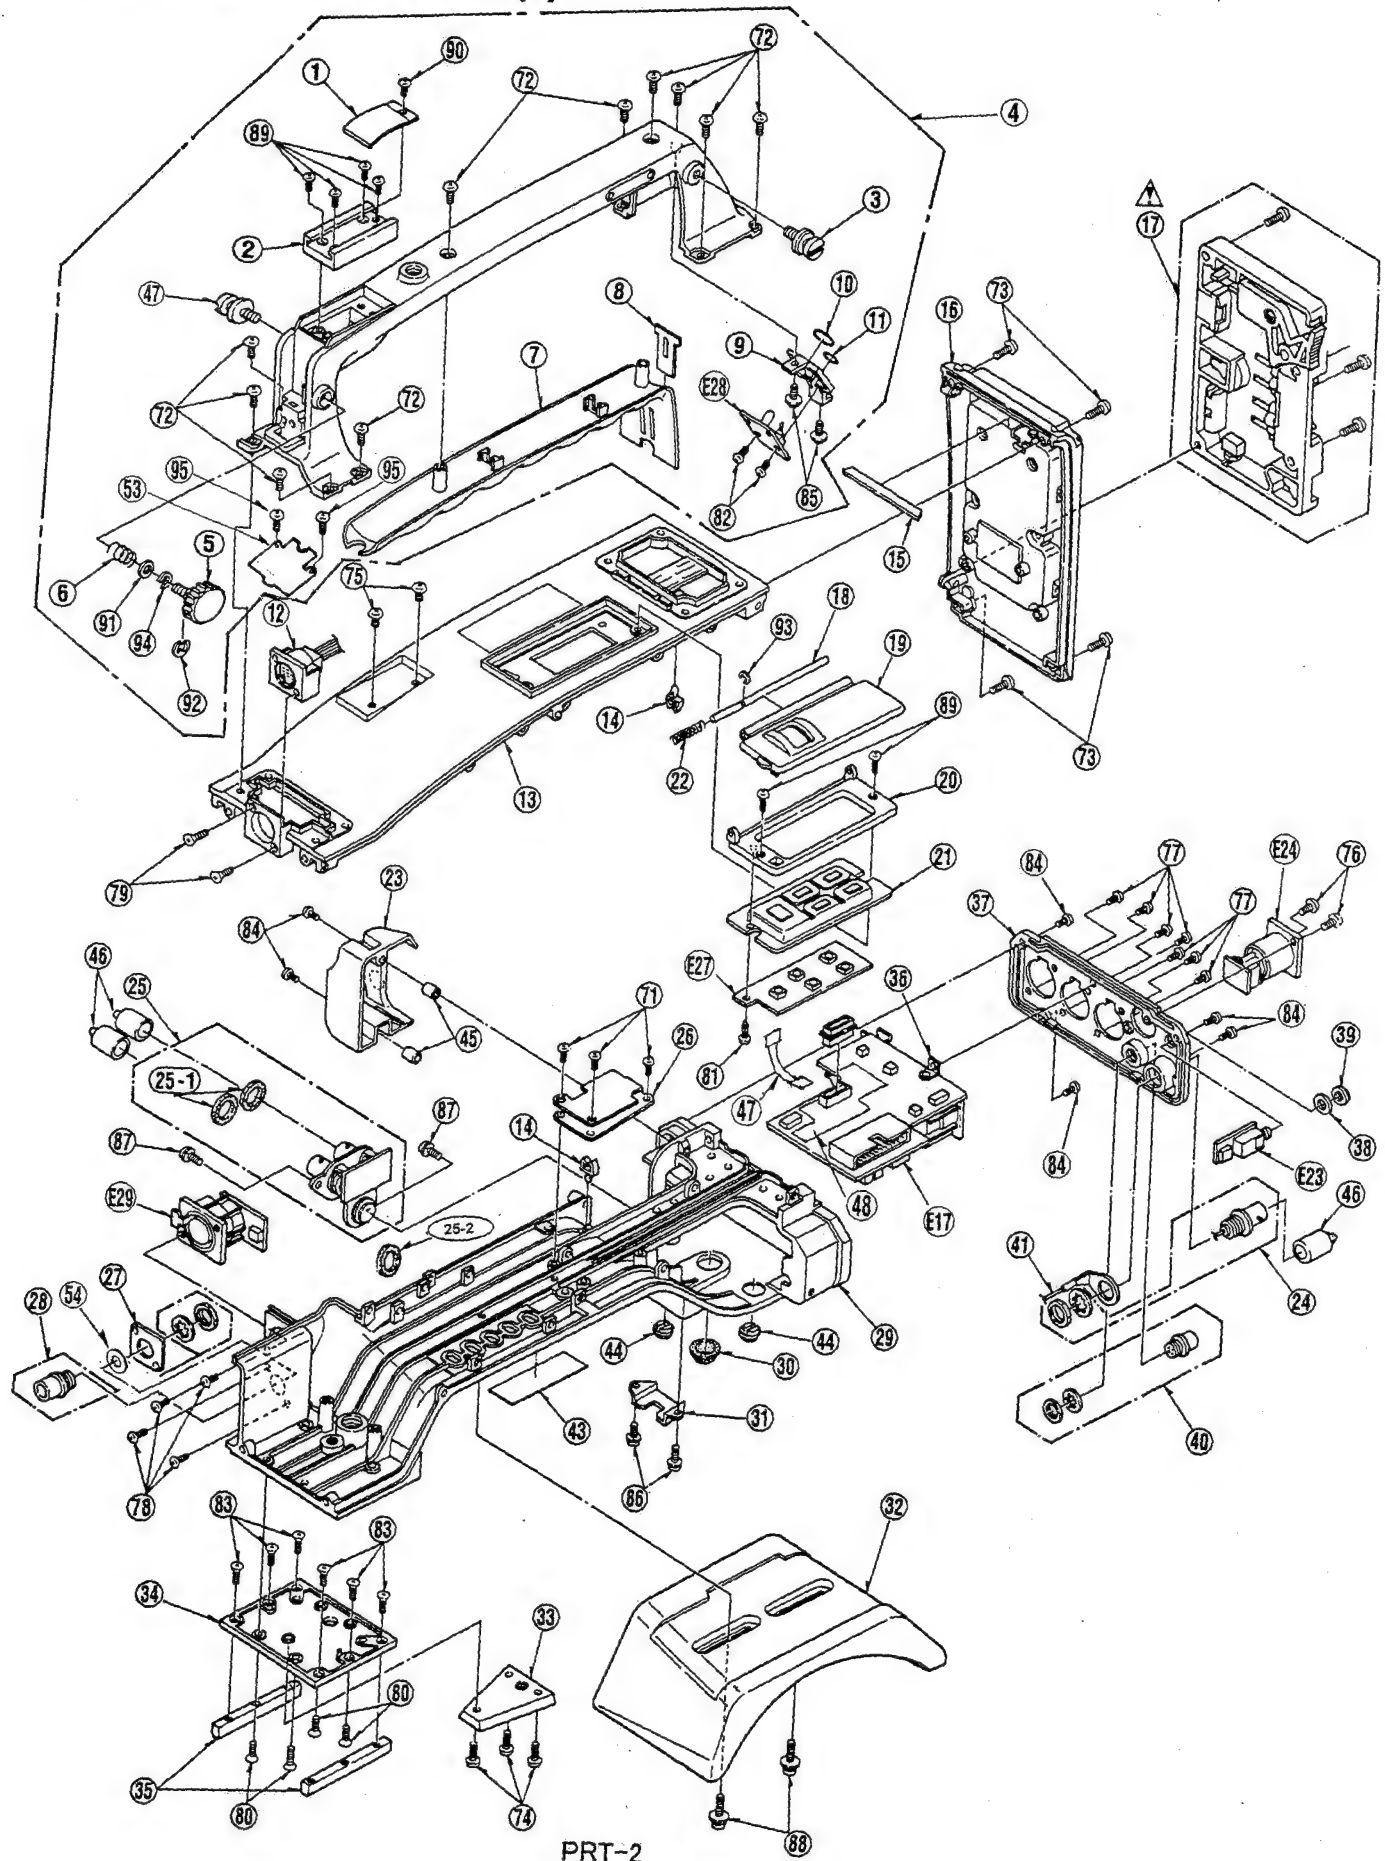

FRAME ASSEMBLY (2)

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
1	VKF2125	MOUNT CAP	1		94	XSB3+6FZ	SCREW	4	
2	VDW0249	LENS MOUNT RING	1		95	XQN2+A4FZ	SCREW	1	
					96	XWGV4D11G	WASHER	1	
5	VMG0948	EVF RUBBER SHIELD	1						
6	VJF0804	CABLE CLAMPER	1		E1	VEP25016A	CDS P. C. BOARD	1	FOR AJ-D400P
7	VGU7079	FILTER KNOB	1		E1	VEP25016B	CDS P. C. BOARD	1	FOR AJ-D400E
8	VKF2485	FRONT DOOR	1		E2	VEP20533A	PULSE P. C. BOARD	1	FOR AJ-D400P
9	VMC1210	FRONT DOOR SPRING	1		E2	VEP20533B	PULSE P. C. BOARD	1	FOR AJ-D400E
10	VMP4850	FRONT DOOR ANGLE	1		E3	VEP23278A	PRE PROCESS 1 P. C. BOARD	1	
11	VMS4088	FRONT DOOR ANGLE PIN	1		E17	VEP04690A	AUDIO LCD P. C. BOARD	1	
12	VGU8140	VTR START KNOB	1		E18	VEP00W03A	POWER SW P. C. BOARD	1	
13	VJF1256	CABLE CLAMPER	1		E19	VEP00W04A	TOGGLE P. C. BOARD	1	
14	VGMI587	FRONT CASE	1		E20	VEP00W05A	MODE CHECK P. C. BOARD	1	
15	VMG0646	WATERPROOF SW INSULATION SH	6		E21	VEP00W07A	ALAM/MONITOR P. C. BOARD	1	
16	VMT0738	SW INSULATION CUSHION	6		E22	VEP80961B	BACKUP BATT P. C. BOARD	1	
17	VMP4839	SW HOLDER ANGLE	1		E25	VEP20537A	FRONT TOGGLE P. C. BOARD	1	
18	VST0195	SWITCH	2		E26	VEP20538A	FRONT P. C. BOARD	1	
19	VMJ18XW065L1	FLAT CABLE	2		E37	VEP00W29A	CAMERA FLEX P. C. BOARD	1	
20	VJF1091	ONE TUCH BUSHING	1						
21	VMP4848	OP LENS UPPER BRACKET	1						
22	VMP4849	OP LENS LOWER BRACKET	1						
23	VSC4370	SHIELD CASE	1						
24	VMX2527	P. C. B SPACER	4						
25	VMX2534	P. C. B. SPACER PIN	4						
26	VGH3360	VR KNOB CAP A	1						
27	VGU5694	VR KNOB	1						
28	VMZ2498	LCD BARRIER	1						
29	VEE9427	FLAT CABLE	1						
30	EAS2P104N	SPEAKER	1						
31	VG03417	PUSH BUTTON HOLDER A	2						
32	VG03415	OPERATION BUTTON HOLDER	1						
33	VGU7081	OPERATION BUTTON	3						
34	VGU7153	OPERATION BUTTON B	1						
35	VGU7152	SLIDE SW COVER B	2						
36	VMG0947	SLIDE KNOB RUBBER	2						
37	VGU7262	SLIDE SW COVER C	3						
38	VGH3746	SLIDE SW SHEET	6						
39	VGU7151	SLIDE SW COVER A	6						
40	VMG0945	VR SHIELD RUBBER	1						
41	VG03417	PUSH BUTTON HOLDER A	1						
42	VST0299	TOGGLE SWITCH	1						
43	VE02160	HEAD OPTICAL ASS'Y	1	FOR AJ-D400P					
43	VE02161	HEAD OPTICAL ASS'Y	1	FOR AJ-D400E					
44	VYP6968	SIDE CASE R1 ASS'Y	1	FOR AJ-D400P					
44	VYP6969	SIDE CASE R1 ASS'Y	1	FOR AJ-D400E					
45	VMX1558	NYLON WASHER	4						
46	VGU7077	VR KNOB A	2						
47	VEE9439	ECU CONNECTOR	1						
48	VGU7078	VR KNOB B	2						
49	VMG0962	O RING	2						
50	CR2032	BATTERY	1						
51	VST0194	SWITCH	1						
52	VST0300	TOGGLE SWITCH	3						
53	VSC4478	50P CABLE SHIELD PLATE	1						
54	VMZ2599	RF INSULATION BARRIER	1						
55	VMX0531	CLATCH SPACER	1						
56	VG0651	SHIELD SHEET	1						
57	VSC4599	SHIELD TUBE	1	FOR AJ-D400E					
81	XSB2+4FZ	SCREW	2						
82	XSB3+6FR	SCREW	2						
83	XSB3+10VZ	SCREW	4						
84	XTV26+6G	SCREW	2						
85	XTV3+8G	SCREW	5						
86	XYN2+C4	SCREW	1						
87	XYN26+K4	SCREW	2						
88	XYN3+C4	SCREW	4						
89	XYN3+C6	SCREW	10						
90	XYN3+E6FR	SCREW	4						
91	XYN3+K6	SCREW	3						
92	XYN3+K6RS	SCREW	15						
93	XXE26W3FP	HEX SCREW	2						


FRAME ASSEMBLY (2)

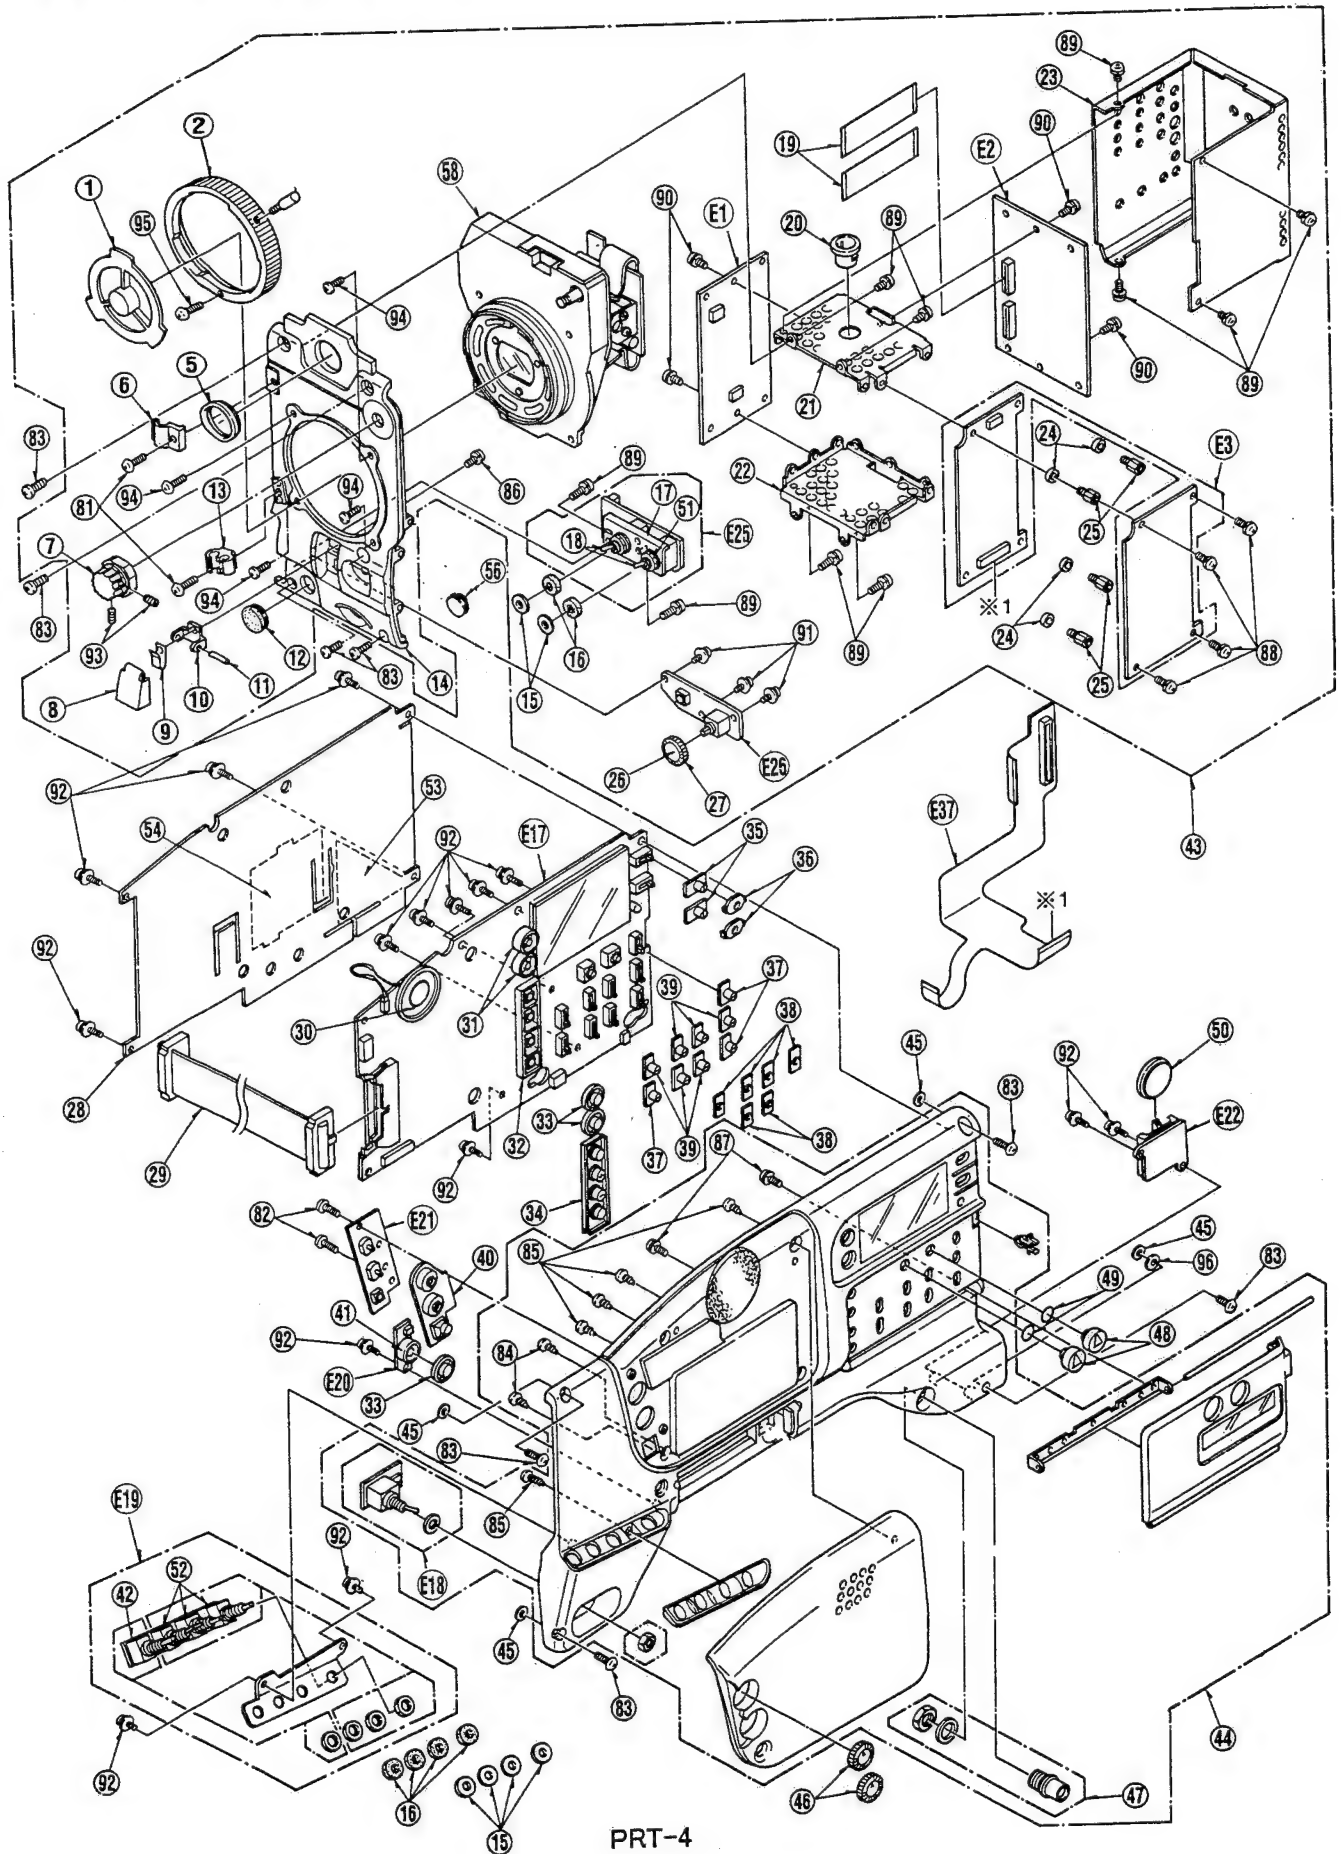


FRAME ASSEMBLY (3)

[illegible]

FRAME ASSEMBLY (3)

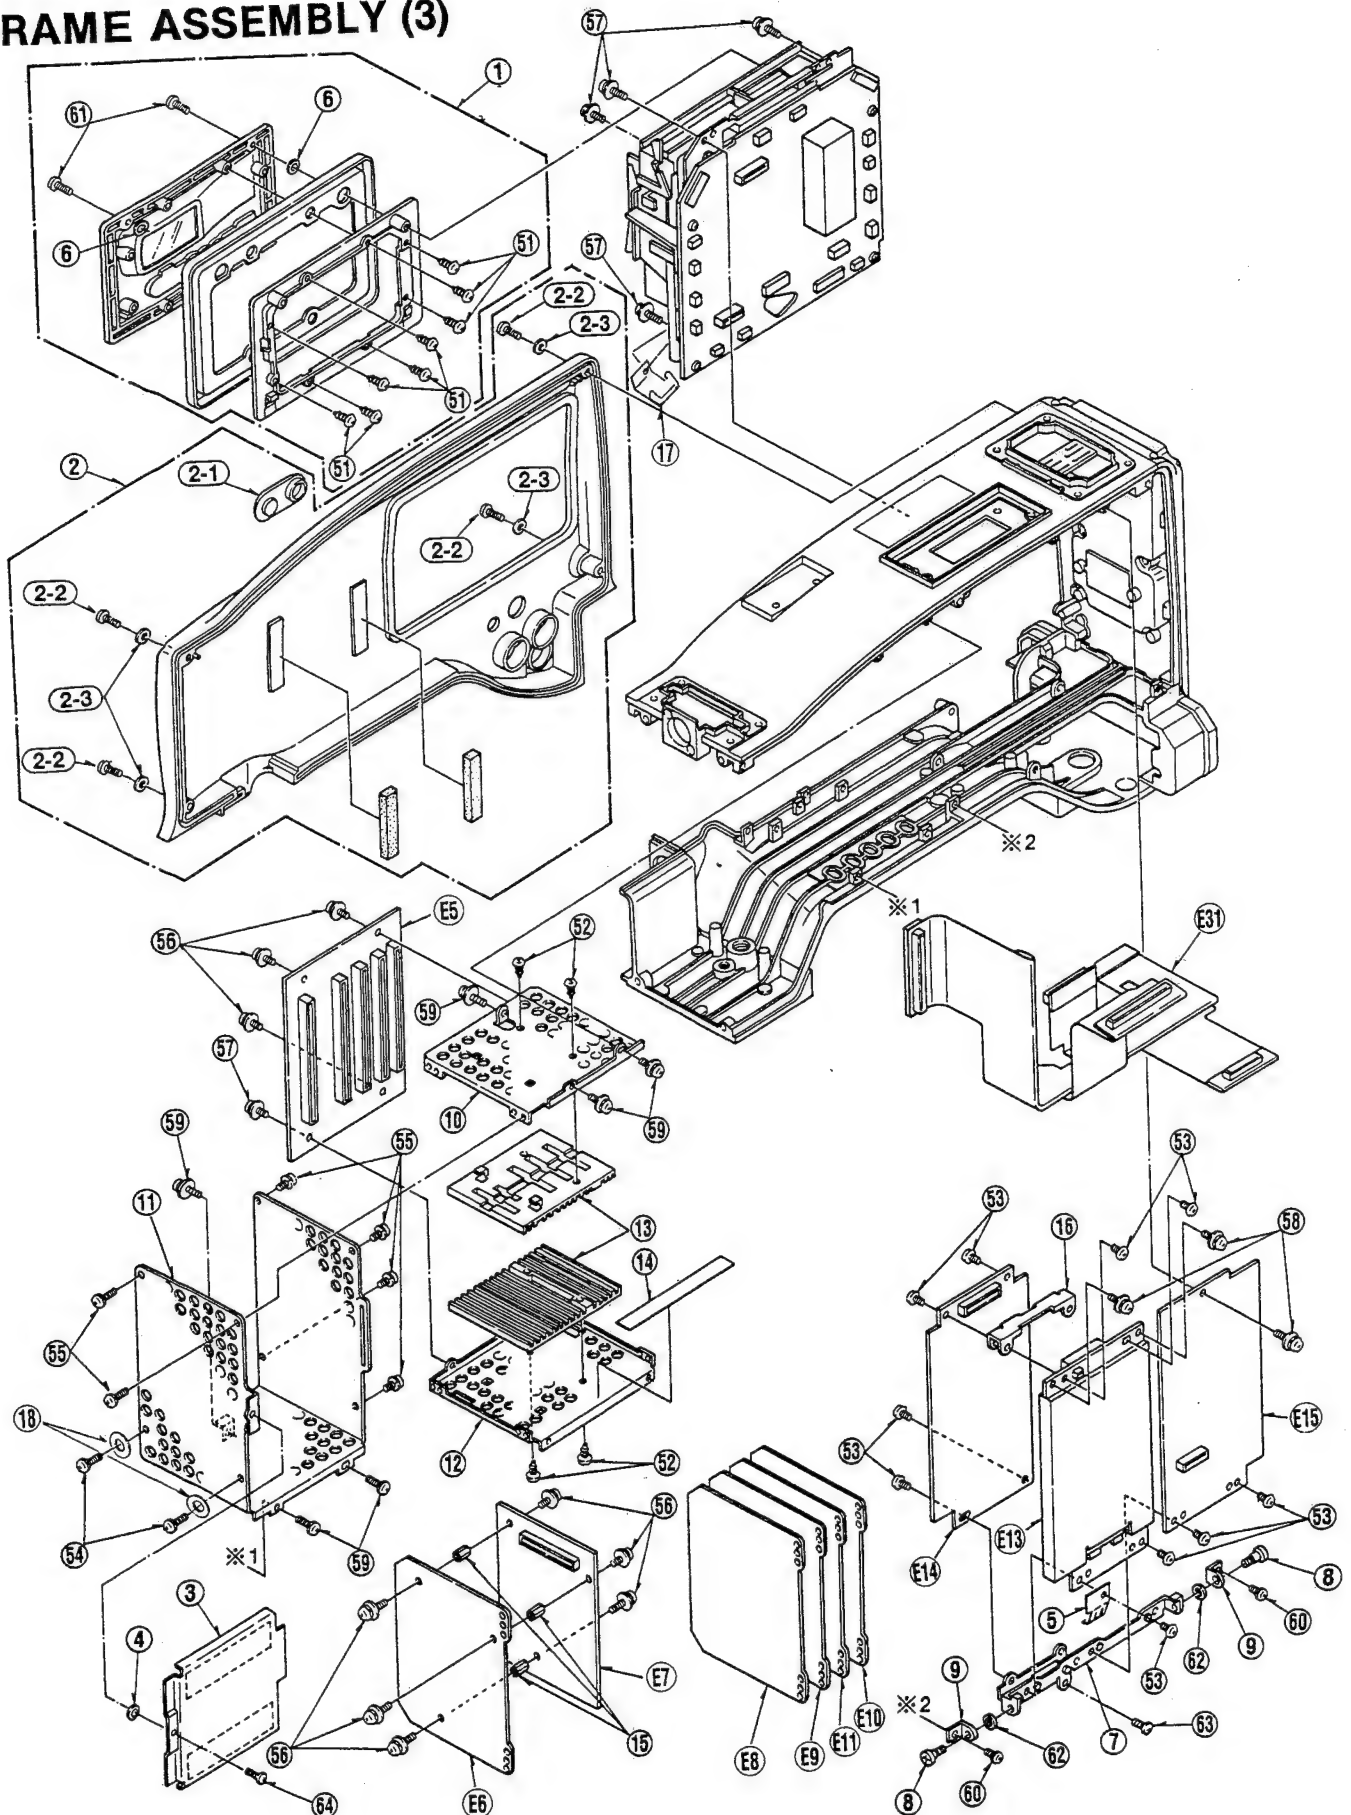


Components identified with the mark  have the special characteristics for safety. When replacing any of these components, use only the same type.

MECHANICAL CHASSIS ASSEMBLY (1)

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
1	VEM0629	S REEL MOTOR ASS'Y	1 (M)	
2	VEM0630	T REEL MOTOR ASS'Y	1 (M)	
3	VXL2614	IDLER ARM ASS'Y	1	
4	VXP1700	IDLER GEAR ASS'Y	1	
5	VDG1189	IDLER GEAR A	1	
6	VMB3011	IDLER SPRING	1	
7	VMA9399	S SIDE M STOPPER	1	
8	VMA9372	T SIDE M STOPPER	1	
9	VMA9400	M LOCK/RELEASE	1	
10	VMD2588	BRAKE RELEASE	1	
11	VSJ0216	BRAKE SOLENOID	2 (M)	
12	VXL2705	M CASSETTE BRAKE (S)A ASS'Y	1 (M)	
13	VXL2706	M CASSETTE BRAKE (T)A ASS'Y	1 (M)	
14	VXA5582	M CASSETTE BRAKE BASE ASS'Y	1	
15	VML3097	CONNECTION ARM A	1	
16	VXL2615	CONNECTION ARM B	1	
16-1	VMB2973	ARM RELEASE SPRING	1	
17	VXL2653	CONNECTION ARM C ASS'Y	1	
18	VMD2536	M SWITCH BASE	1 (M)	
19	VXA5633	M SWITCH BASE (1) ASS'Y	1	
20	VSS0510	REC INHIBIT SWITCH	1 (M)	
21	VSS0509	MIC CONNECTOR	1	
22	VWJ1074	MIC FPC	1	
23	VMB3168	LOCK SPRING	1	
24	VMB3080	M CASSETTE BRAKE SPRING	2	
25	VEK7694	CASSETTE DOWN PHOTO ASS'Y	1	
26	VMB2958	SPRING	1	
31	VMX2391	CUT WASHER	1	
32	VMX1061	WASHER	2	
33	XQN2+A3	SCREW	2	
34	XQN2+CF3	SCREW	8	
35	XQN2+AG4	SCREW	4	
36	XQN2+CF4	SCREW	2	
37	XQN2+CJ5	SCREW	1	
38	XQN2+A1.5	SCREW	4	
39	VMX0967	CUT WASHER	1	
40	XQN2+CF4	SCREW	1	

Components identified with the mark \triangle have the special characteristics for safety.
When replacing any of these components, use only the same type.

MECHANICAL CHASSIS ASSEMBLY (1)

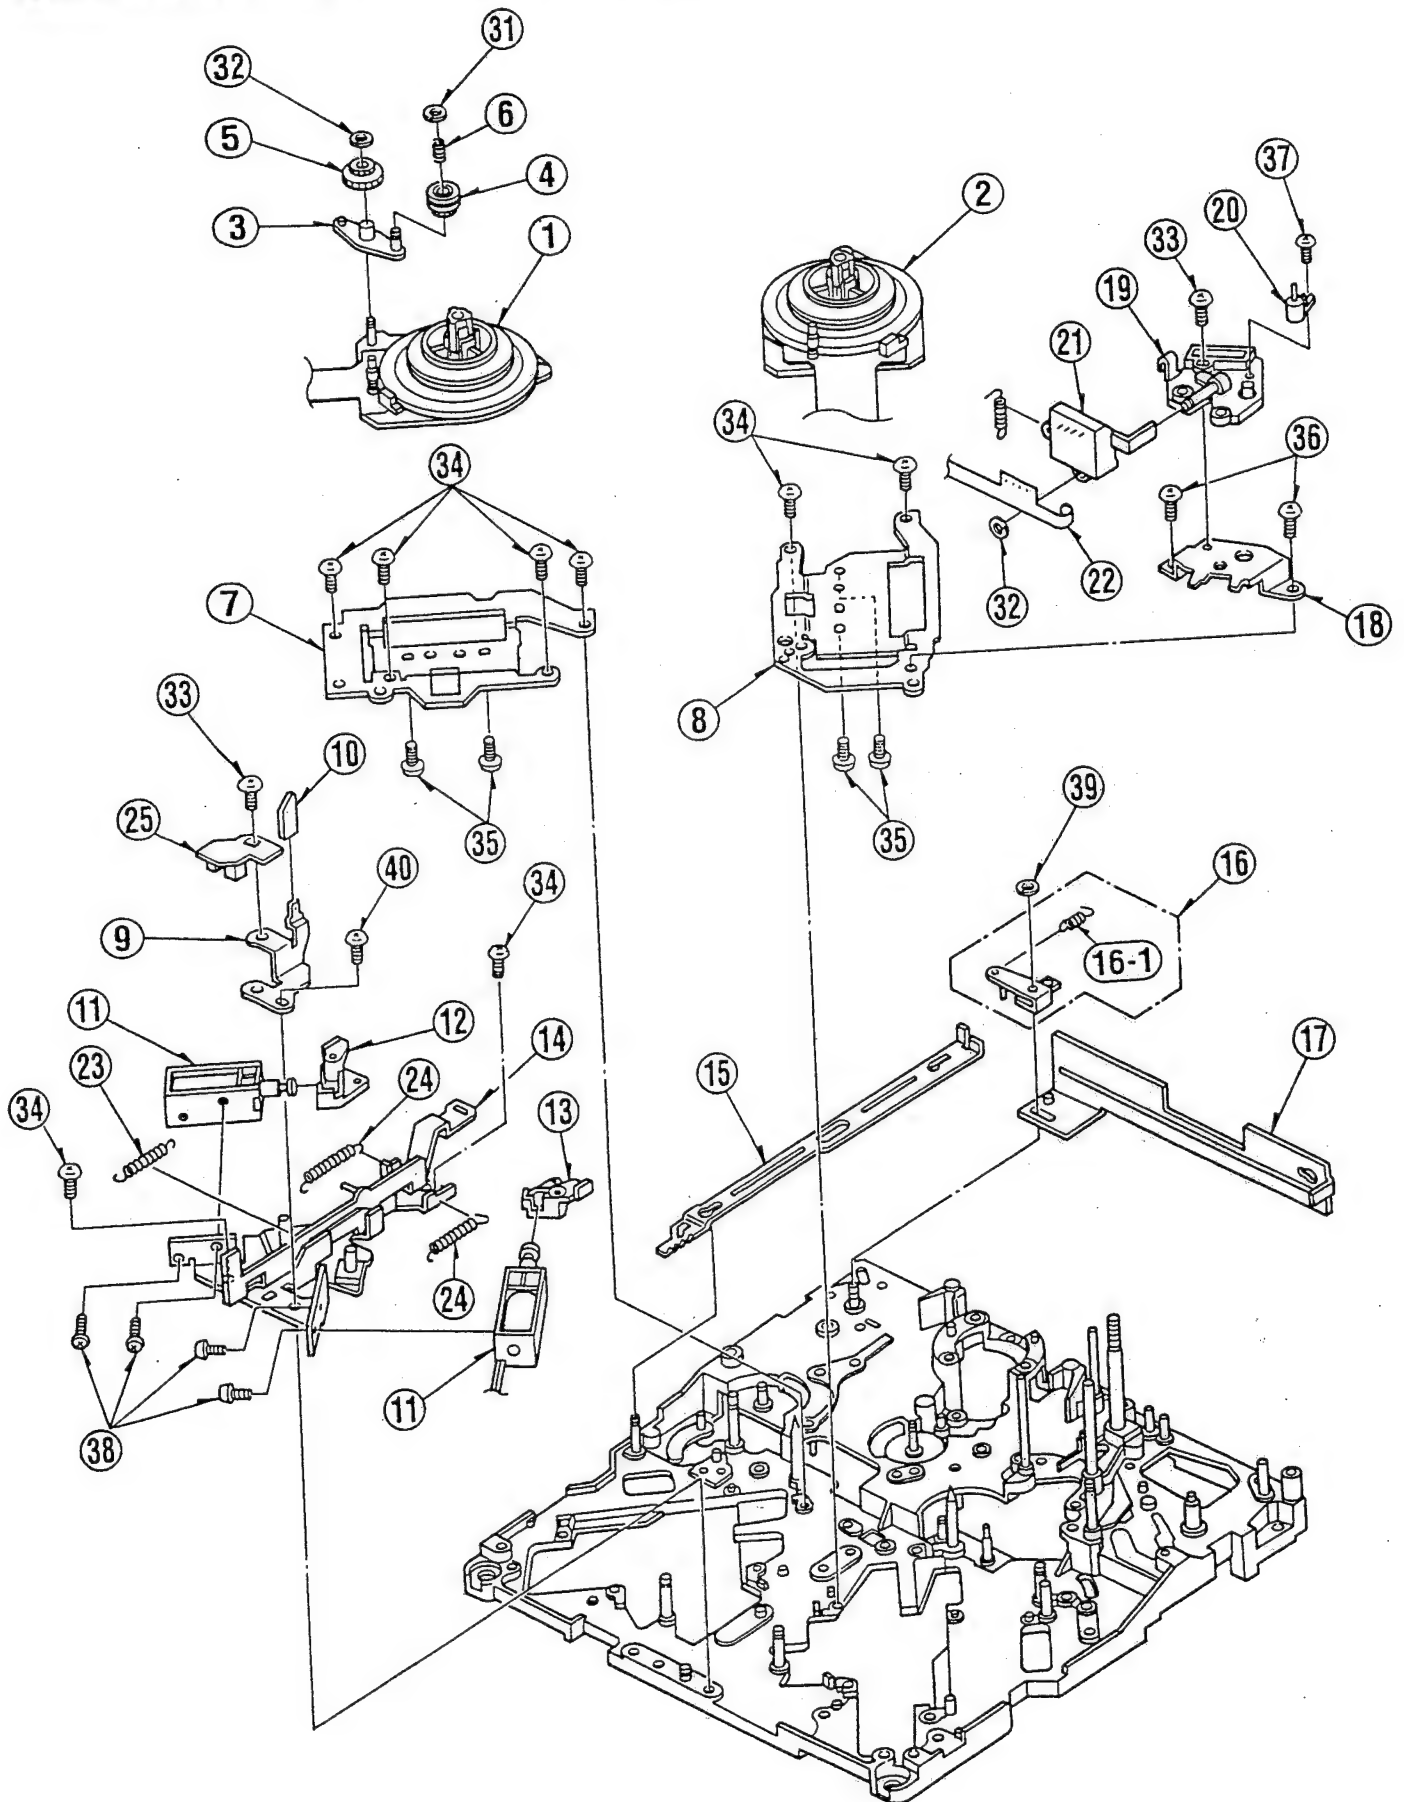


When replacing any of these components, use only the same type.


MECHANICAL CHASSIS ASSEMBLY (2)

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
1	VXA5554	A/C HEAD BASE (1) ASS'Y	1	
2	VED0419	A/C HEAD	1 (M)	
3	VXA6067	A/C HEAD BASE (2) ASS'Y	1	
4	VMB2935	A/C HEAD HEIGHT SPRING	1	
5	VEG1498	CYLINDER UNIT	1 (M)	
6	VXA5715	EMERGENCY SHIFT HOLDER ASS'Y	1	
7	VEM0645	LOADING MOTOR (1)A ASS'Y	1 (M)	
8	VSJ0227	PINCH SOLENOID	1	
9	VXA5584	MOTOR ANGLE ASS'Y	1	
10	VES0814	MODE SW ASS'Y	1	
11	VMA9376	PINCH SOLENOID BASE	1	
12	VXL2748	CLEANING ARM A ASS'Y	1	
12-1	VMX2150	CLEANER ROLLER HOLDER	1	
12-2	VXP1808	CLEANER ROLLER ASS'Y	1	
12-3	VMB3114	CLEANER ROLLER SPRING	1	
13	VXL2870	T2 ARM ASS'Y	1	
13-1	VMB3304	T2 ARM SPRING	1	
14	VXL2831	TENSION ARM A ASS'Y	1 (M)	
14-1	VXP1761	TENSION ROLLER	1	
14-2	VMB3220	TENSION LEG SPRING	1	
14-3	VXA6173	MAGNET HOLDER ASS'Y	1	
15	VXA5791	TENSION LEG SPRING HOOK ASS'Y	1	
16	VXL2709	S1 LOADING ARM ASS'Y	1 (M)	
17	VMD2533	LOADING RAIL	1	
18	VXA6378	T1 BOAT ASS'Y	1 (M)	
19	VHD0561	HEX SCREW	1	
20	VXA6052	S POST BASE A ASS'Y	1 (M)	
21	VXP1683	T4 CONNECTION GEAR ASS'Y	1	
22	VXL2772	T4 ARM ASS'Y	1	
23	VMB2950	T4 THRUST SPRING	1	
24	VXL2898	T LOADING ARM N ASS'Y	1	
25	VMS5906	T3 UPPER FRANGE	1	
26	VMS5905	T3 SLEEVE	1	
27	VMS5904	T3 LOWER FRANGE	1	
28	VMB2929	T3 SPRING	1	
29	VMB2933	PINCH RELEASE SPRING	1	
30	VEK7927	INSULATION SENSOR	1	
31	VEK7691	LED HOLDER P.C.BOARD	1	
32	VMA9411	PINCH SOLENOID ANGLE	1	
33	VXA5820	TENSION SENSOR ASS'Y	1	
34	VXL2835	PINCH ARM ASS'Y	1 (M)	
35	VXL2588	PINCH GUIDE ARM ASS'Y	1	
36	VXA5570	T SECTOR GEAR ASS'Y	1	
37	VXL2838	TENSION LEG, GUIDE ARM	1	
38	VXA5567	S SECTOR GEAR ASS'Y	1	
39	VXA5564	T4 SECTOR GEAR ASS'Y	1	
40	VXA5563	MAIN ROD ASS'Y	1	
41	VXA5627	THRUST SHAFT HOLDER ASS'Y	1	
42	VDG1166	MOTOR WARM GEAR	1	
43	VDG1268	MOTOR EMERGENCY GEAR A(A)	1	
44	VDG1267	MOTOR EMERGENCY GEAR B(A)	1	
45	VXL2889	MAIN CAM ARM ASS'Y	1	
46	VDG1168	MAIN CAM GEAR	1 (M)	
47	VMB2937	A/C HEAD ADJUST SPRING	1	
48	VXL2600	EJECT ARM ASS'Y	1	
49	VMD3475	T1 GUIDE ASS'Y	1	
50	VMB2934	SPRING	1	
51	VMB3051	CLEANER RETURN SPRING	1	
52	VXA6077	CLEANER BASE 1 ASS'Y	1	
53	VXA6078	CLEANER SOLENOID ASS'Y	1	
53-1	VSJ0226	CLEANER SOLENOID	1 (M)	
53-2	VMA9877	CLEANER SOLENOID BASE	1	
54	VMM0429	CLEANER INTERLOCK	1	
55	VXQ0556	THRUST SCREW ASS'Y	1 (M)	
56	VMT0871	SILENCER A	1	
57	VMT0872	SILENCER B	1	
58	VMD3350	TAPE GUIDE	1	
61	VHD0356	SCREW	1	
62	XQN2+A3	SCREW	1	
64	XQN2+A35FZ	SCREW	3	
65	XQN2+AM2	SCREW	3	

Components identified with the mark \triangle have the special characteristics for safety.
When replacing any of these components, use only the same type.


MECHANICAL CHASSIS ASSEMBLY (2)

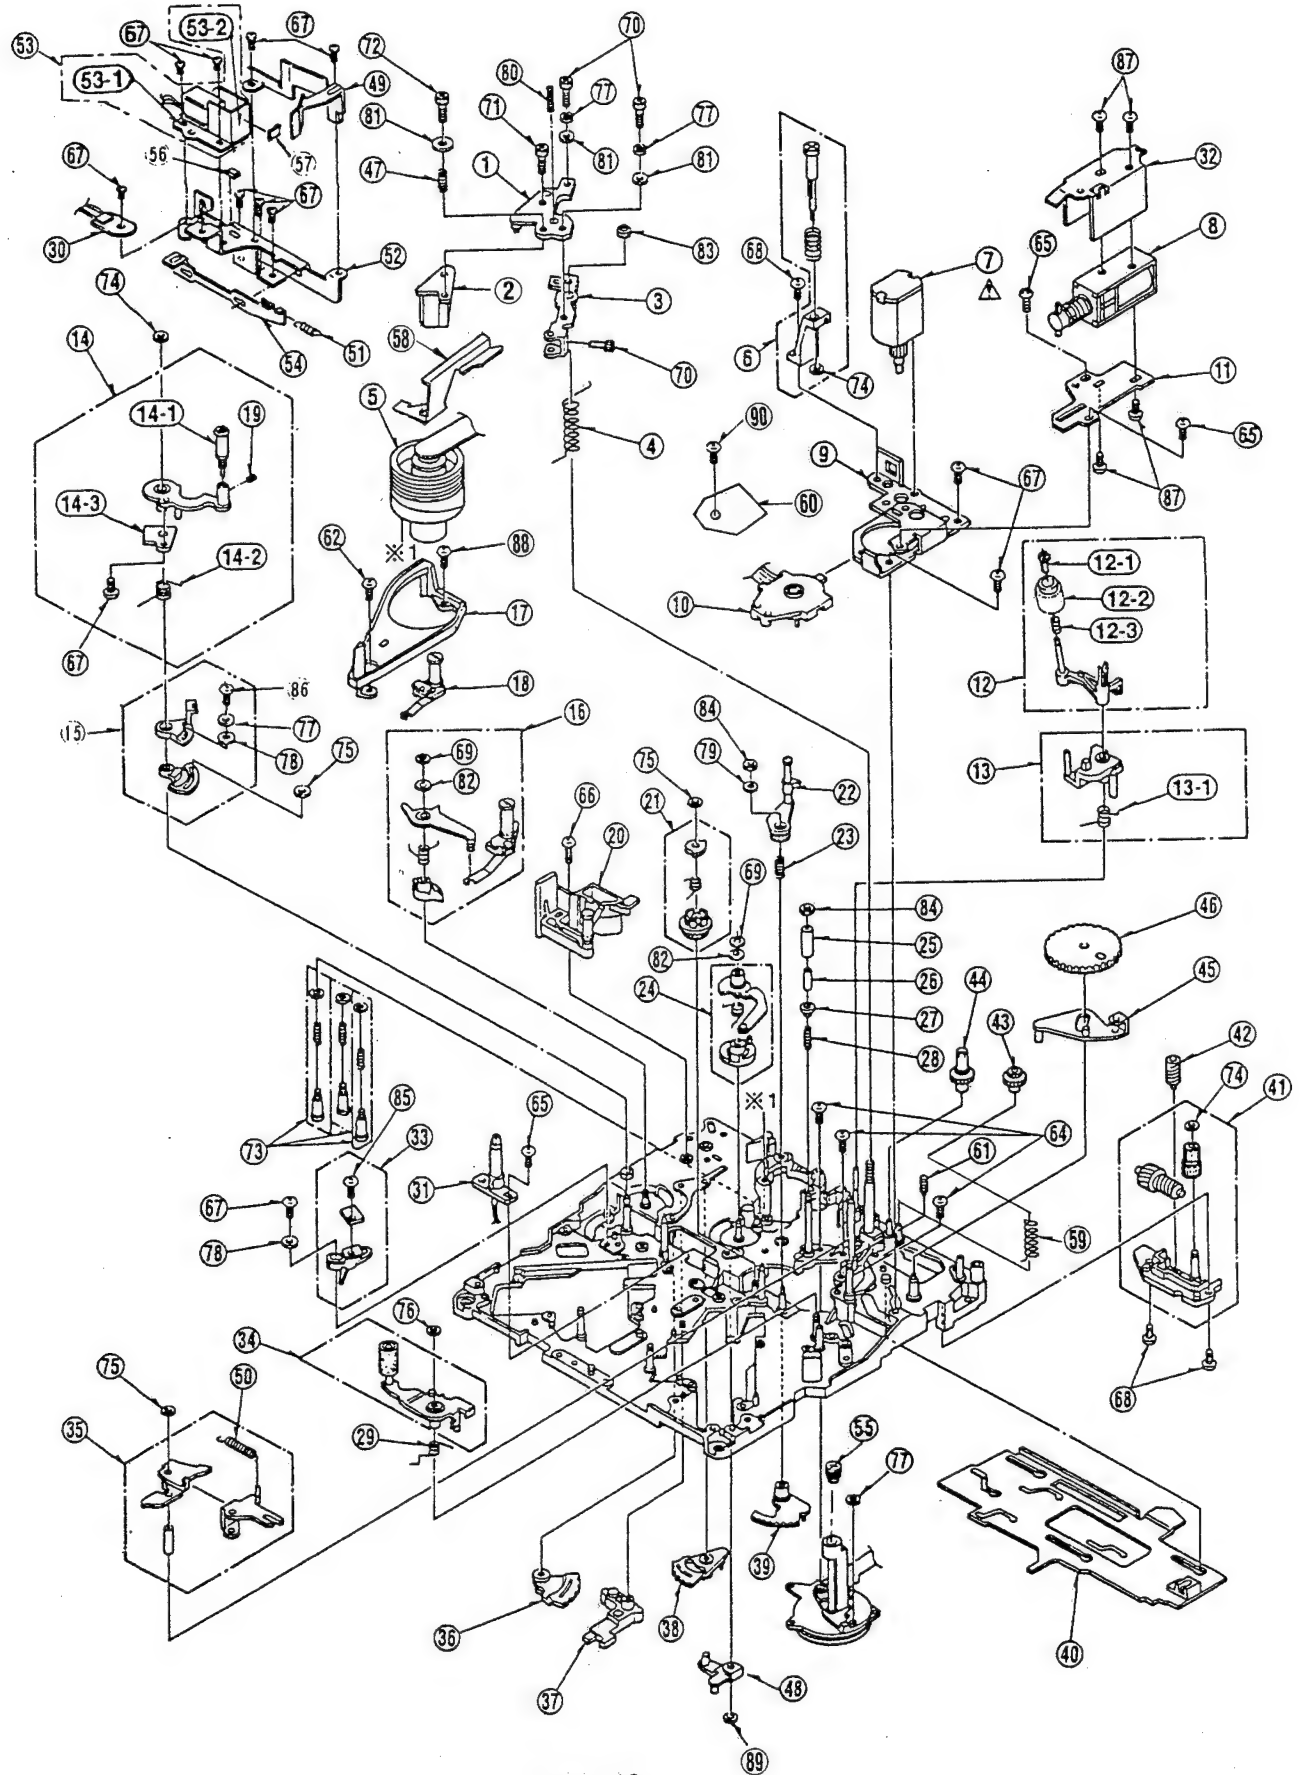


Components identified with the mark  have the special characteristics for safety. When replacing any of these components, use only the same type.

CASSETTE COMPARTMENT ASSEMBLY

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
1	VXA6361	CASSETTE COMPATRMAMENT	1	(M)
2	VXA6362	TOP PLATE ASS'Y	1	
3	VMC1290	CASSETTE PRESSURE SPRING	1	
4	VML3100	ADAPTOR STOPPER	1	
6	VMB2982	SPRING	2	
5	VMX0967	CUT WASHER	4	
7	VXA6050	SIDE PLATE (R) (1) ASS'Y	1	
8	VDG0387	DUMPER	1	
9	VXA6365	BACK PLATE ASS'Y	1	
10	VXA6367	SIDE PLATE (L) (1) ASS'Y	1	
11	VXA5639	RATCHET LOCK LEVER ASS'Y	1	
12	VXA5638	RATCHET ARM ASS'Y	1	
13	VMB2981	RATCHET SPRING	1	
14	VMB3025	SPRING	1	
15	VXA5632	T RECEIVER ANGLE ASS'Y	1	
16	VXA5631	S RECEIVER ANGLE ASS'Y	1	
17	VMB2961	SPRING	1	
18	VML3102	RATCHET TIMING LEVER	1	
19	VDP0967	MAIN ARM ROLLER	2	
20	XWGV4Y6G	WASHER	2	
21	VXK1272	MECHANISM CHASSIS	1	
22	VMA9379	SUB CHASSIS	1	
23	VXA6368	CASSETTE HOLDER ASS'Y	1	
31	XYN2+C8	SCREW	1	
32	XUC2FP	E-RING	1	
33	XWGV3Y5G	WASHER	2	
34	XQN14+A3	SCREW	4	
35	XWGV2Y4G	WASHER	2	
36	XQN2+CF3	SCREW	8	
37	XYN3+C5	SCREW	3	
38	XQN2+A2	SCREW	4	

Components identified with the mark  have the special characteristics for safety.
When replacing any of these components, use only the same type.

CASSETTE COMPARTMENT ASSEMBLY

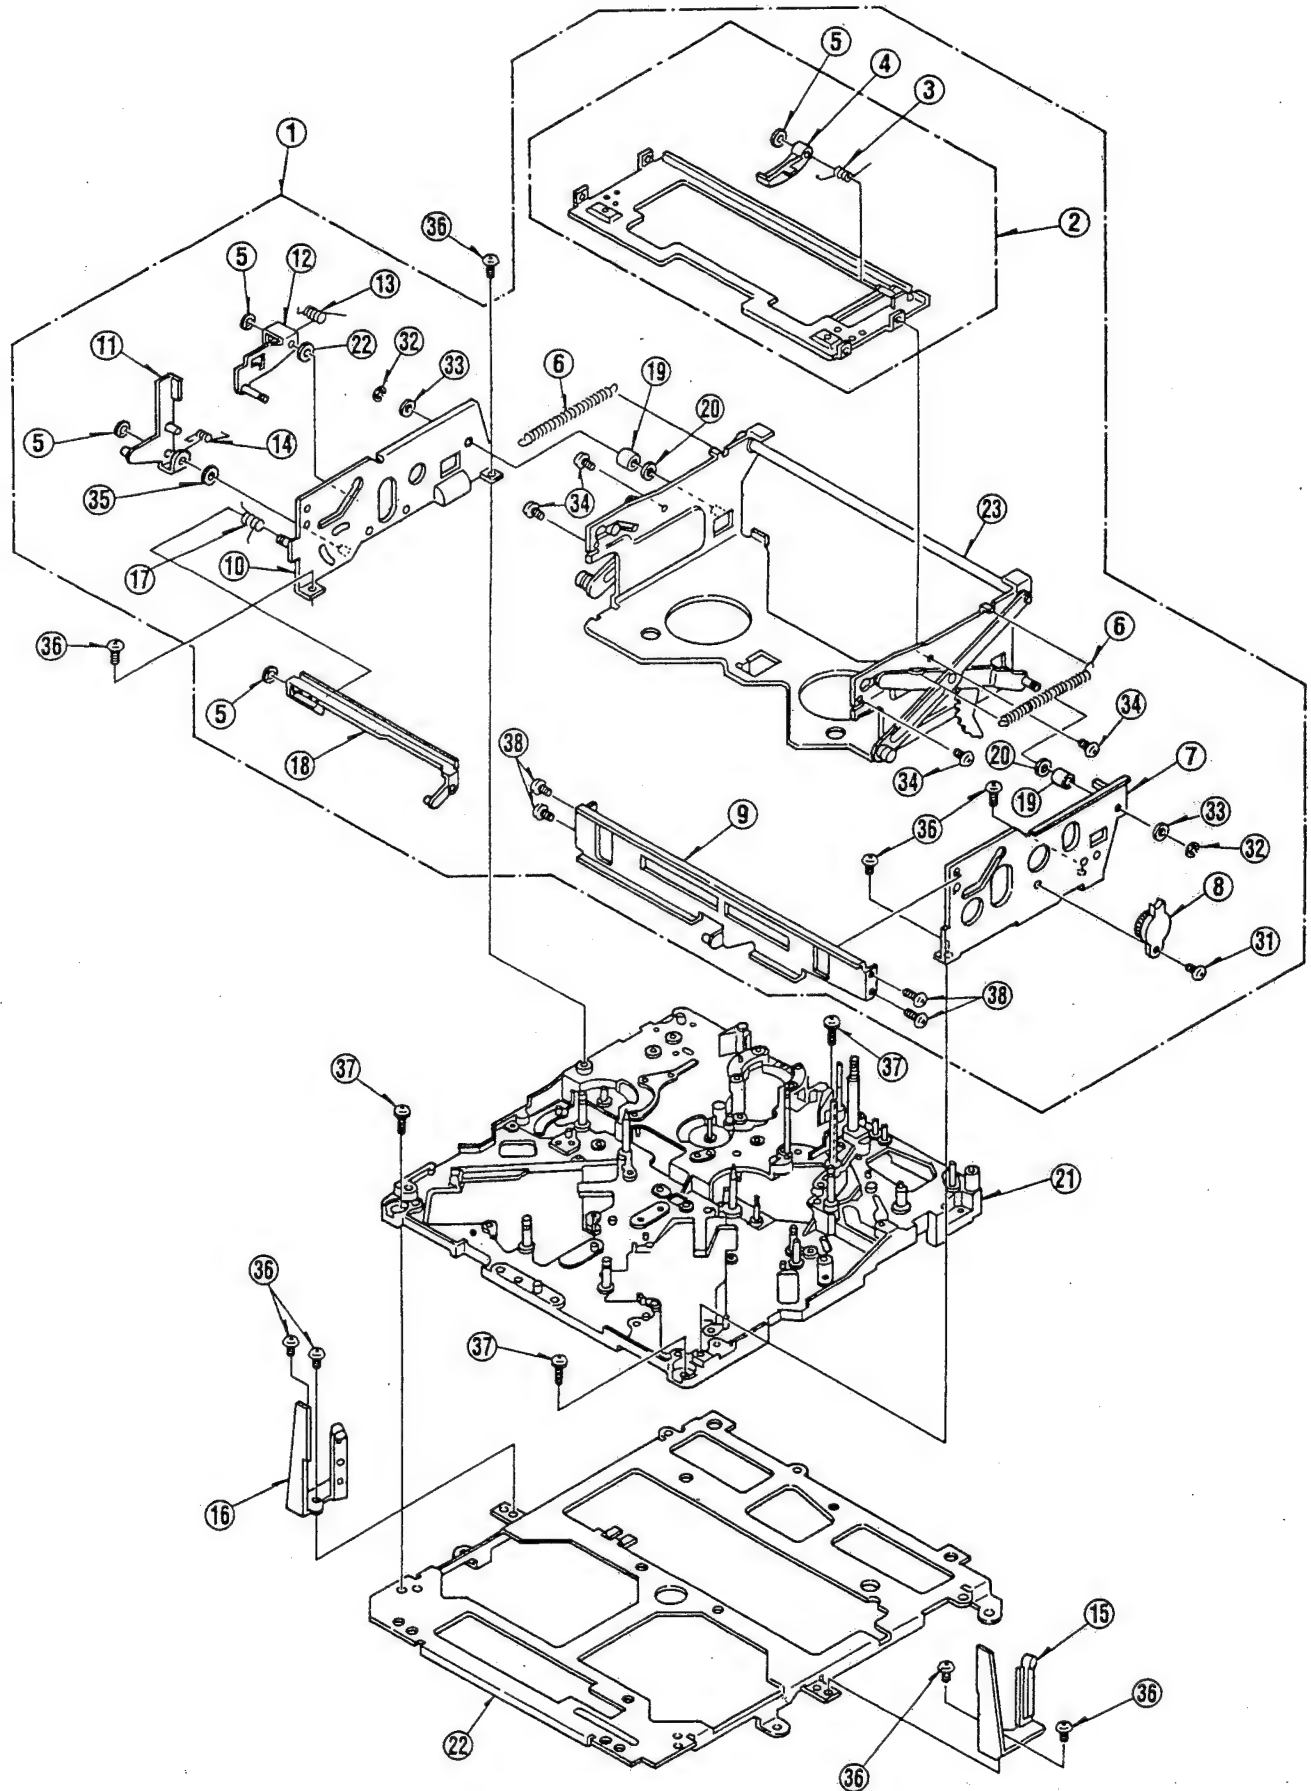


PRT-12

EVF ASSEMBLY

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
1	VGM1297	UPPER BODY	1		75	XNG2E	NUT	2	
2	VGL0723	UPPER TALLY	1		76	XXEV2W3FP	HEX SCREW	3	
4	VMP4945	HOLDER PLATE	1		77	XWA3BFZ	WASHER	3	
5	VMX2684	END CAP	1		78	XWA5BFZ	WASHER	1	
6	VMX2537	PIPE SPACER	1		79	XXEV16D2FP	SCREW	6	
7	VDB1421	SLIP RING	1		80	XUC2FP	E-RING	1	
3	VGB0437	PANASONIC BADGE	1		81	XWGV35D8G	WASHER	1	
△ 8	ELY15V114G	DEFLECTION YOKE	1		82	XSB4+12FZS	SCREW	2	
△ 9	M04KYS07WB	CRT	1						
10	VGP4348	ESCUTCHEON (A)	1		E32	VEP29019A	H-DEF P.C. BOARD	1	
11	VGP4349	ESCUTCHEON (B)	1		E33	VEP29022A	VIDEO P.C. BOARD	1	
12	VGH3966	CRT NAME PLATE	1		E34	VEP29020A	VR SW P.C. BOARD	1	
13	VMX2552	RING	1		E35	VEP29021A	F TALLY P.C. BOARD	1	
14	VGP4205	CRT CASE	1		E36	VEP29023A	CRT MASK P.C. BOARD	1	
15	VXU1443	RELEASE KNOB ASS'Y	1						
17	VMB3026	RELEASE SPRING	1						
18	VGP4495	MOUNT RING	1						
19	VQL8238	WIDTH ADJUST LABEL	1						
20	VYC0806	EYECAP PIECE ASS'Y	1						
21	VMG0799	RUBBER CAP	1						
22	VMX1558	NYLON WASHER	2						
23	VGM1458	LOCK BASE	1						
24	VGM1457	LOCK TABLE	1						
25	VGM1456	PLATE (B)	1						
26	VMS6274	PLATE (B)	1						
27	VGM1455	PLATE (A)	1						
28	VMS6221	LOCK SPACER	1						
29	VHD0991	INSERT SCREW	1						
30	VHD0990	LOCK SCREW	1						
31	VGU7714	LOCK LEVER	1						
32	VMS6275	EVF LOCK SHAFT	1						
33	VMB3027	SPRING	1						
34	VMG0970	SW SPACER	1						
35	VMG0975	SW SHIELD RUBBER	1						
36	VGU7352	VR KNOB	3						
37	VMZ2577	INSULATION PLATE	1						
38	VGM1309	LOWER BODY	1						
39	VMP4946	SW MOUNT PLATE	1						
40	VMG0981	RING	3						
41	VJA0838	INPUT CABLE	1						
42	VGH3813	FRONT NAME PLATE	1						
43	VGO4165	HALF MIRROR HOLDER	1						
44	VDL0417	MIRROR	1						
45	VGF0653	NON REFLECTION SHEET	1						
46	VJF1152	CLAMPER	1						
47	VJF1034	CLAMPER	1						
48	VMP5089	COVER	1						
49	VMS6273	SHAFT (A)	2						
50	VYQ1628	EVF ATTACHMENT	1						
51	VEE9446	CRT SOCKET	1						
52	VGH3967	MASK PLATE	1						
53	VMC1358	PLATE SPRING	1						
54	VDB1421	SLIP RING	1						
55	VMG1123	WATERPROOF COVER CAP	1						
56	VGF0681	PROTECT SHEET (A)	1						
57	VGF0682	PROTECT SHEET (B)	1						
58	VYC0814KIT	MIC HOLDER	1						
59	VHD1010	SCREW	1						
61	XQN26+A4	SCREW	2						
62	XQS2+A6FZ	SCREW	1						
63	XSB26+6	SCREW	4						
64	XSB3+8VZ	SCREW	5						
65	XSB5+8VCK	SCREW	3						
66	XQN2+A3FZ	SCREW	2						
67	XSB2+12	SCREW	2						
68	XSN26+10FZ	SCREW	3						
69	XSS2+4FZ	SCREW	1						
70	XSS26+6FZ	SCREW	2						
71	XTN2+5GFZ	SCREW	8						
72	XYN2+F6	SCREW	1						
73	XYN2+K4	SCREW	2						
74	XYN26+K5	SCREW	6						


EVF ASSEMBLY

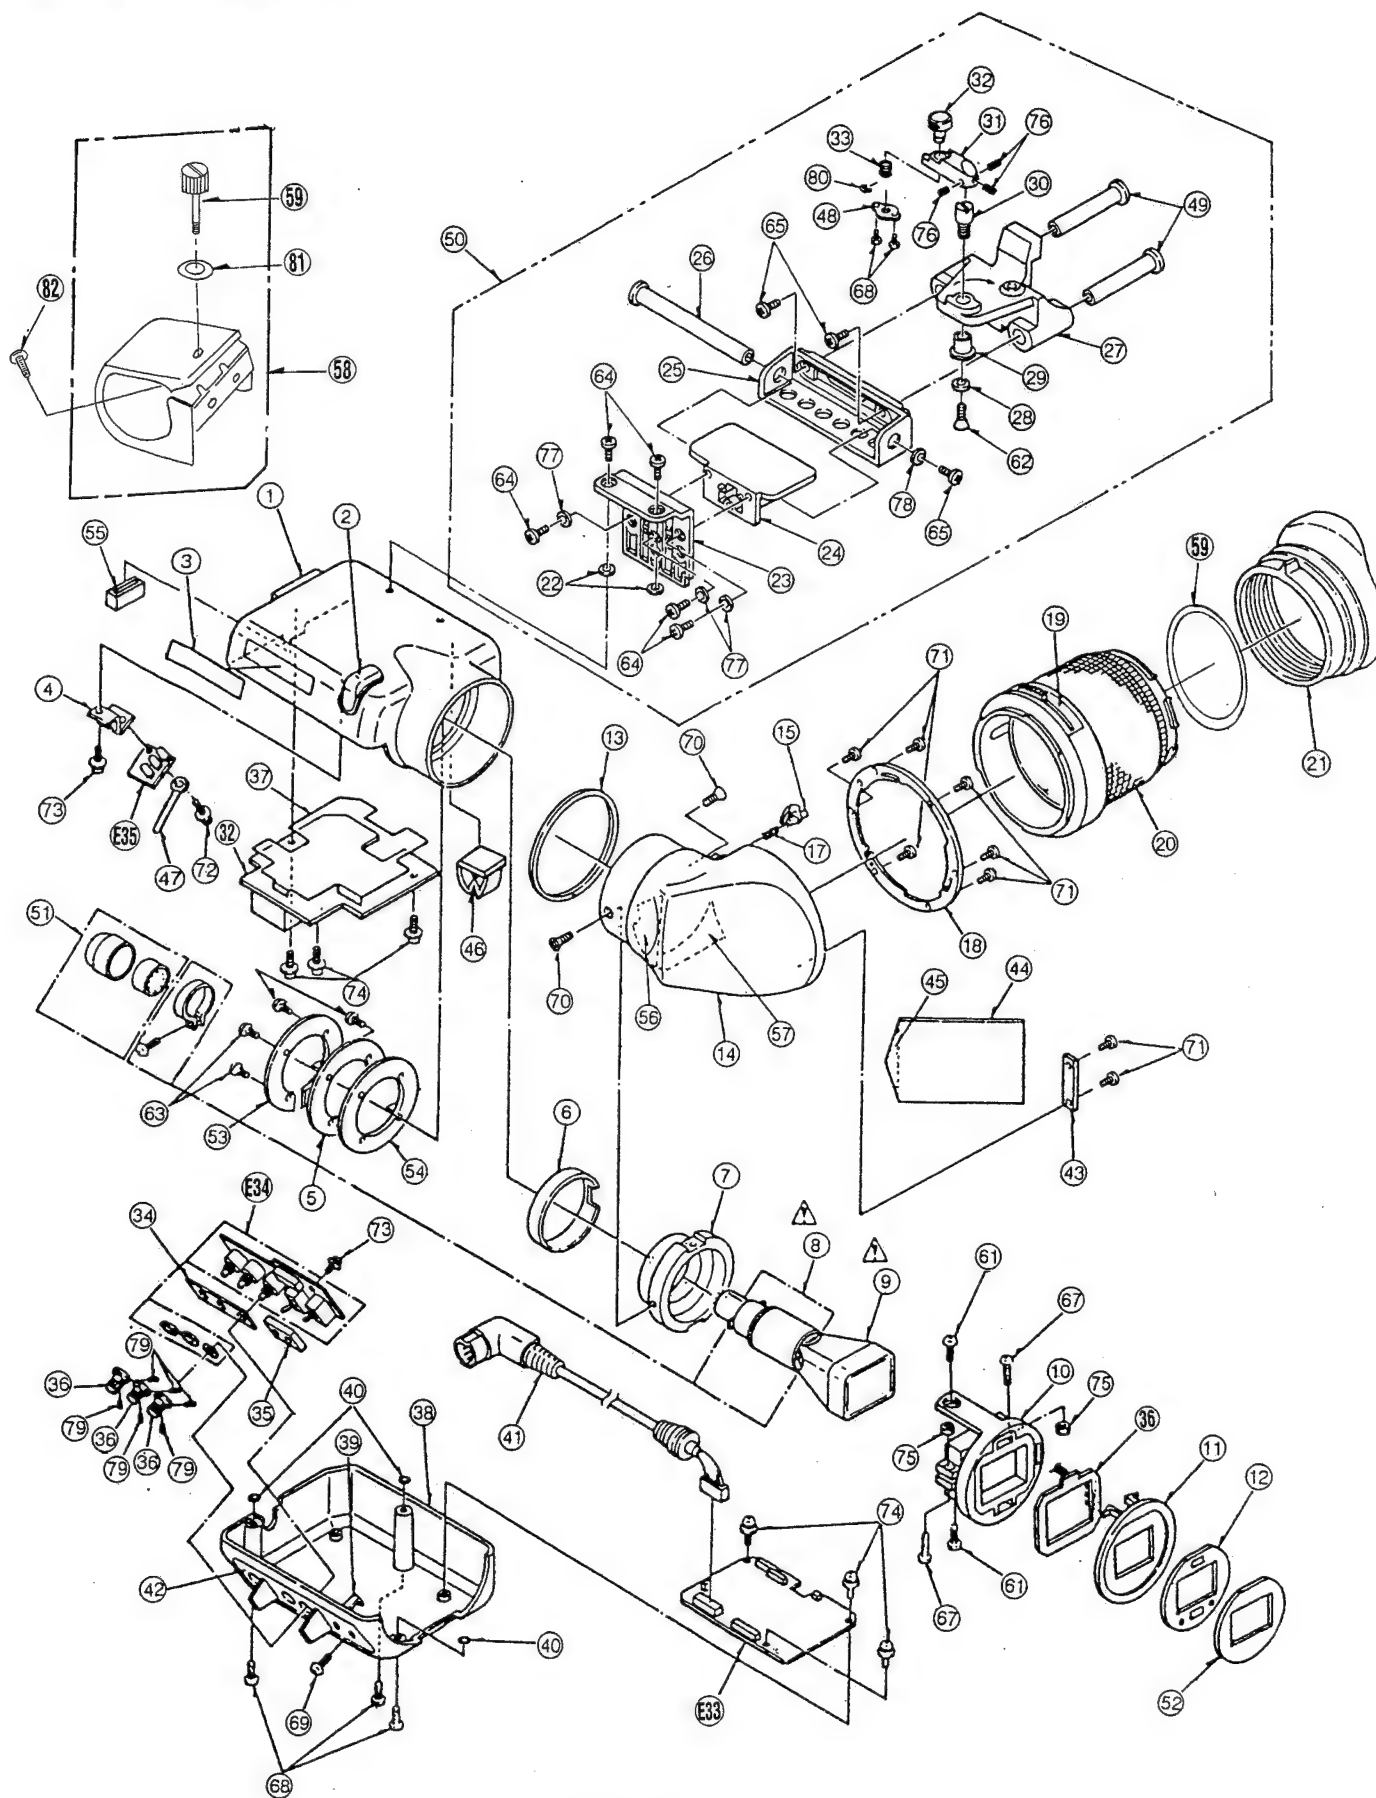

SHAN-TM700


Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
1	VGM1282	LOCK BASE	1	
2	VGM1612	MAIN CHASSIS	1	
3	VMS6007	GUIDE PIN	1	
4	VGQ4063	PLATE	1	
5	VMP4920	PROTECT PLATE	1	
6	VGQ4064	SLIDE RAIL	2	
7	VGU7158	LOCK RELEASE KNOB	1	
8	VGU7160	LOCK KNOB	1	
9	VMB2977	LOCK KNOB SPRING	1	
10	VXL2617	LOCK RELEASE LEVER	1	
11	VXL2616	LOCK SLIDE PLATE	1	
12	VMB2975	LOCK SPRING	1	
13	VMP4919	LOCK LEVER SLIDE PLATE	1	
14	VMP4917	CENTER LEVER	1	
15	VGM1283	LOCK LEVER	1	
16	VMB2976	LOCK LEVER SPRING	1	
100	XSS4+10FZ	SCREW	1	
101	XSS3+6FXS	SCREW	4	
102	XSB3+6	SCREW	3	
103	XSB3+8FZ	SCREW	4	
104	XSB3+10FZ	SCREW	1	
105	XVE4A10FZ	SCREW	6	
106	XWA3BFZ	WASHER	2	
107	XWG3VM	WASHER	2	
108	XWA4BFZ	WASHER	6	

SHAN-TM700

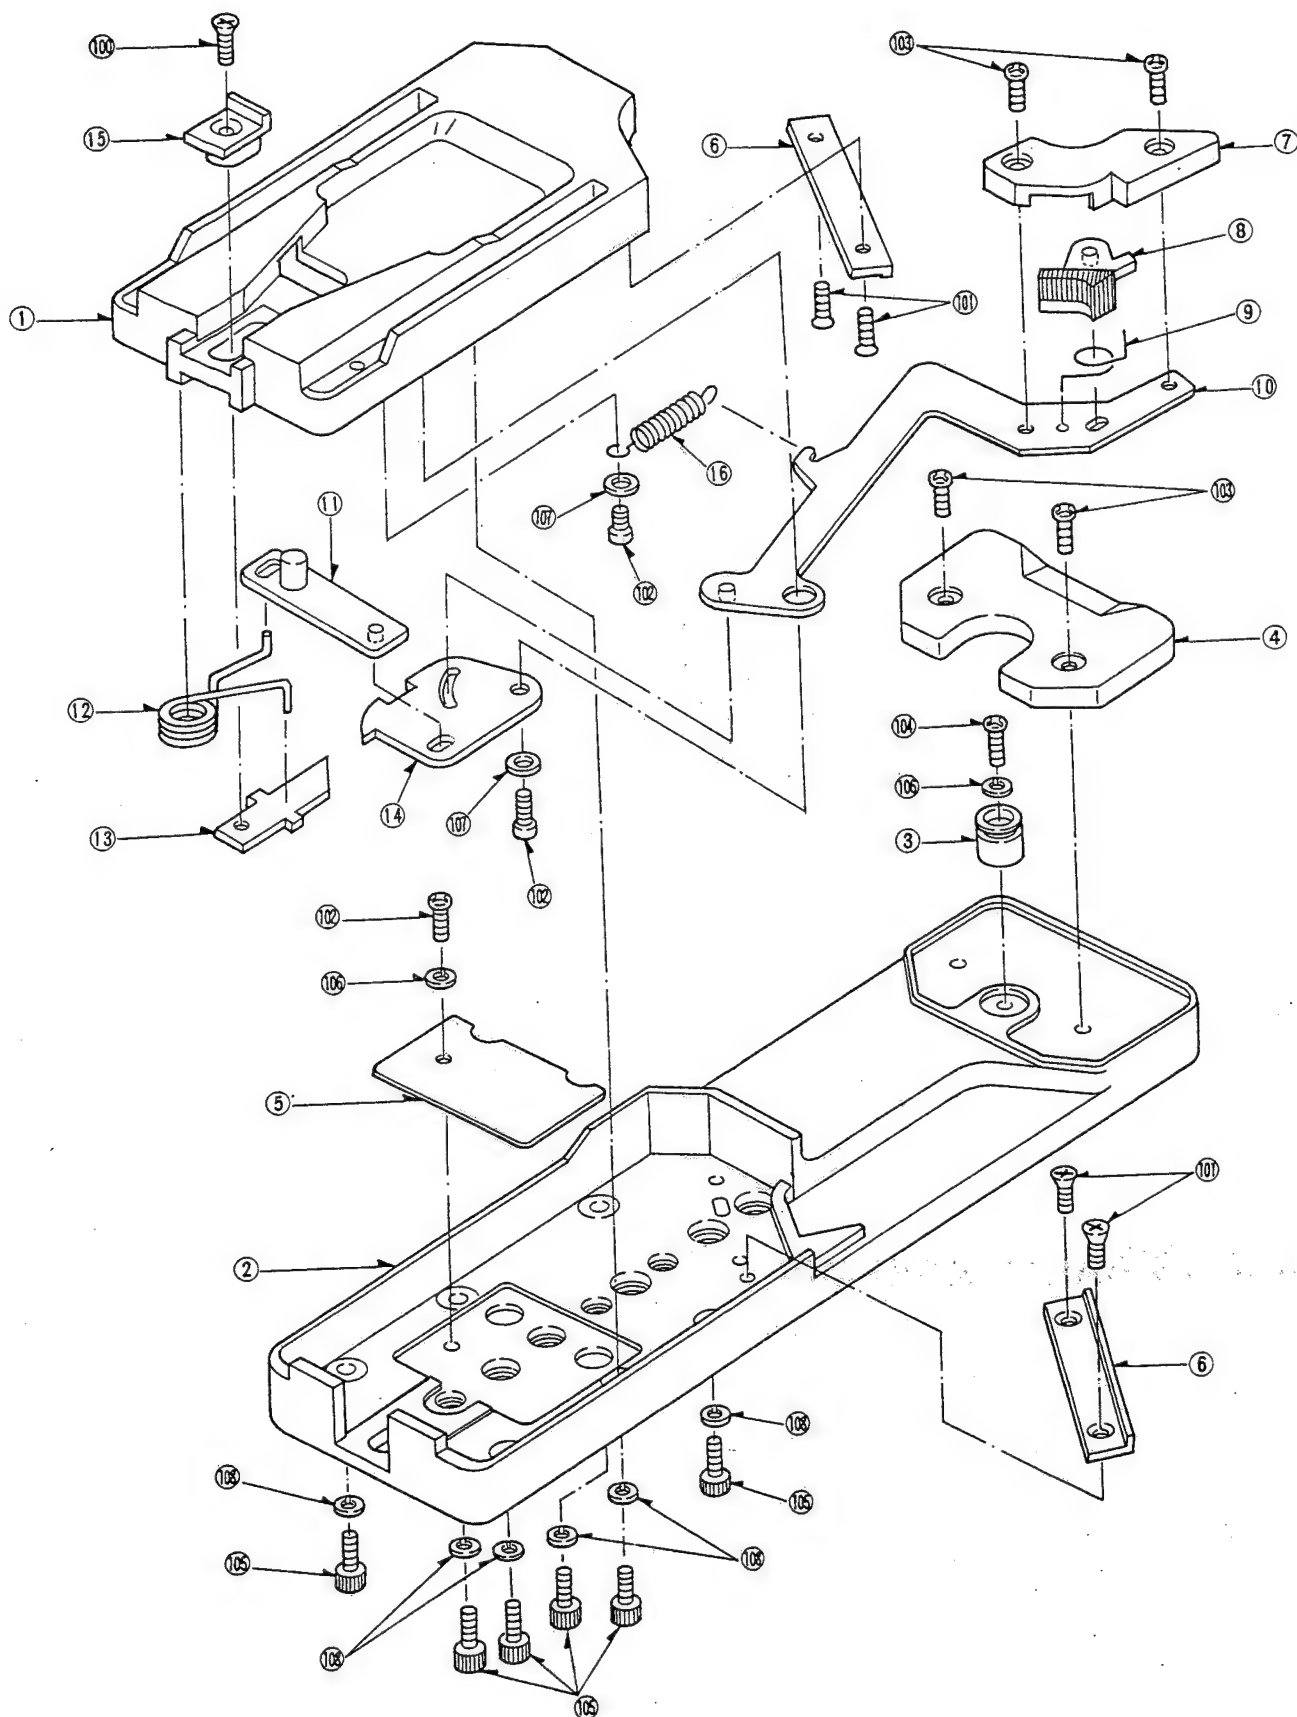

PRT-16

PACKING PARTS ASSEMBLY

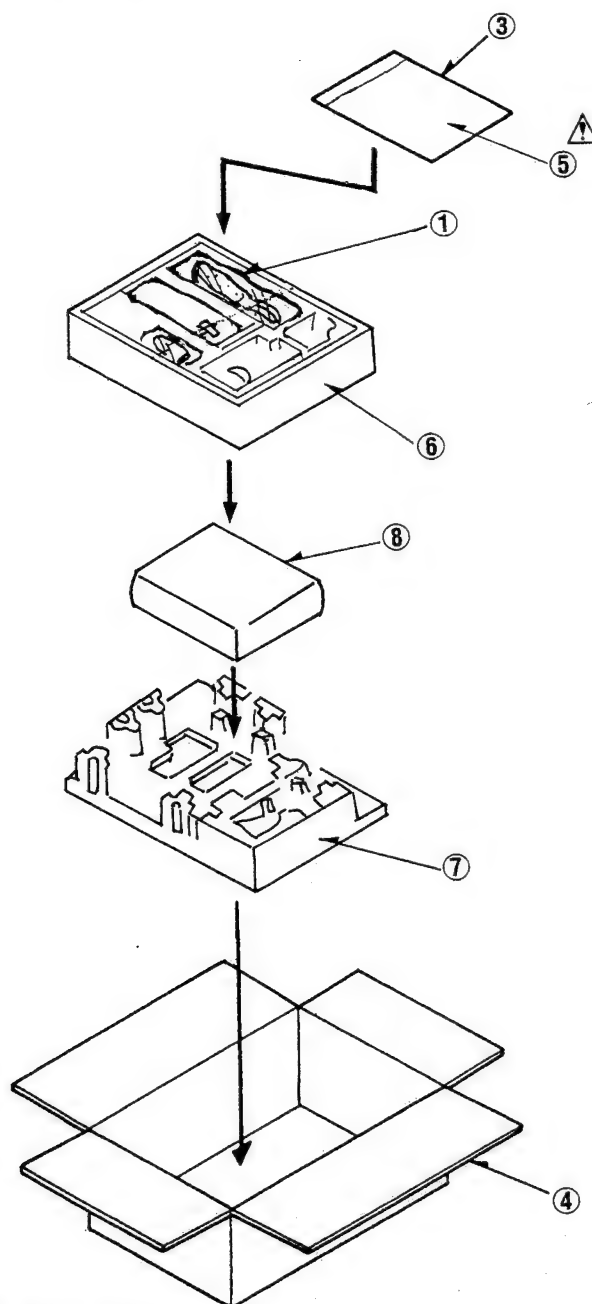

PACKING PARTS ASSEMBLY

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
1	VS01121	MICRO PHONE	1	
3	VEJ1672	BATTERY ADAPTOR ASS'Y	1	
4	VP69853	PACKING CASE	1	FOR AJ-D400P
4	VP69854	PACKING CASE	1	FOR AJ-D400E
△ 5	VQT7984	OPERATING INSTRUCTIONS	1	FOR AJ-D400P
△ 5	VQT7978	OPERATING INSTRUCTIONS	1	(ENGLISH) FOR AJ-D400E
△ 5	VQT7979	OPERATING INSTRUCTIONS	1	(FRENCH) FOR AJ-D400E
△ 5	VQT7980	OPERATING INSTRUCTIONS	1	(GERMAN) FOR AJ-D400E
△ 5	VQT7981	OPERATING INSTRUCTIONS	1	(SPANISH) FOR AJ-D400E
△ 5	VQT7982	OPERATING INSTRUCTIONS	1	(ITALIAN) FOR AJ-D400E
6	VPN4298	CUSHION (UPPER)	1	
7	VPN4299	CUSHION (LOWER)	1	

ELECTRICAL REPLACEMENT PARTS LIST

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
■ E5	VEP00V89A	MOTHER P.C. BOARD	1	(RTL)FOR AJ-D400P	■ E28	VEP80858A	BACK TALLY P.C. BOARD	1	(RTL)
■ E5	VEP00Y28A	MOTHER P.C. BOARD	1	(RTL)FOR AJ-D400E	■ E22	VEP80961B	BACKUP BATT P.C. BOARD	1	(RTL)
■ E1	VEP25016A	CDS P.C. BOARD	1	(RTL)FOR AJ-D400P	■ E30	VEP80A13B	BNC P.C. BOARD	1	(RTL)FOR AJ-D400P
■ E1	VEP25016B	CDS P.C. BOARD	1	(RTL)FOR AJ-D400E	■ E30	VEP80A13A	BNC P.C. BOARD	1	(RTL)FOR AJ-D400E
■ E3	VEP23278A	PRE PROCESS P.C. BOARD	1	(RTL)	■ E24	VEP00X87A	DC INPUT P.C. BOARD	1	(RTL)
■ E7	VEP23275A	CAMERA DSP P.C. BOARD	1	(RTL)	■ E26	VEP20538A	FRONT P.C. BOARD	1	(RTL)
■ E8	VEP23276A	CAMERA ENCODER P.C. BOARD	1	(RTL)FOR AJ-D400P	■ E29	VEP80A14C	FRONT MIC P.C. BOARD	1	(RTL)FOR AJ-D400P
■ E8	VEP23276B	CAMERA ENCODER P.C. BOARD	1	(RTL)FOR AJ-D400E	■ E29	VEP80A14A	FRONT MIC P.C. BOARD	1	(RTL)FOR AJ-D400E
■ E10	VEP03B94B	VIDEO I/F P.C. BOARD	1	(RTL)FOR AJ-D400P	■ E25	VEP20537A	FRONT TOGGLE P.C. BOARD	1	(RTL)
■ E10	VEP03D53A	VIDEO I/F P.C. BOARD	1	(RTL)FOR AJ-D400E	■ E23	VEP00W08B	HEADPHONE(F,R) P.C. BOARD	1	(RTL)
■ E38	VEP03D84A	VIDEO I/F SUB P.C. BOARD	1	(RTL)FOR AJ-D400E	■ E20	VEP00W05A	MODE CHECK P.C. BOARD	1	(RTL)
■ E14	VEP03B96A	VIDEO MAIN P.C. BOARD	1	(RTL)FOR AJ-D400P	■ E18	VEP00W03A	POWER SW P.C. BOARD	1	(RTL)
■ E14	VEP03B96B	VIDEO MAIN P.C. BOARD	1	(RTL)FOR AJ-D400P	■ E19	VEP00W04A	TOGGLE SW P.C. BOARD	1	(RTL)
■ E13	VEP03B95A	VIDEO P.C. BOARD	1	(RTL)					
■ E4	VEP20534A	CCD P.C. BOARD	1	(RTL)					
■ E2	VEP20533A	PULSE P.C. BOARD	1	(RTL)FOR AJ-D400P					
■ E2	VEP20533B	PULSE P.C. BOARD	1	(RTL)FOR AJ-D400E					
■ E9	VEP23277A	CAMERA SYNC P.C. BOARD	1	(RTL)FOR AJ-D400P					
■ E9	VEP23277B	CAMERA SYNC P.C. BOARD	1	(RTL)FOR AJ-D400E					
■ E6	VEP26074B	CAMERA SYSCON P.C. BOARD	1	(RTL)FOR AJ-D400P					
■ E6	VEP26074C	CAMERA SYSCON P.C. BOARD	1	(RTL)FOR AJ-D400E					
■ E11	VEP06A22D	VTR SYSCON P.C. BOARD	1	(RTL)FOR AJ-D400P					
■ E11	VEP06A22E	VTR SYSCON P.C. BOARD	1	(RTL)FOR AJ-D400E					
■ E12	VEP02437A	SERVO P.C. BOARD	1	(RTL)FOR AJ-D400P					
■ E12	VEP02437B	SERVO P.C. BOARD	1	(RTL)FOR AJ-D400E					
■ E15	VEP01643A	POWER P.C. BOARD	1	(RTL)					
■ E16	VEP04690A	AUDIO LCD P.C. BOARD	1	(RTL)					
■ E17	VEP01786A	REAR JACK P.C. BOARD	1	(RTL)					
■ E37	VEP00W29A	CAMERA FLEX P.C. BOARD	1	(RTL)					
■ E33	VEP80980A	VTR FLEX P.C. BOARD	1	(RTL)					
■ E27	VEP86149A	OPERATE P.C. BOARD	1	(RTL)					
■ E33	VEP29022A	EVF VIDEO P.C. BOARD	1	(RTL)					
■ E32	VEP29019A	H DEF P.C. BOARD	1	(RTL)					
■ E36	VEP29023A	EVF CRT MASK P.C. BOARD	1	(RTL)					
■ E34	VEP29020A	EVF SW VR P.C. BOARD	1	(RTL)					
■ E35	VEP29021A	F TALLY P.C. BOARD	1	(RTL)					
■ E21	VEP00W07A	ALARM/MONITOR P.C. BOARD	1	(RTL)					

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
■ E5	VEP00V89A	MOTHER P.C. BOARD	1	(RTL)FOR AJ-D400P
P9601	VJP3808E100	CONNECTOR (MALE)	1	
P9602-06	VJS4064N160	CONNECTOR	5	
P9607	VJP3125B006	CONNECTOR (MALE) 6P	1	
P9608	VJP3125B010	CONNECTOR (MALE)	1	
P9610	VJP3125B014	CONNECTOR (MALE)	1	
P9611	VJP3125B010	CONNECTOR (MALE)	1	
P9612	VJP3518B002	CONNECTOR (MALE)	1	
P9613	VJP3125B005	CONNECTOR (MALE) 5P	1	
P9614	VJP3808E140	CONNECTOR (MALE)	1	
P9617	VJP3125B012	CONNECTOR (MALE)	1	
P9619	VJS3791B045	CONNECTOR (FEMALE)	1	
P9620	VJP3125B006	CONNECTOR (MALE) 6P	1	
P9621	VJP3125B004	CONNECTOR (MALE)	1	
P9622	VJP3125B003	CONNECTOR (MALE) 3P	1	
R9604-08	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	5	
■ E5	VEP00Y28A	MOTHER P.C. BOARD	1	(RTL)FOR AJ-D400E
C9601-12	ECUX1H102JCV	C. CAPACITOR CH 50V 1000P	12	
C9614, 15	ECUX1H102JCV	C. CAPACITOR CH 50V 1000P	2	
L9601-25	VLF1315A102	FILTER	25	
L9626	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
L9627	VLF1315A102	FILTER	1	
L9628	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
L9629-31	VLP0147	COIL	3	
L9632-37	VLF1315A102	FILTER	6	
L9638	VLP0147	COIL	1	
P9601	VJP3808E100	CONNECTOR (MALE)	1	
P9602-06	VJS4064N160	CONNECTOR	5	
P9607	VJP3125B006	CONNECTOR (MALE) 6P	1	
P9608	VJP3125B010	CONNECTOR (MALE)	1	
P9610	VJP3125B014	CONNECTOR (MALE)	1	
P9611	VJP3125B010	CONNECTOR (MALE)	1	
P9612	VJP3518B002	CONNECTOR (MALE)	1	
P9613	VJP3125B005	CONNECTOR (MALE) 5P	1	
P9614	VJP3808E140	CONNECTOR (MALE)	1	
P9617	VJP3125B012	CONNECTOR (MALE)	1	
P9619	VJS3791B045	CONNECTOR (FEMALE)	1	
P9620	VJP3125B006	CONNECTOR (MALE) 6P	1	
P9621	VJP3125B004	CONNECTOR (MALE)	1	
P9622	VJP3125B003	CONNECTOR (MALE) 3P	1	
R9603	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R9605-08	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	4	
■ E1	VEP25016A	CDS P.C. BOARD	1	(RTL)FOR AJ-D400P
C3004	ECST1ED226Z	T. CAPACITOR CH 25V 22U	1	
C3005	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1	
C3006	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	1	
C3007	ECST1ED226Z	T. CAPACITOR CH 25V 22U	1	
C3101	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1	
C3102	ECST1EC106Z	T. CAPACITOR CH 25V 10U	1	
C3103, 04	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	2	
C3105	ECST1ED226Z	T. CAPACITOR CH 25V 22U	1	
C3106, 07	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	2	
C3108	ECST1EC106Z	T. CAPACITOR CH 25V 10U	1	
C3109	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C3111	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1	
C3112	ECST1ED226Z	T. CAPACITOR CH 25V 22U	1	
C3114	ECUX1H030CCV	C. CAPACITOR CH 50V 3P	1	
C3115	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	1	
C3116	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	1	
C3117	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	1	
C3201	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1	
C3202	ECST1EC106Z	T. CAPACITOR CH 25V 10U	1	
C3203, 04	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	2	
C3205	ECST1ED226Z	T. CAPACITOR CH 25V 22U	1	
C3206, 07	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	2	
C3208	ECST1EC106Z	T. CAPACITOR CH 25V 10U	1	
C3209	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1	
C3211	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1	
C3212	ECST1ED226Z	T. CAPACITOR CH 25V 22U	1	
C3214	ECUX1H030CCV	C. CAPACITOR CH 50V 3P	1	
C3215	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	1	
C3216	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	1	
C3217	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	1	
C3301	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1	
C3302	ECST1EC106Z	T. CAPACITOR CH 25V 10U	1	
C3303, 04	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	2	
C3305	ECST1ED226Z	T. CAPACITOR CH 25V 22U	1	
C3306, 07	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	2	
C3308	ECST1EC106Z	T. CAPACITOR CH 25V 10U	1	
C3309	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1	
C3311	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1	
C3312	ECST1ED226Z	T. CAPACITOR CH 25V 22U	1	
C3314	ECUX1H030CCV	C. CAPACITOR CH 50V 3P	1	
C3315	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	1	
C3316	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	1	
C3317	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	1	
D3001	MA3047-M	DIODE	1	
D3102	MA151K	DIODE	1	
D3202	MA151K	DIODE	1	
D3302	MA151K	DIODE	1	
IC3001	NJM431U	IC	1	
IC3002	NJM2904M	IC	1	
L3101	VLQ0163J2R7	COIL 2.7UH	1	
L3201	VLQ0163J2R7	COIL 2.7UH	1	
L3301	VLQ0163J2R7	COIL 2.7UH	1	
P3001	VJP3125B006	CONNECTOR (MALE) 6P	1	
P3002	VJP3550B014	CONNECTOR (MALE)	1	
P3003	VJP3125B006	CONNECTOR (MALE) 6P	1	
Q3001	2SB956-R	TRANSISTOR	1	
Q3101	2SA1022-C	TRANSISTOR	1	
Q3102	3SK157J15	TRANSISTOR	1	
Q3103	2SC2295-C	TRANSISTOR	1	
Q3104	2SA1022-C	TRANSISTOR	1	
Q3105	3SK157J15	TRANSISTOR	1	
Q3106	2SC2295-C	TRANSISTOR	1	
Q3107	2SA1022-C	TRANSISTOR	1	
Q3108	3SK157J15	TRANSISTOR	1	
Q3109	2SC2295-C	TRANSISTOR	1	
Q3110	2SA1022-C	TRANSISTOR	1	
Q3111	3SK157J15	TRANSISTOR	1	
Q3112	2SC2295-C	TRANSISTOR	1	
Q3113	2SA1022-C	TRANSISTOR	1	
Q3114	3SK157J15	TRANSISTOR	1	
Q3115-19	2SC2295-C	TRANSISTOR	5	
Q3120	2SD601A-R	TRANSISTOR	1	
Q3121, 22	2SA1226E34	TRANSISTOR	2	
Q3123	2SB710A-R	TRANSISTOR	1	
Q3201	2SA1022-C	TRANSISTOR	1	
Q3202	3SK157J15	TRANSISTOR	1	
Q3203	2SC2295-C	TRANSISTOR	1	
Q3204	2SA1022-C	TRANSISTOR	1	
Q3205	3SK157J15	TRANSISTOR	1	
Q3206	2SC2295-C	TRANSISTOR	1	
Q3207	2SA1022-C	TRANSISTOR	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
Q3208	3SK157J15	TRANSISTOR	1		R3141	ERJ3RBD241	M.RESISTOR CH 1/16W 240	1	
Q3209	2SC2295-C	TRANSISTOR	1		R3142	ERJ3RBD101	M.RESISTOR CH 1/16W 100	1	
Q3210	2SA1022-C	TRANSISTOR	1		R3143	ERJ3RBD242	M.RESISTOR CH 1/16W 2.4K	1	
Q3211	3SK157J15	TRANSISTOR	1		R3144, 45	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
Q3212	2SC2295-C	TRANSISTOR	1		R3146	ERJ3RBD122	M.RESISTOR CH 1/16W 1.2K	1	
Q3213	2SA1022-C	TRANSISTOR	1		R3147	ERJ3RBD392	M.RESISTOR CH 1/16W 3.9K	1	
Q3214	3SK157J15	TRANSISTOR	1		R3201	ERJ3RBD303	M.RESISTOR CH 1/16W 30K	1	
Q3215-19	2SC2295-C	TRANSISTOR	5		R3202	ERJ3RBD273	M.RESISTOR CH 1/16W 27K	1	
Q3220	2SD601A-R	TRANSISTOR	1		R3203	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1	
Q3221, 22	2SA1226E34	TRANSISTOR	2		R3204	ERJ3RBD272	M.RESISTOR CH 1/16W 2.7K	1	
Q3301	2SA1022-C	TRANSISTOR	1		R3205	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
Q3302	3SK157J15	TRANSISTOR	1		R3206	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
Q3303	2SC2295-C	TRANSISTOR	1		R3207	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
Q3304	2SA1022-C	TRANSISTOR	1		R3208	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
Q3305	3SK157J15	TRANSISTOR	1		R3209	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
Q3306	2SC2295-C	TRANSISTOR	1		R3210	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
Q3307	2SA1022-C	TRANSISTOR	1		R3211	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1	
Q3308	3SK157J15	TRANSISTOR	1		R3212	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
Q3309	2SC2295-C	TRANSISTOR	1		R3213	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
Q3310	2SA1022-C	TRANSISTOR	1		R3214	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
Q3311	3SK157J15	TRANSISTOR	1		R3215	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
Q3312	2SC2295-C	TRANSISTOR	1		R3216	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
Q3313	2SA1022-C	TRANSISTOR	1		R3217	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
Q3314	3SK157J15	TRANSISTOR	1		R3218	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
Q3315-19	2SC2295-C	TRANSISTOR	5		R3219	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
Q3321, 22	2SA1226E34	TRANSISTOR	2		R3220	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
Q3323	2SD601A-R	TRANSISTOR	1		R3221	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
QR3101, 02	UN2217	TRANSISTOR-RESISTOR	2		R3224	ERJ3RBD301	M.RESISTOR CH 1/16W 300	1	
QR3201, 02	UN2217	TRANSISTOR-RESISTOR	2		R3225	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
QR3301, 02	UN2217	TRANSISTOR-RESISTOR	2		R3226	ERJ3RBD301	M.RESISTOR CH 1/16W 300	1	
R3001	ERJ3RBD473	M.RESISTOR CH 1/16W 47K	1		R3227	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
R3002	ERJ3RBD273	M.RESISTOR CH 1/16W 27K	1		R3228	ERJ3RBD122	M.RESISTOR CH 1/16W 1.2K	1	
R3003	ERJ3RBD473	M.RESISTOR CH 1/16W 47K	1		R3229-31	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	3	
R3004	ERJ3RBD273	M.RESISTOR CH 1/16W 27K	1		R3232, 33	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R3005	ERJ3RBD432	M.RESISTOR CH 1/16W 4.3K	1		R3234	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3007	ERJ3RBD563	M.RESISTOR CH 1/16W 56K	1		R3239	ERJ3RBD622	M.RESISTOR CH 1/16W 6.2K	1	
R3008	ERJ3RBD332	M.RESISTOR CH 1/16W 3.3K	1		R3241	ERJ3RBD241	M.RESISTOR CH 1/16W 240	1	
R3009	ERJ3RBD101	M.RESISTOR CH 1/16W 100	1		R3242	ERJ3RBD101	M.RESISTOR CH 1/16W 100	1	
R3010, 11	ERJ3RBD563	M.RESISTOR CH 1/16W 56K	2		R3243	ERJ3RBD242	M.RESISTOR CH 1/16W 2.4K	1	
R3012	ERJ3RBD333	M.RESISTOR CH 1/16W 33K	1		R3244, 45	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R3101	ERJ3RBD303	M.RESISTOR CH 1/16W 30K	1		R3246	ERJ3RBD122	M.RESISTOR CH 1/16W 1.2K	1	
R3102	ERJ3RBD273	M.RESISTOR CH 1/16W 27K	1		R3247	ERJ3RBD392	M.RESISTOR CH 1/16W 3.9K	1	
R3103	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1		R3301	ERJ3RBD303	M.RESISTOR CH 1/16W 30K	1	
R3104	ERJ3RBD272	M.RESISTOR CH 1/16W 2.7K	1		R3302	ERJ3RBD273	M.RESISTOR CH 1/16W 27K	1	
R3105	ERJ3RED220	M.RESISTOR CH 1/16W 22	1		R3303	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1	
R3106	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1		R3304	ERJ3RBD272	M.RESISTOR CH 1/16W 2.7K	1	
R3107	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1		R3305	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3108	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1		R3306	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3109	ERJ3RED220	M.RESISTOR CH 1/16W 22	1		R3307	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3110	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1		R3308	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3111	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1		R3309	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3112	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1		R3310	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3113	ERJ3RED220	M.RESISTOR CH 1/16W 22	1		R3311	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1	
R3114	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1		R3312	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3115	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1		R3313	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3116	ERJ3RED220	M.RESISTOR CH 1/16W 22	1		R3314	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3117	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1		R3315	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3118	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1		R3316	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3119	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1		R3317	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3120	ERJ3RED220	M.RESISTOR CH 1/16W 22	1		R3318	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3121	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1		R3319	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3124	ERJ3RBD301	M.RESISTOR CH 1/16W 300	1		R3320	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3125	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1		R3321	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3126	ERJ3RBD301	M.RESISTOR CH 1/16W 300	1		R3324	ERJ3RBD181	M.RESISTOR CH 1/16W 180	1	
R3127	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1		R3325	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
R3128	ERJ3RBD122	M.RESISTOR CH 1/16W 1.2K	1		R3326	ERJ3RBD181	M.RESISTOR CH 1/16W 180	1	
R3129-31	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	3		R3327	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
R3132, 33	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2		R3328	ERJ3RBD122	M.RESISTOR CH 1/16W 1.2K	1	
R3134	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1		R3329	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3136	ERJ3RBD163	M.RESISTOR CH 1/16W 16K	1		R3330, 31	ERJ3RBD682	M.RESISTOR CH 1/16W 6.8K	2	
R3137	ERJ3RBD561	M.RESISTOR CH 1/16W 560	1		R3332, 33	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R3139	ERJ3RBD392	M.RESISTOR CH 1/16W 3.9K	1		R3334	ERJ3RBD751	M.RESISTOR CH 1/16W 750	1	
R3140	ERJ3RBD822	M.RESISTOR CH 1/16W 8.2K	1		R3339	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
					R3341	ERJ3RBD241	M.RESISTOR CH 1/16W 240	1	
					R3342	ERJ3RBD101	M.RESISTOR CH 1/16W 100	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R3003	ERJ3RBD473	M.RESISTOR CH 1/16W 47K	1	
R3004	ERJ3RBD273	M.RESISTOR CH 1/16W 27K	1	
R3005	ERJ3RBD432	M.RESISTOR CH 1/16W 4.3K	1	
R3007	ERJ3RBD563	M.RESISTOR CH 1/16W 56K	1	
R3008	ERJ3RBD332	M.RESISTOR CH 1/16W 3.3K	1	
R3009	ERJ3RBD101	M.RESISTOR CH 1/16W 100	1	
R3010, 11	ERJ3RBD563	M.RESISTOR CH 1/16W 56K	2	
R3012	ERJ3RBD333	M.RESISTOR CH 1/16W 33K	1	
R3101	ERJ3RBD303	M.RESISTOR CH 1/16W 30K	1	
R3102	ERJ3RBD273	M.RESISTOR CH 1/16W 27K	1	
R3103	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1	
R3104	ERJ3RBD272	M.RESISTOR CH 1/16W 2.7K	1	
R3105	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3106	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3107	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3108	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3109	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3110	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3111	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1	
R3112	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3113	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3114	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3115	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3116	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3117	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3118	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3119	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3120	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3121	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3124	ERJ3RBD301	M.RESISTOR CH 1/16W 300	1	
R3125	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
R3126	ERJ3RBD301	M.RESISTOR CH 1/16W 300	1	
R3127	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
R3128	ERJ3RBD122	M.RESISTOR CH 1/16W 1.2K	1	
R3129-31	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	3	
R3132, 33	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R3134	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3136	ERJ3RBD163	M.RESISTOR CH 1/16W 16K	1	
R3137	ERJ3RBD561	M.RESISTOR CH 1/16W 560	1	
R3139	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
R3140	ERJ3RBD822	M.RESISTOR CH 1/16W 8.2K	1	
R3141	ERJ3RBD241	M.RESISTOR CH 1/16W 240	1	
R3142	ERJ3RBD101	M.RESISTOR CH 1/16W 100	1	
R3143	ERJ3RBD242	M.RESISTOR CH 1/16W 2.4K	1	
R3144, 45	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R3146	ERJ3RBD122	M.RESISTOR CH 1/16W 1.2K	1	
R3147	ERJ3RBD392	M.RESISTOR CH 1/16W 3.9K	1	
R3201	ERJ3RBD303	M.RESISTOR CH 1/16W 30K	1	
R3202	ERJ3RBD273	M.RESISTOR CH 1/16W 27K	1	
R3203	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1	
R3204	ERJ3RBD272	M.RESISTOR CH 1/16W 2.7K	1	
R3205	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3206	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3207	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3208	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3209	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3210	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3211	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1	
R3212	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3213	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3214	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3215	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3216	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3217	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3218	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3219	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3220	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3221	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3224	ERJ3RBD301	M.RESISTOR CH 1/16W 300	1	
R3225	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
R3226	ERJ3RBD301	M.RESISTOR CH 1/16W 300	1	
R3227	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
R3228	ERJ3RBD122	M.RESISTOR CH 1/16W 1.2K	1	
R3229-31	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	3	
R3232, 33	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R3234	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3239	ERJ3RBD302	M.RESISTOR CH 1/16W 3K	1	
R3241	ERJ3RBD241	M.RESISTOR CH 1/16W 240	1	
R3242	ERJ3RBD101	M.RESISTOR CH 1/16W 100	1	
R3243	ERJ3RBD242	M.RESISTOR CH 1/16W 2.4K	1	
R3244, 45	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R3246	ERJ3RBD122	M.RESISTOR CH 1/16W 1.2K	1	
R3247	ERJ3RBD392	M.RESISTOR CH 1/16W 3.9K	1	
R3301	ERJ3RBD303	M.RESISTOR CH 1/16W 30K	1	
R3302	ERJ3RBD273	M.RESISTOR CH 1/16W 27K	1	
R3303	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1	
R3304	ERJ3RBD272	M.RESISTOR CH 1/16W 2.7K	1	
R3305	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3306	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3307	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3308	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3309	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3310	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3311	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1	
R3312	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3313	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3314	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3315	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3316	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3317	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3318	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3319	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3320	ERJ3RED220	M.RESISTOR CH 1/16W 22	1	
R3321	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1	
R3324	ERJ3RBD181	M.RESISTOR CH 1/16W 180	1	
R3325	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
R3326	ERJ3RBD181	M.RESISTOR CH 1/16W 180	1	
R3327	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
R3328	ERJ3RBD122	M.RESISTOR CH 1/16W 1.2K	1	
R3329	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
R3330, 31	ERJ3RBD682	M.RESISTOR CH 1/16W 6.8K	2	
R3332, 33	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R3334	ERJ3RBD751	M.RESISTOR CH 1/16W 750	1	
R3339	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3341	ERJ3RBD241	M.RESISTOR CH 1/16W 240	1	
R3342	ERJ3RBD101	M.RESISTOR CH 1/16W 100	1	
R3343	ERJ3RBD242	M.RESISTOR CH 1/16W 2.4K	1	
R3344, 45	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R3346	ERJ3RBD122	M.RESISTOR CH 1/16W 1.2K	1	
R3347	ERJ3RBD392	M.RESISTOR CH 1/16W 3.9K	1	
TG3001, 02	EYF6CU	TEST POINT	2	
TP3001-05	EYF6CU	TEST POINT	5	
TP3101-03	EYF6CU	TEST POINT	3	
TP3201-03	EYF6CU	TEST POINT	3	
TP3301-03	EYF6CU	TEST POINT	3	
VC3101	VCV0048	TRIMMER	1	
VC3201	VCV0048	TRIMMER	1	
VC3301	VCV0048	TRIMMER	1	
VR3101	VRV0113B502	V.RESISTOR 5K	1	
VR3102	VRV0113B203	V.RESISTOR 20K	1	
VR3201	VRV0113B502	V.RESISTOR 5K	1	
VR3202	VRV0113B203	V.RESISTOR 20K	1	
VR3301	VRV0113B502	V.RESISTOR 5K	1	
VR3302	VRV0113B203	V.RESISTOR 20K	1	
E3	VEP23278A	PRE PROCESS P.C.BOARD	1 (RTL)	
C3001	ECUX1H101JCV	C.CAPACITOR CH 50V 100P	1	
C3002	ECUX1H100DCV	C.CAPACITOR CH 50V 10P	1	
C3003	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
C3004, 05	ECST1CY225Z	T.CAPACITOR CH 16V 2.2U	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C3006, 07	ECST1AY106Z	T. CAPACITOR CH 10V 10U	2		C3415	ECUX1H560JCV	C. CAPACITOR CH 50V 56P	1	
C3008, 09	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2		C3416, 17	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C3010	ECST1CX156Z	T. CAPACITOR CH 16V 15U	1		C3418	ECUX1H050CCV	C. CAPACITOR CH 50V 5P	1	
C3012	ECST1CX156Z	T. CAPACITOR CH 16V 15U	1		C3419-22	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	4	
C3014	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1		C3423	ECUX1H040CCV	C. CAPACITOR CH 50V 4P	1	
C3015	ECUX1H560JCV	C. CAPACITOR CH 50V 56P	1		C3425	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C3016, 17	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2		C3426, 27	ECST1CY225Z	T. CAPACITOR CH 16V 2.2U	2	
C3018	ECUX1H050CCV	C. CAPACITOR CH 50V 5P	1		C3428	ECEV1CN100Q	E. CAPACITOR CH 16V 10U	1	
C3019-22	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	4		C3429, 30	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C3023	ECUX1H040CCV	C. CAPACITOR CH 50V 4P	1		C3431	ECST1EC106Z	T. CAPACITOR CH 25V 10U	1	
C3025	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C3432	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C3026, 27	ECST1CY225Z	T. CAPACITOR CH 16V 2.2U	2		C3433	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1	
C3028	ECEV1CN100Q	E. CAPACITOR CH 16V 10U	1		C3434-38	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	5	
C3029, 30	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2		C3440, 41	ECST1CX106Z	T. CAPACITOR CH 16V 10U	2	
C3031	ECST1EC106Z	T. CAPACITOR CH 25V 10U	1		C3442	ECEV0JN220Q	E. CAPACITOR CH 6.3V 22U	1	
C3032	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C3443	ECST1CX156Z	T. CAPACITOR CH 16V 15U	1	
C3033	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1		C3444	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C3034-38	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	5		C3445	ECST1CX156Z	T. CAPACITOR CH 16V 15U	1	
C3040, 41	ECST1CX106Z	T. CAPACITOR CH 16V 10U	2		C3446, 47	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C3042	ECEV0JN220Q	E. CAPACITOR CH 6.3V 22U	1		C3448	ECUM1H020CCV	C. CAPACITOR CH 50V 2P	1	
C3043	ECST1CX156Z	T. CAPACITOR CH 16V 15U	1		C3449	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C3044	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C3451-53	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	3	
C3045	ECST1CX156Z	T. CAPACITOR CH 16V 15U	1		C3454	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1	
C3046, 47	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2		C3455	ECUX1H270JCV	C. CAPACITOR CH 50V 27P	1	
C3048	ECUM1H020CCV	C. CAPACITOR CH 50V 2P	1		C3456	ECUX1H680JCV	C. CAPACITOR CH 50V 68P	1	
C3049	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C3460	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1	
C3051-53	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	3		C3601	ECST1VY104Z	T. CAPACITOR CH 35V 0.1U	1	
C3054	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		C3602	ECEV0GV101Q	E. CAPACITOR CH 4V 100U	1	
C3055	ECUX1H270JCV	C. CAPACITOR CH 50V 27P	1		C3603, 04	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C3056	ECUX1H680JCV	C. CAPACITOR CH 50V 68P	1		C3607-14	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	8	
C3060	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		C3615-19	ECST1VY104Z	T. CAPACITOR CH 35V 0.1U	5	
C3201	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	1		C3620, 21	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C3202	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1		C3622	ECST1ED226Z	T. CAPACITOR CH 25V 22U	1	
C3203	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C3623	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C3204, 05	ECST1CY225Z	T. CAPACITOR CH 16V 2.2U	2		C3624	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1	
C3206, 07	ECST1AY106Z	T. CAPACITOR CH 10V 10U	2		C3625	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C3208, 09	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2		C3626	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1	
C3210	ECST1CX156Z	T. CAPACITOR CH 16V 15U	1		C3627	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C3212	ECST1CX156Z	T. CAPACITOR CH 16V 15U	1		C3628	ECEV1EN4R7Q	E. CAPACITOR CH 25V 4.7U	1	
C3214	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1		C3633, 34	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C3215	ECUX1H560JCV	C. CAPACITOR CH 50V 56P	1		C3635	ECST1AX226Z	T. CAPACITOR CH 10V 22U	1	
C3216, 17	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2		C3636, 37	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C3218	ECUX1H050CCV	C. CAPACITOR CH 50V 5P	1		C3638	ECST1AX226Z	T. CAPACITOR CH 10V 22U	1	
C3219-22	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	4		C3639	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	1	
C3223	ECUX1H040CCV	C. CAPACITOR CH 50V 4P	1						
C3225	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		D3001-03	MA142K	DIODE	3	
C3226, 27	ECST1CY225Z	T. CAPACITOR CH 16V 2.2U	2		D3201-03	MA142K	DIODE	3	
C3228	ECEV1CN100Q	E. CAPACITOR CH 16V 10U	1		D3401-03	MA142K	DIODE	3	
C3229, 30	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2		D3601	MA142K	DIODE	1	
C3231	ECST1EC106Z	T. CAPACITOR CH 25V 10U	1		D3602-04	MA8024	DIODE	3	
C3232	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1						
C3233	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1		FL3001	VLF1302	FILTER	1	
C3234-38	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	5		FL3002	VLF1303	FILTER	1	
C3240, 41	ECST1CX106Z	T. CAPACITOR CH 16V 10U	2		FL3201	VLF1302	FILTER	1	
C3242	ECEV0JN220Q	E. CAPACITOR CH 6.3V 22U	1		FL3202	VLF1303	FILTER	1	
C3243	ECST1CX156Z	T. CAPACITOR CH 16V 15U	1		FL3401	VLF1302	FILTER	1	
C3244	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		FL3402	VLF1303	FILTER	1	
C3245	ECST1CX156Z	T. CAPACITOR CH 16V 15U	1						
C3246, 47	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2		IC3001	TC4W53FU	IC	1	
C3248	ECUM1H020CCV	C. CAPACITOR CH 50V 2P	1		IC3002	NJM062M	IC	1	
C3249	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		IC3003	MC1495M	IC	1	
C3251-53	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	3		IC3004	NJM062M	IC	1	
C3254	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		IC3005	TC4W53FU	IC	1	
C3255	ECUX1H270JCV	C. CAPACITOR CH 50V 27P	1		IC3006	AN90B60S	IC	1	
C3256	ECUX1H680JCV	C. CAPACITOR CH 50V 68P	1		IC3201	TC4W53FU	IC	1	
C3260	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		IC3202	NJM062M	IC	1	
C3401	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	1		IC3203	MC1495M	IC	1	
C3402	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1		IC3204	NJM062M	IC	1	
C3403	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		IC3205	TC4W53FU	IC	1	
C3404, 05	ECST1CY225Z	T. CAPACITOR CH 16V 2.2U	2		IC3206	AN90B60S	IC	1	
C3406, 07	ECST1AY106Z	T. CAPACITOR CH 10V 10U	2		IC3401	TC4W53FU	IC	1	
C3408, 09	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2		IC3402	NJM062M	IC	1	
C3410	ECST1CX156Z	T. CAPACITOR CH 16V 15U	1		IC3403	MC1495M	IC	1	
C3412	ECST1CX156Z	T. CAPACITOR CH 16V 15U	1		IC3404	NJM062M	IC	1	
C3414	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1		IC3405	TC4W53FU	IC	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
IC3406	AN90B60S	IC	1		Q3601, 02	2SD1819A	TRANSISTOR	2	
IC3601	NJM062M	IC	1		Q3603, 04	2SB956-R	TRANSISTOR	2	
IC3603	NJM064M	IC	1		Q3605	2SD1280-R	TRANSISTOR	1	
IC3604, 05	NJM2904M	IC	2						
IC3606	NJM431U	IC	1		R3001	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1	
IC3607	MC74HC4053F	IC	1		R3002, 03	ERJ3RBD331	M. RESISTOR CH 1/16W 330	2	
IC3608	XC62AP3002M	IC	1		R3004	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1	
IC3609	XC62DN3002M	IC	1		R3005, 06	ERJ3RBD331	M. RESISTOR CH 1/16W 330	2	
P1, P2	VJP3125B006	CONNECTOR (MALE) 6P	2		R3007	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1	
P3	VJS3791B045	CONNECTOR (FEMALE)	1		R3008	ERJ3GEYJ272	M. RESISTOR CH 1/16W 2.7K	1	
					R3009	ERJ3RBD151	M. RESISTOR CH 1/16W 150	1	
Q3001	XP6401	TRANSISTOR-RESISTOR	1		R3010	ERJ3RBD563	M. RESISTOR CH 1/16W 56K	1	
Q3003	2SD1819A	TRANSISTOR	1		R3011	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
Q3004	XP6534	TRANSISTOR-RESISTOR	1		R3012	ERJ3RBD362	M. RESISTOR CH 1/16W 3.6K	1	
Q3006	2SA1532-C	TRANSISTOR	1		R3013	ERJ3RBD223	M. RESISTOR CH 1/16W 22K	1	
Q3007	2SC3930-B	TRANSISTOR	1		R3014	ERJ3RBD683	M. RESISTOR CH 1/16W 68K	1	
Q3008, 09	2SK662-R	TRANSISTOR	2		R3015	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
Q3010	2SK374-R	TRANSISTOR	1		R3016	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1	
Q3011	2SK508-B	TRANSISTOR	1		R3017	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
Q3012, 13	2SK662-R	TRANSISTOR	2		R3018	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
Q3014, 15	2SK508-B	TRANSISTOR	2		R3019	ERJ3RBD471	M. RESISTOR CH 1/16W 470	1	
Q3016	XP6435	TRANSISTOR-RESISTOR	1		R3020	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
Q3018	2SB1218A	TRANSISTOR	1		R3021	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
Q3019	XP1501	TRANSISTOR-RESISTOR	1		R3022	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
Q3021	2SK662-R	TRANSISTOR	1		R3023	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
Q3022	XP1501	TRANSISTOR-RESISTOR	1		R3024	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
Q3023	2SD1819A	TRANSISTOR	1		R3025	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1	
Q3024	2SK662-R	TRANSISTOR	1		R3026	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
Q3025	XP1501	TRANSISTOR-RESISTOR	1		R3027	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
Q3027	2SD1819A	TRANSISTOR	1		R3028	ERJ3RBD122	M. RESISTOR CH 1/16W 1.2K	1	
Q3028	2SC3930-B	TRANSISTOR	1		R3029	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
Q3029	2SK662-R	TRANSISTOR	1		R3030	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1	
Q3201	XP6401	TRANSISTOR-RESISTOR	1		R3031	ERJ3RBD432	M. RESISTOR CH 1/16W 4.3K	1	
Q3203	2SD1819A	TRANSISTOR	1		R3032, 33	ERJ3RBD183	M. RESISTOR CH 1/16W 18K	2	
Q3204	XP6534	TRANSISTOR-RESISTOR	1		R3034	ERJ3RBD272	M. RESISTOR CH 1/16W 2.7K	1	
Q3206	2SA1532-C	TRANSISTOR	1		R3035	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
Q3207	2SC3930-B	TRANSISTOR	1		R3036	ERJ3RBD362	M. RESISTOR CH 1/16W 3.6K	1	
Q3208, 09	2SK662-R	TRANSISTOR	2		R3037	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
Q3210	2SK374-R	TRANSISTOR	1		R3038	ERJ3RBD334	M. RESISTOR CH 1/16W 330K	1	
Q3211	2SK508-B	TRANSISTOR	1		R3039	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1	
Q3212, 13	2SK662-R	TRANSISTOR	2		R3040	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1	
Q3214, 15	2SK508-B	TRANSISTOR	2		R3041	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1	
Q3216	XP6435	TRANSISTOR-RESISTOR	1		R3042	ERJ3RBD181	M. RESISTOR CH 1/16W 180	1	
Q3218	2SB1218A	TRANSISTOR	1		R3043	EXB24V224J	COMBI. R-R 220K	1	
Q3219	XP1501	TRANSISTOR-RESISTOR	1		R3045	EXB24V224J	COMBI. R-R 220K	1	
Q3221	2SK662-R	TRANSISTOR	1		R3047	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
Q3222	XP1501	TRANSISTOR-RESISTOR	1		R3048	ERJ3RBD242	M. RESISTOR CH 1/16W 2.4K	1	
Q3223	2SD1819A	TRANSISTOR	1		R3049, 50	ERJ3RBD272	M. RESISTOR CH 1/16W 2.7K	2	
Q3224	2SK662-R	TRANSISTOR	1		R3051	ERJ3RBD682	M. RESISTOR CH 1/16W 6.8K	1	
Q3225	XP1501	TRANSISTOR-RESISTOR	1		R3052	ERJ3GEYG152	M. RESISTOR CH 1/16W 1.5K	1	
Q3227	2SD1819A	TRANSISTOR	1		R3053	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
Q3228	2SC3930-B	TRANSISTOR	1		R3054	ERJ3RBD682	M. RESISTOR CH 1/16W 6.8K	1	
Q3229	2SK662-R	TRANSISTOR	1		R3055	ERJ3GEYJ122	M. RESISTOR CH 1/16W 1.2K	1	
Q3401	XP6401	TRANSISTOR-RESISTOR	1		R3056, 57	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	2	
Q3403	2SD1819A	TRANSISTOR	1		R3058, 59	ERJ3RBD473	M. RESISTOR CH 1/16W 47K	2	
Q3404	XP6534	TRANSISTOR-RESISTOR	1		R3060	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
Q3406	2SA1532-C	TRANSISTOR	1		R3061	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
Q3407	2SC3930-B	TRANSISTOR	1		R3062	ERJ3GEYJ182	M. RESISTOR CH 1/16W 1.8K	1	
Q3408, 09	2SK662-R	TRANSISTOR	2		R3063	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
Q3410	2SK374-R	TRANSISTOR	1		R3064	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
Q3411	2SK508-B	TRANSISTOR	1		R3065	ERJ3RBD333	M. RESISTOR CH 1/16W 33K	1	
Q3412, 13	2SK662-R	TRANSISTOR	2		R3066	ERJ3GEYJ394	M. RESISTOR CH 1/16W 390K	1	
Q3414, 15	2SK508-B	TRANSISTOR	2		R3067, 68	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	
Q3416	XP6435	TRANSISTOR-RESISTOR	1		R3069	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
Q3418	2SB1218A	TRANSISTOR	1		R3070	EXB24V101J	COMBI. R-R 100	1	
Q3419	XP1501	TRANSISTOR-RESISTOR	1		R3072	EXB24V101J	COMBI. R-R 100	1	
Q3421	2SK662-R	TRANSISTOR	1		R3074	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
Q3422	XP1501	TRANSISTOR-RESISTOR	1		R3075	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
Q3423	2SD1819A	TRANSISTOR	1		R3076	EXB24V103J	COMBI. R-R 10K	1	
Q3424	2SK662-R	TRANSISTOR	1		R3078	EXB24V103J	COMBI. R-R 10K	1	
Q3425	XP1501	TRANSISTOR-RESISTOR	1		R3080	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1	
Q3427	2SD1819A	TRANSISTOR	1		R3081	ERJ3RBD562	M. RESISTOR CH 1/16W 5.6K	1	
Q3428	2SC3930-B	TRANSISTOR	1		R3082	ERJ3RBD682	M. RESISTOR CH 1/16W 6.8K	1	
Q3429	2SK662-R	TRANSISTOR	1		R3083	ERJ3RBD623	M. RESISTOR CH 1/16W 62K	1	
					R3084	ERJ3RBD202	M. RESISTOR CH 1/16W 2K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R3085	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R3086	ERJ3GEYJ182	M. RESISTOR CH 1/16W 1.8K	1	
R3087	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1	
R3088	ERJ3RBD511	M. RESISTOR CH 1/16W 510	1	
R3089	ERJ3RED620	M. RESISTOR CH 1/16W 62	1	
R3090	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R3091	ERJ3RBD242	M. RESISTOR CH 1/16W 2.4K	1	
R3092	ERJ3RBD392	M. RESISTOR CH 1/16W 3.9K	1	
R3093	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R3094	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1	
R3096	ERJ3GEYJ332	M. RESISTOR CH 1/16W 3.3K	1	
R3097	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1	
R3098	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R3099	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R3100	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R3101	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R3102	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R3103	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R3104	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R3105	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R3107	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R3109	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R3111	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R3112	ERJ3RBD752	M. RESISTOR CH 1/16W 7.5K	1	
R3113	ERJ3GEYJ224	M. RESISTOR CH 1/16W 220K	1	
R3114	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R3201	ERJ3GEYJ332	M. RESISTOR CH 1/16W 3.3K	1	
R3202, 03	ERJ3RBD331	M. RESISTOR CH 1/16W 330	2	
R3204	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1	
R3205, 06	ERJ3RBD331	M. RESISTOR CH 1/16W 330	2	
R3207	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1	
R3208	ERJ3GEYJ272	M. RESISTOR CH 1/16W 2.7K	1	
R3209	ERJ3RBD151	M. RESISTOR CH 1/16W 150	1	
R3210	ERJ3RBD563	M. RESISTOR CH 1/16W 56K	1	
R3211	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
R3212	ERJ3RBD362	M. RESISTOR CH 1/16W 3.6K	1	
R3213	ERJ3RBD223	M. RESISTOR CH 1/16W 22K	1	
R3214	ERJ3RBD683	M. RESISTOR CH 1/16W 68K	1	
R3215	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R3216	ERJ3GEYJ332	M. RESISTOR CH 1/16W 3.3K	1	
R3217	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
R3218	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
R3219	ERJ3RBD471	M. RESISTOR CH 1/16W 470	1	
R3220	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R3221	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R3222	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R3223	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R3224	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
R3225	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1	
R3226	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
R3227	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R3228	ERJ3RBD122	M. RESISTOR CH 1/16W 1.2K	1	
R3229	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R3230	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1	
R3231	ERJ3RBD432	M. RESISTOR CH 1/16W 4.3K	1	
R3232	ERJ3RBD333	M. RESISTOR CH 1/16W 33K	1	
R3233	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
R3234	ERJ3RBD272	M. RESISTOR CH 1/16W 2.7K	1	
R3235	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R3236	ERJ3RBD362	M. RESISTOR CH 1/16W 3.6K	1	
R3237	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
R3238	ERJ3RED334	M. RESISTOR CH 1/16W 330K	1	
R3239	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1	
R3240	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1	
R3241	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1	
R3242	ERJ3RBD181	M. RESISTOR CH 1/16W 180	1	
R3243	EXB24V224J	COMBI. R-R 220K	1	
R3245	EXB24V224J	COMBI. R-R 220K	1	
R3247	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
R3248	ERJ3RBD242	M. RESISTOR CH 1/16W 2.4K	1	
R3249, 50	ERJ3RBD272	M. RESISTOR CH 1/16W 2.7K	2	
R3251	ERJ3RBD682	M. RESISTOR CH 1/16W 6.8K	1	
R3252	ERJ3GEYJ152	M. RESISTOR CH 1/16W 1.5K	1	
R3253	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R3254	ERJ3RBD682	M. RESISTOR CH 1/16W 6.8K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R3255	ERJ3GEYJ122	M. RESISTOR CH 1/16W 1.2K	1	
R3256, 57	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	2	
R3258, 59	ERJ3RBD473	M. RESISTOR CH 1/16W 47K	2	
R3260	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
R3261	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R3262	ERJ3GEYJ182	M. RESISTOR CH 1/16W 1.8K	1	
R3263	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R3264	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
R3265	ERJ3RBD473	M. RESISTOR CH 1/16W 47K	1	
R3266	ERJ3GEYJ394	M. RESISTOR CH 1/16W 390K	1	
R3267, 68	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
R3269	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
R3270	EXB24V101J	COMBI. R-R 100	1	
R3272	EXB24V101J	COMBI. R-R 100	1	
R3274	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R3275	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R3276	EXB24V103J	COMBI. R-R 10K	1	
R3278	EXB24V103J	COMBI. R-R 10K	1	
R3280	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1	
R3281	ERJ3RBD562	M. RESISTOR CH 1/16W 5.6K	1	
R3282	ERJ3RBD682	M. RESISTOR CH 1/16W 6.8K	1	
R3283	ERJ3RBD623	M. RESISTOR CH 1/16W 62K	1	
R3284	ERJ3RBD202	M. RESISTOR CH 1/16W 2K	1	
R3285	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R3286	ERJ3GEYJ182	M. RESISTOR CH 1/16W 1.8K	1	
R3287	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1	
R3288	ERJ3RBD511	M. RESISTOR CH 1/16W 510	1	
R3289	ERJ3RED620	M. RESISTOR CH 1/16W 62	1	
R3290	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R3291	ERJ3RBD242	M. RESISTOR CH 1/16W 2.4K	1	
R3292	ERJ3RBD392	M. RESISTOR CH 1/16W 3.9K	1	
R3293	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R3294	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1	
R3296	ERJ3GEYJ332	M. RESISTOR CH 1/16W 3.3K	1	
R3297	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1	
R3298	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R3299	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R3300	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R3301	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R3302	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R3303	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R3304	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R3305-07	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	3	
R3309	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R3311	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R3312	ERJ3RBD752	M. RESISTOR CH 1/16W 7.5K	1	
R3313	ERJ3GEYJ224	M. RESISTOR CH 1/16W 220K	1	
R3314	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R3401	ERJ3GEYJ332	M. RESISTOR CH 1/16W 3.3K	1	
R3402, 03	ERJ3RBD331	M. RESISTOR CH 1/16W 330	2	
R3404	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1	
R3405, 06	ERJ3RBD331	M. RESISTOR CH 1/16W 330	2	
R3407	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1	
R3408	ERJ3GEYJ272	M. RESISTOR CH 1/16W 2.7K	1	
R3409	ERJ3RBD151	M. RESISTOR CH 1/16W 150	1	
R3410	ERJ3RBD563	M. RESISTOR CH 1/16W 56K	1	
R3411	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
R3412	ERJ3RBD362	M. RESISTOR CH 1/16W 3.6K	1	
R3413	ERJ3RBD223	M. RESISTOR CH 1/16W 22K	1	
R3414	ERJ3RBD683	M. RESISTOR CH 1/16W 68K	1	
R3415	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R3416	ERJ3GEYJ332	M. RESISTOR CH 1/16W 3.3K	1	
R3417	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
R3418	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
R3419	ERJ3RBD471	M. RESISTOR CH 1/16W 470	1	
R3420	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R3421	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R3422	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R3423	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R3424	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
R3425	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1	
R3426	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
R3427	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R3428	ERJ3RBD122	M. RESISTOR CH 1/16W 1.2K	1	
R3429	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C3024	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC3305	MC74HC245AF	IC	1	
C3026-31	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	6		IC3306	MB86023PF	IC	1	
C3033	ECEV0GV470Q	E. CAPACITOR CH 4V 47U	1		IC3307	XC62AP5002P	IC	1	
C3034, 35	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		IC3308	XC62DN5002P	IC	1	
C3037-39	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3						
C3042	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		L3001	VL00319K101	COIL 100UH	1	
C3043	ECEV0GV470Q	E. CAPACITOR CH 4V 47U	1		L3002	ERJ8G0Y0R00	M. RESISTOR CH 1/8W 0	1	
C3044	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		L3003	VL00319K101	COIL 100UH	1	
C3046-51	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	6		L3201, 02	VL00319K101	COIL 100UH	2	
C3053	ECEV0GV470Q	E. CAPACITOR CH 4V 47U	1						
C3054, 55	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		P3001	VJS3505A100	CONNECTOR (FEMALE)	1	
C3057-59	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3		P3002	VJP3658D030	CONNECTOR (MALE)	1	
C3061	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1						
C3063	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		Q3201	2SB1218A	TRANSISTOR	1	
C3065	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		Q3202	2SD1819A	TRANSISTOR	1	
C3066	ECEV0GV470Q	E. CAPACITOR CH 4V 47U	1		Q3203	2SB1218A	TRANSISTOR	1	
C3067, 68	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		Q3204, 05	2SD1819A	TRANSISTOR	2	
C3069, 70	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	2						
C3071-73	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3		R3001	ERJ3RBD151	M. RESISTOR CH 1/16W 150	1	
C3074	ECEV0GV470Q	E. CAPACITOR CH 4V 47U	1		R3002	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1	
C3075	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3033-35	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	3	
C3077	ECEV0GV470Q	E. CAPACITOR CH 4V 47U	1		R3041	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
C3101-07	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	7		R3042-44	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	3	
C3108	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1		R3045-47	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	3	
C3109-17	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	9		R3050-64	EXB24V101J	COMBI. R-R 100	15	
C3119-24	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	6		R3066	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
C3127	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3068, 69	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	
C3130	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3071, 72	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2	
C3131	ECEV0GV470Q	E. CAPACITOR CH 4V 47U	1		R3073-75	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	3	
C3201	ECEV0JV470Q	E. CAPACITOR CH6.3V 47U	1		R3102	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
C3202	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3104	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
C3203	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1		R3105-07	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	3	
C3204-08	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	5		R3109, 10	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2	
C3210	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3112	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
C3211	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1		R3114	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
C3212-16	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	5		R3118	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
C3217	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1		R3119-28	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	10	
C3218	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3141	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
C3223	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1		R3201-25	EXB24V101J	COMBI. R-R 100	25	
C3224	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3251	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1	
C3301-04	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	4		R3252-54	ERJ3RED750	M. RESISTOR CH 1/16W 75	3	
C3305-07	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	3		R3255	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1	
C3311-15	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	5		R3256, 57	ERJ3RED750	M. RESISTOR CH 1/16W 75	2	
C3316-18	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	3		R3258	ERJ3RBD122	M. RESISTOR CH 1/16W 1.2K	1	
C3319	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3259	ERJ3RBD302	M. RESISTOR CH 1/16W 3K	1	
C3320	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1		R3260	ERJ3RBD122	M. RESISTOR CH 1/16W 1.2K	1	
C3321	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3261	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1	
C3323	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1		R3262	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
C3324	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3263	ERJ3RED750	M. RESISTOR CH 1/16W 75	1	
C3325	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1		R3301	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1	
C3326	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3302-04	ERJ3GEYJ124	M. RESISTOR CH 1/16W 120K	3	
C3327	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1		R3305	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1	
C3328	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3306-08	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	3	
					R3312-14	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	3	
IC3001-03	XC62AP3002P	IC	3		R3315-17	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	3	
IC3004-06	MM6577H	IC	3						
IC3007-09	HD151015	IC	3		TG3001	EYF6CU	TEST POINT	1	
IC3010-12	74AC574SJ	IC	3		TG3101	EYF6CU	TEST POINT	1	
IC3013	TC7SH86FU	IC	1		TG3201	EYF6CU	TEST POINT	1	
IC3014	NJM2904M	IC	1						
IC3015	HD151015	IC	1		TP3001-07	EYF6CU	TEST POINT	7	
IC3016	NJM431U	IC	1		TP3101-06	EYF6CU	TEST POINT	6	
IC3101	VY06632	IC	1		TP3201-06	EYF6CU	TEST POINT	6	
IC3102	VY06633A	IC	1						
IC3103	MC74HC04AF	IC	1		VR3001	VRV0161B102	V. RESISTOR 1K	1	
IC3104	74AC86SJ	IC	1						
IC3201	XC62AP5002P	IC	1						
IC3202	ADV7122KST50	IC	1						
IC3203	XC62AP5002P	IC	1						
IC3204	ADV7122KST50	IC	1						
IC3205, 06	AD589JR	IC	2						
IC3301	K6256DLG7L	IC	1		■ E8	VEP23276A	CAMERA ENCODER P.C. BOARD	1	(RTL) FOR AJ-D400P
IC3302	MC74HC245AF	IC	1						
IC3303	MB86023PF	IC	1		C3001	ECUX1H560JCV	C. CAPACITOR CH 50V 56P	1	
IC3304	K6256DLG7L	IC	1		C3002	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C3006, 07	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		C3136	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3008	ECUX1H121JCV	C. CAPACITOR CH 50V 120P	1		C3137	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3009	ECUX1H120JCV	C. CAPACITOR CH 50V 12P	1		C3138	ECUX1H181JCV	C. CAPACITOR CH 50V 180P	1	
C3010	ECUX1H560JCV	C. CAPACITOR CH 50V 56P	1		C3139	ECEV1HN010Q	E. CAPACITOR CH 50V 1U	1	
C3011	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1		C3140-42	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3	
C3013	ECEV1HV010Q	E. CAPACITOR CH 50V 1U	1		C3143	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3014	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C3144	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3016	ECUX1H121JCV	C. CAPACITOR CH 50V 120P	1		C3145	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3017	ECUX1H120JCV	C. CAPACITOR CH 50V 12P	1		C3146	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3018	ECUX1H560JCV	C. CAPACITOR CH 50V 56P	1		C3148, 49	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
C3019	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1		C3201	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3021	ECEV1HV010Q	E. CAPACITOR CH 50V 1U	1		C3202	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3022, 23	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	2		C3203	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3024	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		C3204	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3025	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		C3205	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3026	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1		C3206	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1	
C3027	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		C3207, 08	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
C3028	ECUX1H151JCV	C. CAPACITOR CH 50V 150P	1		C3209, 10	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	2	
C3029	ECUM1H561JCV	C. CAPACITOR CH 50V 560P	1		C3211	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3030-32	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	3		C3212	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3033	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C3213	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3034	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		C3214	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3035	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C3215	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3036	ECU1C473JB	P. CAPACITOR 16V 0.047U	1		C3216	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1	
C3037	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C3217	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3038	ECU1C473JB	P. CAPACITOR 16V 0.047U	1		C3219, 20	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	2	
C3039	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C3221	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3040	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		C3224-27	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	4	
C3041	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C3401	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	1	
C3042	ECU1C473JB	P. CAPACITOR 16V 0.047U	1		C3402-04	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3	
C3043	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		C3405	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	1	
C3044	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C3406	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3045	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		C3407	ECEVOGV2210	E. CAPACITOR CH 4V 220U	1	
C3046	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	1		C3409-11	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3	
C3047	ECUX1H030CCV	C. CAPACITOR CH 50V 3P	1		C3412	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3048	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1		C3413	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3049	ECUX1H680JCV	C. CAPACITOR CH 50V 68P	1		C3414	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3050	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	1		C3415-17	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	3	
C3051	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1		C3418	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3052	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C3419	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	1	
C3053, 54	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	2		C3420	ECEVOGV2210	E. CAPACITOR CH 4V 220U	1	
C3055	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C3421	ECUX1H050CCV	C. CAPACITOR CH 50V 5P	1	
C3056	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		C3422	ECEVOJN470Q	E. CAPACITOR CH6.3V 47U	1	
C3057	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C3423	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3058	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		C3424	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3059	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C3425, 26	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	2	
C3060	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		C3427	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	1	
C3061	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C3428-31	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	4	
C3064, 65	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		C3434	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3068	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C3435	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3069	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		C3436	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3070-73	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	4		C3437	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C3101	ECUX1H080DCV	C. CAPACITOR CH 50V 8P	1						
C3102	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	1		FL3101-03	VLF1305	FILTER	3	
C3104	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	1		FL3201, 02	VLF1305	FILTER	2	
C3105-10	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	6						
C3111	ECUX1H080DCV	C. CAPACITOR CH 50V 8P	1		IC3001	AD8047AR	IC	1	
C3112	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	1		IC3003	XC62AP5002P	IC	1	
C3114	ECUX1H080DCV	C. CAPACITOR CH 50V 8P	1		IC3004	M51272FP	IC	1	
C3115	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	1		IC3005	XC62DN5002P	IC	1	
C3120	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3006	TC4W53FU	IC	1	
C3121	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC3101	AD8011AR	IC	1	
C3122	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3102	MC74HC4053F	IC	1	
C3123	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC3103	XC62AP5002P	IC	1	
C3124	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3104	XC62DN5002P	IC	1	
C3125	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC3105	NJM062M	IC	1	
C3126	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3106	MC74HC00AF	IC	1	
C3127	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC3107	TC4W53FU	IC	1	
C3128	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3201, 02	AD8011AR	IC	2	
C3129	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC3203	MC74HC4053F	IC	1	
C3130	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3204, 05	TC4W53FU	IC	2	
C3131	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC3401-03	NJM2535M	IC	3	
C3132	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3404	AD8011AR	IC	1	
C3134	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC3405	XC62AP5002P	IC	1	
C3135	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3406	AD8011AR	IC	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
L3002	VL00426J820	COIL 82UH	1		R3056	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	1	
L3003	VL00163J820	COIL 82UH	1		R3057	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
L3004, 05	VL00426J470	COIL 47UH	2		R3058	ERJ3GEY682	M.RESISTOR CH 1/16W 6.8K	1	
L3006	VL00426J180	COIL 18UH	1		R3059	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	1	
L3007	VL00426J560	COIL 56UH	1		R3060	ERJ3RED680	M.RESISTOR CH 1/16W 68	1	
L3008, 09	VL00426J120	COIL 12UH	2		R3061, 62	ERJ3GEYJ220	M.RESISTOR CH 1/16W 22	2	
L3010-13	VL00319K101	COIL 100UH	4		R3063	ERJ3GEY682	M.RESISTOR CH 1/16W 6.8K	1	
L3101-03	VL00426J470	COIL 47UH	3		R3064	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
L3104-06	VL00319K101	COIL 100UH	3		R3065	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	1	
L3108, 09	VL00319K101	COIL 100UH	2		R3066	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
L3201-04	VL00319K101	COIL 100UH	4		R3067	ERJ3GEY682	M.RESISTOR CH 1/16W 6.8K	1	
L3401-03	VL00319K101	COIL 100UH	3		R3068	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	1	
P3001	VJP40640160	CONNECTOR (MALE)	1		R3069	ERJ3RED680	M.RESISTOR CH 1/16W 68	1	
Q3003	2SD1819A	TRANSISTOR	1		R3073	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
Q3005	2SD1819A	TRANSISTOR	1		R3074	ERJ3RBD912	M.RESISTOR CH 1/16W 9.1K	1	
Q3006-08	2SB1218A	TRANSISTOR	3		R3075	ERJ3RBD822	M.RESISTOR CH 1/16W 8.2K	1	
Q3009	2SD1819A	TRANSISTOR	1		R3078	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
Q3010	XN4401	TRANSISTOR-RESISTOR	1		R3079	ERJ3RED910	M.RESISTOR CH 1/16W 91	1	
Q3011	XN4501	TRANSISTOR-RESISTOR	1		R3080	ERJ3RED390	M.RESISTOR CH 1/16W 39	1	
Q3012	XN4401	TRANSISTOR-RESISTOR	1		R3081	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
Q3013	XN4501	TRANSISTOR-RESISTOR	1		R3095	VRT014182150	THERMISTOR	1	
Q3014, 15	2SD1819A	TRANSISTOR	2		R3096	VRT014116250	THERMISTOR	1	
Q3016	XN4501	TRANSISTOR-RESISTOR	1		R3101-03	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	3	
Q3101	XN4401	TRANSISTOR-RESISTOR	1		R3104	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
Q3102	XN4501	TRANSISTOR-RESISTOR	1		R3105	ERJ3RBD821	M.RESISTOR CH 1/16W 820	1	
Q3103-06	2SD1819A	TRANSISTOR	4		R3106	ERJ3RBD181	M.RESISTOR CH 1/16W 180	1	
Q3107-09	2SB1218A	TRANSISTOR	3		R3107	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
Q3201-04	2SD1819A	TRANSISTOR	4		R3108	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
Q3206	XN4401	TRANSISTOR-RESISTOR	1		R3109	ERJ3RBD151	M.RESISTOR CH 1/16W 150	1	
Q3207	XN4501	TRANSISTOR-RESISTOR	1		R3111	ERJ3RBD911	M.RESISTOR CH 1/16W 910	1	
Q3209, 10	2SD1819A	TRANSISTOR	2		R3112	ERJ3RBD122	M.RESISTOR CH 1/16W 1.2K	1	
Q3212	2SD1819A	TRANSISTOR	1		R3113	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
Q3214	XN4401	TRANSISTOR-RESISTOR	1		R3115	ERJ3RBD132	M.RESISTOR CH 1/16W 1.3K	1	
Q3215	XN4501	TRANSISTOR-RESISTOR	1		R3116	ERJ3RBD821	M.RESISTOR CH 1/16W 820	1	
Q3401-03	2SD1819A	TRANSISTOR	3		R3117	ERJ3RBD271	M.RESISTOR CH 1/16W 270	1	
R3001	ERJ3RED470	M.RESISTOR CH 1/16W 47	1		R3118	ERJ3RBD123	M.RESISTOR CH 1/16W 12K	1	
R3002	ERJ3RBD101	M.RESISTOR CH 1/16W 100	1		R3120	ERJ3RBD392	M.RESISTOR CH 1/16W 3.9K	1	
R3003	ERJ3RBD111	M.RESISTOR CH 1/16W 110	1		R3122	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R3010	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		R3123, 24	ERJ3GEYJ220	M.RESISTOR CH 1/16W 22	2	
R3011	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1		R3125, 26	ERJ3GEY682	M.RESISTOR CH 1/16W 6.8K	2	
R3012	ERJ3RBD241	M.RESISTOR CH 1/16W 240	1		R3127	ERJ3RED680	M.RESISTOR CH 1/16W 68	1	
R3013	ERJ3RBD361	M.RESISTOR CH 1/16W 360	1		R3128, 29	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	2	
R3015	ERJ3GEY6332	M.RESISTOR CH 1/16W 3.3K	1		R3130	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R3020	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		R3131	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R3021	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1		R3132	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3022, 23	ERJ3RBD361	M.RESISTOR CH 1/16W 360	2		R3133	ERJ3RBD681	M.RESISTOR CH 1/16W 680	1	
R3025	ERJ3GEY6332	M.RESISTOR CH 1/16W 3.3K	1		R3134	ERJ3RBD331	M.RESISTOR CH 1/16W 330	1	
R3026	ERJ3RBD821	M.RESISTOR CH 1/16W 820	1		R3135	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R3027	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1		R3136	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3028	ERJ3GEY6332	M.RESISTOR CH 1/16W 3.3K	1		R3137	ERJ3RBD151	M.RESISTOR CH 1/16W 150	1	
R3029	ERJ3RBD821	M.RESISTOR CH 1/16W 820	1		R3139	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3030	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1		R3140	ERJ3RBD751	M.RESISTOR CH 1/16W 750	1	
R3031	ERJ3GEY6332	M.RESISTOR CH 1/16W 3.3K	1		R3141	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
R3032	ERJ3RBD471	M.RESISTOR CH 1/16W 470	1		R3143	ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1	
R3033	ERJ3RBD121	M.RESISTOR CH 1/16W 120	1		R3144	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R3034	ERJ3GEY6332	M.RESISTOR CH 1/16W 3.3K	1		R3145	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3035, 36	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2		R3146	ERJ3RBD751	M.RESISTOR CH 1/16W 750	1	
R3038, 39	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	2		R3147	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1	
R3040	ERJ3RBD273	M.RESISTOR CH 1/16W 27K	1		R3148	ERJ3RED390	M.RESISTOR CH 1/16W 39	1	
R3041, 42	ERJ3RBD183	M.RESISTOR CH 1/16W 18K	2		R3149	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3043	ERJ3RBD273	M.RESISTOR CH 1/16W 27K	1		R3150	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R3044	ERJ3RBD621	M.RESISTOR CH 1/16W 620	1		R3152	ERJ3RBD151	M.RESISTOR CH 1/16W 150	1	
R3045	ERJ3RBD821	M.RESISTOR CH 1/16W 820	1		R3154	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3046	ERJ3GEY6332	M.RESISTOR CH 1/16W 3.3K	1		R3155	ERJ3RBD471	M.RESISTOR CH 1/16W 470	1	
R3047	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1		R3156	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
R3048	ERJ3RBD272	M.RESISTOR CH 1/16W 2.7K	1		R3158	ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1	
R3049	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1		R3159	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R3050, 51	ERJ3RBD561	M.RESISTOR CH 1/16W 560	2		R3160	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R3052, 53	ERJ3GEYJ220	M.RESISTOR CH 1/16W 22	2		R3161-63	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	3	
R3054	ERJ3GEY682	M.RESISTOR CH 1/16W 6.8K	1		R3165	ERJ3RBD471	M.RESISTOR CH 1/16W 470	1	
R3055	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1		R3166	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
					R3167	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
					R3168	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
					R3169, 70	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	2	
					R3171, 72	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C3046	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	1		C3405	ECEVICV100Q	E. CAPACITOR CH 16V 10U	1	
C3047	ECUM1H20CCV	C. CAPACITOR CH 50V 2P	1		C3406	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C3048	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	1		C3407	ECEVOGV221Q	E. CAPACITOR CH 4V 220U	1	
C3049	ECUX1H680JCV	C. CAPACITOR CH 50V 68P	1		C3409-11	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	3	
C3050	ECUX1H090DCV	C. CAPACITOR CH 50V 9P	1		C3412	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3051	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1		C3413	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C3052	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C3414	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3053, 54	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	2		C3415-17	ECEVICV100Q	E. CAPACITOR CH 16V 10U	3	
C3055	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C3418	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C3056	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		C3419	ECEVICV100Q	E. CAPACITOR CH 16V 10U	1	
C3057	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C3420	ECEVOGV221Q	E. CAPACITOR CH 4V 220U	1	
C3058	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		C3421	ECUX1H050CCV	C. CAPACITOR CH 50V 5P	1	
C3059	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C3422	ECEVOJN470Q	E. CAPACITOR CH6.3V 47U	1	
C3060	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		C3423	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C3061	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C3424	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3064, 65	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2		C3425, 26	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	2	
C3068	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C3427	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	1	
C3069	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		C3428-31	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	4	
C3070-73	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	4		C3434	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3101	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		C3435	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C3102	ECUX1H181JCV	C. CAPACITOR CH 50V 180P	1		C3436	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3103	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1		C3437	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C3104	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	1						
C3105-10	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	6		FL3101-03	VLF1305	FILTER	3	
C3111	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		FL3201, 02	VLF1305	FILTER	2	
C3112	ECUX1H181JCV	C. CAPACITOR CH 50V 180P	1						
C3113	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1		IC3001	AD8047AR	IC	1	
C3114	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		IC3003	XC62AP5002P	IC	1	
C3115	ECUX1H181JCV	C. CAPACITOR CH 50V 180P	1		IC3004	M51272P	IC	1	
C3116	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1		IC3005	XC62DN5002P	IC	1	
C3120	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3006	TC4W53FU	IC	1	
C3121	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		IC3101	AD8011AR	IC	1	
C3122	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3102	MC74HC4053F	IC	1	
C3123	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		IC3103	XC62AP5002P	IC	1	
C3124	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3104	XC62DN5002P	IC	1	
C3125	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		IC3105	NJM062M	IC	1	
C3126	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3106	MC74HC00AF	IC	1	
C3127	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		IC3107	TC4W53FU	IC	1	
C3128	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3201, 02	AD8011AR	IC	2	
C3129	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		IC3203	MC74HC4053F	IC	1	
C3130	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3204, 05	TC4W53FU	IC	2	
C3131	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		IC3401-03	NJM2535M	IC	3	
C3132	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3404	AD8011AR	IC	1	
C3134	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		IC3405	XC62AP5002P	IC	1	
C3135	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC3406	AD8011AR	IC	1	
C3136	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1						
C3137	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		L3002	VL00426J820	COIL 82UH	1	
C3138	ECUX1H181JCV	C. CAPACITOR CH 50V 180P	1		L3003	VL00163J820	COIL 82UH	1	
C3139	ECEV1HN010Q	E. CAPACITOR CH 50V 1U	1		L3004, 05	VL00426J470	COIL 47UH	2	
C3140-42	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	3		L3006	VL00426J180	COIL 18UH	1	
C3143	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		L3007	VL00426J560	COIL 56UH	1	
C3144	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		L3008, 09	VL00426J120	COIL 12UH	2	
C3145	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		L3010-13	VL00319K101	COIL 100UH	4	
C3146	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		L3101-03	VL00426J101	COIL 100UH	3	
C3148, 49	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2		L3104-06	VL00319K101	COIL 100UH	3	
C3201	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		L3108, 09	VL00319K101	COIL 100UH	2	
C3202	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		L3201-04	VL00319K101	COIL 100UH	4	
C3203	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		L3401-03	VL00319K101	COIL 100UH	3	
C3204	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1						
C3205	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		P3001	VJP4064Q160	CONNECTOR (MALE)	1	
C3206	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1						
C3207, 08	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2		Q3003	2SD1819A	TRANSISTOR	1	
C3209, 10	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	2		Q3005	2SD1819A	TRANSISTOR	1	
C3211	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		Q3006-08	2SB1218A	TRANSISTOR	3	
C3212	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		Q3009	2SD1819A	TRANSISTOR	1	
C3213	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		Q3010	XN4401	TRANSISTOR-RESISTOR	1	
C3214	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		Q3011	XN4501	TRANSISTOR-RESISTOR	1	
C3215	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		Q3012	XN4401	TRANSISTOR-RESISTOR	1	
C3216	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1		Q3013	XN4501	TRANSISTOR-RESISTOR	1	
C3217	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		Q3014, 15	2SD1819A	TRANSISTOR	2	
C3219, 20	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	2		Q3016	XN4501	TRANSISTOR-RESISTOR	1	
C3221	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		Q3101	XN4401	TRANSISTOR-RESISTOR	1	
C3224-27	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	4		Q3102	XN4501	TRANSISTOR-RESISTOR	1	
C3401	ECEVICV100Q	E. CAPACITOR CH 16V 10U	1		Q3103-06	2SD1819A	TRANSISTOR	4	
C3402-04	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	3		Q3107-09	2SB1218A	TRANSISTOR	3	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
Q3201-04	2SD1819A	TRANSISTOR	4		R3113	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
Q3206	XN4401	TRANSISTOR-RESISTOR	1		R3115	ERJ3RBD132	M.RESISTOR CH 1/16W 1.3K	1	
Q3207	XN4501	TRANSISTOR-RESISTOR	1		R3116	ERJ3RBD821	M.RESISTOR CH 1/16W 820	1	
Q3209, 10	2SD1819A	TRANSISTOR	2		R3117	ERJ3RBD271	M.RESISTOR CH 1/16W 270	1	
Q3212	2SD1819A	TRANSISTOR	1		R3118	ERJ3RBD123	M.RESISTOR CH 1/16W 12K	1	
Q3214	XN4401	TRANSISTOR-RESISTOR	1		R3120	ERJ3RBD392	M.RESISTOR CH 1/16W 3.9K	1	
Q3215	XN4501	TRANSISTOR-RESISTOR	1		R3122	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
Q3401-03	2SD1819A	TRANSISTOR	3		R3123, 24	ERJ3GEYJ220	M.RESISTOR CH 1/16W 22	2	
					R3125, 26	ERJ3GEYG682	M.RESISTOR CH 1/16W 6.8K	2	
R3001	ERJ3RED470	M.RESISTOR CH 1/16W 47	1		R3127	ERJ3RED680	M.RESISTOR CH 1/16W 68	1	
R3002	ERJ3RBD101	M.RESISTOR CH 1/16W 100	1		R3128, 29	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	2	
R3003	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		R3130	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R3010	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		R3131	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R3011	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1		R3132	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3012	ERJ3RBD241	M.RESISTOR CH 1/16W 240	1		R3133	ERJ3RBD681	M.RESISTOR CH 1/16W 680	1	
R3013	ERJ3RBD361	M.RESISTOR CH 1/16W 360	1		R3134	ERJ3RBD331	M.RESISTOR CH 1/16W 330	1	
R3015	ERJ3GEYG332	M.RESISTOR CH 1/16W 3.3K	1		R3135	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R3020	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		R3136	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3021	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1		R3137	ERJ3RBD151	M.RESISTOR CH 1/16W 150	1	
R3022, 23	ERJ3RBD361	M.RESISTOR CH 1/16W 360	2		R3139	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3025	ERJ3GEYG332	M.RESISTOR CH 1/16W 3.3K	1		R3140	ERJ3RBD751	M.RESISTOR CH 1/16W 750	1	
R3026	ERJ3RBD821	M.RESISTOR CH 1/16W 820	1		R3141	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
R3027	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1		R3143	ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1	
R3028	ERJ3GEYG332	M.RESISTOR CH 1/16W 3.3K	1		R3144	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R3029	ERJ3RBD821	M.RESISTOR CH 1/16W 820	1		R3145	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3030	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1		R3146	ERJ3RBD751	M.RESISTOR CH 1/16W 750	1	
R3031	ERJ3GEYG332	M.RESISTOR CH 1/16W 3.3K	1		R3147	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1	
R3032	ERJ3RBD471	M.RESISTOR CH 1/16W 470	1		R3148	ERJ3RED390	M.RESISTOR CH 1/16W 39	1	
R3033	ERJ3RBD241	M.RESISTOR CH 1/16W 240	1		R3149	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3034	ERJ3GEYG332	M.RESISTOR CH 1/16W 3.3K	1		R3150	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R3038, 39	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	2		R3152	ERJ3RBD151	M.RESISTOR CH 1/16W 150	1	
R3040	ERJ3RBD273	M.RESISTOR CH 1/16W 27K	1		R3154	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3041, 42	ERJ3RBD183	M.RESISTOR CH 1/16W 18K	2		R3155	ERJ3RBD621	M.RESISTOR CH 1/16W 620	1	
R3043	ERJ3RBD273	M.RESISTOR CH 1/16W 27K	1		R3156	ERJ3RBD182	M.RESISTOR CH 1/16W 1.8K	1	
R3044	ERJ3RBD621	M.RESISTOR CH 1/16W 620	1		R3158	ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1	
R3045	ERJ3RBD821	M.RESISTOR CH 1/16W 820	1		R3159	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R3046	ERJ3GEYG332	M.RESISTOR CH 1/16W 3.3K	1		R3160	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R3047	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1		R3161-63	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	3	
R3048	ERJ3RBD272	M.RESISTOR CH 1/16W 2.7K	1		R3165	ERJ3RBD471	M.RESISTOR CH 1/16W 470	1	
R3049	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1		R3166	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R3050, 51	ERJ3RBD561	M.RESISTOR CH 1/16W 560	2		R3167	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R3052, 53	ERJ3GEYJ220	M.RESISTOR CH 1/16W 22	2		R3168	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R3054	ERJ3GEYG682	M.RESISTOR CH 1/16W 6.8K	1		R3169, 70	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	2	
R3055	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1		R3171, 72	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	2	
R3056	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	1		R3174	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
R3057	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1		R3175	ERJ3GEYJ221	M.RESISTOR CH 1/16W 220	1	
R3058	ERJ3GEYG682	M.RESISTOR CH 1/16W 6.8K	1		R3201	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R3059	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	1		R3202	ERJ3RBD302	M.RESISTOR CH 1/16W 3K	1	
R3060	ERJ3RED680	M.RESISTOR CH 1/16W 68	1		R3203	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3061, 62	ERJ3GEYJ220	M.RESISTOR CH 1/16W 22	2		R3204	ERJ3RBD101	M.RESISTOR CH 1/16W 100	1	
R3063	ERJ3GEYG682	M.RESISTOR CH 1/16W 6.8K	1		R3206	ERJ3RBD681	M.RESISTOR CH 1/16W 680	1	
R3064	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1		R3207	ERJ3RBD242	M.RESISTOR CH 1/16W 2.4K	1	
R3065	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	1		R3208	ERJ3RBD222	M.RESISTOR CH 1/16W 2.2K	1	
R3066	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1		R3209	ERJ3RBD361	M.RESISTOR CH 1/16W 360	1	
R3067	ERJ3GEYG682	M.RESISTOR CH 1/16W 6.8K	1		R3210	ERJ3RBD222	M.RESISTOR CH 1/16W 2.2K	1	
R3068	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	1		R3214	ERJ3GEYJ122	M.RESISTOR CH 1/16W 1.2K	1	
R3069	ERJ3RED680	M.RESISTOR CH 1/16W 68	1		R3215	ERJ3RBD242	M.RESISTOR CH 1/16W 2.4K	1	
R3073	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		R3216	ERJ3RBD562	M.RESISTOR CH 1/16W 5.6K	1	
R3074	ERJ3RBD912	M.RESISTOR CH 1/16W 9.1K	1		R3217	ERJ3RBD681	M.RESISTOR CH 1/16W 680	1	
R3075	ERJ3RBD822	M.RESISTOR CH 1/16W 8.2K	1		R3218	ERJ3RBD152	M.RESISTOR CH 1/16W 1.5K	1	
R3078	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1		R3219	ERJ3GEYJ821	M.RESISTOR CH 1/16W 820	1	
R3079	ERJ3RED910	M.RESISTOR CH 1/16W 91	1		R3220	ERJ3RED124	M.RESISTOR CH 1/16W 120K	1	
R3080	ERJ3RED390	M.RESISTOR CH 1/16W 39	1		R3221	ERJ3GEYG682	M.RESISTOR CH 1/16W 6.8K	1	
R3081	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1		R3223, 24	ERJ3GEYJ220	M.RESISTOR CH 1/16W 22	2	
R3095	VRT014182150	THERMISTOR	1		R3227	ERJ3GEYG682	M.RESISTOR CH 1/16W 6.8K	1	
R3096	VRT01416250	THERMISTOR	1		R3229	ERJ3RED680	M.RESISTOR CH 1/16W 68	1	
R3101-03	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	3		R3233	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R3104	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1		R3234	ERJ3RBD302	M.RESISTOR CH 1/16W 3K	1	
R3105	ERJ3RBD821	M.RESISTOR CH 1/16W 820	1		R3235	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R3106	ERJ3RBD181	M.RESISTOR CH 1/16W 180	1		R3236	ERJ3RBD101	M.RESISTOR CH 1/16W 100	1	
R3107	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		R3238	ERJ3RBD681	M.RESISTOR CH 1/16W 680	1	
R3108	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1		R3239	ERJ3RBD242	M.RESISTOR CH 1/16W 2.4K	1	
R3109	ERJ3RBD151	M.RESISTOR CH 1/16W 150	1		R3240	ERJ3RBD222	M.RESISTOR CH 1/16W 2.2K	1	
R3111	ERJ3RBD911	M.RESISTOR CH 1/16W 910	1		R3241	ERJ3RBD361	M.RESISTOR CH 1/16W 360	1	
R3112	ERJ3RBD122	M.RESISTOR CH 1/16W 1.2K	1		R3242	ERJ3RBD222	M.RESISTOR CH 1/16W 2.2K	1	

[illegible]

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C263	ECEV0JV3300	E.CAPACITOR CH6.3V 33U	1		R102	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
C264	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	1		R103	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
C265	ECSTICX106Z	T.CAPACITOR CH 16V 10U	1		R105	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
C266	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	1		R107	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
C268	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	1		R108, 09	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	2	
C269, 70	ECUX1H102JV	C.CAPACITOR CH 50V 1000P	2		R110	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
C272	ECUX1E104KBN	C.CAPACITOR CH 25V 0.1U	1		R111	ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1	
C273	ECUX1H180JCV	C.CAPACITOR CH 50V 18P	1		R112	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
C274	ECUX1H070DCV	C.CAPACITOR CH 50V 7P	1		R113	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
C275	ECUX1H820JCV	C.CAPACITOR CH 50V 82P	1		R114	ERJ3GEY682	M.RESISTOR CH 1/16W 6.8K	1	
C276	ECUX1E104KBN	C.CAPACITOR CH 25V 0.1U	1		R115	ERJ3GEYJ122	M.RESISTOR CH 1/16W 1.2K	1	
C279	ECUX1E104KBN	C.CAPACITOR CH 25V 0.1U	1		R116	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
C301-05	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	5		R124	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
D1	MA142K	DIODE	1		R125	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
D201	MA142K	DIODE	1		R126	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
D203, 04	MA704	DIODE	2		R127, 28	ERJ3GEY152	M.RESISTOR CH 1/16W 1.5K	2	
FL2, L3	VLF0941C223	FILTER	2		R129	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
FL101	VLF1179	FILTER	1		R130	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
IC5	XC62DN5002P	IC	1		R131, 32	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
IC7	AD817AR	IC	1		R133	ERJ3GEYJ331	M.RESISTOR CH 1/16W 330	1	
IC103	AD817AR	IC	1		R134	ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1	
IC104	MC14053BDT	IC	1		R136	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
IC105	AD826AR	IC	1		R137	ERJ3GEYJ122	M.RESISTOR CH 1/16W 1.2K	1	
IC106	MC14053BDT	IC	1		R138	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
IC142	MC14053BDT	IC	1		R147	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
IC201	EL4583CS	IC	1		R149	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
IC202	TC7W14FU	IC	1		R150, 51	ERJ3GEY152	M.RESISTOR CH 1/16W 1.5K	2	
IC203, 04	TC7SH08FU	IC	2		R152	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
IC205	TC7W125FU	IC	1		R153	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
IC206	NJM062M	IC	1		R154, 55	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
IC207, 08	CXD1176Q	IC	2		R156	ERJ3GEYJ331	M.RESISTOR CH 1/16W 330	1	
IC209	XC62AP5002P	IC	1		R157	ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1	
IC211	TC7SH08FU	IC	1		R160	ERJ3GEY682	M.RESISTOR CH 1/16W 6.8K	1	
IC212	CXD1176Q	IC	1		R163	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
IC301	T163G26-1018	IC	1		R166	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
L102	VL00426J3R3	COIL 3.3UH	1		R179	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
L104, 05	VL00319K101	COIL 100UH	2		R183	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
L106	VL00426J820	COIL 82UH	1		R184	ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
L107	VL00426J680	COIL 68UH	1		R185, 86	ERJ3GEY152	M.RESISTOR CH 1/16W 1.5K	2	
L110	VL00426J820	COIL 82UH	1		R187	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
L111	VL00426J680	COIL 68UH	1		R188	ERJ3GEY682	M.RESISTOR CH 1/16W 6.8K	1	
L201	VL00319K101	COIL 100UH	1		R203	ERJ3GEYJ823	M.RESISTOR CH 1/16W 82K	1	
L204-06	VL00319K101	COIL 100UH	3		R205	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
L207	VLP0155	COIL	1		R206	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
L262	VL00319K101	COIL 100UH	1		R207	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
L264	VL00163J221	COIL 220UH	1		R208	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
L300-07	VLP0155	COIL	8		R209	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
L309-19	VLP0155	COIL	11		R210	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
P1	VJP4064Q160	CONNECTOR (MALE)	1		R211	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
Q1	2N4601	TRANSISTOR-RESISTOR	1		R212	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
Q101	2SB1218A-R	TRANSISTOR	1		R213	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
Q102	2SD1819A-R	TRANSISTOR	1		R216	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
Q103	2SB1218A-R	TRANSISTOR	1		R218	ERJ3GEYJ750	M.RESISTOR CH 1/16W 75	1	
Q107	2SB1218A-R	TRANSISTOR	1		R219	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
Q108	2SA1532-C	TRANSISTOR	1		R220	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
Q109	2SB1218A-R	TRANSISTOR	1		R221	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
Q113	2SB1218A-R	TRANSISTOR	1		R223	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1	
Q114, 15	2SA1532-C	TRANSISTOR	2		R225	ERJ3GEYJ221	M.RESISTOR CH 1/16W 220	1	
Q116	2SD1819A-R	TRANSISTOR	1		R226, 27	ERJ6GEYJ335	M.RESISTOR CH 1/10W 3.3M	2	
Q201	2SD1819A-R	TRANSISTOR	1		R228	ERJ3GEYJ750	M.RESISTOR CH 1/16W 75	1	
R1	ERJ6RBD151	M.RESISTOR CH 1/10W 150	1		R229	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R2	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1		R231	ERJ3GEY682	M.RESISTOR CH 1/16W 6.8K	1	
R3	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1		R232	VRE006607103	M.RESISTOR CH 1/10W 10K	1	
R4	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1		R234, 35	ERJ6GEYJ335	M.RESISTOR CH 1/10W 3.3M	2	
R5	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1		R236	ERJ3GEYJ750	M.RESISTOR CH 1/16W 75	1	
R6	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1		R237	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R18	ERJ6RBD151	M.RESISTOR CH 1/10W 150	1		R239	ERJ3GEY682	M.RESISTOR CH 1/16W 6.8K	1	
R46	ERJ3GEYJ330	M.RESISTOR CH 1/16W 33	1		R241	VRE006607103	M.RESISTOR CH 1/10W 10K	1	
					R242, 43	ERJ6GEYJ335	M.RESISTOR CH 1/10W 3.3M	2	
					R244	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
					R251	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
					R268	ERJ3GEYJ684	M.RESISTOR CH 1/16W 680K	1	
					R272	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
					R273	ERJ3GEYJ221	M.RESISTOR CH 1/16W 220	1	
					R303	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R305	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1		C168	ECUX1H070DCV	C. CAPACITOR CH 50V 7P	1	
R307	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1		C169	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	1	
R311	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1		C170	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1	
R313-15	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	3		C171	ECUX1H270JCV	C. CAPACITOR CH 50V 27P	1	
R320, 21	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2		C172	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	1	
R323	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1		C173	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1	
R324, 25	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2		C174	ECUX1H560JCV	C. CAPACITOR CH 50V 56P	1	
R326, 27	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2		C176, 77	ECST1CX106Z	T. CAPACITOR CH 16V 10U	2	
R502, 03	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2		C202	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1	
R505, 06	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2		C206	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
					C207	ECUM1H680JCN	C. CAPACITOR CH 50V 68P	1	
TG1	EYF6CU	TEST POINT	1		C208	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
					C216	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
TP201, 02	EYF6CU	TEST POINT	2		C217	ECST1CY225Z	T. CAPACITOR CH 16V 2.2U	1	
TP207, 08	EYF6CU	TEST POINT	2		C218	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1	
TP212	EYF6CU	TEST POINT	1		C219	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
TP301-07	EYF6CU	TEST POINT	7		C220	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1	
					C221	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
VR104	EVM7JGA00B23	V. RESISTOR 2K	1		C223	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
VR107, 08	EVM7JGA00B23	V. RESISTOR 2K	2		C224	ECST1CY225Z	T. CAPACITOR CH 16V 2.2U	1	
VR111, 12	EVM7JGA00B23	V. RESISTOR 2K	2		C225	ECEV0JN100Q	E. CAPACITOR CH6.3V 10U	1	
VR201	EVM7JGA00B14	V. RESISTOR 10K	1		C226	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
					C227	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
X201	VSX0677	CRYSTAL OSCILLATOR	1		C228	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1	
					C229	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
		MISCELLANEOUS			C230	ECST1CY225Z	T. CAPACITOR CH 16V 2.2U	1	
					C231	ECEV0JN100Q	E. CAPACITOR CH6.3V 10U	1	
	XNG2B	NUT	3		C232	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
	YSC4500	SHIELD PLATE	1		C233	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1	
	XSB2+6	SCREW	3		C236-38	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	3	
	VG04620	NUMBER PLATE (5)	1		C242	ECUX1C473KBV	C. CAPACITOR CH 16V 0.047U	1	
					C244-46	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	3	
					C247	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	1	
					C263	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1	
					C264	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
					C265	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1	
■ E10	VEP03D53A	VIDEO I/F P.C. BOARD	1	(RTL)FOR AJ-D400E	C266	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
					C268	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
					C269, 70	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	2	
C8	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C272	ECUX1E104KBN	C. CAPACITOR CH 25V 0.1U	1	
C12	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C273	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	1	
C13	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1		C274	ECUX1H070DCV	C. CAPACITOR CH 50V 7P	1	
C14	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C275	ECUX1H820JCV	C. CAPACITOR CH 50V 82P	1	
C15	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1		C276	ECUX1E104KBN	C. CAPACITOR CH 25V 0.1U	1	
C18	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C279	ECUX1E104KBN	C. CAPACITOR CH 25V 0.1U	1	
C19	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1		C301-05	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	5	
C26	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C307-09	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	3	
C27	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1		C403, 04	VCK0152	C. CAPACITOR	2	
C31	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C405	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C33	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C406	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1	
C34	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1		C407	VCK0151	C. CAPACITOR	1	
C55	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1		C408, 09	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	2	
C57	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C410	VCK0151	C. CAPACITOR	1	
C64	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C411-13	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	3	
C65	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1		C414	VCK0151	C. CAPACITOR	1	
C87	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C415-17	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	3	
C89	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		C602	ECUX1H560JCV	C. CAPACITOR CH 50V 56P	1	
C111	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		C605, 06	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	2	
C112	ECUX1H270JCV	C. CAPACITOR CH 50V 27P	1		C608	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C113	ECUX1H332KBV	C. CAPACITOR CH 50V 3300P	1		C609	ECUX1H181JCV	C. CAPACITOR CH 50V 180P	1	
C114, 15	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	2		C610	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1	
C124, 25	ECST1CX106Z	T. CAPACITOR CH 16V 10U	2		C611	ECUX1H390JCV	C. CAPACITOR CH 50V 39P	1	
C130, 31	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	2		C612	ECUX1H070DCV	C. CAPACITOR CH 50V 7P	1	
C132	ECUX1H390JCV	C. CAPACITOR CH 50V 39P	1		C613	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	1	
C133	ECUX1H070DCV	C. CAPACITOR CH 50V 7P	1		C614	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1	
C134	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	1		C615	ECUX1H270JCV	C. CAPACITOR CH 50V 27P	1	
C135	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		C616	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	1	
C136	ECUX1H270JCV	C. CAPACITOR CH 50V 27P	1		C617	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1	
C137	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	1		C618	ECUX1H560JCV	C. CAPACITOR CH 50V 56P	1	
C141	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	1		C620	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C142	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1		C623	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C143	ECUX1H560JCV	C. CAPACITOR CH 50V 56P	1		C624	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1	
C145, 46	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	2		C625	ECUX1H390JCV	C. CAPACITOR CH 50V 39P	1	
C165, 66	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	2		C626	ECUX1H070DCV	C. CAPACITOR CH 50V 7P	1	
C167	ECUX1H390JCV	C. CAPACITOR CH 50V 39P	1		C627	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C628	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		L402	VL00464K6R8	COIL 6.8UH	1	
C629	ECUX1H270JCV	C. CAPACITOR CH 50V 27P	1		L602	VL00163J390	COIL 39UH	1	
C630	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		L603	VL00319K101	COIL 100UH	1	
C631	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	1		L604	VL00426J820	COIL 82UH	1	
C632	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1		L605	VL00426J680	COIL 68UH	1	
C633	ECUX1H560JCV	C. CAPACITOR CH 50V 56P	1		L607	VL00319K101	COIL 100UH	1	
C635, 36	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	2		L608	VL00426J820	COIL 82UH	1	
C637	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		L609	VL00426J680	COIL 68UH	1	
C638	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		L611, 12	VL00426J470	COIL 47UH	2	
C640	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		L613	VL00426J180	COIL 18UH	1	
C641	ECUX1H151JCV	C. CAPACITOR CH 50V 150P	1		L614	VL00426J560	COIL 56UH	1	
C642	ECUM1H561JCV	C. CAPACITOR CH 50V 560P	1		L618	VL00319K101	COIL 100UH	1	
C643, 44	ECST1CC336Z	T. CAPACITOR CH 16V 33U	2						
C645, 46	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	2		P1	VJP4064Q160	CONNECTOR (MALE)	1	
C647	ECUM1E473KBN	C. CAPACITOR CH 25V 0.047U	1		P2	VJP3819E100	CONNECTOR (MALE)	1	
C648, 49	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2		P101	VJP3358C012	CONNECTOR (MALE)	1	
C650	ECUM1E473KBN	C. CAPACITOR CH 25V 0.047U	1						
C651	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		Q87	2SB1114	TRANSISTOR	1	
C652	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1		Q91	2SD1280-S	TRANSISTOR	1	
C653	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		Q92	2SB1218A-R	TRANSISTOR	1	
C654	ECUM1E473KBN	C. CAPACITOR CH 25V 0.047U	1		Q101	2SB1218A-R	TRANSISTOR	1	
C655	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		Q102	2SD1819A-R	TRANSISTOR	1	
C656	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1		Q103	2SB1218A-R	TRANSISTOR	1	
C657, 58	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	2		Q107	2SB1218A-R	TRANSISTOR	1	
C664	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	1		Q108	2SA1532-C	TRANSISTOR	1	
C667	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1		Q109	2SB1218A-R	TRANSISTOR	1	
C668	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1		Q113	2SB1218A-R	TRANSISTOR	1	
C670	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1		Q114, 15	2SA1532-C	TRANSISTOR	2	
C672	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		Q116	2SD1819A-R	TRANSISTOR	1	
					Q201	2SD1819A-R	TRANSISTOR	1	
D201	MA142K	DIODE	1		Q601-06	2SD1819A-R	TRANSISTOR	6	
DL602	VL00265	DELAY LINE	1		Q607	2SA1532-C	TRANSISTOR	1	
					Q608	2SD1819A-R	TRANSISTOR	1	
FL2-L4	VL0941C223	FILTER	3		Q609	2SA1532-C	TRANSISTOR	1	
FL101	VL01179	FILTER	1		Q610-12	2SB1218A-R	TRANSISTOR	3	
FL601	VL01179	FILTER	1		Q613-15	2SD1819A-R	TRANSISTOR	3	
FL602	VL01337	FILTER	1		Q616	2SB1218A-R	TRANSISTOR	1	
IC5	XC62DN5002P	IC	1		QR88	UN5213	TRANSISTOR-RESISTOR	1	
IC6	XC62AP5002P	IC	1		QR301	UN5213	TRANSISTOR-RESISTOR	1	
IC8	XC62DN5002P	IC	1						
IC9	XC62AP3002P	IC	1		R14	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
IC101, 02	TC4W53FU	IC	2		R21	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
IC103	AD817AR	IC	1		R44	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
IC104	TC4W53FU	IC	1		R83	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
IC105	AD826AR	IC	1		R84	ERJ3GEYG152	M. RESISTOR CH 1/16W 1.5K	1	
IC201	EL4583CS	IC	1		R91	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
IC202	TC7W14FU	IC	1		R92	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1	
IC207, 08	CXD1176Q	IC	2		R99	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
IC209	XC62AP5002P	IC	1		R102	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
IC212	CXD1176Q	IC	1		R103	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
IC301	T163626-1022	IC	1		R105	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
IC304	TC7SH04FU	IC	1		R107	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
IC305	TVHC74FT	IC	1		R108, 09	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
IC306	TC4W53FU	IC	1		R110	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
IC402	MN657021F	IC	1		R111	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1	
IC601	TC7SH08FU	IC	1		R112	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
IC602	AD817AR	IC	1		R113	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
IC603	AD826AR	IC	1		R114	ERJ3GEYG682	M. RESISTOR CH 1/16W 6.8K	1	
IC604	M51272FP	IC	1		R115	ERJ3GEYJ122	M. RESISTOR CH 1/16W 1.2K	1	
IC608-10	TC7S08FU	IC	3		R116	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
IC611	XC62AP5002P	IC	1		R117	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
					R120	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
L102	VL00426J3R3	COIL 3.3UH	1		R121-23	ERJ3RED750	M. RESISTOR CH 1/16W 75	3	
L104	VL00319K101	COIL 100UH	1		R125	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
L106	VL00426J820	COIL 82UH	1		R126	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
L107	VL00426J680	COIL 68UH	1		R127, 28	ERJ3GEYG152	M. RESISTOR CH 1/16W 1.5K	2	
L110	VL00426J820	COIL 82UH	1		R129	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	1	
L111	VL00426J680	COIL 68UH	1		R130	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
L204-06	VL00319K101	COIL 100UH	3		R131, 32	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	
L262	VL00319K101	COIL 100UH	1		R133	ERJ3GEYJ331	M. RESISTOR CH 1/16W 330	1	
L264	VL00163J221	COIL 220UH	1		R134	ERJ3GEYJ272	M. RESISTOR CH 1/16W 2.7K	1	
L300-07	VL00155	COIL	8		R136	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
L309-19	VL00155	COIL	11		R137	ERJ3GEYJ122	M. RESISTOR CH 1/16W 1.2K	1	
					R138	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R147	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
R149	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R150, 51	ERJ3GEYJ152	M. RESISTOR CH 1/16W 1.5K	2	
R152	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	1	
R153	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
R154, 55	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
R156	ERJ3GEYJ331	M. RESISTOR CH 1/16W 330	1	
R157	ERJ3GEYJ272	M. RESISTOR CH 1/16W 2.7K	1	
R160	ERJ3GEY682	M. RESISTOR CH 1/16W 6.8K	1	
R163	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R166	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R179	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R184	ERJ3GEYJ562	M. RESISTOR CH 1/16W 5.6K	1	
R185, 86	ERJ3GEYJ152	M. RESISTOR CH 1/16W 1.5K	2	
R187	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R188	ERJ3GEY682	M. RESISTOR CH 1/16W 6.8K	1	
R203	ERJ3GEYJ823	M. RESISTOR CH 1/16W 82K	1	
R204	ERJ3GEY6332	M. RESISTOR CH 1/16W 3.3K	1	
R205	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
R206	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R208	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R209	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R211	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R213	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
R215	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R216	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
R217	ERJ3GEY682	M. RESISTOR CH 1/16W 6.8K	1	
R218	ERJ3GEYJ750	M. RESISTOR CH 1/16W 75	1	
R219	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R223	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
R225	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1	
R226, 27	ERJ6GEYJ335	M. RESISTOR CH 1/10W 3.3M	2	
R228	ERJ3GEYJ750	M. RESISTOR CH 1/16W 75	1	
R229	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R231	ERJ3GEY682	M. RESISTOR CH 1/16W 6.8K	1	
R232	VRE006607103	M. RESISTOR CH 1/10W 10K	1	
R234, 35	ERJ6GEYJ335	M. RESISTOR CH 1/10W 3.3M	2	
R236	ERJ3GEYJ750	M. RESISTOR CH 1/16W 75	1	
R237	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R239	ERJ3GEY682	M. RESISTOR CH 1/16W 6.8K	1	
R241	VRE006607103	M. RESISTOR CH 1/10W 10K	1	
R242, 43	ERJ6GEYJ335	M. RESISTOR CH 1/10W 3.3M	2	
R244	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R268	ERJ3GEYJ684	M. RESISTOR CH 1/16W 680K	1	
R272	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
R273	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1	
R303	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R307-09	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	3	
R313-15	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	3	
R316	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R320, 21	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
R323	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R324, 25	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
R326, 27	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
R328	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R329	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R330	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R332	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R334	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R335	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R336	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R401-08	EXB24V151J	COMBI. R-R	150	8
R409	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R410	ERJ3GEYJ562	M. RESISTOR CH 1/16W 5.6K	1	
R411	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R412	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
R413	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
R414-16	ERJ3GEYJ391	M. RESISTOR CH 1/16W 390	3	
R417	ERJ3GEYJ152	M. RESISTOR CH 1/16W 1.5K	1	
R418	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R426, 27	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
R505	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R601	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R603	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
R605	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R606	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1	
R607	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R608	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
R609	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R610	ERJ3GEYJ562	M. RESISTOR CH 1/16W 5.6K	1	
R611	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R612	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
R614, 15	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
R616	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
R619	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R620	VRT014116250	THERMISTOR	1	
R622	ERJ3GEYJ181	M. RESISTOR CH 1/16W 180	1	
R623	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R624	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1	
R625	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	1	
R626	ERJ3GEYJ152	M. RESISTOR CH 1/16W 1.5K	1	
R627	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R628, 29	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	2	
R631	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R632	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
R633, 34	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
R635, 36	ERJ3GEYJ152	M. RESISTOR CH 1/16W 1.5K	2	
R637	ERJ3GEYJ821	M. RESISTOR CH 1/16W 820	1	
R638	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
R639, 40	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
R641	ERJ3GEYJ331	M. RESISTOR CH 1/16W 330	1	
R642	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R645	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
R646, 47	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
R648, 49	ERJ3GEYJ152	M. RESISTOR CH 1/16W 1.5K	2	
R650	ERJ3GEYJ821	M. RESISTOR CH 1/16W 820	1	
R651	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
R652, 53	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
R654	ERJ3GEYJ331	M. RESISTOR CH 1/16W 330	1	
R655	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R656	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
R658	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
R660	ERJ3GEY6332	M. RESISTOR CH 1/16W 3.3K	1	
R661	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
R663	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
R665	ERJ3GEY6332	M. RESISTOR CH 1/16W 3.3K	1	
R666	ERJ3RBD471	M. RESISTOR CH 1/16W 470	1	
R667	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R668, 69	ERJ3RBD241	M. RESISTOR CH 1/16W 240	2	
R671	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R675, 76	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
R677	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	1	
R678, 79	ERJ3RBD183	M. RESISTOR CH 1/16W 18K	2	
R680	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	1	
R681	ERJ3RBD221	M. RESISTOR CH 1/16W 220	1	
R682	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
R683	ERJ3RBD121	M. RESISTOR CH 1/16W 120	1	
R684	ERJ3RBD221	M. RESISTOR CH 1/16W 220	1	
R685	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1	
R686	ERJ3GEY6332	M. RESISTOR CH 1/16W 3.3K	1	
R687	ERJ3GEY682	M. RESISTOR CH 1/16W 6.8K	1	
R688	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R689	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
R690	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
R693	ERJ3GEYJ330	M. RESISTOR CH 1/16W 33	1	
R694	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R695	VRT014182150	THERMISTOR	1	
R696, 97	ERJ3RBD132	M. RESISTOR CH 1/16W 1.3K	2	
R698, 99	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
R700	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
R701	ERJ3GEYJ122	M. RESISTOR CH 1/16W 1.2K	1	
R703	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1	
R706, 07	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
R801, 02	ERJ6RBD181	M. RESISTOR CH 1/10W 180	2	
TG1	EYF6CU	TEST POINT	1	
TP207, 08	EYF6CU	TEST POINT	2	
TP212	EYF6CU	TEST POINT	1	
TP301-07	EYF6CU	TEST POINT	7	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
TP601	EYF6CU	TEST POINT	1	
VC601	VCV0047	TRIMMER	1	
VR104	EVM7JGA00B23	V. RESISTOR 2K	1	
VR107, 08	EVM7JGA00B23	V. RESISTOR 2K	2	
VR111, 12	EVM7JGA00B23	V. RESISTOR 2K	2	
VR201	EVM7JGA00B14	V. RESISTOR 10K	1	
VR602	EVM7JGA00B53	V. RESISTOR 5K	1	
VR603	EVM7JGA00B13	V. RESISTOR 1K	1	
VR604	EVM7JGA00B22	V. RESISTOR 200	1	
VR605	EVM7JGA00B13	V. RESISTOR 1K	1	
VR607	EVM7JGA00B14	V. RESISTOR 10K	1	
VR608	EVM7JGA00B53	V. RESISTOR 5K	1	
VR609, 10	EVM7JGA00B23	V. RESISTOR 2K	2	
		MISCELLANEOUS		
	XSB2+6	SCREW	2	
■ E38	VEP03D84A	VIDEO I/F SUB P.C. BOARD	1 (RTL) FOR AJ-D400E	
C2, C3	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	2	
C6	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C20	ECUX1H390JCV	C. CAPACITOR CH 50V 39P	1	
C21-25	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	5	
C28	ECUX1H390JCV	C. CAPACITOR CH 50V 39P	1	
C203	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C204	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1	
C209-11	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	3	
C212	ECUM1C474KBM	C. CAPACITOR CH 16V 0.47U	1	
C213	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	1	
C234, 35	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C243	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C250	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C251	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1	
C252	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C253	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1	
C254	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C280	ECST1CC336Z	T. CAPACITOR CH 16V 33U	1	
D203, 04	MA704	DIODE	2	
IC1	T160G41-1437	IC	1	
IC3	C625123-5106	IC	1	
IC4	CY7C19920ZC	IC	1	
IC7	TC7S04FU	IC	1	
IC10	CY7C19920ZC	IC	1	
IC203	TVHC04FT	IC	1	
IC205	TC7W125FU	IC	1	
IC206	NJM062M	IC	1	
IC211	TC7SH00FU	IC	1	
IC213	XC62AP5002P	IC	1	
L201-03	VL00319K101	COIL 100UH	3	
L207	VL00155	COIL	1	
L208	VL00319K101	COIL 100UH	1	
P3	VJS3819E100	CONNECTOR (FEMALE)	1	
R7, R8	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	
R9	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1	
R10	ERJ3RBD111	M. RESISTOR CH 1/16W 110	1	
R11	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R17	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R26-33	EXB24V151J	COMBI. R-R 150	8	
R35-42	EXB24V151J	COMBI. R-R 150	8	
R46, 47	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	
R48, 49	ERJ3GEYJ151	M. RESISTOR CH 1/16W 150	2	
R50-52	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	3	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R207	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	1	
R220	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R221	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
R251	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R258	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
R260	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R274	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R276	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R278	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R280	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R282, 83	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	
R285	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1	
R286	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
R287	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
R288	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
TP201-03	EYF6CU	TEST POINT	3	
X201	VXS0677	CRYSTAL OSCILLATOR	1	
■ E14	VEP03B96A	VIDEO MAIN P.C. BOARD	1 (RTL) FOR AJ-D400P	
C1	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C2	VCK0151	C. CAPACITOR	1	
C3, C4	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C5	ECEVOG470Q	E. CAPACITOR CH 4V 47U	1	
C8	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C9	VCK0152	C. CAPACITOR	1	
C11	VCK0152	C. CAPACITOR	1	
C13	VCK0152	C. CAPACITOR	1	
C16, 17	VCK0152	C. CAPACITOR	2	
C19	VCK0152	C. CAPACITOR	1	
C21	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C22, 23	ECUX1H050CCV	C. CAPACITOR CH 50V 5P	2	
C24	VCK0152	C. CAPACITOR	1	
C25	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C26	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C32, 33	VCK0151	C. CAPACITOR	2	
C34	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C35	VCK0151	C. CAPACITOR	1	
C38	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	1	
C39, 40	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C41	ECST1AX106Z	T. CAPACITOR CH 10V 10U	1	
C42, 43	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C44	VCK0151	C. CAPACITOR	1	
C45, 46	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C47	ECST1AX106Z	T. CAPACITOR CH 10V 10U	1	
C48	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C49	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	1	
C50	ECUX1H682KBV	C. CAPACITOR CH 50V 6800P	1	
C51-53	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	3	
C54	ECEVOG470Q	E. CAPACITOR CH 4V 47U	1	
C55, 56	VCK0152	C. CAPACITOR	2	
C57	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C58	ECEVOJ470Q	E. CAPACITOR CH6.3V 47U	1	
C59	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C60-62	VCK0151	C. CAPACITOR	3	
C63-65	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	3	
C66	VCK0151	C. CAPACITOR	1	
C75, 76	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C77	ECEVOJ470Q	E. CAPACITOR CH6.3V 47U	1	
C78, 79	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C80-82	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	3	
C86	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	1	
C87	ECEVOG470Q	E. CAPACITOR CH 4V 47U	1	
C88	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C90, 91	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C92	ECEVOJ470Q	E. CAPACITOR CH6.3V 47U	1	
C93, 94	ECUX1E104ZV	C. CAPACITOR CH 25V 0.1U	2	
C95	ECEVOG470Q	E. CAPACITOR CH 4V 47U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C96	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		L3-11	VLP0155	COIL	9	
C97	ECEVOGV4700	E. CAPACITOR CH 4V 47U	1		L13-16	VLP0155	COIL	4	
C98	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		L17	VLQ0319K101	COIL 100UH	1	
C99	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	1		L25	VLQ0464K6R8	COIL 6.8UH	1	
C100	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	1		L26	VLQ0319K101	COIL 100UH	1	
C101	ECUX1H222KBV	C. CAPACITOR CH 50V 2200P	1		L29	VLP0155	COIL	1	
C103	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		L30	ELJNA1R5JF	COIL 1.5UH	1	
C104	VCK0150	C. CAPACITOR	1		L31	VLQ0464K6R8	COIL 6.8UH	1	
C105, 06	ECUX1H050CCV	C. CAPACITOR CH 50V 5P	2		L34	VLQ0319K101	COIL 100UH	1	
C120	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		L40	VLQ0163J390	COIL 39UH	1	
C121	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		L41	VLQ0163J270	COIL 27UH	1	
C122	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		L42	VLP0145	COIL	1	
C123	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		L44	VLQ0464K6R8	COIL 6.8UH	1	
C124	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	1		L501	VLQ0464K6R8	COIL 6.8UH	1	
C125	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	1		L502	VLP0155	COIL	1	
C129, 30	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2						
C131	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		P1	VJP3808E140	CONNECTOR (MALE)	1	
C141	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		P2	VJP3798A060B	CONNECTOR (MALE)	1	
C142	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		P3	VJP3125B002	CONNECTOR (MALE)	1	
C143	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	1						
C144	ECUX1H151JCV	C. CAPACITOR CH 50V 150P	1		Q1	2SD1819A-R	TRANSISTOR	1	
C145	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	1		Q2	2SB1218A-R	TRANSISTOR	1	
C146	VCK0152	C. CAPACITOR	1		Q3-Q5	2SD1819A-R	TRANSISTOR	3	
C147	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		Q6	2SB1218A-R	TRANSISTOR	1	
C148	ECEVOGV4700	E. CAPACITOR CH 4V 47U	1		Q7	2SD1819A-R	TRANSISTOR	1	
C150, 51	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		Q8	2SB1114	TRANSISTOR	1	
C152	ECEVOGV4700	E. CAPACITOR CH 4V 47U	1		Q9	2SB1218A-R	TRANSISTOR	1	
C153	ECUX1H050CCV	C. CAPACITOR CH 50V 5P	1		Q10	2SD1280-S	TRANSISTOR	1	
C154	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		Q11	2SD1819A-R	TRANSISTOR	1	
C501, 02	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		Q12	2SB1218A-R	TRANSISTOR	1	
C504	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	1		Q13	2SD1819A-R	TRANSISTOR	1	
C505	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	1						
C506	VCK0152	C. CAPACITOR	1		QR1, R2	UN5213	TRANSISTOR-RESISTOR	2	
C508	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1						
C509, 10	ECUX1H681JV	C. CAPACITOR CH 50V 680P	2						
					R27	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
F6D1	ERJ6GEY0R00	M. RESISTOR CH 1/10W 0	1		R31	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
					R34	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
FL1	VLF1118	FILTER	1		R41	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
FL2	VLF1326	FILTER	1		R42	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
FL4	VLF1293	FILTER	1		R43	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	1	
					R47	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
IC1	MN67372A2	IC	1		R52, 53	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	
IC2	MN4706F	IC	1		R54	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1	
IC3	MN673711	IC	1		R56	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1	
IC4	L7A1433	IC	1		R58	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
IC5	L7A1434	IC	1		R60	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	1	
IC6	XC62AP2302P	IC	1		R61	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
IC7	TC7SH08FU	IC	1		R66, 67	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	
IC9	TVHC125FT	IC	1		R68	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
IC10	TC7S68FU	IC	1		R71, 72	ERJ3GEYJ152	M. RESISTOR CH 1/16W 1.5K	2	
IC11	M65401FP	IC	1		R73	ERJ3GEYJ391	M. RESISTOR CH 1/16W 390	1	
IC12	TC7W04FU	IC	1		R78	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
IC13	M52660FP	IC	1		R81	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
IC14	TVHC125FT	IC	1		R82, 83	VRT014116250	THERMISTOR	2	
IC15	MN657021F	IC	1		R84	ERJ3GEYJ562	M. RESISTOR CH 1/16W 5.6K	1	
IC16	MB81V4260S7	IC	1		R85	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
IC19	XC62AP3002P	IC	1		R86, 87	ERJ3GEYJ391	M. RESISTOR CH 1/16W 390	2	
IC20	XC62AP5002M	IC	1		R88	ERJ3GEY0152	M. RESISTOR CH 1/16W 1.5K	1	
IC22	MB88344PFV	IC	1		R89	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
IC23	XC62AP5002M	IC	1		R90	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1	
IC24	UPC2384GA	IC	1		R91	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
IC25, 26	TC7SH08FU	IC	2		R92	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1	
IC30	XC62DN5002P	IC	1		R93	ERJ3GEYJ821	M. RESISTOR CH 1/16W 820	1	
IC31	TC7SH08FU	IC	1		R94	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
IC32	AD826AR	IC	1		R95	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1	
IC33	T160G11-1233	IC	1		R96	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
IC35	XC62AP3002P	IC	1		R97	ERJ3GEYJ821	M. RESISTOR CH 1/16W 820	1	
IC36	TVHC08FT	IC	1		R98	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
IC37	TC7SH08FU	IC	1		R99	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1	
IC501	M37709M4L165	IC	1		R110-12	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	3	
IC502	S80727ANDQ	IC	1		R113-15	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	3	
IC503	TC7SH08FU	IC	1		R116	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
					R117	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
					R118	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
L1	VLP0145	COIL	1		R124	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R125	ERJ3GEYJ221	M.RESISTOR CH 1/16W 220	1	
R127-29	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	3	
R130	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R131	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R132	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R133	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R134	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R135	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R136, 37	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	2	
R150	ERJ3GEYJ821	M.RESISTOR CH 1/16W 820	1	
R151	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R153	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	1	
R154	ERJ3GEYG152	M.RESISTOR CH 1/16W 1.5K	1	
R155	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R156	ERJ3GEYG332	M.RESISTOR CH 1/16W 3.3K	1	
R157	ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1	
R158	ERJ3GEYG152	M.RESISTOR CH 1/16W 1.5K	1	
R162	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R163	ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1	
R164	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R165	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R166, 67	ERJ3RBD102	M.RESISTOR CH 1/16W 1K	2	
R169	ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1	
R170	ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1	
R171	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R172	ERJ3GEYG332	M.RESISTOR CH 1/16W 3.3K	1	
R173	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R174	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R179	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R180	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1	
R181	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R183	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R184-86	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	3	
R189	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R195	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R196, 97	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	2	
R205, 06	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R220	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R221	ERJ3GEYJ271	M.RESISTOR CH 1/16W 270	1	
R222	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R223, 24	ERJ8GEY0R00	M.RESISTOR CH 1/8W 0	2	
R227	ERJ3RED270	M.RESISTOR CH 1/16W 27	1	
R501, 02	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	2	
R503, 04	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	2	
R506	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R507, 08	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R509	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R510	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R512	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R513, 14	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2	
R515, 16	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	2	
R517	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R518	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R519, 20	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R521	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
R522, 23	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R524-26	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	3	
R528	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R530, 31	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R533-40	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	8	
R541, 42	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2	
R543	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R544	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R546, 47	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
TP1-11	EYF6CU	TEST POINT	11	
TP501, 02	EYF6CU	TEST POINT	2	
VR5	EVM7JGA00B52	V.RESISTOR 500	1	
VR6, R7	EVM7JGA00B13	V.RESISTOR 1K	2	
X1	VSX0645	CRYSTAL OSCILLATOR	1	
X501	VSX0637	CRYSTAL OSCILLATOR	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
E14	VEP03B96B	VIDEO MAIN P.C.BOARD	1	(RTL)FOR AJ-D400E
C1	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	1	
C2	VCK0151	C.CAPACITOR	1	
C3, C4	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	2	
C5	ECEVOGV4700	E.CAPACITOR CH 4V 47U	1	
C8	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	1	
C9	VCK0152	C.CAPACITOR	1	
C11	VCK0152	C.CAPACITOR	1	
C13	VCK0152	C.CAPACITOR	1	
C16, 17	VCK0152	C.CAPACITOR	2	
C19	VCK0152	C.CAPACITOR	1	
C21	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	1	
C22, 23	ECUX1H050CCV	C.CAPACITOR CH 50V 5P	2	
C24	VCK0152	C.CAPACITOR	1	
C25	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	1	
C26	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	1	
C32, 33	VCK0151	C.CAPACITOR	2	
C34	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	1	
C35	VCK0151	C.CAPACITOR	1	
C38	ECUX1H102JV	C.CAPACITOR CH 50V 1000P	1	
C39, 40	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	2	
C41	ECST1AX106Z	T.CAPACITOR CH 10V 10U	1	
C42, 43	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	2	
C44	VCK0151	C.CAPACITOR	1	
C45, 46	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	2	
C47	ECST1AX106Z	T.CAPACITOR CH 10V 10U	1	
C48	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	1	
C49	ECUX1H180JCV	C.CAPACITOR CH 50V 18P	1	
C50	ECUX1H682KBV	C.CAPACITOR CH 50V 6800P	1	
C51-53	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	3	
C54	ECEVOGV4700	E.CAPACITOR CH 4V 47U	1	
C66	VCK0151	C.CAPACITOR	1	
C86	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	1	
C87	ECEVOGV4700	E.CAPACITOR CH 4V 47U	1	
C90, 91	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	2	
C92	ECEVOJV4700	E.CAPACITOR CH6.3V 47U	1	
C93, 94	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	2	
C95	ECEVOGV4700	E.CAPACITOR CH 4V 47U	1	
C96	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	1	
C97	ECEVOGV4700	E.CAPACITOR CH 4V 47U	1	
C98	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	1	
C99	ECUX1H470JCV	C.CAPACITOR CH 50V 47P	1	
C100	ECUX1H101JCV	C.CAPACITOR CH 50V 100P	1	
C101	ECUX1H222KBV	C.CAPACITOR CH 50V 2200P	1	
C103	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	1	
C104	VCK0150	C.CAPACITOR	1	
C105, 06	ECUX1H050CCV	C.CAPACITOR CH 50V 5P	2	
C141	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	1	
C146	VCK0152	C.CAPACITOR	1	
C147	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	1	
C148	ECEVOGV4700	E.CAPACITOR CH 4V 47U	1	
C150, 51	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	2	
C152	ECEVOGV4700	E.CAPACITOR CH 4V 47U	1	
C501, 02	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	2	
C504	ECUX1H150JCV	C.CAPACITOR CH 50V 15P	1	
C505	ECUX1H180JCV	C.CAPACITOR CH 50V 18P	1	
C506	VCK0152	C.CAPACITOR	1	
C508	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	1	
C509, 10	ECUX1H681JV	C.CAPACITOR CH 50V 680P	2	
F601	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
FL1	VL1F118	FILTER	1	
IC1	MN67372A2	IC	1	
IC2	MN4707F	IC	1	
IC3	MN673711	IC	1	
IC4	L7A1433	IC	1	
IC5	L7A1434	IC	1	
IC6	XC62AP2302P	IC	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
IC7	TC7SH08FU	IC	1		R223, 24	ERJ8G0Y0R00	M.RESISTOR CH 1/8W 0	2	
IC9	TVHC125FT	IC	1		R227	ERJ3RED270	M.RESISTOR CH 1/16W 27	1	
IC10	TC7S66FU	IC	1		R501, 02	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	2	
IC11	M65401FP	IC	1		R503, 04	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	2	
IC12	TC7W04FU	IC	1		R506	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
IC13	M52660FP	IC	1		R507, 08	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
IC14	TVHC125FT	IC	1		R509	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
IC16	MB81V4260S7	IC	1		R510	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
IC19	XC62AP3002P	IC	1		R512	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
IC22	MB88344PFV	IC	1		R513, 14	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2	
IC23	XC62AP5002M	IC	1		R515, 16	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	2	
IC24	UPC2384GA	IC	1		R517	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
IC25	TC7SH08FU	IC	1		R518	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
IC33	T160G11-1233	IC	1		R519, 20	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
IC35	XC62AP3002P	IC	1		R521	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
IC36	TVHC08FT	IC	1		R522, 23	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
IC37	TC7SH08FU	IC	1		R524-26	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	3	
IC501	M37709M4L165	IC	1		R528	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
IC502	S80727ANDQ	IC	1		R530	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
IC503	TC7SH08FU	IC	1		R532	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
L1	VLP0145	COIL	1		R533-40	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	8	
L3-11	VLP0155	COIL	9		R541, 42	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2	
L13-16	VLP0155	COIL	4		R543	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
L25	VL00464K6R8	COIL 6.8UH	1		R544	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
L26	VL00319K101	COIL 100UH	1		R546, 47	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
L29	VLP0155	COIL	1		TP1, P2	EYF6CU	TEST POINT	2	
L30	ELJNA1R5JF	COIL 1.5UH	1		TP6-11	EYF6CU	TEST POINT	6	
L34	VL00319K101	COIL 100UH	1		TP501, 02	EYF6CU	TEST POINT	2	
L42	VLP0145	COIL	1						
L44	VL00464K6R8	COIL 6.8UH	1		X1	VSX0645	CRYSTAL OSCILLATOR	1	
L501	VL00464K6R8	COIL 6.8UH	1		X501	VSX0637	CRYSTAL OSCILLATOR	1	
L502	VLP0155	COIL	1						
P1	VJP3808E140	CONNECTOR (MALE)	1						
P2	VJP3798A060B	CONNECTOR (MALE)	1						
QR1	UN5213	TRANSISTOR-RESISTOR	1		■ E13	VEP03B95A	VIDEO P.C. BOARD	1	(RTL)
R27	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1						
R31	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1		C1, C2	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
R34	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1		C3	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1	
R41	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		C4, C5	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
R42	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1		C6	ECEV1CV470Q	E. CAPACITOR CH 16V 47U	1	
R43	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	1		C7	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R47	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1		C8	ECEV0JV1010	E. CAPACITOR CH6.3V 100U	1	
R52, 53	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2		C9, 10	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
R54	ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1		C11	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1	
R56	ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1		C12	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R58	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		C13	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1	
R60	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1		C14, 15	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
R61	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1		C16	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1	
R66, 67	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2		C17, 18	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
R68	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1		C19	ECEV0V470Q	E. CAPACITOR CH 4V 47U	1	
R71, 72	ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	2		C20, 21	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
R73	ERJ3GEYJ391	M.RESISTOR CH 1/16W 390	1		C22	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1	
R82, 83	VRT014116250	THERMISTOR	2		C23, 24	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
R110-12	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	3		C25	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1	
R113-15	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	3		C26-30	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	5	
R116	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1		C100	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R117	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1		C102	ECUX1H471JCV	C. CAPACITOR CH 50V 470P	1	
R118	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1		C104	ECUX1H270JCV	C. CAPACITOR CH 50V 27P	1	
R124	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1		C105, 06	ECUX1H080DCV	C. CAPACITOR CH 50V 8P	2	
R125	ERJ3GEYJ221	M.RESISTOR CH 1/16W 220	1		C107	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R127-29	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	3		C109	ECUX1H471JCV	C. CAPACITOR CH 50V 470P	1	
R183	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		C111	ECUX1H270JCV	C. CAPACITOR CH 50V 27P	1	
R184	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		C112, 13	ECUX1H080DCV	C. CAPACITOR CH 50V 8P	2	
R186	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		C114, 15	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
R190	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		C200	ECUX1H121JCV	C. CAPACITOR CH 50V 120P	1	
R195	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1		C208	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R196, 97	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	2		C210	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	1	
R205, 06	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2		C211	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R211-18	EXB24VR000	COMB1.R-R	0	8	C212	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	1	
R219	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		C213	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	1	
R222	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		C214, 15	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C217, 18	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		FL1	VLF0941C223	FILTER	1	
C219	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC1	TVHC125FT	IC	1	
C220, 21	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		IC2	TC7S04FU	IC	1	
C223, 24	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		IC3	XC62AP5002P	IC	1	
C225	ECUX1H121JCV	C. CAPACITOR CH 50V 120P	1		IC4	XC62DN5002P	IC	1	
C231	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	1		IC5	XC62AP3002P	IC	1	
C232	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC6	XC62AP5002M	IC	1	
C233	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	1		IC7	XC62DN5002P	IC	1	
C234	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	1		IC8	TVHC125FT	IC	1	
C235, 36	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		IC9	TC7S00FU	IC	1	
C238	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC10	TC7W02FU	IC	1	
C240, 41	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		IC11	TC7S04FU	IC	1	
C243-46	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	4		IC100	TC7W04FU	IC	1	
C248-50	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3		IC101	TC7W00FU	IC	1	
C251, 52	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	2		IC200, 01	TC4S69F	IC	2	
C253	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC203	NJM062M	IC	1	
C254, 55	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	2		IC204	XC62DN5002P	IC	1	
C257-60	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	4		IC205, 06	TC4S69F	IC	2	
C261, 62	ECEV1EV4R70	E. CAPACITOR CH 25V 4.7U	2		IC207	NJM062M	IC	1	
C263	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC208	UPC1663G	IC	1	
C264	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		IC209	TC7W32FU	IC	1	
C265	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC210, 11	TC7S04FU	IC	2	
C266	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		IC300	UPC5102GS030	IC	1	
C267, 68	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	2		IC301	TC7W04FU	IC	1	
C269	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC302	UPC1663G	IC	1	
C270	ECEV1HNR220	E. CAPACITOR CH 50V 0.22U	1		IC303	TC7W08FU	IC	1	
C271, 72	ECUX1H221JCV	C. CAPACITOR CH 50V 220P	2		IC304	TC7W04FU	IC	1	
C300-07	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	8		IC400	UPC5102GS030	IC	1	
C309	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC401	UPC1663G	IC	1	
C311	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	1		IC402	NJM062M	IC	1	
C312	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC403	TC7S86FU	IC	1	
C313	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	1		IC404	TC4W53F	IC	1	
C314-18	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	5		IC500	AN3730FA	IC	1	
C319	ECUX1H680JCV	C. CAPACITOR CH 50V 68P	1		IC501	AN3740FAP	IC	1	
C320	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC502	MC14053BF	IC	1	
C321	ECUX1H560JCV	C. CAPACITOR CH 50V 56P	1						
C322	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	1		L1	VL00319K220	COIL	22UH	1
C323	ECUX1H560JCV	C. CAPACITOR CH 50V 56P	1		L2, L3	VL00319K101	COIL	100UH	2
C324	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		L100-03	VL00163J2R2	COIL	2.2UH	4
C400-07	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	8		L200-03	VL00163J330	COIL	33UH	4
C408	ECUX1H471JCV	C. CAPACITOR CH 50V 470P	1		L300, 01	VL00163J1R0	COIL	1UH	2
C409	ECUX1H820JCV	C. CAPACITOR CH 50V 82P	1		L303	VL00163JR22	COIL	0.22UH	1
C410-16	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	7		L400	VL00163JR22	COIL	0.22UH	1
C417	ECUM1H561JCV	C. CAPACITOR CH 50V 560P	1		L401	VL00163J1R0	COIL	1UH	1
C418-21	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	4		L402	VL00163J470	COIL	47UH	1
C422	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	1		L403	VL00163JR22	COIL	0.22UH	1
C423	ECUX1H821JV	C. CAPACITOR CH 50V 820P	1						
C424	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		P1	VJS3827A060B	CONNECTOR (FEMALE)		1
C425	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	1		P2	VJP3358C012	CONNECTOR (MALE)		1
C426	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		P3	VJS3899B013	CONNECTOR (FEMALE)		1
C427	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	1		P4	VJS3898B010	CONNECTOR (FEMALE)		1
C428	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	1						
C429-31	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3		Q1	2SB1114	TRANSISTOR		1
C432	ECUX1H332KBV	C. CAPACITOR CH 50V 3300P	1		Q2	2SD1280-S	TRANSISTOR		1
C433	ECUX1H121JCV	C. CAPACITOR CH 50V 120P	1		Q3	2SB1218A-R	TRANSISTOR		1
C434	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		Q100	2SB709-R	TRANSISTOR		1
C435	ECUX1H221JCV	C. CAPACITOR CH 50V 220P	1		Q101	2SD1819A-R	TRANSISTOR		1
C500	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	1		Q102, 03	2SC3735B35	TRANSISTOR		2
C501-08	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	8		Q104	2SB709-R	TRANSISTOR		1
C509, 10	ECUX1H122KBV	C. CAPACITOR CH 50V 1200P	2		Q105	2SD1819A-R	TRANSISTOR		1
C511-14	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	4		Q106, 07	2SC3735B35	TRANSISTOR		2
C515	ECUX1H680JCV	C. CAPACITOR CH 50V 68P	1		Q201	2SA1532-C	TRANSISTOR		1
C516-22	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	7		Q202-05	2SD1979	TRANSISTOR		4
C523-26	ECUX1H152KBV	C. CAPACITOR CH 50V 1500P	4		Q207	2SC3935	TRANSISTOR		1
C527-29	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3		Q208, 09	2SC2954	TRANSISTOR		2
C530	ECUM1C154KBN	C. CAPACITOR CH 16V 0.15U	1		Q210	2SC3935	TRANSISTOR		1
C531	ECUX1H471JCV	C. CAPACITOR CH 50V 470P	1		Q212, 13	2SA1532-C	TRANSISTOR		2
C532-34	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3		Q214	2SC2954	TRANSISTOR		1
C535	ECUX1H152KBV	C. CAPACITOR CH 50V 1500P	1		Q215	2SA1532-C	TRANSISTOR		1
C536-51	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	16		Q216-19	2SD1979	TRANSISTOR		4
					Q221, 22	2SC2954	TRANSISTOR		2
D200-03	MA142WK	DIODE	4		Q225, 26	2SA1532-C	TRANSISTOR		2
D400	MA142WA	DIODE	1		Q227	2SC2954	TRANSISTOR		1
D401	MA142WK	DIODE	1		Q228	2SD1280-S	TRANSISTOR		1

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
Q229	2SB1218A-R	TRANSISTOR	1		R249, 50	ERJ3GEYJ122	M. RESISTOR CH 1/16W 1.2K	2	
Q230	2SB1114	TRANSISTOR	1		R251, 52	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2	
Q231-34	2SK508K512	TRANSISTOR	4		R253	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1	
Q235	2SB1114	TRANSISTOR	1		R262, 63	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	2	
Q300	XN5531	TRANSISTOR-RESISTOR	1		R264	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1	
Q304, 05	2SC3935	TRANSISTOR	2		R266	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	1	
Q306	2SC3930-B	TRANSISTOR	1		R268	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
Q307	XN5531	TRANSISTOR-RESISTOR	1		R269	ERJ3GEYJ272	M. RESISTOR CH 1/16W 2.7K	1	
Q400, 01	2SC3930-B	TRANSISTOR	2		R270, 71	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	2	
Q403	2SC3930-B	TRANSISTOR	1		R274	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
Q404	XN5531	TRANSISTOR-RESISTOR	1		R275, 76	ERJ3GEYJ182	M. RESISTOR CH 1/16W 1.8K	2	
Q405	XN6435	TRANSISTOR-RESISTOR	1		R277	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
Q406-11	2SC3930-B	TRANSISTOR	6		R278	ERJ14YJ270H	M. RESISTOR CH 1/4W 27	1	
Q500	2SC3930-B	TRANSISTOR	1		R280	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	1	
Q501	2SB1219A-R	TRANSISTOR	1		R287, 88	ERJ3GEYJ182	M. RESISTOR CH 1/16W 1.8K	2	
QR1	UN5213	TRANSISTOR-RESISTOR	1		R289, 90	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
QR100, 01	UN5213	TRANSISTOR-RESISTOR	2		R291	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
QR200, 01	UN5213	TRANSISTOR-RESISTOR	2		R292	ERJ3GEYG152	M. RESISTOR CH 1/16W 1.5K	1	
QR400	UN5212	TRANSISTOR-RESISTOR	1		R293-96	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	4	
QR401	UN5213	TRANSISTOR-RESISTOR	1		R300	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
R1	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R301	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R3	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1		R309, 10	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	2	
R4	ERJ3GEYG152	M. RESISTOR CH 1/16W 1.5K	1		R318	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1	
R5	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1		R319	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	1	
R6	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1		R320	ERJ3GEYJ272	M. RESISTOR CH 1/16W 2.7K	1	
R7	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1		R321, 22	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	2	
R8	ERJ6GEYOR00	M. RESISTOR CH 1/10W 0	1		R323	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1	
R9	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R324, 25	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	2	
R11	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R326, 27	ERJ3GEYJ331	M. RESISTOR CH 1/16W 330	2	
R100, 01	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	2		R328, 29	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	2	
R102	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1		R330	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	1	
R103	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1		R331	ERJ3GEYJ182	M. RESISTOR CH 1/16W 1.8K	1	
R104	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1		R332-34	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	3	
R105	ERJ6GEYJ5R6	M. RESISTOR CH 1/10W 5.6	1		R335, 36	ERJ3GEYJ272	M. RESISTOR CH 1/16W 2.7K	2	
R106	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1		R337	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	1	
R107	ERJ3GEYJ122	M. RESISTOR CH 1/16W 1.2K	1		R338	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R108, 09	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2		R339	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R110	ERJ6GEYG270	M. RESISTOR CH 1/10W 27	1		R340	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1	
R111	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1		R341	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R112	ERJ3GEYJ122	M. RESISTOR CH 1/16W 1.2K	1		R343	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R114	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1		R400	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R115	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1		R401, 02	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
R116	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1		R403	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	1	
R117	ERJ6GEYJ5R6	M. RESISTOR CH 1/10W 5.6	1		R404	ERJ3GEYJ272	M. RESISTOR CH 1/16W 2.7K	1	
R118	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1		R405, 06	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	2	
R119	ERJ3GEYJ122	M. RESISTOR CH 1/16W 1.2K	1		R407	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1	
R120, 21	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2		R408-11	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	4	
R122	ERJ6GEYG270	M. RESISTOR CH 1/10W 27	1		R412, 13	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	2	
R123	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1		R414	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	1	
R124	ERJ3GEYJ122	M. RESISTOR CH 1/16W 1.2K	1		R415	ERJ3GEYJ182	M. RESISTOR CH 1/16W 1.8K	1	
R200-02	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	3		R416	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	1	
R203-06	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	4		R417, 18	ERJ3GEYJ562	M. RESISTOR CH 1/16W 5.6K	2	
R207, 08	ERJ3GEYJ122	M. RESISTOR CH 1/16W 1.2K	2		R419, 20	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2	
R212, 13	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	2		R421, 22	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	2	
R218	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	1		R423, 24	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	2	
R219	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R425	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1	
R220	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	1		R426, 27	ERJ3GEYJ150	M. RESISTOR CH 1/16W 15	2	
R221	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1		R428	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1	
R222, 23	ERJ3GEYJ330	M. RESISTOR CH 1/16W 33	2		R429	ERJ3GEYG152	M. RESISTOR CH 1/16W 1.5K	1	
R224	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1		R430	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1	
R225, 26	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	2		R431, 32	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	2	
R227	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1		R433	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R229	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	1		R434	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R230	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1		R435	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R231	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1		R436	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R232	ERJ3GEYJ272	M. RESISTOR CH 1/16W 2.7K	1		R437, 38	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2	
R233, 34	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	2		R439	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
R237	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1		R440	ERJ3GEYG683	M. RESISTOR CH 1/16W 68K	1	
R238, 39	ERJ3GEYJ182	M. RESISTOR CH 1/16W 1.8K	2		R441	ERJ3GEYG103	M. RESISTOR CH 1/16W 10K	1	
R240	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R442	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1	
R241	ERJ14YJ270H	M. RESISTOR CH 1/4W 27	1		R443	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R242-44	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	3		R444	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R245-48	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	4		R445, 46	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
					R447, 48	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	2	
					R449	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R450	ERJ3GEYJ332	M.RESISTOR CH 1/16W 3.3K	1				MISCELLANEOUS		
R455, 56	ERJ3GEYJ332	M.RESISTOR CH 1/16W 3.3K	2						
R458	ERJ3GEYJ333	M.RESISTOR CH 1/16W 33K	1						
R500	ERJ3GEYJ122	M.RESISTOR CH 1/16W 1.2K	1			VSC4375	SHIELD CASE (LOWER)	1	
R501	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1						
R503	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1						
R504	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1						
R505	ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1						
R506	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1						
R508, 09	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	2		■ E4	VEP20534A	CCD P.C.BOARD	1	(RTL)
R510	ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1						
R511	ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	1						
R512	ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1						
R513	ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1		C101-06	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	6	
R514	ERJ3GEYJ224	M.RESISTOR CH 1/16W 220K	1		C107	ECEA1HGE220	E.CAPACITOR 50V 22U	1	
R515	ERJ3GEYJ821	M.RESISTOR CH 1/16W 820	1		C108	ECA1CF0471	E.CAPACITOR 16V 470U	1	
R516	ERJ3GEYJ680	M.RESISTOR CH 1/16W 68	1		C109	ECA0JF0471	E.CAPACITOR 6.3V 470U	1	
R517	ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1		C112	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	1	
R518	ERJ3GEYJ332	M.RESISTOR CH 1/16W 3.3K	1		C201	ECA1AF0221	E.CAPACITOR 10V 220U	1	
R519	ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1		C202	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	1	
R520	ERJ3GEYJ331	M.RESISTOR CH 1/16W 330	1		C207	ECST1CY105Z	T.CAPACITOR CH 16V 1U	1	
R521-23	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	3		C210	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	1	
R524	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		C212-16	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	5	
R526	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1		C217	ECEA1HGE220	E.CAPACITOR 50V 22U	1	
R527	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		C218	ECA1CF0471	E.CAPACITOR 16V 470U	1	
R528	ERJ3GEYJ123	M.RESISTOR CH 1/16W 12K	1		C219	ECA0JF0471	E.CAPACITOR 6.3V 470U	1	
R529	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1		C224	ECUX1H682KBV	C.CAPACITOR CH 50V 6800P	1	
R530	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1		C231	ECA0JF0221	E.CAPACITOR 6.3V 220U	1	
R531, 32	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	2		C232, 33	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	2	
R533	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1		C301-06	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	6	
R534	ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1		C307	ECEA1HGE220	E.CAPACITOR 50V 22U	1	
R535	ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1		C308	ECA1CF0471	E.CAPACITOR 16V 470U	1	
R536	ERJ3GEYJ332	M.RESISTOR CH 1/16W 3.3K	1		C309	ECA0JF0471	E.CAPACITOR 6.3V 470U	1	
R537	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1		C314	ECUX1E104ZFV	C.CAPACITOR CH 25V 0.1U	1	
R538	ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1						
R2000	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1		D101	MA142K	DIODE	1	
R2001	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		D202	MA142K	DIODE	1	
R2002	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1		D204	MA142K	DIODE	1	
R2003	ERJ3GEYJ682	M.RESISTOR CH 1/16W 6.8K	1		D301	MA142K	DIODE	1	
R2004-07	ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	4						
R2008	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1		IC101, 02	UPD16510GR	IC	2	
R2009	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		IC201, 02	UPD16510GR	IC	2	
R2010	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1		IC207, 08	MC74HC367F	IC	2	
R2011	ERJ3GEYJ682	M.RESISTOR CH 1/16W 6.8K	1		IC301, 02	UPD16510GR	IC	2	
R2012-15	ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	4						
R2016	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1		L201, 02	VLP0147	COIL	2	
R2018	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1						
R2020	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		P201, 02	VJS2907D018	CONNECTOR (FEMALE)	2	
R2023-25	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	3						
R2026, 27	ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	2		Q101	2SD1819A-R	TRANSISTOR	1	
R2028, 29	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	2		Q201	2SD1819A-R	TRANSISTOR	1	
R2031, 32	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	2		Q301	2SD1819A-R	TRANSISTOR	1	
R2038	ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1						
R2039	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1		R101	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
R2041-43	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	3		R102	ERJ3RBD101	M.RESISTOR CH 1/16W 100	1	
R2044	ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1		R103	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R2045, 46	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2		R104	ERJ3RBD223	M.RESISTOR CH 1/16W 22K	1	
R2047	ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1		R105	ERJ3RED100	M.RESISTOR CH 1/16W 10	1	
R2048	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R106	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R2049, 50	ERJ3GEYJ221	M.RESISTOR CH 1/16W 220	2		R202	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
					R215	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
T61	EYF6CU	TEST POINT	1		R217	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
T6300	EYF6CU	TEST POINT	1		R218	ERJ3GEYJ220	M.RESISTOR CH 1/16W 22	1	
T6500	EYF6CU	TEST POINT	1		R220	ERJ3GEYJ220	M.RESISTOR CH 1/16W 22	1	
					R222	ERJ3GEYJ220	M.RESISTOR CH 1/16W 22	1	
TH500	ERTD2FHL103S	THERMISTOR 10K	1		R225-30	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	6	
					R232	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
TP100, 01	EYF6CU	TEST POINT	2		R233	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
TP200-03	EYF6CU	TEST POINT	4		R236	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
TP300	EYF6CU	TEST POINT	1		R237	ERJ3RBD101	M.RESISTOR CH 1/16W 100	1	
TP400-02	EYF6CU	TEST POINT	3		R238	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
TP500-08	EYF6CU	TEST POINT	9		R239	ERJ3RBD223	M.RESISTOR CH 1/16W 22K	1	
					R240	ERJ3RED100	M.RESISTOR CH 1/16W 10	1	
VR200	EVM7JGA00B13	V.RESISTOR 1K	1		R243	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
VR400, 01	EVM7JGA00B23	V.RESISTOR 2K	2		R301	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
					R302	ERJ3RBD101	M.RESISTOR CH 1/16W 100	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R107	ERJ3RBD621	M. RESISTOR CH 1/16W 620	1		C64	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R108-10	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	3		C65	ECEVOJV101Q	E. CAPACITOR CH6.3V 100U	1	
R112	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		C66	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R113	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1		C68	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R117	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C69	ECEVOJV101Q	E. CAPACITOR CH6.3V 100U	1	
R121-23	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	3		C70, 71	ECEVICV470Q	E. CAPACITOR CH 16V 47U	2	
R124	ERJ3RBD104	M. RESISTOR CH 1/16W 100K	1		C72	ECEV1EV330Q	E. CAPACITOR CH 25V 33U	1	
R125	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1		C73	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
R127, 28	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2		C77	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
R138	ERJ6GEYOR00	M. RESISTOR CH 1/10W 0	1		C78	ECA1CF0332	E. CAPACITOR 16V 3300U	1	
R149	ERJ6GEYOR00	M. RESISTOR CH 1/10W 0	1		C80-83	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	4	
R160	ERJ3RED100	M. RESISTOR CH 1/16W 10	1		C522	ECEV1EV330Q	E. CAPACITOR CH 25V 33U	1	
R162	ERJ6GEYOR00	M. RESISTOR CH 1/10W 0	1						
R163, 64	ERJ3RED560	M. RESISTOR CH 1/16W 56	2		D3	MA3024	DIODE	1	
R167	ERJ3RED390	M. RESISTOR CH 1/16W 39	1		D4	MA3068-M	DIODE	1	
R168, 69	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2		D5	MA3047-M	DIODE	1	
R174	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		D6	MA152K	DIODE	1	
R176	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		D7	MA153	DIODE	1	
R186	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		D8	MA152K	DIODE	1	
R188	ERJ3RBD223	M. RESISTOR CH 1/16W 22K	1		D9	MA704	DIODE	1	
R189, 90	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2						
					IC1	MN53003XCU	IC	1	
TG1, G2	EYF6CU	TEST POINT	2		IC2	MN53020XXF	IC	1	
					IC3	MC74HC244AF	IC	1	
TP1-P4	EYF6CU	TEST POINT	4		IC5	MC74HC244AF	IC	1	
					IC6	MC74HC4538AF	IC	1	
VR1-R6	VRV0161B501	V. RESISTOR 500	6		IC7	MC74HC08AF	IC	1	
VR7-R9	VRV0161B503	V. RESISTOR 50K	3		IC8	MC74HC00AF	IC	1	
VR13	VRV0113B203	V. RESISTOR 20K	1		IC9	MC74HC08AF	IC	1	
VR14	VRV0161B202	V. RESISTOR 2K	1		IC10	MC74HC04AF	IC	1	
					IC13	NJM431U	IC	1	
X1	VXS0686	CRYSTAL OSCILLATOR	1		IC14	NJM2904M	IC	1	
					IC15	NJM431U	IC	1	
					IC16	NJM2904M	IC	1	
					IC17	MC74HC74AF	IC	1	
					IC18	MC74HC08AF	IC	1	
					IC19	MC74HC157AF	IC	1	
■ E2	VEP20533B	PULSE P.C. BOARD	1 (RTL) FOR AJ-D400E		IC20	NJM2904M	IC	1	
					L1	VLP0147	COIL	1	
C1	ECUX1H820JCV	C. CAPACITOR CH 50V 82P	1		L3-L6	VLP0147	COIL	4	
C3	ECST1CD336Z	T. CAPACITOR CH 16V 33U	1						
C4	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		P1	VJS2907D025	CONNECTOR (FEMALE)	1	
C5	ECUX1H820JCV	C. CAPACITOR CH 50V 82P	1		P2, P3	VJS3422B018	CONNECTOR (FEMALE)	2	
C6	ECUX1H680JCV	C. CAPACITOR CH 50V 68P	1		P4	VJS3550A014	CONNECTOR (FEMALE)	1	
C9	ECUX1H390JCV	C. CAPACITOR CH 50V 39P	1						
C15	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		Q3, Q4	2SB956-R	TRANSISTOR	2	
C16	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	1		Q5	2SD1280-R	TRANSISTOR	1	
C17	ECUX1H680JCV	C. CAPACITOR CH 50V 68P	1		Q6	2SB709A-R	TRANSISTOR	1	
C18	ECWV1E333JS	P. CAPACITOR CH 25V 0.033U	1		Q7	2SD601A-R	TRANSISTOR	1	
C19	ECEVOJV470Q	E. CAPACITOR CH6.3V 47U	1		Q9	2SB709A-R	TRANSISTOR	1	
C20	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		Q10	2SD1280-R	TRANSISTOR	1	
C21	ECEV1EV330Q	E. CAPACITOR CH 25V 33U	1		Q11, 12	2SC3734B24	TRANSISTOR	2	
C22-24	ECEVICV470Q	E. CAPACITOR CH 16V 47U	3		Q13	2SB709A-R	TRANSISTOR	1	
C28, 29	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		Q14	2SD601A-R	TRANSISTOR	1	
C34	ECST1CY105Z	T. CAPACITOR CH 16V 1U	1		Q15, 16	2SC3735B35	TRANSISTOR	2	
C35	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		Q17-19	2SD601A-R	TRANSISTOR	3	
C36	ECEVOJV101Q	E. CAPACITOR CH6.3V 100U	1						
C37	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		R1-R9	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	9	
C38	ECA1EFQ181	E. CAPACITOR 25V 180U	1		R12	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1	
C39	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		R13	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
C40	ECA1CFQ121	E. CAPACITOR 16V 120U	1		R16, 17	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
C41	ECST1EX335Z	T. CAPACITOR CH 25V 3.3U	1		R20-23	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	4	
C43	ECEVICV470Q	E. CAPACITOR CH 16V 47U	1		R25, 26	ERJ3RED470	M. RESISTOR CH 1/16W 47	2	
C45	ECEVICV470Q	E. CAPACITOR CH 16V 47U	1		R27-29	ERJ3RED820	M. RESISTOR CH 1/16W 82	3	
C46	ECEV1HV2R2Q	E. CAPACITOR CH 50V 2.2U	1		R30, 31	ERJ3RBD101	M. RESISTOR CH 1/16W 100	2	
C48	ECEV1EV330Q	E. CAPACITOR CH 25V 33U	1		R32	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
C50	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R38-40	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	3	
C52, 53	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		R42	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
C55-57	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3		R43, 44	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2	
C58, 59	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	2		R45, 46	ERJ3RBD391	M. RESISTOR CH 1/16W 390	2	
C60	ECUX1H821JV	C. CAPACITOR CH 50V 820P	1		R47	ERJ3RBD562	M. RESISTOR CH 1/16W 5.6K	1	
C61	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		R48	ERJ3RBD123	M. RESISTOR CH 1/16W 12K	1	
C62	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R49	ERJ3RBD473	M. RESISTOR CH 1/16W 47K	1	
C63	ECEVOJV101Q	E. CAPACITOR CH6.3V 100U	1		R50	ERJ3RBD562	M. RESISTOR CH 1/16W 5.6K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R51	ERJ3RBD123	M. RESISTOR CH 1/16W 12K	1		C3015, 16	ECUX1H180JCV	C. CAPACITOR CH 50V 18P	2	
R52	ERJ3RBD473	M. RESISTOR CH 1/16W 47K	1		C3017	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1	
R53	ERJ3RBD562	M. RESISTOR CH 1/16W 5.6K	1		C3018, 19	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	2	
R54	ERJ3RBD123	M. RESISTOR CH 1/16W 12K	1		C3020	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1	
R55	ERJ3RBD473	M. RESISTOR CH 1/16W 47K	1		C3022	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R76	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1		C3023	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
R77	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1		C3024	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R78	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1		C3025	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
R79, 80	ERJ3RBD223	M. RESISTOR CH 1/16W 22K	2		C3026-28	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3	
R81	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1		C3029	ECEV1HNR47Q	E. CAPACITOR CH 50V 0.47U	1	
R82	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C3030	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	1	
R83	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1		C3031	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R84	ERJ3RBD562	M. RESISTOR CH 1/16W 5.6K	1		C3032	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
R85	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1		C3035	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
R86	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C3036-38	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3	
R87, 88	ERJ3RBD563	M. RESISTOR CH 1/16W 56K	2		C3041	ECEV1CV220Q	E. CAPACITOR CH 16V 22U	1	
R89	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1		C3042	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R90	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1		C3045	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
R91	ERJ3RBD473	M. RESISTOR CH 1/16W 47K	1		C3046	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R92	ERJ3RBD363	M. RESISTOR CH 1/16W 36K	1		C3047	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
R93	ERJ3RBD333	M. RESISTOR CH 1/16W 33K	1		C3048	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R94	ERJ3RBD393	M. RESISTOR CH 1/16W 39K	1		C3049	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
R95-97	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	3		C3050	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R98	ERJ3RBD151	M. RESISTOR CH 1/16W 15K	1		C3051	ECUM1H561JCV	C. CAPACITOR CH 50V 560P	1	
R99	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		C3056-64	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	9	
R101	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		C3065	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
R102	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1		C3066	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R103	ERJ3RBD822	M. RESISTOR CH 1/16W 8.2K	1		C3067	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
R104	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		C3068-70	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3	
R105	ERJ3RBD122	M. RESISTOR CH 1/16W 1.2K	1		C3071	ECEV1HNR47Q	E. CAPACITOR CH 50V 0.47U	1	
R106	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1		C3072	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	1	
R107	ERJ3RBD621	M. RESISTOR CH 1/16W 620	1		C3073	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R108-10	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	3		C3074	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
R112	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		C3076-78	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3	
R113	ERJ3GEYJ474	M. RESISTOR CH 1/16W 470K	1		C3079	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
R117	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C3080	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R121-23	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	3		C3081	ECEV1HNO10Q	E. CAPACITOR CH 50V 1U	1	
R124	ERJ3RBD104	M. RESISTOR CH 1/16W 100K	1		C3082	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R125	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1		C3083	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
R127, 28	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2		C3084-86	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3	
R138	ERJ6GEYOR00	M. RESISTOR CH 1/10W 0	1		C3087	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
R149	ERJ6GEYOR00	M. RESISTOR CH 1/10W 0	1		C3088	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R160	ERJ3RED100	M. RESISTOR CH 1/16W 10	1		C3089	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
R162	ERJ6GEYOR00	M. RESISTOR CH 1/10W 0	1		C3090, 91	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
R163, 64	ERJ3RED560	M. RESISTOR CH 1/16W 56	2		C3092	ECUM1H561JCV	C. CAPACITOR CH 50V 560P	1	
R165	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		C3093, 94	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
R167	ERJ3RED390	M. RESISTOR CH 1/16W 39	1		C3095	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	1	
R168, 69	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2		C3096	ECUX1H820JCV	C. CAPACITOR CH 50V 82P	1	
R174	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		C3098-00	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3	
R176	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		C3101	ECEV1EN3R3Q	E. CAPACITOR CH 25V 3.3U	1	
R180	ERJ3RBD471	M. RESISTOR CH 1/16W 470	1		C3102	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
R186	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		C3103	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R188-90	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	3		C3104	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
					C3105	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
TG1, G2	EYF6CU	TEST POINT	2		C3108, 09	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
TP1-P4	EYF6CU	TEST POINT	4		C3110	ECEV1CN100Q	E. CAPACITOR CH 16V 10U	1	
					C3111-13	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3	
VR1-R6	VRV0161B501	V. RESISTOR 500	6		C3114	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
VR7-R9	VRV0161B503	V. RESISTOR 50K	3		C3115-17	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3	
VR13	VRV0113B203	V. RESISTOR 20K	1		C3121	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1	
VR14	VRV0161B202	V. RESISTOR 2K	1		C3122	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1	
					C3123	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
X1	VSX0687	CRYSTAL OSCILLATOR	1		C3124	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1	
					C3131	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
					C3132	ECUX1E223KBV	C. CAPACITOR CH 25V 0.023U	1	
					C3133, 34	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
					C3135	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	1	
					C3136	ECUX1H181JCV	C. CAPACITOR CH 50V 180P	1	
					C3137	ECUX1H821JV	C. CAPACITOR CH 50V 820P	1	
■ E9	VEP23277A	CAMERA SYNC P.C.BOARD	1	(RTL)FOR AJ-D400P	C3138	ECEV1CV220Q	E. CAPACITOR CH 16V 22U	1	
					C3139, 40	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
					C3141	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3001	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C3142-45	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	4	
C3013	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C3146	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C3014	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1		C3147	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C3148	ECUX1E104KBN	C. CAPACITOR CH 25V 0.1U	1		R3021	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
C3149	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		R3022	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1	
C3150	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3023, 24	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
C3152-54	ECUX1E104KBN	C. CAPACITOR CH 25V 0.1U	3		R3025	ERJ3RBD392	M. RESISTOR CH 1/16W 3.9K	1	
C3155, 56	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		R3027	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
C3157	ECEVICV100Q	E. CAPACITOR CH 16V 10U	1		R3028	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1	
C3203-05	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	3		R3029	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	1	
C3206, 07	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		R3030	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1	
					R3033	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1	
D3003-08	MA142K	DIODE	6		R3034	ERJ3RBD163	M. RESISTOR CH 1/16W 16K	1	
D3011, 12	MA142K	DIODE	2		R3035	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
					R3036	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
IC3001	TC7S32FU	IC	1		R3037	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
IC3002	AD790JR	IC	1		R3051	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	1	
IC3003	MC74HC00AF	IC	1		R3052	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1	
IC3005	MN74HC221S	IC	1		R3055, 56	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	2	
IC3006	MC74HC04AF	IC	1		R3057	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
IC3007	MC74HC125AF	IC	1		R3058	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
IC3008	AD790JR	IC	1		R3059	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
IC3009	MC74HC125AF	IC	1		R3060	ERJ3RBD912	M. RESISTOR CH 1/16W 9.1K	1	
IC3010	NJM062M	IC	1		R3061	ERJ3RBD622	M. RESISTOR CH 1/16W 6.2K	1	
IC3011	TI60G16-1220	IC	1		R3062	ERJ3GEYJ122	M. RESISTOR CH 1/16W 1.2K	1	
IC3013-16	MC74HC04AF	IC	4		R3063	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
IC3017	NJM062M	IC	1		R3064	ERJ3RBD133	M. RESISTOR CH 1/16W 13K	1	
IC3018	MC74HC04AF	IC	1		R3066	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
IC3019, 20	NJM062M	IC	2		R3067	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
IC3021	XC62AP5002P	IC	1		R3068	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
IC3022	AD790JR	IC	1		R3071	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
IC3023	MC14053BF	IC	1		R3072	ERJ3RBD223	M. RESISTOR CH 1/16W 22K	1	
IC3024	NJM062M	IC	1		R3073	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1	
IC3025	XC62AP5002P	IC	1		R3074	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
IC3027	UPD65650J203	IC	1		R3075	ERJ3RBD821	M. RESISTOR CH 1/16W 820	1	
IC3028	MN74HC221S	IC	1		R3076	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1	
IC3031	TC4W66F	IC	1		R3077	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1	
IC3032	74AC04SJ	IC	1		R3078	ERJ3GEYG822	M. RESISTOR CH 1/16W 8.2K	1	
IC3033	XC62AP5002P	IC	1		R3079	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
IC3034	EL4583CS	IC	1		R3080	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1	
IC3035	MC74HC157AF	IC	1		R3081	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
IC3036	MC74HC74AF	IC	1		R3082	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
IC3037	TC7S08FU	IC	1		R3083	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
IC3201	MC74HC04AF	IC	1		R3084	ERJ3GEYJ684	M. RESISTOR CH 1/16W 680K	1	
IC3202	MC74HC153F	IC	1		R3085	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
					R3089	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
L3002	VL00163J680	COIL 68UH	1		R3091	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
L3003-05	VL00319K101	COIL 100UH	3		R3093	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
L3007-12	VL00319K101	COIL 100UH	6		R3097, 98	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	
L3013	VL00163J221	COIL 220UH	1		R3100	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
L3014, 15	VL00319K101	COIL 100UH	2		R3102	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
L3021	VL00163J4R7	COIL 4.7UH	1		R3103	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
L3022	VL00163J101	COIL 100UH	1		R3104	ERJ3RBD562	M. RESISTOR CH 1/16W 5.6K	1	
					R3105	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
P3001	VJP4064Q160	CONNECTOR (MALE)	1		R3107	ERJ3RBD821	M. RESISTOR CH 1/16W 820	1	
					R3108	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1	
Q3001	2SD1819A	TRANSISTOR	1		R3109	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
Q3002, 03	2SB1218A	TRANSISTOR	2		R3112	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
Q3011	2SC3930-B	TRANSISTOR	1		R3115	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1	
Q3012	2SA1532-C	TRANSISTOR	1		R3117, 18	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	
Q3013	2SC3938-R	TRANSISTOR	1		R3119	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
Q3014, 15	2SA1532-C	TRANSISTOR	2		R3120, 21	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	
Q3016	2SB1218A	TRANSISTOR	1		R3131	ERJ3RBD202	M. RESISTOR CH 1/16W 2K	1	
Q3017	2SD1819A	TRANSISTOR	1		R3132	ERJ3RBD243	M. RESISTOR CH 1/16W 24K	1	
Q3018	2SB1218A	TRANSISTOR	1		R3133	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
Q3023	2SD1819A	TRANSISTOR	1		R3134	ERJ3RBD221	M. RESISTOR CH 1/16W 220	1	
					R3135	ERJ3GEYJ562	M. RESISTOR CH 1/16W 5.6K	1	
R3001	ERJ3RED750	M. RESISTOR CH 1/16W 75	1		R3136	ERJ3GEYJ272	M. RESISTOR CH 1/16W 2.7K	1	
R3002	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1		R3137	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1	
R3003	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1		R3138	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
R3005	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1		R3139, 40	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	2	
R3010	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1		R3141	ERJ3GEYJ821	M. RESISTOR CH 1/16W 820	1	
R3013	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1		R3142	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	1	
R3014	ERJ3GEYJ224	M. RESISTOR CH 1/16W 220K	1		R3143	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R3015	ERJ3GEYJ272	M. RESISTOR CH 1/16W 2.7K	1		R3144	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R3016	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1		R3145	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
R3017	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R3146	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1	
R3018	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1		R3147, 48	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R3150	ERJ3GEY0R00	M.RESISTOR CH 1/16W	0	1	C3036-38	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	3	
R3152	ERJ3GEY0R00	M.RESISTOR CH 1/16W	0	1	C3041	ECEVICV220Q	E.CAPACITOR CH 16V 22U	1	
R3154	ERJ3GEY0R00	M.RESISTOR CH 1/16W	0	1	C3042	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
R3156, 57	ERJ3GEY0R00	M.RESISTOR CH 1/16W	0	2	C3045	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1	
R3159	ERJ3GEY0R00	M.RESISTOR CH 1/16W	0	1	C3046	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
R3164	ERJ3RBD103	M.RESISTOR CH 1/16W 10K	1	1	C3047	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1	
R3165	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	1	C3048	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
R3166	ERJ3GEY0R00	M.RESISTOR CH 1/16W	0	1	C3049	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1	
R3167	ERJ3GEYJ684	M.RESISTOR CH 1/16W 680K	1	1	C3050	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
R3168	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	1	C3051	ECUM1H561JCV	C.CAPACITOR CH 50V 560P	1	
R3171	ERJ3GEYJ823	M.RESISTOR CH 1/16W 82K	1	1	C3056-64	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	9	
R3181	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	1	C3065	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1	
R3182, 83	ERJ3GEYJ221	M.RESISTOR CH 1/16W 220	2	2	C3066	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
R3184	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	1	C3067	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	1	
R3194, 95	ERJ3GEY0R00	M.RESISTOR CH 1/16W	0	2	C3068-70	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	3	
R3197	ERJ3GEY0R00	M.RESISTOR CH 1/16W	0	1	C3071	ECEVIHNR47Q	E.CAPACITOR CH 50V 0.47U	1	
R3198, 99	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	2	C3072	ECUX1H102JV	C.CAPACITOR CH 50V 1000P	1	
R3201-03	ERJ3RBD101	M.RESISTOR CH 1/16W 100	3	3	C3073	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
R3204	ERJ3GEY0R00	M.RESISTOR CH 1/16W	0	1	C3074	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1	
R3206	ERJ3GEY0R00	M.RESISTOR CH 1/16W	0	1	C3076-78	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	3	
R3211	ERJ3GEY0R00	M.RESISTOR CH 1/16W	0	1	C3079	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	1	
R3213, 14	ERJ3GEY0R00	M.RESISTOR CH 1/16W	0	2	C3080	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
R3217-22	ERJ3GEY0R00	M.RESISTOR CH 1/16W	0	6	C3081	ECEVIHNR10Q	E.CAPACITOR CH 50V 1U	1	
R3223, 24	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2	2	C3082	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
R3225	ERJ3GEYJ274	M.RESISTOR CH 1/16W 270K	1	1	C3083	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1	
					C3084-86	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	3	
TG3001, 02	EYF6CU	TEST POINT		2	C3087	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1	
					C3088	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
TP3001-17	EYF6CU	TEST POINT		17	C3089	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1	
					C3090, 91	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	2	
VR3002	EVM7JGA00B14	V.RESISTOR 10K	1	1	C3092	ECUM1H561JCV	C.CAPACITOR CH 50V 560P	1	
VR3005	EVM7JGA00B53	V.RESISTOR 5K	1	1	C3093, 94	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	2	
VR3006	EVM7JGA00B23	V.RESISTOR 2K	1	1	C3095	ECUX1H150JCV	C.CAPACITOR CH 50V 15P	1	
VR3007	EVM7JGA00B53	V.RESISTOR 5K	1	1	C3096	ECUX1H820JCV	C.CAPACITOR CH 50V 82P	1	
VR3011, 12	EVM7JGA00B14	V.RESISTOR 10K	2	2	C3097	ECEVICN100Q	E.CAPACITOR CH 16V 10U	1	
VR3013-15	VRV0161B102	V.RESISTOR 1K	3	3	C3098-00	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	3	
VR3201-03	VRV0113B202	V.RESISTOR 2K	3	3	C3101	ECEVIEN3R3Q	E.CAPACITOR CH 25V 3.3U	1	
					C3102	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1	
X3001	VSX0686	CRYSTAL OSCILLATOR	1	1	C3103	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
X3002	VSX0677	CRYSTAL OSCILLATOR	1	1	C3104	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1	
X3003	VSX0338	CRYSTAL OSCILLATOR	1	1	C3105	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
X3004	VSX0688	CRYSTAL OSCILLATOR	1	1	C3107-09	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	3	
					C3110	ECEVICN100Q	E.CAPACITOR CH 16V 10U	1	
		MISCELLANEOUS			C3111-13	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	3	
					C3114	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1	
	XSB2+6	SCREW		3	C3115-17	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	3	
	VGQ4618	NUMBER PLATE (3)		1	C3122	ECUX1H120JCV	C.CAPACITOR CH 50V 12P	1	
	XNG2B	NUT		1	C3123	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
					C3124	ECUX1H100DCV	C.CAPACITOR CH 50V 10P	1	
					C3131	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
					C3132	ECUX1E223KBV	C.CAPACITOR CH 25V 0.023U	1	
					C3133, 34	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	2	
					C3135	ECUX1H470JCV	C.CAPACITOR CH 50V 47P	1	
■ E9	VEP23277B	CAMERA SYNC P.C.BOARD	1	(RTL)FOR AJ-D400E	C3136	ECUX1H181JCV	C.CAPACITOR CH 50V 180P	1	
					C3137	ECUX1H821JV	C.CAPACITOR CH 50V 820P	1	
					C3138	ECEVICV220Q	E.CAPACITOR CH 16V 22U	1	
C3001, 02	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	2		C3139, 40	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	2	
C3003	ECUX1H100DCV	C.CAPACITOR CH 50V 10P	1		C3141	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1	
C3004	ECUX1H151JCV	C.CAPACITOR CH 50V 150P	1		C3142-45	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	4	
C3005	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1		C3146	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1	
C3013	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1		C3147	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
C3014	ECUX1H330JCV	C.CAPACITOR CH 50V 33P	1		C3148	ECUX1E104KBN	C.CAPACITOR CH 25V 0.1U	1	
C3015, 16	ECUX1H180JCV	C.CAPACITOR CH 50V 18P	2		C3149	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1	
C3017	ECUX1H220JCV	C.CAPACITOR CH 50V 22P	1		C3150	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1	
C3020	ECUX1H330JCV	C.CAPACITOR CH 50V 33P	1		C3152-54	ECUX1E104KBN	C.CAPACITOR CH 25V 0.1U	3	
C3022	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1		C3155, 56	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	2	
C3023	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1		C3157	ECEVICV100Q	E.CAPACITOR CH 16V 10U	1	
C3024	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1		C3203-05	ECUX1H470JCV	C.CAPACITOR CH 50V 47P	3	
C3025	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	1		C3206, 07	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	2	
C3026-28	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	3						
C3029	ECEVIHNR10Q	E.CAPACITOR CH 50V 1U	1		D3003-07	MA142K	DIODE	5	
C3030	ECUX1H102JV	C.CAPACITOR CH 50V 1000P	1		D3011, 12	MA142K	DIODE	2	
C3031	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1						
C3032	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1		IC3001	TC7S32FU	IC	1	
C3035	ECEVOJV330Q	E.CAPACITOR CH6.3V 33U	1		IC3002	AD790JR	IC	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
IC3003	MC74HC00AF	IC	1		R3034	ERJ3RBD223	M.RESISTOR CH 1/16W 22K	1	
IC3004	TC7S04FU	IC	1		R3035	ERJ3RBD512	M.RESISTOR CH 1/16W 5.1K	1	
IC3005	MN74HC221S	IC	1		R3036	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
IC3006	MC74HC04AF	IC	1		R3037	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
IC3007	MC74HC125AF	IC	1		R3051	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
IC3008	AD790JR	IC	1		R3052	ERJ3GEYJ333	M.RESISTOR CH 1/16W 33K	1	
IC3009	MC74HC125AF	IC	1		R3055, 56	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	2	
IC3010	NJM062M	IC	1		R3057	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
IC3011	T160616-1220	IC	1		R3058	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
IC3012	MN74HC221S	IC	1		R3059	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
IC3013-16	MC74HC04AF	IC	4		R3060	ERJ3RBD113	M.RESISTOR CH 1/16W 11K	1	
IC3017	NJM062M	IC	1		R3061	ERJ3RBD622	M.RESISTOR CH 1/16W 6.2K	1	
IC3018	MC74HC04AF	IC	1		R3062	ERJ3GEYJ122	M.RESISTOR CH 1/16W 1.2K	1	
IC3019, 20	NJM062M	IC	2		R3063	ERJ3RBD103	M.RESISTOR CH 1/16W 10K	1	
IC3021	XC62AP5002P	IC	1		R3064	ERJ3RBD223	M.RESISTOR CH 1/16W 22K	1	
IC3022	AD790JR	IC	1		R3066	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
IC3023	MC14053BF	IC	1		R3067	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
IC3024	NJM062M	IC	1		R3068	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
IC3025	XC62AP5002P	IC	1		R3071	ERJ3RBD222	M.RESISTOR CH 1/16W 2.2K	1	
IC3026	AD790JR	IC	1		R3072	ERJ3RBD223	M.RESISTOR CH 1/16W 22K	1	
IC3027	UPD65650J203	IC	1		R3073	ERJ3RBD751	M.RESISTOR CH 1/16W 750	1	
IC3028	MN74HC221S	IC	1		R3074	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
IC3031	TC4W66F	IC	1		R3075	ERJ3RBD821	M.RESISTOR CH 1/16W 820	1	
IC3032	74AC04SJ	IC	1		R3076	ERJ3RBD152	M.RESISTOR CH 1/16W 1.5K	1	
IC3033	XC62AP5002P	IC	1		R3077	ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1	
IC3034	EL4583CS	IC	1		R3078	ERJ3GEY6822	M.RESISTOR CH 1/16W 8.2K	1	
IC3035	MC74HC157AF	IC	1		R3079	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
IC3036	MC74HC74AF	IC	1		R3080	ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1	
IC3037	TC7S08FU	IC	1		R3081	ERJ3GEYJ823	M.RESISTOR CH 1/16W 82K	1	
IC3201	MC74HC04AF	IC	1		R3082	ERJ3RBD103	M.RESISTOR CH 1/16W 10K	1	
IC3202	MC74HC153F	IC	1		R3083	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1	
L3002	VLQ0163J390	COIL	39UH	1	R3084	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
L3003-05	VLQ00319K101	COIL	100UH	3	R3085	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
L3007-12	VLQ00319K101	COIL	100UH	6	R3086	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
L3013	VLQ0163J221	COIL	220UH	1	R3087	ERJ3GEYJ183	M.RESISTOR CH 1/16W 18K	1	
L3014, 15	VLQ00319K101	COIL	100UH	2	R3088	ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1	
L3021	VLQ0163J4R7	COIL	4.7UH	1	R3089	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
L3022	VLQ0163J101	COIL	100UH	1	R3091	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
P3001	VJP4064Q160	CONNECTOR (MALE)		1	R3092	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
Q3001	2SD1819A	TRANSISTOR		1	R3094, 95	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
Q3002, 03	2SB1218A	TRANSISTOR		2	R3097	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
Q3011	2SC3930-B	TRANSISTOR		1	R3099, 00	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
Q3012	2SA1532-C	TRANSISTOR		1	R3103	ERJ3RBD103	M.RESISTOR CH 1/16W 10K	1	
Q3013	2SC3938-R	TRANSISTOR		1	R3104	ERJ3RBD472	M.RESISTOR CH 1/16W 4.7K	1	
Q3014, 15	2SA1532-C	TRANSISTOR		2	R3105	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
Q3016	2SB1218A	TRANSISTOR		1	R3106	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
Q3017	2SD1819A	TRANSISTOR		1	R3107	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
Q3018	2SB1218A	TRANSISTOR		1	R3108	ERJ3RBD561	M.RESISTOR CH 1/16W 560	1	
Q3023	2SD1819A	TRANSISTOR		1	R3109	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R3001	ERJ3RBD911	M.RESISTOR CH 1/16W 910	1		R3112	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R3002	ERJ3GEY6332	M.RESISTOR CH 1/16W 3.3K	1		R3114	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R3004	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		R3115	ERJ3RBD561	M.RESISTOR CH 1/16W 560	1	
R3006	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		R3117, 18	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R3007	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R3119	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R3008	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1		R3120, 21	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R3009	ERJ3GEYJ274	M.RESISTOR CH 1/16W 270K	1		R3131	ERJ3RBD202	M.RESISTOR CH 1/16W 2K	1	
R3013	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1		R3132	ERJ3RBD243	M.RESISTOR CH 1/16W 24K	1	
R3014	ERJ3GEYJ224	M.RESISTOR CH 1/16W 220K	1		R3133	ERJ3RBD103	M.RESISTOR CH 1/16W 10K	1	
R3015	ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1		R3134	ERJ3RBD221	M.RESISTOR CH 1/16W 220	1	
R3016	ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1		R3135	ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R3017	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1		R3136	ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1	
R3019	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		R3137	ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1	
R3021	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		R3138	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R3022	ERJ3GEY6332	M.RESISTOR CH 1/16W 3.3K	1		R3139, 40	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2	
R3023, 24	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	2		R3141	ERJ3GEYJ821	M.RESISTOR CH 1/16W 820	1	
R3025	ERJ3RBD392	M.RESISTOR CH 1/16W 3.9K	1		R3142	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R3027	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		R3143	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R3028	ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1		R3144	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R3029	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1		R3145	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R3030	ERJ3GEYJ333	M.RESISTOR CH 1/16W 33K	1		R3146	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	1	
R3033	ERJ3RBD153	M.RESISTOR CH 1/16W 15K	1		R3147, 48	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
					R3150	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
					R3153	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
					R3156, 57	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
					R3159	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3164	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		C3565,66	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
R3165	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		C3567,68	ECEVOJV3300	E. CAPACITOR CH6.3V 33U	2	
R3166	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		C3571-76	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	6	
R3167	ERJ3GEYJ684	M. RESISTOR CH 1/16W 680K	1		C3577-79	ECST1VY224Z	T. CAPACITOR CH 35V 0.22U	3	
R3168	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1		C3580-82	ECEVOJN1000	E. CAPACITOR CH6.3V 10U	3	
R3171	ERJ3GEYJ823	M. RESISTOR CH 1/16W 82K	1		C3583-88	ECST1VY474Z	T. CAPACITOR CH 35V 0.47U	6	
R3181	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		C3593-95	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3	
R3182,83	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	2		C3596-98	ECEV1CV1000	E. CAPACITOR CH 16V 10U	3	
R3184	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		C3599	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R3194	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		C3610	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
R3197	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		C3701-03	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3	
R3198,99	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2						
R3201-03	ERJ3RBD101	M. RESISTOR CH 1/16W 100	3		D3500,01	MA142K	DIODE	2	
R3204	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1						
R3206	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		IC3501	MN18885	IC	1	
R3210	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1		IC3502	VS12000G	IC	1	
R3212	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		IC3503	K6256DL67L	IC	1	
R3215	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		IC3504	STK12C68S45	IC	1	
R3217-22	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	6		IC3505	VS12202H	IC	1	
R3223,24	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2		IC3506	NJM064M	IC	1	
R3225	ERJ3GEYJ274	M. RESISTOR CH 1/16W 270K	1		IC3507	UPD71055GB	IC	1	
					IC3508	MN12821R	IC	1	
TG3001,02	EYF6CU	TEST POINT	2		IC3510	MC14053BF	IC	1	
TP3001-17	EYF6CU	TEST POINT	17		IC3511	NJM064M	IC	1	
					IC3513	NJM064M	IC	1	
VR3002	EVM7JGA00B14	V. RESISTOR 10K	1		IC3514	74AC138SJ	IC	1	
VR3005	EVM7JGA00B53	V. RESISTOR 5K	1		IC3515	74AC11SJ	IC	1	
VR3006	EVM7JGA00B23	V. RESISTOR 2K	1		IC3516	74AC00SJ	IC	1	
VR3007	EVM7JGA00B53	V. RESISTOR 5K	1		IC3517	74AC04SJ	IC	1	
VR3011,12	EVM7JGA00B14	V. RESISTOR 10K	2		IC3518	XC62AP5002P	IC	1	
VR3013-15	VRV0161B102	V. RESISTOR 1K	3		IC3519	MB88344PFV	IC	1	
VR3201-03	VRV0113B202	V. RESISTOR 2K	3		IC3520	MC74HC4052F	IC	1	
					IC3521-23	MB88351PF	IC	3	
X3001	VSX0687	CRYSTAL OSCILLATOR	1		IC3525	MC14053BF	IC	1	
X3002	VSX0677	CRYSTAL OSCILLATOR	1		IC3526	NJM2904M	IC	1	
X3003	VSX0270	CRYSTAL OSCILLATOR	1		IC3528	74AC138SJ	IC	1	
X3004	VSX0689	CRYSTAL OSCILLATOR	1		IC3529	MC14053BF	IC	1	
					IC3530	IDT71321A55	IC	1	
					IC3531	MC74HC244AF	IC	1	
		MISCELLANEOUS			IC3532	MC14053BF	IC	1	
	XSB2+6	SCREW	3		IC3533	MC74HC244AF	IC	1	
	VG04618	NUMBER PLATE (3)	1		IC3701	NJM2904M	IC	1	
	XNG2B	NUT	1						
					IF3502	VJF1047	IC SOCKET	1	
					IF3505	VJF1047	IC SOCKET	1	
					IS3502	VJS3427X032	CONNECTOR (FEMALE)	1	
					IS3505	VJS3427X032	CONNECTOR (FEMALE)	1	
■ E6	VEP26074B	CAMERA SYSCON P.C. BOARD	1	(RTL) FOR AJ-D400P					
					L3500-02	VL00319K101	COIL 100UH	3	
C3500	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1						
C3502,03	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		P3501	VJP40640160	CONNECTOR (MALE)	1	
C3504	ECEV1HN0100	E. CAPACITOR CH 50V 1U	1		P3502	VJP3506A100	CONNECTOR (MALE)	1	
C3505,06	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	2		P3503	VJP3358C012	CONNECTOR (MALE)	1	
C3507	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1						
C3509	ECEV1HVOR10	E. CAPACITOR CH 50V 0.1U	1		Q3500-02	2SA1532-C	TRANSISTOR	3	
C3511	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		Q3503-05	2SD1819A	TRANSISTOR	3	
C3512	ECST1VY224Z	T. CAPACITOR CH 35V 0.22U	1						
C3513	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		QR3500,01	UN5213	TRANSISTOR-RESISTOR	2	
C3514	ECST1VY224Z	T. CAPACITOR CH 35V 0.22U	1		QR3502	UN5211	TRANSISTOR-RESISTOR	1	
C3515-19	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	5		QR3503	UN5113	TRANSISTOR-RESISTOR	1	
C3520	ECEVOJV1010	E. CAPACITOR CH6.3V 100U	1						
C3521	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3500	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
C3523-28	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	6		R3501	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
C3531	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3503,04	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
C3533	ECUX1H151JCV	C. CAPACITOR CH 50V 150P	1		R3505	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
C3534	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3506	ERJ3GEYJ680	M. RESISTOR CH 1/16W 68	1	
C3535	ECEVOJV3300	E. CAPACITOR CH6.3V 33U	1		R3507	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
C3536-40	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	5		R3508	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1	
C3558-60	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3		R3510	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
C3561	ECEV1CV2200	E. CAPACITOR CH 16V 22U	1		R3512	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
C3562	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R3513-17	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	5	
C3564	ECEV1EN3R30	E. CAPACITOR CH 25V 3.3U	1		R3518-23	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	6	
					R3524	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
					R3526-28	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	3	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
IS3502	VJS3427X032	CONNECTOR (FEMALE)	1	
IS3505	VJS3427X032	CONNECTOR (FEMALE)	1	
L3500-02	VL00319K101	COIL 100UH	3	
P3501	VJP40640160	CONNECTOR (MALE)	1	
P3502	VJP3506A100	CONNECTOR (MALE)	1	
P3503	VJP3358C012	CONNECTOR (MALE)	1	
Q3500-02	2SA1532-C	TRANSISTOR	3	
Q3503-05	2SD1819A	TRANSISTOR	3	
QR3500, 01	UN5213	TRANSISTOR-RESISTOR	2	
QR3502	UN5211	TRANSISTOR-RESISTOR	1	
QR3503	UN5113	TRANSISTOR-RESISTOR	1	
R3500	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R3501	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R3503, 04	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	
R3505	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
R3506	ERJ3GEYJ680	M. RESISTOR CH 1/16W 68	1	
R3507	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
R3508	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1	
R3510	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R3512	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R3513-17	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	5	
R3518-23	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	6	
R3524	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R3526-28	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	3	
R3529	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R3531	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R3535, 36	ERJ3RBD363	M. RESISTOR CH 1/16W 36K	2	
R3537	ERJ3RBD683	M. RESISTOR CH 1/16W 68K	1	
R3538	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R3539	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R3540	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R3541, 42	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	
R3543	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R3545	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R3547-49	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	3	
R3550	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
R3551	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R3554	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R3555	ERJ3GEYG822	M. RESISTOR CH 1/16W 8.2K	1	
R3562	ERJ3RBD183	M. RESISTOR CH 1/16W 18K	1	
R3563	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1	
R3564	ERJ3GEYJ273	M. RESISTOR CH 1/16W 27K	1	
R3565	ERJ3RBD183	M. RESISTOR CH 1/16W 18K	1	
R3566	ERJ3RBD123	M. RESISTOR CH 1/16W 12K	1	
R3567	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R3575-77	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	3	
R3578	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R3579	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
R3580	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R3581	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R3582-84	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	3	
R3585	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R3589	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R3590-93	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	4	
R3594	ERJ3GEYJ562	M. RESISTOR CH 1/16W 5.6K	1	
R3595	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R3597	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R3598	ERJ3GEYJ823	M. RESISTOR CH 1/16W 82K	1	
R3599	ERJ3GEYJ824	M. RESISTOR CH 1/16W 820K	1	
R3600	ERJ3GEYJ823	M. RESISTOR CH 1/16W 82K	1	
R3601	ERJ3GEYJ824	M. RESISTOR CH 1/16W 820K	1	
R3602	ERJ3GEYJ823	M. RESISTOR CH 1/16W 82K	1	
R3603	ERJ3GEYJ824	M. RESISTOR CH 1/16W 820K	1	
R3604	ERJ3GEYJ562	M. RESISTOR CH 1/16W 5.6K	1	
R3605	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
R3606	ERJ3GEYJ562	M. RESISTOR CH 1/16W 5.6K	1	
R3607	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
R3608	ERJ3GEYJ562	M. RESISTOR CH 1/16W 5.6K	1	
R3609	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	

Ref.No.	Part No.	Part Name & Description
---------	----------	-------------------------

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C6006, 07	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	2		QR6201-04	UN5114	TRANSISTOR-RESISTOR	4	
C6008, 09	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		QR6206	UN5213	TRANSISTOR-RESISTOR	1	
C6010	ECUX1H470JCV	C. CAPACITOR CH 50V 47P	1		QR6207	UN5114	TRANSISTOR-RESISTOR	1	
C6012-19	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	8		QR6208, 09	UN5213	TRANSISTOR-RESISTOR	2	
C6021, 22	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2						
C6023	ECUX1H120JCV	C. CAPACITOR CH 50V 12P	1		R6001	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
C6101	ECEVOJV470Q	E. CAPACITOR CH6.3V 47U	1		R6002	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	1	
C6102	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R6003	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	1	
C6103	ECEVOJV470Q	E. CAPACITOR CH6.3V 47U	1		R6004	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
C6104-06	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3		R6005	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
C6201-09	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	9		R6006	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
C6210	ECEVOJV470Q	E. CAPACITOR CH6.3V 47U	1		R6007	ERJ6RBD473	M. RESISTOR CH 1/10W 47K	1	
C6211	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R6008	ERJ6RBD153	M. RESISTOR CH 1/10W 15K	1	
C6213-17	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	5		R6009	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
C6801, 02	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		R6010	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
C6803, 04	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	2		R6011	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	1	
C6805-07	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3		R6012	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
C6809	ECUX1H270JCV	C. CAPACITOR CH 50V 27P	1		R6013	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	1	
C6810	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		R6014	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
C6811	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R6015	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1	
C6812	ECEVOJV470Q	E. CAPACITOR CH6.3V 47U	1		R6016, 17	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
C6813, 14	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		R6019, 20	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	2	
C6815	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	1		R6021	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
C6816	ECEVICV470Q	E. CAPACITOR CH 16V 47U	1		R6022	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	1	
C6817	ECEVICV100Q	E. CAPACITOR CH 16V 10U	1		R6023	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1	
C6818	ECEVICN100Q	E. CAPACITOR CH 16V 10U	1		R6025	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	1	
C6819	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R6026	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
C6820	ECUM1C105ZFN	C. CAPACITOR CH 16V 1U	1		R6029	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	1	
C6821, 22	ECEVICN100Q	E. CAPACITOR CH 16V 10U	2		R6030-36	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	7	
					R6037-39	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	3	
D6001	MA151K	DIODE	1		R6040-44	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	5	
D6002-04	MA728	DIODE	3		R6045, 46	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
D6007-09	MA728	DIODE	3		R6047, 48	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	2	
D6021	MA151K	DIODE	1		R6049	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1	
D6801	MA143	DIODE	1		R6050	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	1	
D6802	MA8024	DIODE	1		R6051, 52	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
					R6053	ERJ3GEYJ152	M. RESISTOR CH 1/16W 1.5K	1	
IC6001	M37702S4AFP	IC	1		R6101-29	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	29	
IC6002	MN13821-S	IC	1		R6201-05	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	5	
IC6003	TC7W04F	IC	1		R6206-12	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	7	
IC6004	TC7W32F	IC	1		R6213-15	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	3	
IC6005	PC74HC75T	IC	1		R6216	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
IC6006	VS13004	IC	1		R6217	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
IC6007	TC7W00F	IC	1		R6218, 19	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	2	
IC6008	MC74HC138AF	IC	1		R6220-24	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	5	
IC6009	UPD6456T611Y	IC	1		R6225	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
IC6010	TC7W32F	IC	1		R6226-30	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	5	
IC6011, 12	TC74ACT541F	IC	2		R6231, 32	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	2	
IC6013	TC7S32F	IC	1		R6233-36	ERJ6GEY0271	M. RESISTOR CH 1/10W 270	4	
IC6101, 02	TC74ACT541F	IC	2		R6237	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
IC6201	MB89363BPF	IC	1		R6238-41	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	4	
IC6202	UPC393G2	IC	1		R6243, 44	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
IC6801	MN51040VPI	IC	1		R6246	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
IC6802	UPC393G2	IC	1		R6801	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
IC6803	NJM4558M	IC	1		R6803, 04	ERJ3GEYJ224	M. RESISTOR CH 1/16W 220K	2	
					R6805	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
IF6006	VJFT047	IC SOCKET	1		R6806	ERJ3GEYJ123	M. RESISTOR CH 1/16W 12K	1	
					R6807	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
IS6006	VJS3427X032	CONNECTOR (FEMALE)	1		R6808	ERJ3GEYJ123	M. RESISTOR CH 1/16W 12K	1	
					R6809	ERJ6RBD682	M. RESISTOR CH 1/10W 6.8K	1	
L6001	VLQ0319K100	COIL 10UH	1		R6810	ERJ6RBD912	M. RESISTOR CH 1/10W 9.1K	1	
L6002	VLQ0163J270	COIL 27UH	1		R6811	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1	
L6101	VLQ0319K101	COIL 100UH	1		R6812, 13	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	2	
L6102, 03	VLQ0163J470	COIL 47UH	2		R6814	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
L6201	VLQ0319K101	COIL 100UH	1		R6816	ERJ3GEYJ394	M. RESISTOR CH 1/16W 390K	1	
L6801	VLQ0163J470	COIL 47UH	1		R6817	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
L6802	VLQ0319K101	COIL 100UH	1		R6818	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
					R6819	ERJ3GEYJ152	M. RESISTOR CH 1/16W 1.5K	1	
P6001	VJP40640160	CONNECTOR (MALE)	1		R6820	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
					R6821	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1	
Q6801	2SD1819A-R	TRANSISTOR	1		R6822	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
					R6823	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1	
QR6001	UN5213	TRANSISTOR-RESISTOR	1		R6824	ERJ3GEYJ682	M. RESISTOR CH 1/16W 6.8K	1	
QR6003	UN5211	TRANSISTOR-RESISTOR	1		R6826	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	1	
QR6004, 05	UN5213	TRANSISTOR-RESISTOR	2		R6827, 28	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R6829	ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1	
R6839	ERJ6RBD392	M.RESISTOR CH 1/10W 3.9K	1	
R6840	ERJ6RBD102	M.RESISTOR CH 1/10W 1K	1	
R6845	ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1	
SW6001	VSS0342	SWITCH	1	
TG6001	EYF6CU	TEST POINT	1	
TP6001, 02	EYF6CU	TEST POINT	2	
VC6001	VCV0049	TRIMMER	1	
X6001	VSX0465	CRYSTAL OSCILLATOR	1	
X6801	VSX0498	CRYSTAL OSCILLATOR	1	
X6802	VSX0615	CRYSTAL OSCILLATOR	1	
		MISCELLANEOUS		
	XSB2+6	SCREW	3	
	VG04619	NUMBER PLATE (4)	1	
	XNG2B	NUT	1	
				</

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C810,11	ECUX1E104KBN	C. CAPACITOR CH 25V 0.1U	2		L200	VLQ0319K100	COIL 10UH	1	
C812,13	ECA1CM332	E. CAPACITOR 16V 3300U	2		L301	VLQ0407120M	COIL 12UH	1	
C814	ECUX1E104KBN	C. CAPACITOR CH 25V 0.1U	1		L302,03	VLQ0407151K	COIL 150UH	2	
C817	ECEV1EV4R70	E. CAPACITOR CH 25V 4.7U	1		L501	VLQ0319K100	COIL 10UH	1	
C903-05	ECUX1H221JCV	C. CAPACITOR CH 50V 220P	3		L701	VLQ0319K101	COIL 100UH	1	
C906	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1						
D10	MA728	DIODE	1		P600	VJP3172D003	CONNECTOR (MALE)	1	
D11,12	MA736	DIODE	2		P601	VJP3172D002	CONNECTOR (MALE)	1	
D13	MA728	DIODE	1		P602	VJP3172D004	CONNECTOR (MALE)	1	
D100	MA142K	DIODE	1		P603	VJP3172D002	CONNECTOR (MALE)	1	
D101,02	MA143	DIODE	2		P604	VJP3172D003	CONNECTOR (MALE)	1	
D103	MA736	DIODE	1		P605	VJP3518B002	CONNECTOR (MALE)	1	
D200,01	MA143	DIODE	2		P606	VJP3172D003	CONNECTOR (MALE)	1	
D301	MA728	DIODE	1		P607	VJS3801B010	CONNECTOR (FEMALE)	1	
D302	MA736	DIODE	1		P608	VJP3518B002	CONNECTOR (MALE)	1	
D303	MA728	DIODE	1		P609	VJP3172D002	CONNECTOR (MALE)	1	
D304	MA736	DIODE	1		P610	VJP3518B003	CONNECTOR (MALE)	1	
D401	MA736	DIODE	1		P611	VJP3518B002	CONNECTOR (MALE)	1	
D402-05	MA143	DIODE	4		P612	VJP3172D004	CONNECTOR (MALE)	1	
D406	MA736	DIODE	1		P613	VJS3406B015	CONNECTOR (FEMALE)	1	
D501	MA142WK	DIODE	1		P614,15	VJS3813C017	CONNECTOR (FEMALE)	2	
D502-04	MA142WA	DIODE	3		P616	VJS3406B019	CONNECTOR (FEMALE)	1	
D505	MA142WK	DIODE	1		P617	VJP1232T	CONNECTOR (MALE) 5P	1	
D701	MA143	DIODE	1		P618	VJP3125B002	CONNECTOR (MALE)	1	
D702	MA3062M	DIODE	1		P619	VJP3809E060	CONNECTOR (MALE)	1	
D703	MA738	DIODE	1		P620	VJP3358C022	CONNECTOR (MALE)	1	
D704	MA3056-L	DIODE	1						
D801-03	MA142WK	DIODE	3		Q2	2SD1820-R	TRANSISTOR	1	
D807	MA142WK	DIODE	1		Q3,04	2SB1073-R	TRANSISTOR	2	
D811,12	MA142WK	DIODE	2		Q5-07	2SD1820-R	TRANSISTOR	3	
D813	21DQ04	DIODE	1		Q100,01	2SD1820-R	TRANSISTOR	2	
D814-16	MA142WK	DIODE	3		Q103,04	2SD1820-R	TRANSISTOR	2	
D817-28	MA738	DIODE	12		Q105	2SB1219A-R	TRANSISTOR	1	
D829	NS003A04	DIODE	1		Q106	2SD1819A-R	TRANSISTOR	1	
D830	MA8051-H	DIODE	1		Q301,02	2SB1073-R	TRANSISTOR	2	
D831,32	NS003A04	DIODE	2		Q401	2SB1219A-R	TRANSISTOR	1	
D833	MA142WK	DIODE	1		Q502,03	2SD1819A-R	TRANSISTOR	2	
					Q702	2SB1073-R	TRANSISTOR	1	
IC6	TA75W01FU	IC	1		Q703	2SD1624-S	TRANSISTOR	1	
IC7	TA75W393FU	IC	1		Q811	2SB936A-Q	TRANSISTOR	1	
IC9	TA75W393FU	IC	1		Q812	2SD1819A-R	TRANSISTOR	1	
IC100	MA6755486H8E	IC	1		Q815	2SD1819A-R	TRANSISTOR	1	
IC101	SC371025AVFU	IC	1		Q816,17	2SB1073-R	TRANSISTOR	2	
IC103	UPC4556G2	IC	1		Q819	2SD1819A-R	TRANSISTOR	1	
IC104	MA13821-S	IC	1		Q820	2SB1219A-R	TRANSISTOR	1	
IC110	XC62AP3002P	IC	1		Q821,22	2SD1624-S	TRANSISTOR	2	
IC200	TB6519F	IC	1		Q823	2SB1219A-R	TRANSISTOR	1	
IC201,02	UN224	TRANSISTOR-RESISTOR	2		Q825	2SD1819A-R	TRANSISTOR	1	
IC203	TA75W393FU	IC	1		Q826,27	2SB1073-R	TRANSISTOR	2	
IC204	TA75W01FU	IC	1		Q829	2SD1819A-R	TRANSISTOR	1	
IC205	TB6519F	IC	1		Q830	2SB1219A-R	TRANSISTOR	1	
IC301	TL1451CDB	IC	1		Q831,32	2SD1624-S	TRANSISTOR	2	
IC302,03	AN3841SR	IC	2		Q833	2SB1219A-R	TRANSISTOR	1	
IC401,02	TA75W393FU	IC	2		Q835	2SD1819A-R	TRANSISTOR	1	
IC403	TA75W01FU	IC	1		Q836,37	2SB1073-R	TRANSISTOR	2	
IC404,05	TC7W74FU	IC	2		Q839	2SD1819A-R	TRANSISTOR	1	
IC406,07	UPC4558G2	IC	2		Q840	2SB1219A-R	TRANSISTOR	1	
IC409,10	TA75W01FU	IC	2		Q841,42	2SD1624-S	TRANSISTOR	2	
IC501	MA6755486H8N	IC	1		Q843	2SB1219A-R	TRANSISTOR	1	
IC502	TC7W04FU	IC	1		Q906	2SD1819A-R	TRANSISTOR	1	
IC503	TA75W393FU	IC	1		Q908	2SD1819A-R	TRANSISTOR	1	
IC701	TA75W393FU	IC	1		Q914	2SD1819A-R	TRANSISTOR	1	
IC702	BA6219BFPY	IC	1		Q918	2SD1819A-R	TRANSISTOR	1	
IC801	MC14538BF	IC	1		Q922	2SD1819A-R	TRANSISTOR	1	
IC802	NJM2904M	IC	1						
IC803	MC14538BF	IC	1		QR2	UN5213	TRANSISTOR-RESISTOR	1	
IC804	MC74HC11F	IC	1		QR5	UN5213	TRANSISTOR-RESISTOR	1	
IC805,06	TC7W04FU	IC	2		QR101,02	UN5213	TRANSISTOR-RESISTOR	2	
					QR106	UN5213	TRANSISTOR-RESISTOR	1	
L1	VLQ0407120M	COIL 12UH	1		QR149,50	UN5213	TRANSISTOR-RESISTOR	2	
L2	VLQ0129	COIL 300UH	1		QR305	UN5113	TRANSISTOR-RESISTOR	1	
L4	VLQ0407151K	COIL 150UH	1		QR306	UN5213	TRANSISTOR-RESISTOR	1	
L101	VLQ0319K101	COIL 100UH	1		QR501	UN5213	TRANSISTOR-RESISTOR	1	
L102-04	VLQ0319K100	COIL 10UH	3		QR504	UN5213	TRANSISTOR-RESISTOR	1	
					QR701,02	UN5114	TRANSISTOR-RESISTOR	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
QR703, 04	UN5214	TRANSISTOR-RESISTOR	2		R146	ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1	
QR801	UN5213	TRANSISTOR-RESISTOR	1		R148	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
QR804	UN5214	TRANSISTOR-RESISTOR	1		R149	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
QR809, 10	UN5214	TRANSISTOR-RESISTOR	2		R150	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
QR813	UN5214	TRANSISTOR-RESISTOR	1		R151	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
QR814	UN5114	TRANSISTOR-RESISTOR	1		R153	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
QR818	UN5114	TRANSISTOR-RESISTOR	1		R154	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
QR824	UN5114	TRANSISTOR-RESISTOR	1		R155	ERJ3GEYJ682	M.RESISTOR CH 1/16W 6.8K	1	
QR828	UN5114	TRANSISTOR-RESISTOR	1		R156, 57	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
QR834	UN5114	TRANSISTOR-RESISTOR	1		R158-66	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	9	
QR838	UN5114	TRANSISTOR-RESISTOR	1		R167	ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
QR844-46	UN5214	TRANSISTOR-RESISTOR	3		R172	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
QR905	UN5214	TRANSISTOR-RESISTOR	1		R174, 75	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
QR907	UN5214	TRANSISTOR-RESISTOR	1		R178	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
QR913	UN5214	TRANSISTOR-RESISTOR	1		R179, 80	ERJ6RBD223	M.RESISTOR CH 1/10W 22K	2	
QR915	UN5214	TRANSISTOR-RESISTOR	1		R181	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
QR917	UN5214	TRANSISTOR-RESISTOR	1		R182	ERJ3GEYJ122	M.RESISTOR CH 1/16W 1.2K	1	
QR919-21	UN5214	TRANSISTOR-RESISTOR	3		R183	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
					R185	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R19	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1		R186, 87	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	2	
R20	ERJ8GCYJ681	M.RESISTOR CH 1/8W 680	1		R189	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R22	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R190	ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	1	
R23	ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1		R191	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R24, 25	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2		R192-95	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	4	
R26	ERJ3GEYJ394	M.RESISTOR CH 1/16W 390K	1		R196	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R27	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1		R204, 05	ERJ8GCYJ1R0	M.RESISTOR CH 1/8W 1	2	
R28	ERJ3GEYJ123	M.RESISTOR CH 1/16W 12K	1		R206	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R29	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1		R207	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1	
R30	ERJ3GEYJ394	M.RESISTOR CH 1/16W 390K	1		R209	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R31	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1		R210	ERJ8GCYJ1R0	M.RESISTOR CH 1/8W 1	1	
R32	ERJ3GEYJ123	M.RESISTOR CH 1/16W 12K	1		R211	ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1	
R33	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1		R212	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R34	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R213	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R36	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R214, 15	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2	
R37	ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1		R216	ERJ3GEYJ184	M.RESISTOR CH 1/16W 180K	1	
R38	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R217	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R42, 43	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	2		R220	ERJ3GEYJ821	M.RESISTOR CH 1/16W 820	1	
R44	ERJ3GEYJ564	M.RESISTOR CH 1/16W 560K	1		R226, 27	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	2	
R45	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1		R229	ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1	
R46	ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1		R233, 34	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2	
R47	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R235	ERJ8GCYJ1R0	M.RESISTOR CH 1/8W 1	1	
R49, 50	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2		R236	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1	
R51	ERJ3GEYJ334	M.RESISTOR CH 1/16W 330K	1		R238	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R52	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1		R239	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R54	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R240	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1	
R63	ERJ8GCYJ681	M.RESISTOR CH 1/8W 680	1		R241	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R64	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1		R242	ERJ3GEYJ184	M.RESISTOR CH 1/16W 180K	1	
R77	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1		R243	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R78	ERJ3GEYJ823	M.RESISTOR CH 1/16W 82K	1		R244	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R84	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1		R245	ERDS2TJ101	C.RESISTOR 1/4W 100	1	
R93	ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1		R246	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R101	ERJ8GCY0R00	M.RESISTOR CH 1/8W 0	1		R247	ERJ3GEYJ821	M.RESISTOR CH 1/16W 820	1	
R102, 03	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	2		R248	ERJ3GEYJ332	M.RESISTOR CH 1/16W 3.3K	1	
R104-07	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	4		R249	ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1	
R111	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1		R250, 51	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2	
R112	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R257, 58	ERJ8GCYJ1R0	M.RESISTOR CH 1/8W 1	2	
R118-26	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	9		R259	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R128	ERJ3GEYJ682	M.RESISTOR CH 1/16W 6.8K	1		R260	ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1	
R129	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		R263, 64	ERJ3GEYJ181	M.RESISTOR CH 1/16W 180	2	
R130	ERJ3GEYJ683	M.RESISTOR CH 1/16W 68K	1		R265, 66	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R131	ERJ3GEYJ334	M.RESISTOR CH 1/16W 330K	1		R267	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R132	ERJ3GEYJ823	M.RESISTOR CH 1/16W 82K	1		R301, 02	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	2	
R133	ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1		R303	ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	1	
R134	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1		R304	ERJ3GEYJ683	M.RESISTOR CH 1/16W 68K	1	
R135	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1		R305	ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	1	
R136	ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1		R306	ERJ3GEYJ683	M.RESISTOR CH 1/16W 68K	1	
R137	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1		R308-10	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	3	
R138	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1		R312	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R139	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R313, 14	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	2	
R140	ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1		R315	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1	
R141	ERJ3GEYJ330	M.RESISTOR CH 1/16W 33	1		R316	ERJ3GEYJ474	M.RESISTOR CH 1/16W 470K	1	
R142	ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1		R317	ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R143	ERJ8GCYJ271	M.RESISTOR CH 1/8W 270	1		R318	ERJ6RBD183	M.RESISTOR CH 1/10W 18K	1	
R144	ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1		R319	ERJ3GEYJ474	M.RESISTOR CH 1/16W 470K	1	
R145	ERJ3GEYJ221	M.RESISTOR CH 1/16W 220	1		R320	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R327, 28	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	2		R542	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R330	ERJ8GCYJ1R0	M. RESISTOR CH 1/8W 1	1		R543	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R332	ERJ8GCYJ1R0	M. RESISTOR CH 1/8W 1	1		R544	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R334, 35	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	2		R545-51	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	7	
R337, 38	ERJ8GCYJ1R0	M. RESISTOR CH 1/8W 1	2		R701, 02	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	2	
R339	ERJ3GEYJ330	M. RESISTOR CH 1/16W 33	1		R703	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R340, 41	ERJ8GCYJ681	M. RESISTOR CH 1/8W 680	2		R704	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R342	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R706	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R344	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R707	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R346-49	ERJ3GEYJ330	M. RESISTOR CH 1/16W 33	4		R708	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R356, 57	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	2		R709	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R358	ERJ3GEYJ330	M. RESISTOR CH 1/16W 33	1		R710	ERJ3GEYJ394	M. RESISTOR CH 1/16W 390K	1	
R361	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1		R711	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R362	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1		R712, 13	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
R363	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1		R714	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R364	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1		R715	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R371, 72	ERJ3GEYJ271	M. RESISTOR CH 1/16W 270	2		R716, 17	ERJ8GCY6101	M. RESISTOR CH 1/8W 100	2	
R401	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		R718	ERJ8GCYJ300	M. RESISTOR CH 1/8W 30	1	
R402	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R721	ERJ6GEYG271	M. RESISTOR CH 1/10W 270	1	
R404	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1		R722	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R406	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R727-30	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	4	
R407	ERJ3GEYJ184	M. RESISTOR CH 1/16W 180K	1		R731-34	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	4	
R408	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R735	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R411	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		R736	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R412	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R737, 38	ERJ8GCYJ102	M. RESISTOR CH 1/8W 1K	2	
R414	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1		R739-42	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	4	
R416	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R743-46	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	4	
R417	ERJ3GEYJ184	M. RESISTOR CH 1/16W 180K	1		R747	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R418	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R748	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R421	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		R750	ERJ8GCY0R00	M. RESISTOR CH 1/8W 0	1	
R422	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R801	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R424	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1		R803, 04	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2	
R426	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R805	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R427	ERJ3GEYJ184	M. RESISTOR CH 1/16W 180K	1		R806	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R428	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R810, 11	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2	
R431	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		R815-17	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	3	
R432	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R819, 20	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	2	
R434	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1		R821	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1	
R436	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R822	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R437	ERJ3GEYJ184	M. RESISTOR CH 1/16W 180K	1		R823-25	ERJ6GEYG681	M. RESISTOR CH 1/10W 680	3	
R438	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R826, 27	ERJ3GEYJ394	M. RESISTOR CH 1/16W 390K	2	
R441, 42	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	2		R828	ERJ3GEYG682	M. RESISTOR CH 1/16W 6.8K	1	
R443	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R829	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R444, 45	ERJ3GEYJ273	M. RESISTOR CH 1/16W 27K	2		R830	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R448	ERJ6RBD222	M. RESISTOR CH 1/10W 2.2K	1		R831, 32	ERJ8GCYJ391	M. RESISTOR CH 1/8W 390	2	
R449	ERJ6RBD682	M. RESISTOR CH 1/10W 6.8K	1		R833	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R451	ERJ3GEYJ391	M. RESISTOR CH 1/16W 390	1		R834, 35	ERJ8GCYJ391	M. RESISTOR CH 1/8W 390	2	
R461	ERJ3GEYJ331	M. RESISTOR CH 1/16W 330	1		R836	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R468, 69	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2		R837	ERJ3GEYG682	M. RESISTOR CH 1/16W 6.8K	1	
R470	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		R838	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R471	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R839	ERJ3GEYG682	M. RESISTOR CH 1/16W 6.8K	1	
R472, 73	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2		R840, 41	ERJ8GCYJ391	M. RESISTOR CH 1/8W 390	2	
R501, 02	ERJ3GEYJ182	M. RESISTOR CH 1/16W 1.8K	2		R842	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R503-06	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	4		R843, 44	ERJ8GCYJ391	M. RESISTOR CH 1/8W 390	2	
R508	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R845	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R509	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R846	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R510	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		R847, 48	ERJ3GEYG682	M. RESISTOR CH 1/16W 6.8K	2	
R512	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R849	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R513	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R850	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R514	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		R851, 52	ERJ8GCYJ391	M. RESISTOR CH 1/8W 390	2	
R515	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1		R853	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R516	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1		R854, 55	ERJ8GCYJ391	M. RESISTOR CH 1/8W 390	2	
R517, 18	ERJ6RBD223	M. RESISTOR CH 1/10W 22K	2		R856	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R519-21	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	3		R857	ERJ3GEYG682	M. RESISTOR CH 1/16W 6.8K	1	
R524	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R858	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R526	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1		R859	ERJ3GEYG682	M. RESISTOR CH 1/16W 6.8K	1	
R527	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		R860, 61	ERJ8GCYJ391	M. RESISTOR CH 1/8W 390	2	
R528	ERJ3GEYJ183	M. RESISTOR CH 1/16W 18K	1		R862	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R532	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R863, 64	ERJ8GCYJ391	M. RESISTOR CH 1/8W 390	2	
R533	ERJ3GEYJ183	M. RESISTOR CH 1/16W 18K	1		R865	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R534	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1		R866	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R535	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		R867, 68	ERJ3GEYG682	M. RESISTOR CH 1/16W 6.8K	2	
R536	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1		R869	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R537-40	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	4		R870	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R541	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1		R871, 72	ERJ8GCYJ391	M. RESISTOR CH 1/8W 390	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C357-59	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	3		IC101	SC371025AVFU	IC	1	
C401-04	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	4		IC103	UPC455662	IC	1	
C407-10	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	4		IC104	MN13821-S	IC	1	
C411-13	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	3		IC110	XC82AP3002P	IC	1	
C414-16	ECUX1E104KBN	C. CAPACITOR CH 25V 0.1U	3		IC200	TB6519F	IC	1	
C418	ECEV1HV3R3Q	E. CAPACITOR CH 50V 3.3U	1		IC201, 02	UN224	TRANSISTOR-RESISTOR	2	
C419	ECUX1E104KBN	C. CAPACITOR CH 25V 0.1U	1		IC203	TA75W393FU	IC	1	
C420	ECEV1HV3R3Q	E. CAPACITOR CH 50V 3.3U	1		IC204	TA75W01FU	IC	1	
C422-25	ECUX1H101JCV	C. CAPACITOR CH 50V 100P	4		IC205	TB6519F	IC	1	
C430	VCK0152	C. CAPACITOR	1		IC301	TL1451CDB	IC	1	
C432	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1		IC302, 03	AN3841SR	IC	2	
C433	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		IC401, 02	TA75W393FU	IC	2	
C434	ECEV1HV3R3Q	E. CAPACITOR CH 50V 3.3U	1		IC403	TA75W01FU	IC	1	
C435	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	1		IC404, 05	TC7W74FU	IC	2	
C503	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	1		IC406, 07	UPC455862	IC	2	
C504	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1		IC409, 10	TA75W01FU	IC	2	
C506	VCK0152	C. CAPACITOR	1		IC501	MN6755486H8N	IC	1	
C507	ECEV1HV3R3Q	E. CAPACITOR CH 50V 3.3U	1		IC502	TC7W04FU	IC	1	
C508-11	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	4		IC503	TA75W393FU	IC	1	
C514	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	1		IC701	TA75W393FU	IC	1	
C515	ECEV1HV3R3Q	E. CAPACITOR CH 50V 3.3U	1		IC702	BA6219BFPY	IC	1	
C517	ECEV1HV3R3Q	E. CAPACITOR CH 50V 3.3U	1		IC801	MC14538BF	IC	1	
C702	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1		IC802	NJM2904M	IC	1	
C703	ECEV1EV4R7Q	E. CAPACITOR CH 25V 4.7U	1		IC803	MC14538BF	IC	1	
C704	ECUX1E104KBN	C. CAPACITOR CH 25V 0.1U	1		IC804	MC74HC11F	IC	1	
C705	ECEV1EV330Q	E. CAPACITOR CH 25V 33U	1		IC805, 06	TC7W04FU	IC	2	
C706, 07	ECUX1E104KBN	C. CAPACITOR CH 25V 0.1U	2						
C801	ECUX1E104KBN	C. CAPACITOR CH 25V 0.1U	1		L1	VL00407120M	COIL 12UH	1	
C802	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	1		L2	VL00129	COIL 300UH	1	
C803	ECA1CM332	E. CAPACITOR 16V 3300U	1		L4	VL00407151K	COIL 150UH	1	
C804-08	ECUX1E104KBN	C. CAPACITOR CH 25V 0.1U	5		L101	VL00319K101	COIL 100UH	1	
C809	ECEV0JV330Q	E. CAPACITOR CH6.3V 33U	1		L102-04	VL00319K100	COIL 10UH	3	
C810, 11	ECUX1E104KBN	C. CAPACITOR CH 25V 0.1U	2		L200	VL00319K100	COIL 10UH	1	
C812, 13	ECA1CM332	E. CAPACITOR 16V 3300U	2		L301	VL00407120M	COIL 12UH	1	
C814	ECUX1E104KBN	C. CAPACITOR CH 25V 0.1U	1		L302, 03	VL00407151K	COIL 150UH	2	
C817	ECEV1EV4R7Q	E. CAPACITOR CH 25V 4.7U	1		L501	VL00319K100	COIL 10UH	1	
C903-05	ECUX1H221JCV	C. CAPACITOR CH 50V 220P	3		L701	VL00319K101	COIL 100UH	1	
C906	ECUX1H100DCV	C. CAPACITOR CH 50V 10P	1						
					P600	VJP3172D003	CONNECTOR (MALE)	1	
D10	MA728	D10DE	1		P601	VJP3172D002	CONNECTOR (MALE)	1	
D11, 12	MA736	D10DE	2		P602	VJP3172D004	CONNECTOR (MALE)	1	
D13	MA728	D10DE	1		P603	VJP3172D002	CONNECTOR (MALE)	1	
D100	MA142K	D10DE	1		P604	VJP3172D003	CONNECTOR (MALE)	1	
D101, 02	MA143	D10DE	2		P605	VJP3518B002	CONNECTOR (MALE)	1	
D103	MA736	D10DE	1		P606	VJP3172D003	CONNECTOR (MALE)	1	
D200, 01	MA143	D10DE	2		P607	VJS3801B010	CONNECTOR (FEMALE)	1	
D301	MA728	D10DE	1		P608	VJP3518B002	CONNECTOR (MALE)	1	
D302	MA736	D10DE	1		P609	VJP3172D002	CONNECTOR (MALE)	1	
D303	MA728	D10DE	1		P610	VJP3518B003	CONNECTOR (MALE)	1	
D304	MA736	D10DE	1		P611	VJP3518B002	CONNECTOR (MALE)	1	
D401	MA736	D10DE	1		P612	VJP3172D004	CONNECTOR (MALE)	1	
D402-05	MA143	D10DE	4		P613	VJS3406B015	CONNECTOR (FEMALE)	1	
D406	MA736	D10DE	1		P614, 15	VJS3813C017	CONNECTOR (FEMALE)	2	
D501	MA142WK	D10DE	1		P616	VJS3406B019	CONNECTOR (FEMALE)	1	
D502-04	MA142WA	D10DE	3		P617	VJP1232T	CONNECTOR (MALE) 5P	1	
D505	MA142WK	D10DE	1		P618	VJP3125B002	CONNECTOR (MALE)	1	
D701	MA143	D10DE	1		P619	VJP3809E060	CONNECTOR (MALE)	1	
D702	MA3062M	D10DE	1		P620	VJP3358C022	CONNECTOR (MALE)	1	
D703	MA738	D10DE	1						
D704	MA3056-L	D10DE	1		Q2	2SD1820-R	TRANSISTOR	1	
D801-03	MA142WK	D10DE	3		Q3, 04	2SB1073-R	TRANSISTOR	2	
D807	MA142WK	D10DE	1		Q5-07	2SD1820-R	TRANSISTOR	3	
D811, 12	MA142WK	D10DE	2		Q100, 01	2SD1820-R	TRANSISTOR	2	
D813	21D004	D10DE	1		Q103, 04	2SD1820-R	TRANSISTOR	2	
D814-16	MA142WK	D10DE	3		Q105	2SB1219A-R	TRANSISTOR	1	
D817-28	MA738	D10DE	12		Q106	2SD1819A-R	TRANSISTOR	1	
D829	NSQ03A04	D10DE	1		Q301, 02	2SB1073-R	TRANSISTOR	2	
D830	MA8051-H	D10DE	1		Q401	2SB1219A-R	TRANSISTOR	1	
D831, 32	NSQ03A04	D10DE	2		Q502, 03	2SD1819A-R	TRANSISTOR	2	
D833	MA142WK	D10DE	1		Q702	2SB1073-R	TRANSISTOR	1	
					Q703	2SD1624-S	TRANSISTOR	1	
IC6	TA75W01FU	IC	1		Q811	2SB936A-Q	TRANSISTOR	1	
IC7	TA75W393FU	IC	1		Q812	2SD1819A-R	TRANSISTOR	1	
IC9	TA75W393FU	IC	1		Q815	2SD1819A-R	TRANSISTOR	1	
IC100	MN6755486H8E	IC	1		Q816, 17	2SB1073-R	TRANSISTOR	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q819	2SD1819A-R	TRANSISTOR	1		R52	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
Q820	2SB1219A-R	TRANSISTOR	1		R54	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
Q821, 22	2SD1624-S	TRANSISTOR	2		R63	ERJ8GJYJ681	M. RESISTOR CH 1/8W 680	1	
Q823	2SB1219A-R	TRANSISTOR	1		R64	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
Q825	2SD1819A-R	TRANSISTOR	1		R77	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
Q826, 27	2SB1073-R	TRANSISTOR	2		R78	ERJ3GEYJ823	M. RESISTOR CH 1/16W 82K	1	
Q829	2SD1819A-R	TRANSISTOR	1		R84	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
Q830	2SB1219A-R	TRANSISTOR	1		R93	ERJ3GEYJ562	M. RESISTOR CH 1/16W 5.6K	1	
Q831, 32	2SD1624-S	TRANSISTOR	2		R101	ERJ8GJYJ0R00	M. RESISTOR CH 1/8W 0	1	
Q833	2SB1219A-R	TRANSISTOR	1		R102, 03	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	2	
Q835	2SD1819A-R	TRANSISTOR	1		R104-07	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	4	
Q836, 37	2SB1073-R	TRANSISTOR	2		R111	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
Q839	2SD1819A-R	TRANSISTOR	1		R112	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
Q840	2SB1219A-R	TRANSISTOR	1		R118-26	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	9	
Q841, 42	2SD1624-S	TRANSISTOR	2		R128	ERJ3GEYJ682	M. RESISTOR CH 1/16W 6.8K	1	
Q843	2SB1219A-R	TRANSISTOR	1		R129	ERJ3GEYJ0R00	M. RESISTOR CH 1/16W 0	1	
Q906	2SD1819A-R	TRANSISTOR	1		R130	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	1	
Q908	2SD1819A-R	TRANSISTOR	1		R131	ERJ3GEYJ334	M. RESISTOR CH 1/16W 330K	1	
Q914	2SD1819A-R	TRANSISTOR	1		R132	ERJ3GEYJ823	M. RESISTOR CH 1/16W 82K	1	
Q918	2SD1819A-R	TRANSISTOR	1		R133	ERJ3GEYJ822	M. RESISTOR CH 1/16W 8.2K	1	
Q922	2SD1819A-R	TRANSISTOR	1		R134	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
QR2	UN5213	TRANSISTOR-RESISTOR	1		R135	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
QR5	UN5213	TRANSISTOR-RESISTOR	1		R136	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1	
QR101, 02	UN5213	TRANSISTOR-RESISTOR	2		R137	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
QR106	UN5213	TRANSISTOR-RESISTOR	1		R138	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
QR149, 50	UN5213	TRANSISTOR-RESISTOR	2		R139	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
QR305	UN5113	TRANSISTOR-RESISTOR	1		R140	ERJ3GEYJ562	M. RESISTOR CH 1/16W 5.6K	1	
QR306	UN5213	TRANSISTOR-RESISTOR	1		R141	ERJ3GEYJ330	M. RESISTOR CH 1/16W 33	1	
QR501	UN5213	TRANSISTOR-RESISTOR	1		R142	ERJ3GEYJ562	M. RESISTOR CH 1/16W 5.6K	1	
QR504	UN5213	TRANSISTOR-RESISTOR	1		R143	ERJ8GJYJ271	M. RESISTOR CH 1/8W 270	1	
QR701, 02	UN5114	TRANSISTOR-RESISTOR	2		R144	ERJ3GEYJ182	M. RESISTOR CH 1/16W 1.8K	1	
QR703, 04	UN5214	TRANSISTOR-RESISTOR	2		R145	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1	
QR801	UN5213	TRANSISTOR-RESISTOR	1		R146	ERJ3GEYJ182	M. RESISTOR CH 1/16W 1.8K	1	
QR804	UN5214	TRANSISTOR-RESISTOR	1		R148	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
QR809, 10	UN5214	TRANSISTOR-RESISTOR	2		R149	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
QR813	UN5214	TRANSISTOR-RESISTOR	1		R150	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
QR814	UN5114	TRANSISTOR-RESISTOR	1		R151	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
QR818	UN5114	TRANSISTOR-RESISTOR	1		R153	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	1	
QR824	UN5114	TRANSISTOR-RESISTOR	1		R154	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
QR828	UN5114	TRANSISTOR-RESISTOR	1		R155	ERJ3GEYJ682	M. RESISTOR CH 1/16W 6.8K	1	
QR834	UN5114	TRANSISTOR-RESISTOR	1		R156, 57	ERJ3GEYJ0R00	M. RESISTOR CH 1/16W 0	2	
QR838	UN5114	TRANSISTOR-RESISTOR	1		R158-66	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	9	
QR844-46	UN5214	TRANSISTOR-RESISTOR	3		R167	ERJ3GEYJ152	M. RESISTOR CH 1/16W 1.5K	1	
QR905	UN5214	TRANSISTOR-RESISTOR	1		R172	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
QR907	UN5214	TRANSISTOR-RESISTOR	1		R174, 75	ERJ3GEYJ0R00	M. RESISTOR CH 1/16W 0	2	
QR913	UN5214	TRANSISTOR-RESISTOR	1		R178	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
QR915	UN5214	TRANSISTOR-RESISTOR	1		R179, 80	ERJ6RBD223	M. RESISTOR CH 1/10W 22K	2	
QR917	UN5214	TRANSISTOR-RESISTOR	1		R181	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
QR919-21	UN5214	TRANSISTOR-RESISTOR	3		R182	ERJ3GEYJ122	M. RESISTOR CH 1/16W 1.2K	1	
R19	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		R183	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R20	ERJ8GJYJ681	M. RESISTOR CH 1/8W 680	1		R185	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R22	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R186, 87	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	2	
R23	ERJ3GEYJ393	M. RESISTOR CH 1/16W 39K	1		R189	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R24, 25	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	2		R190	ERJ3GEYJ273	M. RESISTOR CH 1/16W 27K	1	
R26	ERJ3GEYJ394	M. RESISTOR CH 1/16W 390K	1		R191	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
R27	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		R192-95	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	4	
R28	ERJ3GEYJ123	M. RESISTOR CH 1/16W 12K	1		R196	ERJ3GEYJ0R00	M. RESISTOR CH 1/16W 0	1	
R29	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1		R204, 05	ERJ8GJYJ1R0	M. RESISTOR CH 1/8W 1	2	
R30	ERJ3GEYJ394	M. RESISTOR CH 1/16W 390K	1		R206	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R31	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		R207	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
R32	ERJ3GEYJ123	M. RESISTOR CH 1/16W 12K	1		R209	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R33	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1		R210	ERJ8GJYJ1R0	M. RESISTOR CH 1/8W 1	1	
R34	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R211	ERJ3GEYJ393	M. RESISTOR CH 1/16W 39K	1	
R36	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R212	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R37	ERJ3GEYJ393	M. RESISTOR CH 1/16W 39K	1		R213	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
R38	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R214, 15	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	2	
R42, 43	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	2		R216	ERJ3GEYJ184	M. RESISTOR CH 1/16W 180K	1	
R44	ERJ3GEYJ564	M. RESISTOR CH 1/16W 560K	1		R217	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R45	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		R220	ERJ3GEYJ821	M. RESISTOR CH 1/16W 820	1	
R46	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1		R226, 27	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
R47	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		R229	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1	
R49, 50	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	2		R233, 34	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2	
R51	ERJ3GEYJ334	M. RESISTOR CH 1/16W 330K	1		R235	ERJ8GJYJ1R0	M. RESISTOR CH 1/8W 1	1	
					R236	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
					R238	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R239	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R240	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
R241	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R242	ERJ3GEYJ184	M. RESISTOR CH 1/16W 180K	1	
R243	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R244	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	1	
R245	ERDS2TJ101	C. RESISTOR 1/4W 100	1	
R246	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	1	
R247	ERJ3GEYJ821	M. RESISTOR CH 1/16W 820	1	
R248	ERJ3GEY6332	M. RESISTOR CH 1/16W 3.3K	1	
R249	ERJ3GEYJ393	M. RESISTOR CH 1/16W 39K	1	
R250, 51	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2	
R257, 58	ERJ8GCYJ1R0	M. RESISTOR CH 1/8W 1	2	
R259	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R260	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1	
R263, 64	ERJ3GEYJ181	M. RESISTOR CH 1/16W 180	2	
R265, 66	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	
R267	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R301, 02	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
R303	ERJ3GEYJ273	M. RESISTOR CH 1/16W 27K	1	
R304	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	1	
R305	ERJ3GEYJ273	M. RESISTOR CH 1/16W 27K	1	
R306	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	1	
R308-10	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	3	
R312	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R313, 14	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	2	
R315	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
R316	ERJ3GEYJ474	M. RESISTOR CH 1/16W 470K	1	
R317	ERJ6GEY6154	M. RESISTOR CH 1/10W 150K	1	
R318	ERJ6RBD183	M. RESISTOR CH 1/10W 18K	1	
R319	ERJ3GEYJ474	M. RESISTOR CH 1/16W 470K	1	
R320	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
R327, 28	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	2	
R330	ERJ8GCYJ1R0	M. RESISTOR CH 1/8W 1	1	
R332	ERJ8GCYJ1R0	M. RESISTOR CH 1/8W 1	1	
R334, 35	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	2	
R337, 38	ERJ8GCYJ1R0	M. RESISTOR CH 1/8W 1	2	
R339	ERJ3GEYJ330	M. RESISTOR CH 1/16W 33	1	
R340, 41	ERJ8GCYJ681	M. RESISTOR CH 1/8W 680	2	
R342	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R344	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R346-49	ERJ3GEYJ330	M. RESISTOR CH 1/16W 33	4	
R356, 57	ERJ3GEYJ471	M. RESISTOR CH 1/16W 470	2	
R358	ERJ3GEYJ330	M. RESISTOR CH 1/16W 33	1	
R361	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R362	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
R363	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R364	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
R371, 72	ERJ3GEYJ271	M. RESISTOR CH 1/16W 270	2	
R401	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R402	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R404	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R406	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R407	ERJ3GEYJ184	M. RESISTOR CH 1/16W 180K	1	
R408	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R411	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R412	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R414	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R416	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R417	ERJ3GEYJ184	M. RESISTOR CH 1/16W 180K	1	
R418	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R421	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R422	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R424	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R426	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R427	ERJ3GEYJ184	M. RESISTOR CH 1/16W 180K	1	
R428	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R431	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R432	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R434	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R436	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R437	ERJ3GEYJ184	M. RESISTOR CH 1/16W 180K	1	
R438	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R441, 42	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	2	
R443	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R444, 45	ERJ3GEYJ273	M. RESISTOR CH 1/16W 27K	2	
R448	ERJ6RBD222	M. RESISTOR CH 1/10W 2.2K	1	
R449	ERJ6RBD682	M. RESISTOR CH 1/10W 6.8K	1	
R451	ERJ3GEYJ391	M. RESISTOR CH 1/16W 390	1	
R461	ERJ3GEYJ331	M. RESISTOR CH 1/16W 330	1	
R468, 69	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2	
R470	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R471	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R472, 73	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2	
R501, 02	ERJ3GEYJ182	M. RESISTOR CH 1/16W 1.8K	2	
R503-06	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	4	
R508	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R509	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R510	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R512	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R513	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R514	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R515	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R516	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1	
R517, 18	ERJ6RBD223	M. RESISTOR CH 1/10W 22K	2	
R519-21	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	3	
R524	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R526	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1	
R527	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R528	ERJ3GEYJ183	M. RESISTOR CH 1/16W 18K	1	
R532	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R533	ERJ3GEYJ183	M. RESISTOR CH 1/16W 18K	1	
R534	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1	
R535	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R536	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
R537-40	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	4	
R541	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
R542	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R543	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R544	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R545-51	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	7	
R701, 02	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	2	
R703	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R704	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R706	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R707	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R708	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R709	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R710	ERJ3GEYJ394	M. RESISTOR CH 1/16W 390K	1	
R711	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R712, 13	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
R714	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R715	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R716, 17	ERJ8GCY6101	M. RESISTOR CH 1/8W 100	2	
R718	ERJ8GCYJ300	M. RESISTOR CH 1/8W 30	1	
R721	ERJ6GEY6271	M. RESISTOR CH 1/10W 270	1	
R722	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R727-30	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	4	
R731-34	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	4	
R735	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R736	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R737, 38	ERJ8GCYJ102	M. RESISTOR CH 1/8W 1K	2	
R739-42	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	4	
R743-46	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	4	
R747	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R748	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R750	ERJ8GCY0R00	M. RESISTOR CH 1/8W 0	1	
R801	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R803, 04	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2	
R805	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R806	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R810, 11	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2	
R815-17	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	3	
R819, 20	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	2	
R821	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1	
R822	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R823-25	ERJ6GEY681	M. RESISTOR CH 1/10W 680	3	
R826, 27	ERJ3GEYJ394	M. RESISTOR CH 1/16W 390K	2	
R828	ERJ3GEY682	M. RESISTOR CH 1/16W 6.8K	1	
R829	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R830	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		TP501,02	EYF6CU	TEST POINT	2	
R831,32	ERJ8GCVJ391	M.RESISTOR CH 1/8W 390	2		TP505	EYF6CU	TEST POINT	1	
R833	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		TP902	EYF6CU	TEST POINT	1	
R834,35	ERJ8GCVJ391	M.RESISTOR CH 1/8W 390	2						
R836	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		VR101	EVM7JGA00B54	V.RESISTOR 50K	1	
R837	ERJ3GEY6682	M.RESISTOR CH 1/16W 6.8K	1		VR401	EVM7JGA00B54	V.RESISTOR 50K	1	
R838	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1		VR402	EVM7JGA00B24	V.RESISTOR 20K	1	
R839	ERJ3GEY6682	M.RESISTOR CH 1/16W 6.8K	1		VR501,02	EVM7JGA00B24	V.RESISTOR 20K	2	
R840,41	ERJ8GCVJ391	M.RESISTOR CH 1/8W 390	2				MISCELLANEOUS		
R842	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1						
R843,44	ERJ8GCVJ391	M.RESISTOR CH 1/8W 390	2			VSC4371	SHIELD CASE	1	
R845	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1						
R846	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1						
R847,48	ERJ3GEY6682	M.RESISTOR CH 1/16W 6.8K	2						
R849	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1						
R850	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1						
R851,52	ERJ8GCVJ391	M.RESISTOR CH 1/8W 390	2						
R853	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		■ E15	VEP01643A	POWER P.C. BOARD	1	(RTL)
R854,55	ERJ8GCVJ391	M.RESISTOR CH 1/8W 390	2						
R856	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1						
R857	ERJ3GEY6682	M.RESISTOR CH 1/16W 6.8K	1		C1001	VCEA1DAP680	E.CAPACITOR 20V 68U	1	
R858	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1		C1002	VCEA1DAP101	E.CAPACITOR 20V 100U	1	
R859	ERJ3GEY6682	M.RESISTOR CH 1/16W 6.8K	1		C1004	ECUX1H683KBM	C.CAPACITOR CH 50V 0.068U	1	
R860,61	ERJ8GCVJ391	M.RESISTOR CH 1/8W 390	2		C1005	ECUX1H272KBV	C.CAPACITOR CH 50V 2700P	1	
R862	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		C1006	ECUX1H683KBM	C.CAPACITOR CH 50V 0.068U	1	
R863,64	ERJ8GCVJ391	M.RESISTOR CH 1/8W 390	2		C1007	VCEA1DAP680	E.CAPACITOR 20V 68U	1	
R865	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		C1010	VCEA1AAP221	E.CAPACITOR 10V 220U	1	
R866	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1		C1011	ECUX1E104KBN	C.CAPACITOR CH 25V 0.1U	1	
R867,68	ERJ3GEY6682	M.RESISTOR CH 1/16W 6.8K	2		C1014	ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
R869	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1		C1015	ECUX1H122KBN	C.CAPACITOR CH 50V 1200P	1	
R870	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		C1016	ECUX1C333KBV	C.CAPACITOR CH 16V 0.033U	1	
R871,72	ERJ8GCVJ391	M.RESISTOR CH 1/8W 390	2		C1017	ECUX1H682KBN	C.CAPACITOR CH 50V 6800P	1	
R873	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		C1018	VCEA1DAP680	E.CAPACITOR 20V 68U	1	
R874,75	ERJ8GCVJ391	M.RESISTOR CH 1/8W 390	2		C1019	ECUX1H333KBN	C.CAPACITOR CH 50V 0.033U	1	
R876	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		C1024	ECUX1H681JV	C.CAPACITOR CH 50V 680P	1	
R877	ERJ3GEY6682	M.RESISTOR CH 1/16W 6.8K	1		C1025	ECUX1E104KBN	C.CAPACITOR CH 25V 0.1U	1	
R878	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1		C1026	ECUX1H471JCV	C.CAPACITOR CH 50V 470P	1	
R879	ERJ3GEY6682	M.RESISTOR CH 1/16W 6.8K	1		C1027,28	ECUX1E104KBN	C.CAPACITOR CH 25V 0.1U	2	
R880	ERJ8GCVJ391	M.RESISTOR CH 1/8W 390	1		C1030	ECUX1H471JCV	C.CAPACITOR CH 50V 470P	1	
R881	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		C1031	ECUX1E104KBN	C.CAPACITOR CH 25V 0.1U	1	
R882-84	ERJ8GCVJ391	M.RESISTOR CH 1/8W 390	3		C1032	ECUX1H681JV	C.CAPACITOR CH 50V 680P	1	
R885	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		C1033	VCEA1DAP680	E.CAPACITOR 20V 68U	1	
R886	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1		C1034	VCEA1AAP101	E.CAPACITOR 10V 100U	1	
R887	ERJ3GEY6682	M.RESISTOR CH 1/16W 6.8K	1		C1036	VCEA0JSC220M	E.CAPACITOR 6.3V 22U	1	
R890-95	ERJ12YJ3R3	M.RESISTOR CH 1/2W 3.3	6		C1038	VCEA0JSC220M	E.CAPACITOR 6.3V 22U	1	
R897,98	ERJ12YJ3R3	M.RESISTOR CH 1/2W 3.3	2		C1040	ECUX1E104KBN	C.CAPACITOR CH 25V 0.1U	1	
R905	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		C1041	ECUX1H471JCV	C.CAPACITOR CH 50V 470P	1	
R906	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1		C1042	ECUX1E104KBN	C.CAPACITOR CH 25V 0.1U	1	
R907	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		C1044	ECUX1H681JV	C.CAPACITOR CH 50V 680P	1	
R908	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1		C1045	ECUX1H471JCV	C.CAPACITOR CH 50V 470P	1	
R910	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		C1046	ECUX1E104KBN	C.CAPACITOR CH 25V 0.1U	1	
R913	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		C1047	VCEA1DAP680	E.CAPACITOR 20V 68U	1	
R914	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1		C1048	VCEA1AAP101	E.CAPACITOR 10V 100U	1	
R915	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1		C1050	VCEA1DAP680	E.CAPACITOR 20V 68U	1	
R917,18	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2		C1051	VCEA1AAP101	E.CAPACITOR 10V 100U	1	
R919-21	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	3		C1053	ECUX1H681JV	C.CAPACITOR CH 50V 680P	1	
R922	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1		C1054	ECUX1H332KBV	C.CAPACITOR CH 50V 3300P	1	
R923	ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	1		C1056,57	VCEA1DAP680	E.CAPACITOR 20V 68U	2	
R924	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1		C1059	VCEA0JSC220M	E.CAPACITOR 6.3V 22U	1	
R925	ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	1		C1062	ECEV0JV2200	E.CAPACITOR CH6.3V 22U	1	
R926	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1		C1063	ECUX1H101JCV	C.CAPACITOR CH 50V 100P	1	
R927,28	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2		C1064-66	VCEA0JSC100M	E.CAPACITOR 6.3V 10U	3	
R932	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1		C1067	VCEA1CAP101	E.CAPACITOR 16V 100U	1	
					C1070	VCEA1DAP680	E.CAPACITOR 20V 68U	1	
TG114	EYF6CU	TEST POINT	1		C1071	VCEA1AAP101	E.CAPACITOR 10V 100U	1	
TG300	EYF6CU	TEST POINT	1		C1074	ECEA1CU101	E.CAPACITOR 16V 100U	1	
					C1080,81	VCEA1AAP101	E.CAPACITOR 10V 100U	2	
TP100-02	EYF6CU	TEST POINT	3		C1093	ECUX1H331JCV	C.CAPACITOR CH 50V 330P	1	
TP107	EYF6CU	TEST POINT	1		C1094	ECA1EFQ221	E.CAPACITOR 25V 220U	1	
TP113	EYF6CU	TEST POINT	1		C1095	VCEA1CAP101	E.CAPACITOR 16V 100U	1	
TP115,16	EYF6CU	TEST POINT	2		C1096,97	VCEA0JAP151	E.CAPACITOR 6.3V 150U	2	
TP201	EYF6CU	TEST POINT	1		C1098	ECA1EFQ221	E.CAPACITOR 25V 220U	1	
TP301,02	EYF6CU	TEST POINT	2		C1099	VCEA1CAP101	E.CAPACITOR 16V 100U	1	
TP402	EYF6CU	TEST POINT	1		C1100,01	VCEA0JAP151	E.CAPACITOR 6.3V 150U	2	
TP431-34	EYF6CU	TEST POINT	4		C1102	ECEV1EV100Q	E.CAPACITOR CH 25V 10U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C1103	ECUX1H333KEN	C. CAPACITOR CH 50V 0.033U	1	
D1003	NS003A04	D10DE	1	
D1005	SFPB-76V	D10DE	1	
D1008-11	NS003A04	D10DE	4	
D1012	MA142WK	D10DE	1	
D1013	MA8100-M	D10DE	1	
D1016	MA8100-M	D10DE	1	
D1017	MA8062-M	D10DE	1	
D1018	MA8036-H	D10DE	1	
D1019	MA8056-M	D10DE	1	
D1020	MA142WK	D10DE	1	
D1030-32	SFPB-76V	D10DE	3	
D1033	MA739	D10DE	1	
D1035, 36	MA8043-M	D10DE	2	
D1037-41	MA8068-H	D10DE	5	
IC1001-03	TL1451CNS	IC	3	
L1001, 02	VL00642	COIL	2	
L1003, 04	VL00765	COIL	2	
L1005	VL00504220M	COIL 22UH	1	
L1006-11	VLQ0441K1R0	COIL 1.0UH	6	
L1012	VLQ0417	COIL 10UH	1	
L1015	VLQ0417	COIL 10UH	1	
L1016	VLQ0441K1R0	COIL 1.0UH	1	
L1017, 18	VLQ0417	COIL 10UH	2	
L1019	VL00642	COIL	1	
L1020	ELELN560KA	COIL 56UH	1	
L1021-24	VLQ0417	COIL 10UH	4	
L1026	VL00319K100	COIL 10UH	1	
L1027-32	VLP0353	COIL	6	
P1001	VJP1231T	CONNECTOR (MALE) 4P	1	
P1002	VJP3808E060	CONNECTOR (MALE)	1	
Q1001	2SJ279S	TRANSISTOR	1	
Q1002	2SK1748-Z	TRANSISTOR	1	
Q1003-06	2SJ279S	TRANSISTOR	4	
Q1007	2SD1820A-R	TRANSISTOR	1	
Q1008	2SB1219A-R	TRANSISTOR	1	
Q1009	2SD1820A-R	TRANSISTOR	1	
Q1010	2SB1219A-R	TRANSISTOR	1	
Q1013	2SD1820A-R	TRANSISTOR	1	
Q1014	2SB1219A-R	TRANSISTOR	1	
Q1015	2SD1820A-R	TRANSISTOR	1	
Q1016	2SB1219A-R	TRANSISTOR	1	
Q1017	2SD1820A-R	TRANSISTOR	1	
Q1018	2SB1219A-R	TRANSISTOR	1	
Q1019	2SD1820A-R	TRANSISTOR	1	
Q1020	2SB1219A-R	TRANSISTOR	1	
Q1022	2SB1219A-R	TRANSISTOR	1	
Q1023	XN2401	TRANSISTOR-RESISTOR	1	
Q1024, 25	2SD1820A-R	TRANSISTOR	2	
QR1001	UN5111	TRANSISTOR-RESISTOR	1	
QR1003	UN5211	TRANSISTOR-RESISTOR	1	
QR1004	UN5111	TRANSISTOR-RESISTOR	1	
R1001, 02	ERJ3GEYJ183	M. RESISTOR CH 1/16W 18K	2	
R1005	ERJ3GEYJ622	M. RESISTOR CH 1/16W 6.2K	1	
R1006	ERJ3RBD622	M. RESISTOR CH 1/16W 6.2K	1	
R1007	ERJ3RBD393	M. RESISTOR CH 1/16W 39K	1	
R1010	ERJ3GEYJ6332	M. RESISTOR CH 1/16W 3.3K	1	
R1011	ERJ3GEYJ560	M. RESISTOR CH 1/16W 56	1	
R1012	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R1013, 14	ERJ3GEYJ183	M. RESISTOR CH 1/16W 18K	2	
R1017	ERJ3GEYJ183	M. RESISTOR CH 1/16W 18K	1	
R1018	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
R1019	ERJ3GEYJ182	M. RESISTOR CH 1/16W 1.8K	1	
R1020	ERJ3GEYJ6332	M. RESISTOR CH 1/16W 3.3K	1	
R1021	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1	
R1022	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1	
R1023	ERJ3GEYJ560	M. RESISTOR CH 1/16W 56	1	
R1024	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R1025	ERJ8GCYJ472	M. RESISTOR CH 1/8W 4.7K	1	
R1031	ERJ3GEYJ622	M. RESISTOR CH 1/16W 6.2K	1	
R1032, 33	ERJ3GEYJ183	M. RESISTOR CH 1/16W 18K	2	
R1036	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1	
R1037	ERJ3GEYJ622	M. RESISTOR CH 1/16W 6.2K	1	
R1038	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
R1039	ERJ3GEYJ6332	M. RESISTOR CH 1/16W 3.3K	1	
R1040	ERJ3GEYJ560	M. RESISTOR CH 1/16W 56	1	
R1041	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R1042, 43	ERJ3GEYJ183	M. RESISTOR CH 1/16W 18K	2	
R1046, 47	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	2	
R1048, 49	ERJ3GEYJ6332	M. RESISTOR CH 1/16W 3.3K	2	
R1050	ERJ3GEYJ560	M. RESISTOR CH 1/16W 56	1	
R1051	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R1052, 53	ERJ3GEYJ183	M. RESISTOR CH 1/16W 18K	2	
R1056	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
R1057	ERJ3GEYJ392	M. RESISTOR CH 1/16W 3.9K	1	
R1058	ERJ3GEYJ182	M. RESISTOR CH 1/16W 1.8K	1	
R1059	ERJ3GEYJ6332	M. RESISTOR CH 1/16W 3.3K	1	
R1060	ERJ3GEYJ560	M. RESISTOR CH 1/16W 56	1	
R1061	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R1062, 63	ERJ3GEYJ183	M. RESISTOR CH 1/16W 18K	2	
R1066	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
R1067	ERJ3GEYJ123	M. RESISTOR CH 1/16W 12K	1	
R1068, 69	ERJ3GEYJ6332	M. RESISTOR CH 1/16W 3.3K	2	
R1070	ERJ3GEYJ560	M. RESISTOR CH 1/16W 56	1	
R1071	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R1073	ERJ3RBD682	M. RESISTOR CH 1/16W 6.8K	1	
R1077	ERJ3GEYJ6332	M. RESISTOR CH 1/16W 3.3K	1	
R1078, 79	ERW2PKR10	M. RESISTOR 2W 0.1	2	
R1080	ERJ3RBD391	M. RESISTOR CH 1/16W 390	1	
R1081	ERJ3RBD681	M. RESISTOR CH 1/16W 680	1	
R1082	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R1083	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R1084	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R1093	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R1096	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R1099	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R1102	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R1118	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
R1119	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
R1120	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
R1129	ERJ3GEYR000	M. RESISTOR CH 1/16W 0	1	
R1143	ERJ3GEYJ121	M. RESISTOR CH 1/16W 120	1	
R1144	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R1145	ERJ3GEYJ820	M. RESISTOR CH 1/16W 82	1	
R1146, 47	ERJ3GEYJ680	M. RESISTOR CH 1/16W 68	2	
R1152	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R1156	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R1158	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
T1001	VTP0486	TRANSFORMER	1	
TG1001, 02	EYF6CU	TEST POINT	2	
TP1001	EYF6CU	TEST POINT	1	
TP1003	EYF6CU	TEST POINT	1	
TP1005-12	EYF6CU	TEST POINT	8	
VR1001-06	EVM7JGA00B23	V. RESISTOR 2K	6	
		MISCELLANEOUS		
	VSC4372	SHIELD CASE (UPPER)	1	
	VSC4373	SHIELD CASE (LOWER)	1	
E16	VEP04690A	AUDIO LCD P.C. BOARD	1 (RTL)	
C4001	ECA1CM471	E. CAPACITOR 16V 470U	1	
C4002	ECE1VCV4700	E. CAPACITOR CH 16V 47U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C4003-06	ECEVOJV470Q	E. CAPACITOR CH6.3V 47U	4		C4206	ECUX1H183KBN	C. CAPACITOR CH 50V 0.018U	1	
C4007	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C4207,08	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
C4008	ECEVOJV101Q	E. CAPACITOR CH6.3V 100U	1		C4209	ECEVOJN470Q	E. CAPACITOR CH6.3V 47U	1	
C4009-11	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	3		C4214,15	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
C4012-17	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	6		C4216,17	ECEVOJN100Q	E. CAPACITOR CH6.3V 10U	2	
C4018,19	ECU1H102JB	P. CAPACITOR 50V 1000P	2		C4218	ECEVOJV220Q	E. CAPACITOR CH6.3V 22U	1	
C4020,21	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		C4219	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	1	
C4022	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	1		C4226,27	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
C4023	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	1		C4228	ECU1C472JB	P. CAPACITOR 16V 4700P	1	
C4024,25	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		C4229	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1	
C4027	ECEVOGV470Q	E. CAPACITOR CH 4V 47U	1		C4230	ECEVOGV470Q	E. CAPACITOR CH 4V 47U	1	
C4028	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C4231	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C4029	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	1		C4232	ECEVOJV220Q	E. CAPACITOR CH6.3V 22U	1	
C4030	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C4233	ECEVOGV470Q	E. CAPACITOR CH 4V 47U	1	
C4031	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		C4234	ECUX1H222KBV	C. CAPACITOR CH 50V 2200P	1	
C4032,33	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		C4237	ECEVOJV220Q	E. CAPACITOR CH6.3V 22U	1	
C4034	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		C4238	ECUX1H151JCV	C. CAPACITOR CH 50V 150P	1	
C4035-37	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3		C4239	ECEVOJV220Q	E. CAPACITOR CH6.3V 22U	1	
C4039,40	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		C4240	ECUX1H151JCV	C. CAPACITOR CH 50V 150P	1	
C4041	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	1		C4241	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	1	
C4042	ECEVOJV101Q	E. CAPACITOR CH6.3V 100U	1		C4242	ECUX1H221JCV	C. CAPACITOR CH 50V 220P	1	
C4043	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C4243,44	ECEV1HV010Q	E. CAPACITOR CH 50V 1U	2	
C4044	ECEV1CV470Q	E. CAPACITOR CH 16V 47U	1		C4245,46	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	2	
C4045	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C4247,48	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
C4046	ECEV1CV470Q	E. CAPACITOR CH 16V 47U	1		C4252	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	1	
C4047,48	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		C4253	ECUM1C105ZFN	C. CAPACITOR CH 16V 1U	1	
C4049,50	ECUX1H471JCV	C. CAPACITOR CH 50V 470P	2		C4255	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1	
C4051,52	ECEV1HN010Q	E. CAPACITOR CH 50V 1U	2		C4257	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	1	
C4053	ECUM1H104KBM	C. CAPACITOR CH 50V 0.1U	1		C4258	ECEVOGV101Q	E. CAPACITOR CH 4V 100U	1	
C4054	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C4259	ECEVOGV470Q	E. CAPACITOR CH 4V 47U	1	
C4055	ECUX1H563KBN	C. CAPACITOR CH 50V 0.056U	1		C4260,61	ECUX1H471JCV	C. CAPACITOR CH 50V 470P	2	
C4056	ECEVOJV470Q	E. CAPACITOR CH6.3V 47U	1		C4262-65	ECEV1HN010Q	E. CAPACITOR CH 50V 1U	4	
C4057,58	ECEV1HV010Q	E. CAPACITOR CH 50V 1U	2		C4266	ECUM1H104KBM	C. CAPACITOR CH 50V 0.1U	1	
C4059,60	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	2		C4267	ECUX1H151JCV	C. CAPACITOR CH 50V 150P	1	
C4061,62	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		C4268,69	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
C4101	ECEV1CV470Q	E. CAPACITOR CH 16V 47U	1		C4270	ECUX1C224ZFV	C. CAPACITOR CH 16V 0.22U	1	
C4102,03	ECUM1H273KBN	C. CAPACITOR CH 50V 0.027U	2		C4304	ECEV1CV470Q	E. CAPACITOR CH 16V 47U	1	
C4106	ECUX1H183KBN	C. CAPACITOR CH 50V 0.018U	1		C4305	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C4107,08	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		C4306	ECEV1CV470Q	E. CAPACITOR CH 16V 47U	1	
C4109	ECEVOJN470Q	E. CAPACITOR CH6.3V 47U	1		C4307	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C4114,15	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		C4308	ECEVOJN100Q	E. CAPACITOR CH6.3V 10U	1	
C4116,17	ECEVOJN100Q	E. CAPACITOR CH6.3V 10U	2		C4309	ECUX1H331JCV	C. CAPACITOR CH 50V 330P	1	
C4118	ECEVOJV220Q	E. CAPACITOR CH6.3V 22U	1		C4408	ECEVOJN100Q	E. CAPACITOR CH6.3V 10U	1	
C4119	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	1		C4409	ECUX1H331JCV	C. CAPACITOR CH 50V 330P	1	
C4126,27	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		C4501,02	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
C4128	ECU1C472JB	P. CAPACITOR 16V 4700P	1		C4508	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	1	
C4129	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1		C4509	ECEV1CV220Q	E. CAPACITOR CH 16V 22U	1	
C4130	ECEVOGV470Q	E. CAPACITOR CH 4V 47U	1		C4510	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C4131	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		C4511	ECEVOJV470Q	E. CAPACITOR CH6.3V 47U	1	
C4132	ECEVOJV220Q	E. CAPACITOR CH6.3V 22U	1		C4512	ECST1VY684Z	T. CAPACITOR CH 35V 0.68U	1	
C4133	ECEVOGV470Q	E. CAPACITOR CH 4V 47U	1		C4513	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	1	
C4134	ECUX1H222KBV	C. CAPACITOR CH 50V 2200P	1		C4514	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C4137	ECEVOJV220Q	E. CAPACITOR CH6.3V 22U	1		C4515	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	1	
C4138	ECUX1H151JCV	C. CAPACITOR CH 50V 150P	1		C4516,17	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	2	
C4139	ECEVOJV220Q	E. CAPACITOR CH6.3V 22U	1		C4519	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C4140	ECUX1H151JCV	C. CAPACITOR CH 50V 150P	1		C4520	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1	
C4141	ECUX1H102JV	C. CAPACITOR CH 50V 1000P	1		C4521,22	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2	
C4142	ECUX1H221JCV	C. CAPACITOR CH 50V 220P	1		C4523,24	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	2	
C4143,44	ECEV1HV010Q	E. CAPACITOR CH 50V 1U	2		C4602	ECEVOJV470Q	E. CAPACITOR CH6.3V 47U	1	
C4145,46	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	2		C4603	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C4147,48	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		C4604	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1	
C4152	ECEV1CV100Q	E. CAPACITOR CH 16V 10U	1		C4605	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C4153	ECUM1C105ZFN	C. CAPACITOR CH 16V 1U	1		C4606,07	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	2	
C4155	ECUX1H330JCV	C. CAPACITOR CH 50V 33P	1		C4608-10	ECUM1H561JCV	C. CAPACITOR CH 50V 560P	3	
C4157	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	1		C4611	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C4158	ECEVOGV101Q	E. CAPACITOR CH 4V 100U	1		C4612	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C4159	ECEVOGV470Q	E. CAPACITOR CH 4V 47U	1		C4701	ECAT1EF082Q	E. CAPACITOR 25V 82U	1	
C4160,61	ECUX1H471JCV	C. CAPACITOR CH 50V 470P	2		C4702	ECEV1HV3R3Q	E. CAPACITOR CH 50V 3.3U	1	
C4162-65	ECEV1HN010Q	E. CAPACITOR CH 50V 1U	4		C4703	ECAT1JF022Q	E. CAPACITOR 63V 22U	1	
C4166	ECUM1H104KBM	C. CAPACITOR CH 50V 0.1U	1		C4704	ECUM1H104KBM	C. CAPACITOR CH 50V 0.1U	1	
C4167	ECUX1H151JCV	C. CAPACITOR CH 50V 150P	1		C4705	ECAT1JF022Q	E. CAPACITOR 63V 22U	1	
C4168,69	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		C4707	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	
C4170	ECUX1C224ZFV	C. CAPACITOR CH 16V 0.22U	1		C4708	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	1	
C4201	ECEV1CV470Q	E. CAPACITOR CH 16V 47U	1		C4709	ECEV1CV470Q	E. CAPACITOR CH 16V 47U	1	
C4202,03	ECUM1H273KBN	C. CAPACITOR CH 50V 0.027U	2		C4710	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C4711	ECEVICV470Q	E. CAPACITOR CH 16V 47U	1		IC4701	LM2577MX-ADJ	IC	1	
C4712, 13	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		IC4702	NJM062M-D	IC	1	
C6502	ECEVOJV470Q	E. CAPACITOR CH6.3V 47U	1		IC4703	MC74HC08AF	IC	1	
C6503	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		IC4704	NJM386M	IC	1	
C6504	ECUX1C105KBM	C. CAPACITOR CH 16V 1U	1		IC6501	UPD75316BE83	IC	1	
C6505-07	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	3		IC6502	S8420BF	IC	1	
C6508	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		IC6503	S81350HG	IC	1	
C6509	ECEVOJV330Q	E. CAPACITOR CH6.3V 33U	1		IC6505	NJU7112AM	IC	1	
C6510, 11	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	2						
C6512, 13	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	2		L4003, 04	VLQ0163J100	COIL	10UH	2
C6524	ECEVOJV1010	E. CAPACITOR CH6.3V 100U	1		L4101, 02	VLQ0163J100	COIL	10UH	2
C6525	ECEV1EV220Q	E. CAPACITOR CH 25V 22U	1		L4201, 02	VLQ0163J100	COIL	10UH	2
C6526-28	ECEVOJV1010	E. CAPACITOR CH6.3V 100U	3		L4701	VLQ0407680K	COIL	68UH	1
					L4702	VLQ0621	COIL		1
D4001, 02	MA143	DIODE	2						
D4003	MA142K	DIODE	1		P4001	VJP3816B050	CONNECTOR (MALE)		1
D4004	MA143	DIODE	1		P4002	VJP3172D002	CONNECTOR (MALE)		1
D4101, 02	MA143	DIODE	2		P4003	VJP1613T	CONNECTOR (MALE)		1
D4103	MA142K	DIODE	1		P4004	VJP1609T	CONNECTOR (MALE)		1
D4105, 06	MA142K	DIODE	2		P4005	VJP3172D002	CONNECTOR (MALE)		1
D4107	MA714	DIODE	1		P6501	VJP1944T	CONNECTOR (MALE)		1
D4201, 02	MA143	DIODE	2						
D4203	MA142K	DIODE	1		PC4001	MCD5223	IC		1
D4205, 06	MA142K	DIODE	2						
D4207	MA714	DIODE	1		Q4001	2SD1819A-R	TRANSISTOR		1
D4601	MA142K	DIODE	1		Q4002	2SD602A-S	TRANSISTOR		1
D4604, 05	MA714	DIODE	2		Q4003	2SB710A-R	TRANSISTOR		1
D4606	MA142K	DIODE	1		Q4004	2SK663-R	TRANSISTOR		1
D4701	E100S10	DIODE	1		Q4007	2SB1219-R	TRANSISTOR		1
D4702	MA143	DIODE	1		Q4008	2SB1220-R	TRANSISTOR		1
D4703	MA714	DIODE	1		Q4009, 10	2SD1979	TRANSISTOR		2
D6501	MA704	DIODE	1		Q4101-03	2SD1819A-R	TRANSISTOR		3
D6502-07	LNJ310M6URA	DIODE	6		Q4107	2SD1979	TRANSISTOR		1
D6508	HZ16-1L	DIODE	1		Q4110	2SD1979	TRANSISTOR		1
D6509, 10	LNJ310M6URA	DIODE	2		Q4111	2SB1220-R	TRANSISTOR		1
D6511, 12	MA142K	DIODE	2		Q4201-03	2SD1819A-R	TRANSISTOR		3
D6513	BR3902S	DIODE	1		Q4207	2SD1979	TRANSISTOR		1
D6514-28	MA142K	DIODE	15		Q4210	2SD1979	TRANSISTOR		1
D6530-40	MA142K	DIODE	11		Q4211	2SB1220-R	TRANSISTOR		1
D6541, 42	LNJ310M6URA	DIODE	2		Q4302	2SD1979	TRANSISTOR		1
D6543, 44	MA142K	DIODE	2		Q4305-07	2SD1979	TRANSISTOR		3
					Q4402	2SD1979	TRANSISTOR		1
DP6501	EDD074Y61A4P	LCD	1		Q4405-07	2SD1979	TRANSISTOR		3
					Q4702, 03	2SD1979	TRANSISTOR		2
FL4501	VLF1069	FILTER	1		Q4704	2SD874-R	TRANSISTOR		1
					Q4705	2SB766-R	TRANSISTOR		1
IC4001	UPC5022GA144	IC	1		Q6501, 02	2SD968-R	TRANSISTOR		2
IC4002	NJM062M-D	IC	1		Q6503	2SD602A-S	TRANSISTOR		1
IC4003	MC74HC04AF	IC	1						
IC4004	MC14053BF	IC	1		QR4001	UN5113	TRANSISTOR-RESISTOR		1
IC4005	NJM062M-D	IC	1		QR4006	UN5213	TRANSISTOR-RESISTOR		1
IC4006	NJM062M-D	IC	1		QR4007	UN5113	TRANSISTOR-RESISTOR		1
IC4007	XC62AP3002P	IC	1		QR4010	UN5213	TRANSISTOR-RESISTOR		1
IC4008	AK4503VF	IC	1		QR4012	UN5213	TRANSISTOR-RESISTOR		1
IC4009	BA6138F	IC	1		QR4013	UN5113	TRANSISTOR-RESISTOR		1
IC4010	NJM062M-D	IC	1		QR4102, 03	UN5113	TRANSISTOR-RESISTOR		2
IC4011	MC14052BF	IC	1		QR4104	UN521F	TRANSISTOR-RESISTOR		1
IC4012	MC14053BF	IC	1		QR4105	UN5113	TRANSISTOR-RESISTOR		1
IC4013	NJM2073M	IC	1		QR4106	UN521F	TRANSISTOR-RESISTOR		1
IC4014	TC7WT125FU	IC	1		QR4107	UN5213	TRANSISTOR-RESISTOR		1
IC4015-17	NJM062M-D	IC	3		QR4108	UN5113	TRANSISTOR-RESISTOR		1
IC4018	NJM4580ED	IC	1		QR4201	UN5213	TRANSISTOR-RESISTOR		1
IC4101	NJM4580ED	IC	1		QR4202, 03	UN5113	TRANSISTOR-RESISTOR		2
IC4102	NJM062M-D	IC	1		QR4204	UN521F	TRANSISTOR-RESISTOR		1
IC4103	NJM4580ED	IC	1		QR4205	UN5113	TRANSISTOR-RESISTOR		1
IC4105	MC14052BF	IC	1		QR4206	UN521F	TRANSISTOR-RESISTOR		1
IC4201	NJM4580ED	IC	1		QR4207	UN5213	TRANSISTOR-RESISTOR		1
IC4202	NJM062M-D	IC	1		QR4208	UN5113	TRANSISTOR-RESISTOR		1
IC4203	NJM4580ED	IC	1		QR4301, 02	UN5113	TRANSISTOR-RESISTOR		2
IC4205	MC14052BF	IC	1		QR4303, 04	UN5213	TRANSISTOR-RESISTOR		2
IC4501	MC14053BF	IC	1		QR4401, 02	UN5113	TRANSISTOR-RESISTOR		2
IC4502	NJM062M-D	IC	1		QR4403, 04	UN5213	TRANSISTOR-RESISTOR		2
IC4503	CXA1102M	IC	1		QR4507	UN5113	TRANSISTOR-RESISTOR		1
IC4602	MN13821-R	IC	1		QR4508	UN5213	TRANSISTOR-RESISTOR		1
IC4603	UPD753286769	IC	1		QR4601	UN5213	TRANSISTOR-RESISTOR		1

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
QR6501	UN5211	TRANSISTOR-RESISTOR	1		R4136	ERJ3GEYJ332	M.RESISTOR CH 1/16W 3.3K	1	
QR6502-04	UN5213	TRANSISTOR-RESISTOR	3		R4137	ERJ3GEYJ122	M.RESISTOR CH 1/16W 1.2K	1	
					R4142	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4001	ERJ3GEYJ331	M.RESISTOR CH 1/16W 330	1		R4144	ERJ3GEYJ683	M.RESISTOR CH 1/16W 68K	1	
R4002	ERJ3GEYJ330	M.RESISTOR CH 1/16W 33	1		R4145	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R4003	ERJ3GEYJ331	M.RESISTOR CH 1/16W 330	1		R4146	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
R4004, 05	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	2		R4147	ERJ6RBD102	M.RESISTOR CH 1/10W 1K	1	
R4006	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	1		R4148	ERJ6RBD222	M.RESISTOR CH 1/10W 2.2K	1	
R4011, 12	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2		R4149, 50	ERJ6RBD153	M.RESISTOR CH 1/10W 15K	2	
R4013, 14	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	2		R4151, 52	ERJ6RBD472	M.RESISTOR CH 1/10W 4.7K	2	
R4015-17	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	3		R4153, 54	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2	
R4018	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1		R4155	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R4019	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R4160	ERJ6RBD103	M.RESISTOR CH 1/10W 10K	1	
R4020	ERJ3GEYOR00	M.RESISTOR CH 1/16W 0	1		R4161	ERJ6RBD153	M.RESISTOR CH 1/10W 15K	1	
R4021, 22	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2		R4162	ERJ6RBD103	M.RESISTOR CH 1/10W 10K	1	
R4023	ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1		R4163	ERJ6RBD153	M.RESISTOR CH 1/10W 15K	1	
R4024	ERJ3GEYJ332	M.RESISTOR CH 1/16W 3.3K	1		R4164-66	ERJ6RBD103	M.RESISTOR CH 1/10W 10K	3	
R4025	ERJ3GEYJ122	M.RESISTOR CH 1/16W 1.2K	1		R4183	ERJ3GEYJ334	M.RESISTOR CH 1/16W 330K	1	
R4026	ERJ3GEYJ332	M.RESISTOR CH 1/16W 3.3K	1		R4184	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4027	ERJ3GEYJ122	M.RESISTOR CH 1/16W 1.2K	1		R4185	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R4031	ERJ3GEYOR00	M.RESISTOR CH 1/16W 0	1		R4186	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R4035	ERJ3GEYJ154	M.RESISTOR CH 1/16W 150K	1		R4187	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4036	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1		R4189	ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	1	
R4037	ERJ3GEYJ682	M.RESISTOR CH 1/16W 8.2K	1		R4190	ERJ3GEYJ124	M.RESISTOR CH 1/16W 120K	1	
R4038, 39	ERJ3GEYOR00	M.RESISTOR CH 1/16W 0	2		R4191	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R4040	ERJ6RED164	M.RESISTOR CH 3W 160K	1		R4192	ERJ6GEYJ1R0	M.RESISTOR CH 1/10W 1	1	
R4042	ERJ6RED164	M.RESISTOR CH 3W 160K	1		R4193-96	ERJ6GEYJ150	M.RESISTOR CH 1/10W 15	4	
R4046	ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1		R4197	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R4047	ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1		R4201	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4048	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1		R4202	ERJ3GEYJ183	M.RESISTOR CH 1/16W 18K	1	
R4049	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R4203	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4051	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1		R4206	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R4061, 62	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2		R4210	ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R4064, 65	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	2		R4211	ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1	
R4066	ERJ3GEYOR00	M.RESISTOR CH 1/16W 0	1		R4212	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4068, 69	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	2		R4213	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
R4070, 71	ERJ3GEYJ390	M.RESISTOR CH 1/16W 39	2		R4214	ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4073	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1		R4215	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R4074, 75	ERJ12YJ682	M.RESISTOR CH 1/2W 6.8K	2		R4216	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4076	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1		R4217	ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1	
R4077	ERJ3GEYJ334	M.RESISTOR CH 1/16W 330K	1		R4218, 19	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2	
R4079	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R4220	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4081-83	ERJ3GEYOR00	M.RESISTOR CH 1/16W 0	3		R4221	ERJ3GEYJ155	M.RESISTOR CH 1/16W 1.5M	1	
R4084, 85	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2		R4222	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R4086	ERJ3GEYJ154	M.RESISTOR CH 1/16W 150K	1		R4223	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R4087	ERJ3GEYJ682	M.RESISTOR CH 1/16W 6.8K	1		R4224	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R4088	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R4225	ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R4089	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1		R4226	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R4090-93	ERJ6GEYJ150	M.RESISTOR CH 1/10W 15	4		R4230	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1	
R4094	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R4231, 32	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2	
R4095	ERJ3GEYOR00	M.RESISTOR CH 1/16W 0	1		R4233	ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1	
R4101	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1		R4234	ERJ3GEYJ332	M.RESISTOR CH 1/16W 3.3K	1	
R4102	ERJ3GEYJ183	M.RESISTOR CH 1/16W 18K	1		R4235	ERJ3GEYJ122	M.RESISTOR CH 1/16W 1.2K	1	
R4103	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1		R4236	ERJ3GEYJ332	M.RESISTOR CH 1/16W 3.3K	1	
R4106	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1		R4237	ERJ3GEYJ122	M.RESISTOR CH 1/16W 1.2K	1	
R4110	ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1		R4242	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4111	ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1		R4244	ERJ3GEYJ683	M.RESISTOR CH 1/16W 68K	1	
R4112	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1		R4245	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R4113	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1		R4246	ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
R4114	ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1		R4247	ERJ6RBD102	M.RESISTOR CH 1/10W 1K	1	
R4115	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1		R4248	ERJ6RBD222	M.RESISTOR CH 1/10W 2.2K	1	
R4116	ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1		R4249, 50	ERJ6RBD153	M.RESISTOR CH 1/10W 15K	2	
R4117	ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1		R4251, 52	ERJ6RBD472	M.RESISTOR CH 1/10W 4.7K	2	
R4118, 19	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2		R4253, 54	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2	
R4120	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1		R4255	ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R4121	ERJ3GEYJ155	M.RESISTOR CH 1/16W 1.5M	1		R4260	ERJ6RBD103	M.RESISTOR CH 1/10W 10K	1	
R4122	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1		R4261	ERJ6RBD153	M.RESISTOR CH 1/10W 15K	1	
R4123	ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1		R4262	ERJ6RBD103	M.RESISTOR CH 1/10W 10K	1	
R4124	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1		R4263	ERJ6RBD153	M.RESISTOR CH 1/10W 15K	1	
R4125	ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1		R4264-66	ERJ6RBD103	M.RESISTOR CH 1/10W 10K	3	
R4130	ERJ3GEYJ153	M.RESISTOR CH 1/16W 15K	1		R4283	ERJ3GEYJ334	M.RESISTOR CH 1/16W 330K	1	
R4131, 32	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2		R4284	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4133	ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1		R4285	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R4134	ERJ3GEYJ332	M.RESISTOR CH 1/16W 3.3K	1		R4286	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R4135	ERJ3GEYJ122	M.RESISTOR CH 1/16W 1.2K	1		R4287	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
TP4101,02	EYF6CU	TEST POINT	2		P1008	VJP3172D002	CONNECTOR (MALE)	1	
TP4201,02	EYF6CU	TEST POINT	2		P1009	VJP3518B002	CONNECTOR (MALE)	1	
TP4501	EYF6CU	TEST POINT	1		P1010	VJP3518B008	CONNECTOR (MALE)	1	
TP4505	EYF6CU	TEST POINT	1		P1011	VJP3125B003	CONNECTOR (MALE) 3P	1	
TP4601,02	EYF6CU	TEST POINT	2		P1012	VJP3125B004	CONNECTOR (MALE)	1	
TP6501-06	EYF6CU	TEST POINT	6		P1014	VJP3125B004	CONNECTOR (MALE)	1	
					P1015	VJP3098B050	CONNECTOR (MALE)	1	
VR4001	EVM7JGA00B23	V.RESISTOR 2K	1		P1016,17	VJS3551	CONNECTOR (FEMALE)	2	
VR4002	EVM7JGA00B53	V.RESISTOR 5K	1		P1018	VJP3551	CONNECTOR (MALE)	1	
VR4101	VRV0080	V.RESISTOR	1						
VR4102,03	EVM7JGA00B14	V.RESISTOR 10K	2		Q1001	2SJ280S	TRANSISTOR	1	
VR4201	VRV0080	V.RESISTOR	1		Q1002	2SB779-R	TRANSISTOR	1	
VR4202,03	EVM7JGA00B14	V.RESISTOR 10K	2		Q1003	2SD874-R	TRANSISTOR	1	
VR4301	EVM7JGA00B14	V.RESISTOR 10K	1		Q1005	2SD1819A-R	TRANSISTOR	1	
VR4401	EVM7JGA00B14	V.RESISTOR 10K	1		Q1006-08	2SD1979	TRANSISTOR	3	
VR4501	EVM7JGA00B14	V.RESISTOR 10K	1		Q1009	2SB1220-R	TRANSISTOR	1	
VR4503	EVM7JGA00B54	V.RESISTOR 50K	1		Q1010,11	2SD1821-R	TRANSISTOR	2	
VR4701	EVM7JGA00B14	V.RESISTOR 10K	1						
					QR1001-06	UN5113	TRANSISTOR-RESISTOR	6	
X4601	VSX0140	CRYSTAL OSCILLATOR	1						
X6501	VSX0094C	CRYSTAL OSCILLATOR	1		R1001	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
X6502	VSX0140	CRYSTAL OSCILLATOR	1		R1002	ERJ6GEYJ151	M.RESISTOR CH 1/10W 150	1	
		MISCELLANEOUS			R1003	VLF1315A102	FILTER	1	
					R1006,07	VLF1315A102	FILTER	2	
	VGL0721	BACK LIGHT BASE	1		R1010	VLF1315A102	FILTER	1	
	VMX1144	LED SPACER	1		R1012,13	VLF1315A102	FILTER	2	
					△ R1015	VRT01512R2	THERMISTOR	1	
					R1016	ERJ6GEYJ1R0	M.RESISTOR CH 1/10W 1	1	
					R1020	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
					R1021	ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1	
					R1022	ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1	
					R1023	ERJ8GCYJ1R0	M.RESISTOR CH 1/8W 1	1	
					R1024	ERJ3GEYJ183	M.RESISTOR CH 1/16W 18K	1	
■ E17	VEP01786A	REAR JACK P.C.BOARD	1 (RTL)		R1025	ERJ3GEYJ390	M.RESISTOR CH 1/16W 39	1	
					R1028	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
					R1029	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
C1020	ECST1CD476Z	T.CAPACITOR CH 16V 47U	1		R1030	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
C1021	ECUX1C105KBM	C.CAPACITOR CH 16V 1U	1		R1032,33	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	2	
C1022	ECUX1H223KBN	C.CAPACITOR CH 50V 0.22U	1		R1034	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
C1023	ECUX1H102JV	C.CAPACITOR CH 50V 1000P	1		R1035	ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
C1024,25	ECQP1682JZ	P.CAPACITOR 100V 6800P	2		R1036	ERJ3GEYJ124	M.RESISTOR CH 1/16W 120K	1	
C1026	ECEV1CV4700	E.CAPACITOR CH 16V 47U	1		R1037	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
C1029	ECUX1H221JCV	C.CAPACITOR CH 50V 220P	1		R1038	ERJ3GEYJ821	M.RESISTOR CH 1/16W 820	1	
C1030	ECUX1H151JCV	C.CAPACITOR CH 50V 150P	1		R1039	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
C1031	ECUX1H390JCV	C.CAPACITOR CH 50V 39P	1		R1040	ERJ3GEYJ221	M.RESISTOR CH 1/16W 220	1	
C1032	ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1		R1041	ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
C1033	ECEV0JN1000	E.CAPACITOR CH6.3V 10U	1		R1042	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
C1034	ECUM1H273KBN	C.CAPACITOR CH 50V 0.027U	1		R1043	ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
C1035	ECUX1H822KBV	C.CAPACITOR CH 50V 8200P	1		R1044	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
C1036	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1		R1045	ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
C1037	ECEV0JN1000	E.CAPACITOR CH6.3V 10U	1		R1046,47	ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	2	
C1038	ECUX1H222KBV	C.CAPACITOR CH 50V 2200P	1		R1048	ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1	
C1039	VCC0030	C.CAPACITOR	1		R1049	ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
C1040	ECUX1E104ZV	C.CAPACITOR CH 25V 0.1U	1		R1055	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
C1050-65	ECUX1H102JV	C.CAPACITOR CH 50V 1000P	16						
△ CP1001	VS00834	CIRCUIT PROTECTOR	1		T1001	VLT0729	TRANSFORMER	1	
D1001	RK34	DIODE	1		TG1001	EYF6CU	TEST POINT	1	
D1002,03	MA142K	DIODE	2						
FL1001	E1R70F012B	TRANSFORMER	1		TP1001	EYF6CU	TEST POINT	1	
IC1001	NJM4558M-D	IC	1		VR1001	VRV0161B503	V.RESISTOR 50K	1	
					VR1002	VRV0161B103	V.RESISTOR 10K	1	
							MISCELLANEOUS		
L1001	VL00423J472	COIL 4700UH	1						
L1010	VLP0320	COIL	1			VMP4846	JACK P.C.B. ANGLE	1	
L1011,12	VLF1151A132	COIL	2			XYN3+K6	SCREW	1	
L1013-23	VLF1315A102	FILTER	11						
P1001	VJP3810E040	CONNECTOR (MALE)	1						
P1003	VJP3125B009	CONNECTOR (MALE)	1						
P1004	VJP3125B003	CONNECTOR (MALE) 3P	1						
P1006	VJP2824B002	CONNECTOR (MALE)	1						
P1007	VJP2824A003	CONNECTOR (MALE) 3P	1						
					■ E27	VEP86149A	OPERATE P.C.BOARD	1 (RTL)	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
D6001-03	BR1102W-1	DIODE	3		IC9002	HA11423MP	IC	1	
P501	VJP3125B010	CONNECTOR (MALE)	1		IC9003	TC7S04F	IC	1	
SW6001-05	EVQPHL03T	SWITCH	5		IC9004	TC7S32F	IC	1	
		MISCELLANEOUS			IC9005	MC74HC164AF	IC	1	
	VEE9417	CONNECTION CABLE	1		IC9006	M66311FP	IC	1	
					IC9007	MC74HC08AF	IC	1	
					IC9008	TC7W04F	IC	1	
					IC9009	AN8008M	IC	1	
■ E33	VEP29022A	EVF VIDEO P.C. BOARD	1	(RTL)	P9001	VJP2741A016	CONNECTOR (MALE) 16P	1	
C9001	ECA1CF0331	E. CAPACITOR 16V 330U	1		P9002	VJP2312	CONNECTOR (MALE)	1	
C9002	ECA0JKF121	E. CAPACITOR 6.3V 120U	1		P9003	VJP2311	CONNECTOR (MALE)	1	
C9003-06	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	4		P9004	VJP2279	CONNECTOR (MALE)	1	
C9007	ECA1CKF560	E. CAPACITOR 16V 56U	1		P9005	VJP1595T	CONNECTOR (MALE) 2P	1	
C9008	ECST1CY105Z	T. CAPACITOR CH 16V 1U	1						
C9009	ECUX1E223KBV	C. CAPACITOR CH 25V 0.023U	1		Q9001-03	2SD1819A-R	TRANSISTOR	3	
C9010	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1		Q9004	2SC3624	TRANSISTOR	1	
C9011	ECST1CY105Z	T. CAPACITOR CH 16V 1U	1		Q9005	2SA1411	TRANSISTOR	1	
C9012	ECST1CC226Z	T. CAPACITOR CH 16V 22U	1		Q9006-08	2SD1819A-R	TRANSISTOR	3	
C9013	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		Q9009	2SC3624	TRANSISTOR	1	
C9014	ECUX1H682KBV	C. CAPACITOR CH 50V 6800P	1		Q9010	2SA1411	TRANSISTOR	1	
C9015	ECU1C472JB	P. CAPACITOR 16V 4700P	1		Q9011	2SD1819A-R	TRANSISTOR	1	
C9016	ECUX1H331JCV	C. CAPACITOR CH 50V 330P	1		Q9012	2SB1218A-R	TRANSISTOR	1	
C9017	ECUX1C473KBV	C. CAPACITOR CH 16V 0.047U	1		Q9013	2SK508-B	TRANSISTOR	1	
C9018	ECUM1C105ZFN	C. CAPACITOR CH 16V 1U	1		Q9014	2SB1218A-R	TRANSISTOR	1	
C9019	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		Q9015	2SD1821-R	TRANSISTOR	1	
C9020	ECST1CY105Z	T. CAPACITOR CH 16V 1U	1		Q9016	2SC4181	TRANSISTOR	1	
C9021	ECST1CY335Z	T. CAPACITOR CH 16V 3.3U	1		Q9017	2SD1821-R	TRANSISTOR	1	
C9022	ECUX1H472KBV	C. CAPACITOR CH 50V 4700P	1		Q9018	2SB1220-R	TRANSISTOR	1	
C9023	ECUX1H181JCV	C. CAPACITOR CH 50V 180P	1		Q9019	UN511L	TRANSISTOR-RESISTOR	1	
C9024	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		Q9020	UN5214	TRANSISTOR-RESISTOR	1	
C9025, 26	ECA0JKF121	E. CAPACITOR 6.3V 120U	2		Q9021	2SD1819A-R	TRANSISTOR	1	
C9027	ECST1CX106Z	T. CAPACITOR CH 16V 10U	1		Q9022	2SC4181	TRANSISTOR	1	
C9028	ECUX1H272KBV	C. CAPACITOR CH 50V 2700P	1						
C9029	ECA1CKF560	E. CAPACITOR 16V 56U	1		R9001	ERJ12YJR68	M. RESISTOR CH 1/2W 0.68	1	
C9030	ECUX1H221JCV	C. CAPACITOR CH 50V 220P	1		R9002	ERJ3GEYJ474	M. RESISTOR CH 1/16W 470K	1	
C9031	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R9003	ERJ3GEYJ822	M. RESISTOR CH 1/16W 8.2K	1	
C9032	ECUM1C105ZFN	C. CAPACITOR CH 16V 1U	1		R9004	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1	
C9033	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R9005	ERJ3GEYJ153	M. RESISTOR CH 1/16W 15K	1	
C9034	ECST1AC226Z	T. CAPACITOR CH 10V 22U	1		R9006	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
C9035	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R9007	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1	
C9036	ECA1CKF560	E. CAPACITOR 16V 56U	1		R9008	ERJ3GEYJ121	M. RESISTOR CH 1/16W 120	1	
C9037	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R9009	ERJ3GEYJ183	M. RESISTOR CH 1/16W 18K	1	
C9039	ECUX1H220JCV	C. CAPACITOR CH 50V 22P	1		R9010	ERJ3GEYJ682	M. RESISTOR CH 1/16W 6.8K	1	
C9041	ECUX1H221JCV	C. CAPACITOR CH 50V 220P	1		R9011	ERJ6RBD123	M. RESISTOR CH 1/10W 12K	1	
C9042	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R9012	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	1	
C9044	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R9013	ERJ3GEYJ822	M. RESISTOR CH 1/16W 8.2K	1	
C9046	ECA1JF0680	E. CAPACITOR 63V 68U	1		R9014	ERJ3GEYJ152	M. RESISTOR CH 1/16W 1.5K	1	
C9047	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	1		R9015	ERJ3GEYJ912	M. RESISTOR CH 1/16W 9.1K	1	
C9049	ECUM1C105ZFN	C. CAPACITOR CH 16V 1U	1		R9016	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
C9051	ECUX1H150JCV	C. CAPACITOR CH 50V 15P	1		R9018	ERJ3GEYJ562	M. RESISTOR CH 1/16W 5.6K	1	
C9055	ECA1EKF390	E. CAPACITOR 25V 39U	1		R9019	ERJ3GEYJ682	M. RESISTOR CH 1/16W 6.8K	1	
C9056	ECA1CKF560	E. CAPACITOR 16V 56U	1		R9020	ERJ3GEYJ562	M. RESISTOR CH 1/16W 5.6K	1	
C9057	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		R9021	ERJ3GEYJ332	M. RESISTOR CH 1/16W 3.3K	1	
C9058, 59	ECUX1E104ZFV	C. CAPACITOR CH 25V 0.1U	2		R9022	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
C9060	ECQV1104JM	P. CAPACITOR 100V 0.1U	1		R9023	ERJ3GEYJ4R7	M. RESISTOR CH 1/16W 4.7	1	
C9061	ECCF1H471J	C. CAPACITOR 50V 470P	1		R9024	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1	
					R9025	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
D9001	MA142K	DIODE	1		R9026	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
D9002	RD10UMB1	DIODE	1		R9027	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1	
D9003	MA143	DIODE	1		R9028	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
D9005	MA143	DIODE	1		R9029	ERJ3GEYJ393	M. RESISTOR CH 1/16W 39K	1	
D9007, 08	MA3047	DIODE	2		R9030	ERJ6RBD472	M. RESISTOR CH 1/10W 4.7K	1	
					R9031	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1	
DL9001	VLD0259	DELAY LINE	1		R9032	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
IC9001	AN77L05M	IC	1		R9033	ERJ3GEYJ150	M. RESISTOR CH 1/16W 15	1	
					R9034	ERJ3GEYJ184	M. RESISTOR CH 1/16W 180K	1	
					R9035	ERJ3GEYJ154	M. RESISTOR CH 1/16W 150K	1	
					R9036	ERJ3GEYJ181	M. RESISTOR CH 1/16W 180	1	
					R9037, 38	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2	
					R9039	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
					R9040	ERJ3GEYJ472	M. RESISTOR CH 1/16W 4.7K	1	
					R9041	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1	
					R9042	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
					R9043	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9044	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R9045	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R9046	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1	
R9047	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R9048	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R9049	ERJ6RBD223	M. RESISTOR CH 1/10W 22K	1	
R9050	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1	
R9051	ERJ3RED124	M. RESISTOR CH 1/16W 120K	1	
R9052	ERJ6RBD104	M. RESISTOR CH 1/10W 100K	1	
R9053	ERJ3GEYR000	M. RESISTOR CH 1/16W 0	1	
R9055	ERJ6RBD102	M. RESISTOR CH 1/10W 10K	1	
R9056	ERJ6RBD681	M. RESISTOR CH 1/10W 680	1	
R9058	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R9059	ERJ6RBD102	M. RESISTOR CH 1/10W 1K	1	
R9060	ERJ6RBD222	M. RESISTOR CH 1/10W 2.2K	1	
R9061	ERJ3GEYJ391	M. RESISTOR CH 1/16W 390	1	
R9063	ERJ6RBD682	M. RESISTOR CH 1/10W 6.8K	1	
R9064, 65	ERJ6RBD222	M. RESISTOR CH 1/10W 2.2K	2	
R9066	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R9067, 68	ERJ6RBD562	M. RESISTOR CH 1/10W 5.6K	2	
R9069	ERJ6RBD473	M. RESISTOR CH 1/10W 47K	1	
R9071	ERJ6RBD473	M. RESISTOR CH 1/10W 47K	1	
R9072, 73	ERJ3GEYJ680	M. RESISTOR CH 1/16W 68	2	
R9074	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1	
R9076	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
R9077	ERJ3GEYJ1R0	M. RESISTOR CH 1/16W 1	1	
R9078	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	1	
R9079, 80	ERJ3GEYJ272	M. RESISTOR CH 1/16W 2.7K	2	
R9081	ERJ3GEYJ331	M. RESISTOR CH 1/16W 330	1	
R9082, 83	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	2	
R9085	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1	
R9087	ERJ3GEYJ681	M. RESISTOR CH 1/16W 680	1	
R9089	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R9090	ERJ3GEYJ331	M. RESISTOR CH 1/16W 330	1	
R9092	ERJ3GEYJ512	M. RESISTOR CH 1/16W 5.1K	1	
R9093	ERJ3GEYR000	M. RESISTOR CH 1/16W 0	1	
R9095	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R9096	EROS2CKF8201	M. RESISTOR 1/4W 8.2K	1	
R9097	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
R9098	ERJ3RBD912	M. RESISTOR CH 1/16W 9.1K	1	
R9099	EROS2CKG1003	M. RESISTOR 1/4W 100K	1	
T69001	EYF6CU	TEST POINT	1	
TP9001-03	EYF6CU	TEST POINT	3	
VR9001, 02	EVM7JGA00B53	V. RESISTOR 5K	2	
VR9003	EVM7JGA00B22	V. RESISTOR 200	1	
VR9004	EVM7JGA00B52	V. RESISTOR 500	1	
■ E32	VEP29019A	H DEF P. C. BOARD	1 (RTL)	
C9101, 02	ECA1CFQ331	E. CAPACITOR 16V 330U	2	
C9104	ECA1JFQ680	E. CAPACITOR 63V 68U	1	
C9105	VCF0066J123	P. CAPACITOR 160V 0.012U	1	
C9106	VCF0066J102	P. CAPACITOR 160V 1000P	1	
C9107, 08	VCF0066J223	P. CAPACITOR 160V 0.022U	2	
C9110	ECKD3A472MEH	C. CAPACITOR 1KV 4700P	1	
C9111	ECKD2H103MD	C. CAPACITOR 500V 0.01U	1	
C9112	ECKD3A472MEH	C. CAPACITOR 1KV 4700P	1	
C9113	ECA1CFQ121	E. CAPACITOR 16V 120U	1	
C9114	VCF0066J472	P. CAPACITOR 160V 4700P	1	
C9115	ECKD2H103MD	C. CAPACITOR 500V 0.01U	1	
C9116	ECFF1E473KB	C. CAPACITOR 25V 0.047U	1	
D9101	MA142K	DIODE	1	
D9102	EC11FS2	DIODE	1	
D9103	MA142K	DIODE	1	
D9104	SHV-03	DIODE	1	
D9105	MA142K	DIODE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D9106	EC100S1012	DIODE	1	
L9101	VLQ0417	COIL 10UH	1	
L9102	ELH5L220	COIL 22UH	1	
L9103	VLQEL06F270J	COIL	1	
L9104	VLQ0620	COIL	1	
P9006	VJP2311	CONNECTOR (MALE)	1	
P9007	VJP1595T	CONNECTOR (MALE) 2P	1	
P9008	VJP1232T	CONNECTOR (MALE) 5P	1	
P9009	VJP2271	CONNECTOR (MALE)	1	
Q9101, 02	2SK1954Z	TRANSISTOR	2	
R9101	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R9102	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
R9103	ERDS2TJ222	C. RESISTOR 1/4W 2.2K	1	
R9104	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R9105	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
R9107	ERJ6RED270	M. RESISTOR CH 1/10W 27	1	
R9108, 09	ERJ6GEYR000	M. RESISTOR CH 1/10W 0	2	
R9110, 11	ERJ6GEYG474	M. RESISTOR CH 1/10W 470K	2	
R9112	ERJ6GEYR000	M. RESISTOR CH 1/10W 0	1	
R9113	ERJ6GEYG474	M. RESISTOR CH 1/10W 470K	1	
R9114	ERJ6GEYJ684	M. RESISTOR CH 1/10W 680K	1	
R9115	ERJ6GEYG223	M. RESISTOR CH 1/10W 22K	1	
R9118	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R9119	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
R9120	ERJ6GEYR000	M. RESISTOR CH 1/10W 0	1	
T9101	ETF15L7A	TRANSFORMER	1	
T69101-05	EYF6CU	TEST POINT	5	
VR9101	VRV0113B500	V. RESISTOR 50	1	
VR9102	EVMLRGA00B16	V. RESISTOR 1M	1	
VR9103	VRV0113B204	V. RESISTOR 200K	1	
■ E36	VEP29023A	EVF CRT MASK P. C. BOARD	1 (RTL)	
D9402	BR1101W330	DIODE	1	
D9404	AA1101W330	DIODE	1	
D9405	BR1101W330	DIODE	1	
D9406	AA1101W330	DIODE	1	
		MISCELLANEOUS		
	VMP5140	CRT EARTH PLATE	1	
	VEE9448	VF CABLE	1	
■ E34	VEP29020A	EVF SW VR P. C. BOARD	1 (RTL)	
P9010	VJP2312	CONNECTOR (MALE)	1	
R9301	EROS2CKG6800	M. RESISTOR 1/4W 680	1	
SW9301	VST0114	SWITCH	1	
SW9302	VST0113	SWITCH	1	
VR9301	VRV0278B504	V. RESISTOR 500K	1	
VR9302	VRV0278B102	V. RESISTOR 1K	1	
VR9303	VRV0278B104	V. RESISTOR 100K	1	
		MISCELLANEOUS		

